



Vincotech

flow PACK 0B

Output Inverter Application

600 V / 15 A

General conditions

3phase SPWM


$V_{GEon} = 15\text{ V}$

$V_{GEoff} = -15\text{ V}$

$R_{gon} = 32\ \Omega$


$R_{goff} = 32\ \Omega$

figure 1. IGBT
Typical average static loss as a function of output current

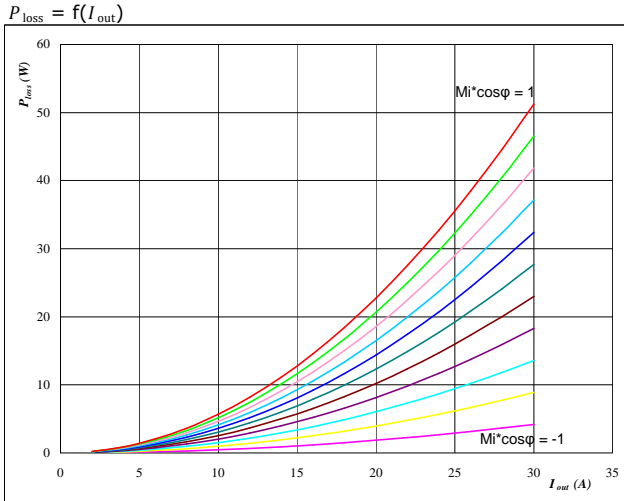


At
 $T_j = 150\text{ }^\circ\text{C}$
 $Mi \cdot \cos\phi$ from -1 to 1 in steps of 0,2

figure 2. FWD
Typical average static loss as a function of output current

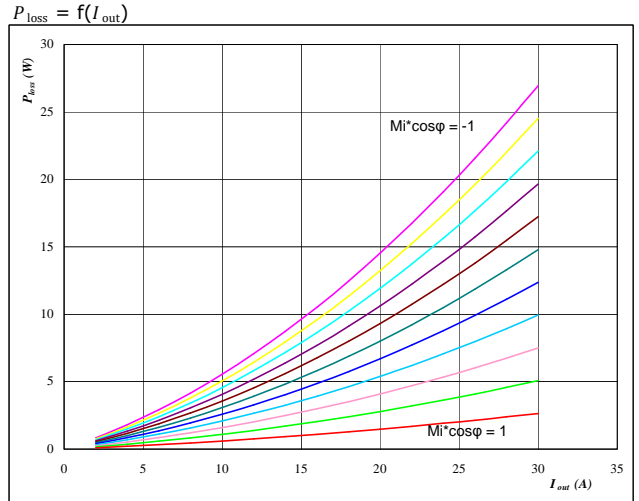


At
 $T_j = 150\text{ }^\circ\text{C}$
 $Mi \cdot \cos\phi$ from -1 to 1 in steps of 0,2

figure 3. IGBT
Typical average switching loss as a function of output current

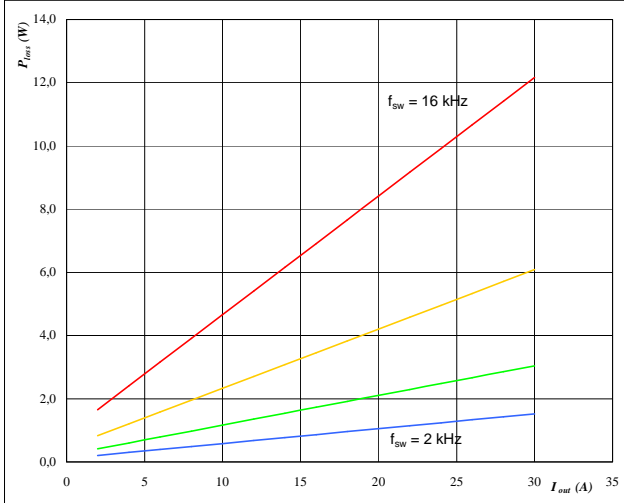

At
 $T_j = 150\text{ }^\circ\text{C}$
DC-link = 320 V
 f_{sw} from 2 kHz to 16 kHz in steps of factor 2

figure 4. FWD
Typical average switching loss as a function of output current

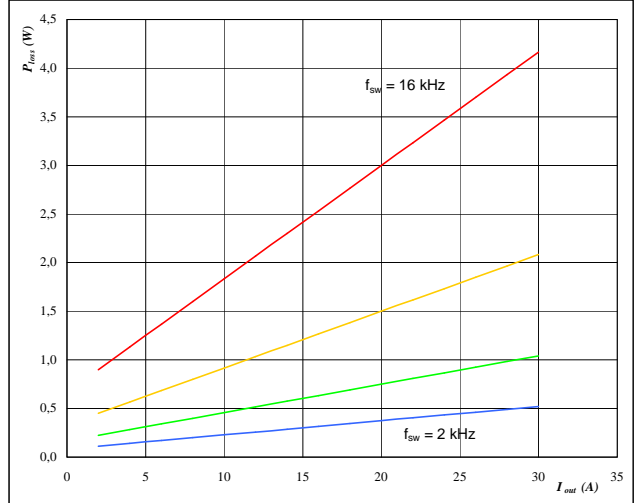

At
 $T_j = 150\text{ }^\circ\text{C}$
DC-link = 320 V
 f_{sw} from 2 kHz to 16 kHz in steps of factor 2



Vincotech


flow PACK 0B

Output Inverter Application

600 V / 15 A

figure 5. Phase


Typical available 50Hz output current as a function $Mi \cdot \cos \varphi$ $I_{out} = f(Mi \cdot \cos \varphi)$

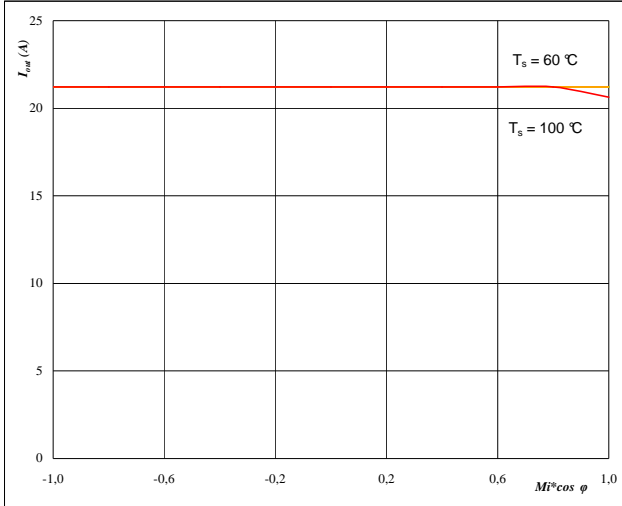

At
 $T_j = 150^\circ C$
 DC-link = 320 V
 $f_{sw} = 4$ kHz
 T_s from 60 °C to 100 °C in steps of 5 °C

figure 6. Phase


Typical available 50Hz output current as a function of switching frequency $I_{out} = f(f_{sw})$

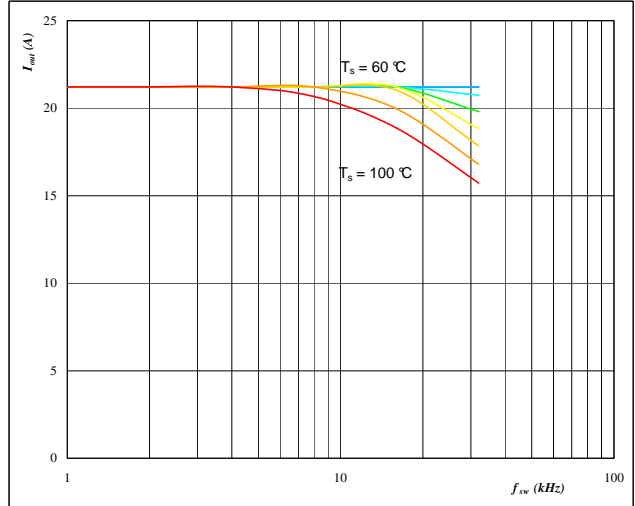

At
 $T_j = 150^\circ C$
 DC-link = 320 V
 $Mi \cdot \cos \varphi = 0,8$
 T_s from 60 °C to 100 °C in steps of 5 °C

figure 7. Phase


Typical available 50Hz output current as a function of $Mi \cdot \cos \varphi$ and switching frequency $I_{out} = f(f_{sw}, Mi \cdot \cos \varphi)$

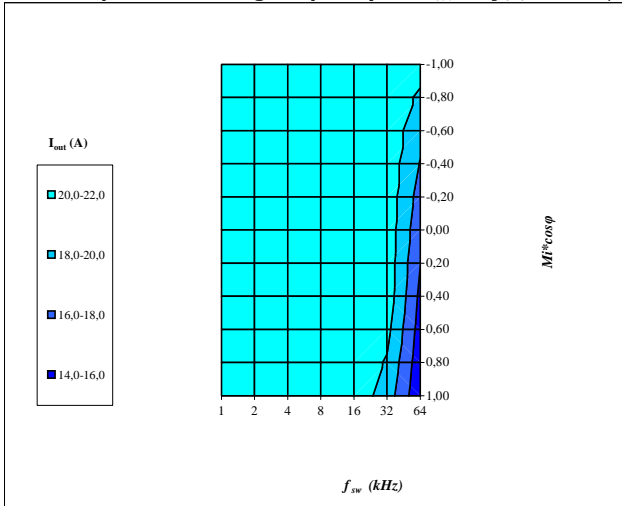

At
 $T_j = 150^\circ C$
 DC-link = 320 V
 $T_s = 80^\circ C$

figure 8. Phase

Typical available 0Hz output current as a function of switching frequency $I_{outpeak} = f(f_{sw})$

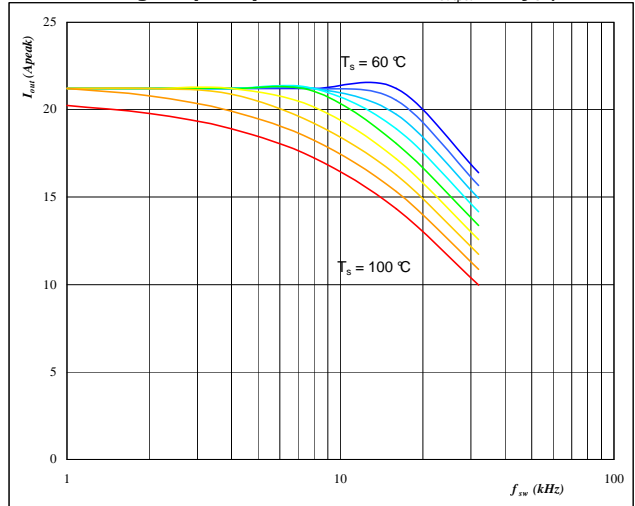

At
 $T_j = 150^\circ C$
 DC-link = 320 V
 T_s from 60 °C to 100 °C in steps of 5 °C
 $Mi = 0$



Vincotech


flow PACK 0B

Output Inverter Application

600 V / 15 A

figure 9. Inverter


Typical available peak output power as a function of heatsink temperature $P_{out} = f(T_s)$

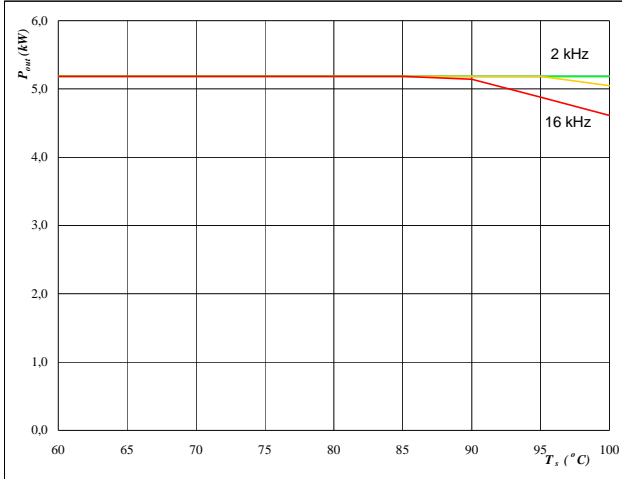

At
 $T_j = 150 \text{ } ^\circ\text{C}$
 DC-link = 320 V
 $M_i = 1$
 $\cos \varphi = 0,80$
 f_{sw} from 2 kHz to 16 kHz in steps of factor 2

figure 10. Inverter


Typical efficiency as a function of output power efficiency = $f(P_{out})$

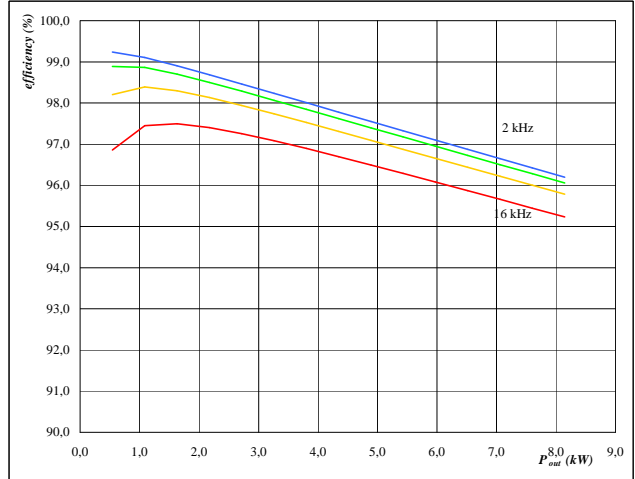

At
 $T_j = 150 \text{ } ^\circ\text{C}$
 DC-link = 320 V
 $M_i = 1$
 $\cos \varphi = 0,80$
 f_{sw} from 2 kHz to 16 kHz in steps of factor 2

figure 11. Inverter

Typical available overload factor as a function of motor power and switching frequency $P_{peak} / P_{nom} = f(P_{nom}, f_{sw})$

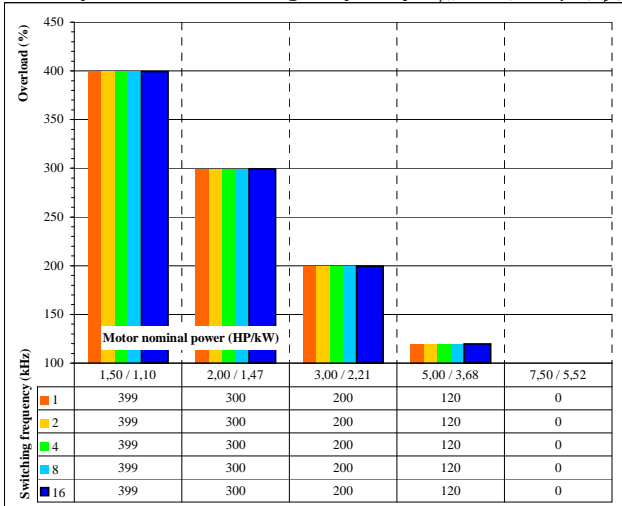

At
 $T_j = 150 \text{ } ^\circ\text{C}$
 DC-link = 320 V
 $M_i = 1$
 $\cos \varphi = 0,8$
 f_{sw} from 1 kHz to 16 kHz in steps of factor 2
 $T_s = 80 \text{ } ^\circ\text{C}$
 Motor eff = 0,85