

**General conditions**
**3phase SPWM**

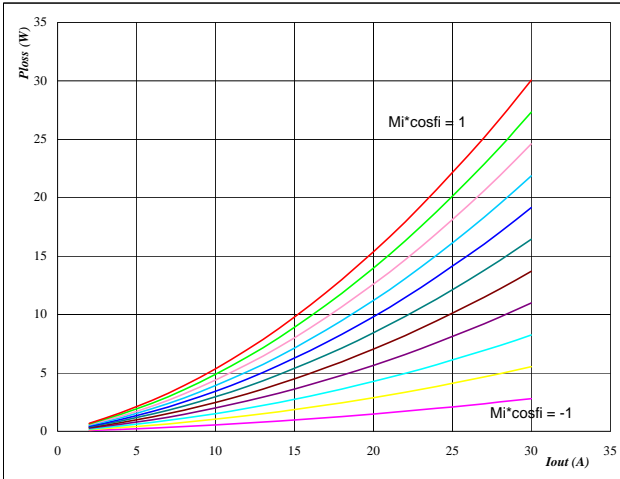
$V_{GEon}$	=	15 V
$V_{GEoff}$	=	-15 V
$R_{gon}$	=	16 $\Omega$
$R_{goff}$	=	16 $\Omega$

**Figure 1**

IGBT

**Typical average static loss as a function of output current**

$$P_{loss} = f(I_{out})$$

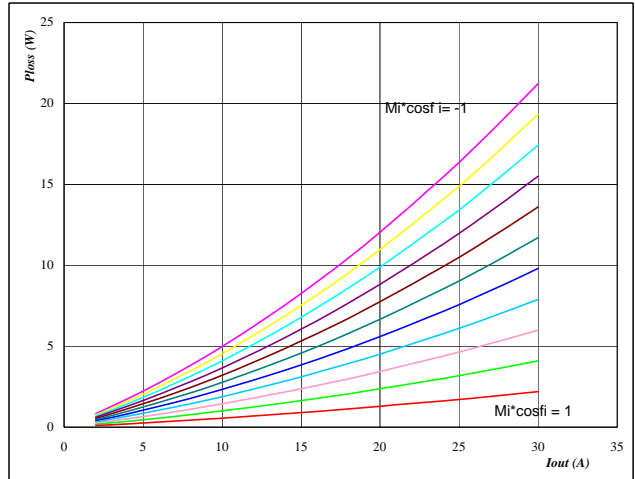

**At**
 $T_j = 126 \text{ } ^\circ\text{C}$ 
 $M_i \cdot \cos\phi$  from -1 to 1 in steps of 0,2

**Figure 2**

FWD

**Typical average static loss as a function of output current**

$$P_{loss} = f(I_{out})$$

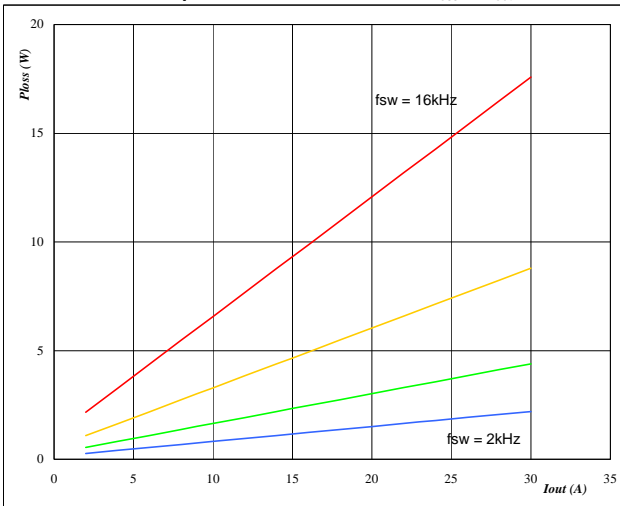

**At**
 $T_j = 126 \text{ } ^\circ\text{C}$ 
 $M_i \cdot \cos\phi$  from -1 to 1 in steps of 0,2

**Figure 3**

IGBT

**Typical average switching loss as a function of output current**

$$P_{loss} = f(I_{out})$$


**At**
 $T_j = 126 \text{ } ^\circ\text{C}$ 

DC link = 400 V

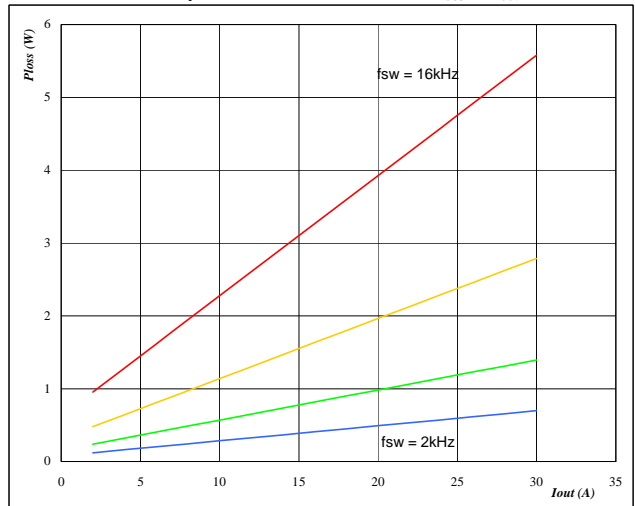
 $f_{sw}$  from 2 kHz to 16 kHz in steps of factor 2

**Figure 4**

FWD

**Typical average switching loss as a function of output current**

$$P_{loss} = f(I_{out})$$


**At**
 $T_j = 126 \text{ } ^\circ\text{C}$ 


DC link = 400 V

 $f_{sw}$  from 2 kHz to 16 kHz in steps of factor 2

**Figure 5** Phase

**Typical available 50Hz output current as a function  $Mi \cdot \cos \varphi$** 

$$I_{out} = f(Mi \cdot \cos \varphi)$$

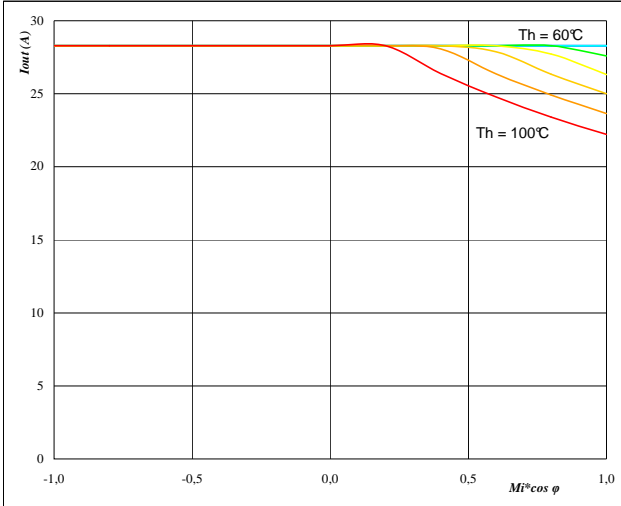


**At**  
 $T_j = 126^\circ\text{C}$   
 DC link = 400 V  
 $f_{sw} = 4$  kHz  
 $T_h$  from 60 °C to 100 °C in steps of 5 °C

**Figure 6** Phase

**Typical available 50Hz output current as a function of switching frequency**

$$I_{out} = f(f_{sw})$$

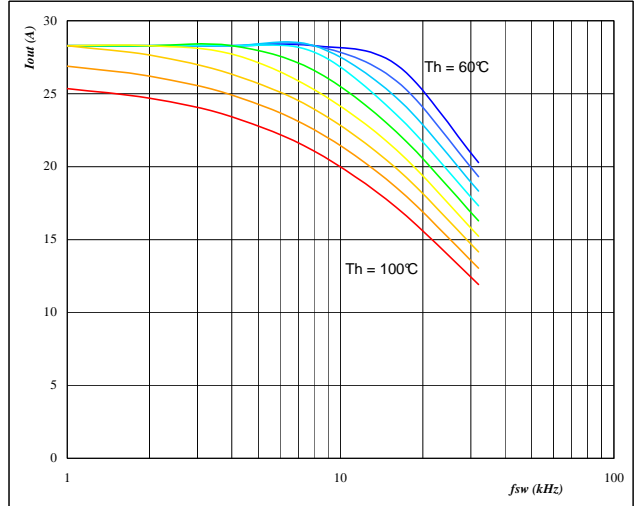


**At**  
 $T_j = 126^\circ\text{C}$   
 DC link = 400 V  
 $Mi \cdot \cos \varphi = 0,8$   
 $T_h$  from 60 °C to 100 °C in steps of 5 °C

**Figure 7** Phase

**Typical available 50Hz output current as a function of  $Mi \cdot \cos \varphi$  and switching frequency**

$$I_{out} = f(f_{sw}, Mi \cdot \cos \varphi)$$

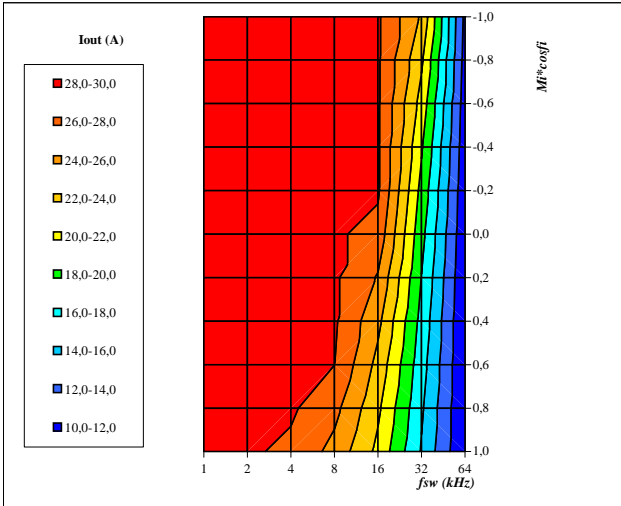


**At**  
 $T_j = 126^\circ\text{C}$   
 DC link = 400 V  
 $T_h = 80^\circ\text{C}$

**Figure 8** Phase

**Typical available 0Hz output current as a function of switching frequency**

$$I_{outpeak} = f(f_{sw})$$

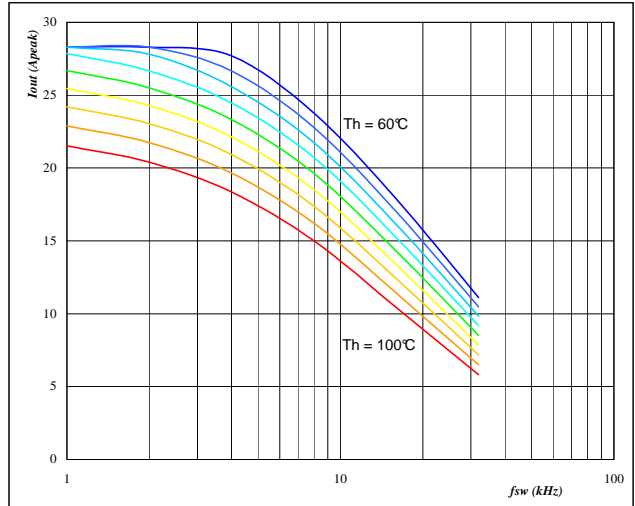


**At**  
 $T_j = 126^\circ\text{C}$   
 DC link = 400 V  
 $T_h$  from 60 °C to 100 °C in steps of 5 °C  
 $Mi = 0$

flowPIM0+PFC 2nd **Output Inverter Application** 600V/20A

**Figure 9** Inverter


Typical available peak output power as a function of heatsink temperature  
 $P_{out}=f(T_h)$

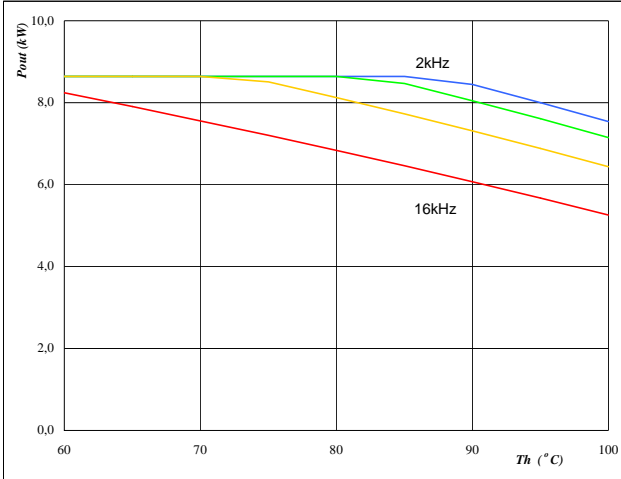

**At**  
 $T_j = 126 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 Mi = 1  
 cos  $\varphi = 0,80$   
 $f_{sw}$  from 2 kHz to 16 kHz in steps of factor 2

**Figure 10** Inverter


Typical efficiency as a function of output power  
efficiency=f( $P_{out}$ )

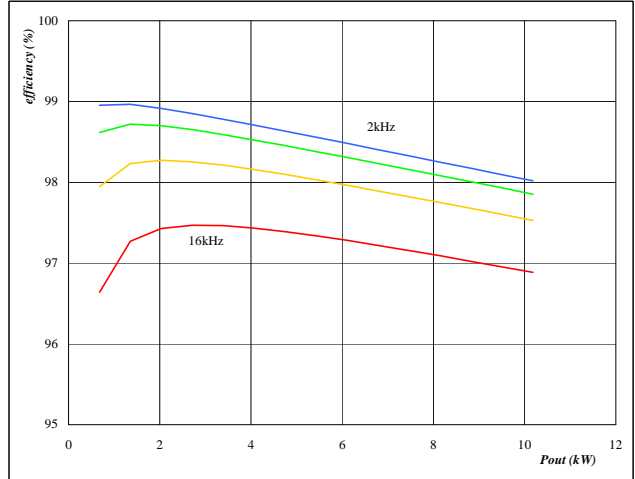

**At**  
 $T_j = 126 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 Mi = 1  
 cos  $\varphi = 0,80$   
 $f_{sw}$  from 2 kHz to 16 kHz in steps of factor 2

**Figure 11** Inverter

Typical available overload factor as a function of motor power and switching frequency  
 $P_{peak} / P_{nom}=f(P_{nom}, f_{sw})$

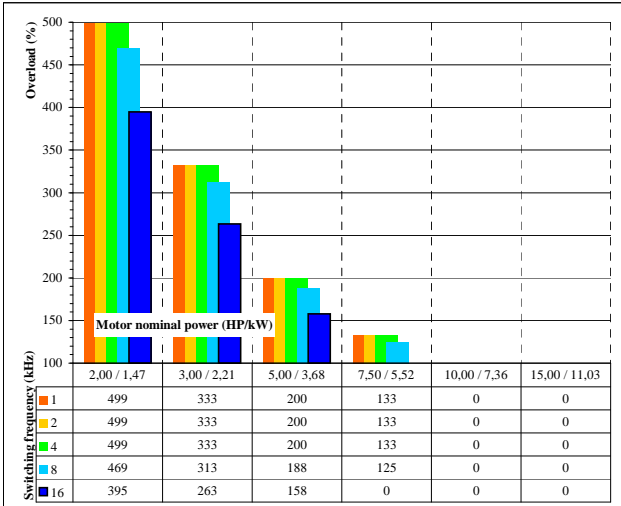

**At**  
 $T_j = 126 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 Mi = 1  
 cos  $\varphi = 0,8$   
 $f_{sw}$  from 1 kHz to 16kHz in steps of factor 2  
 $T_h = 80 \text{ } ^\circ\text{C}$   
 Motor eff = 0,85


flowPIM0+PFC 2nd **Boost PFC Application** 600V/20A

General conditions

**Boost PFC**  
 $V_{GEon} = 10\text{ V}$   
 $V_{GEoff} = 0\text{ V}$   
 $R_{gon} = 8\ \Omega$   
 $R_{goff} = 8\ \Omega$   
 $V_{in} = V_{inpk} \cdot \sin\omega t$

Figure 1 MOSFET


Typical average static loss as a function of input current  
 $P_{loss} = f(I_{in})$

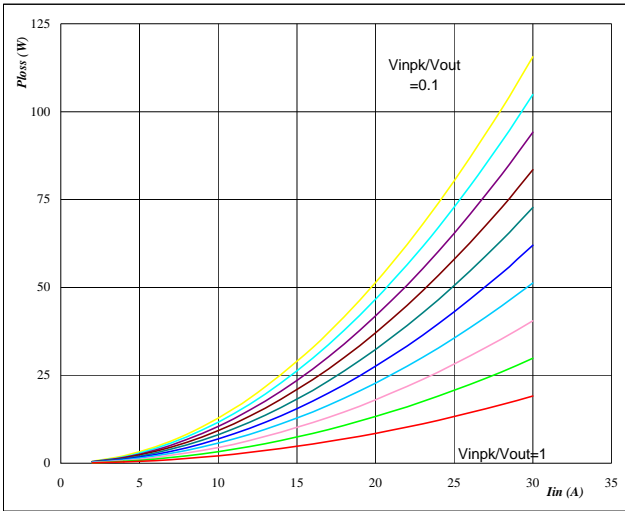

At  $T_j = 125\text{ }^\circ\text{C}$   
 $V_{inpk} / V_{out}$  from 0,1 to 1 in steps of 0,1

Figure 2 FWD


Typical average static loss as a function of input current  
 $P_{loss} = f(I_{in})$

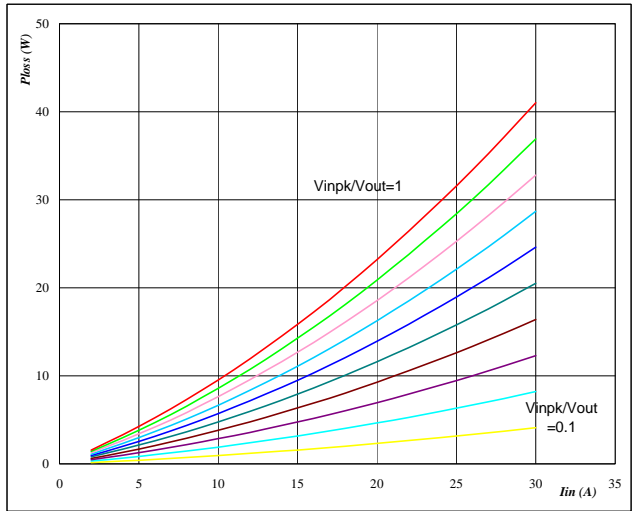

At  $T_j = 125\text{ }^\circ\text{C}$   
 $V_{inpk} / V_{out}$  from 0,1 to 1 in steps of 0,1

Figure 3 MOSFET


Typical average switching loss as a function of input current  
 $P_{loss} = f(I_{in})$

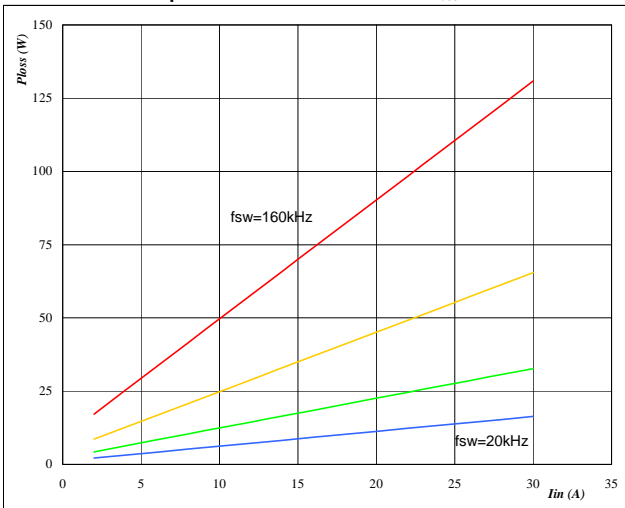

At  $T_j = 125\text{ }^\circ\text{C}$   
 DC link = 400 V  
 $f_{sw}$  from 20 kHz to 160 kHz in steps of factor 2

Figure 4 FWD

Typical average switching loss as a function of input current  
 $P_{loss} = f(I_{in})$

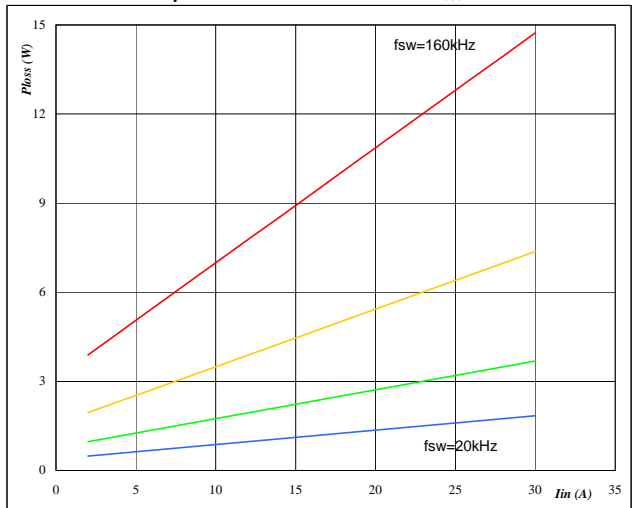


At  $T_j = 125\text{ }^\circ\text{C}$   
 DC link = 400 V  
 $f_{sw}$  from 20 kHz to 160 kHz in steps of factor 2

**Figure 5** PFC

**Typical available input current as a function of  $V_{inpk}/V_{out}$** 

$$I_{in} = f(V_{inpk}/V_{out})$$

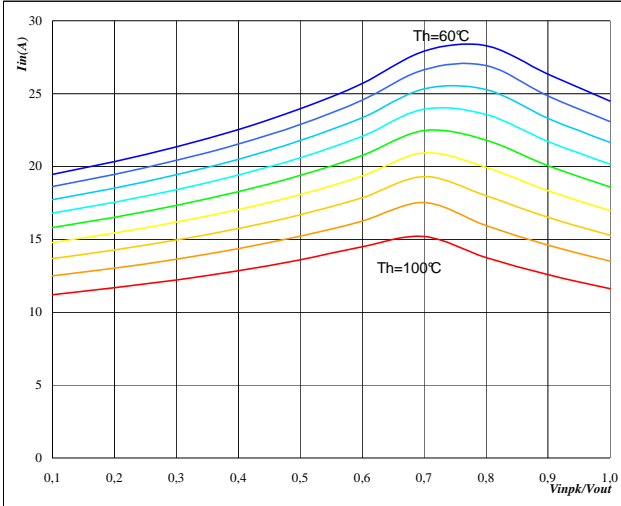


**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $f_{sw} = 20 \text{ kHz}$   
 Th from 60 °C to 100 °C in steps of 5 °C

**Figure 6** PFC

**Typical available input current as a function of switching frequency**

$$I_{in} = f(f_{sw})$$

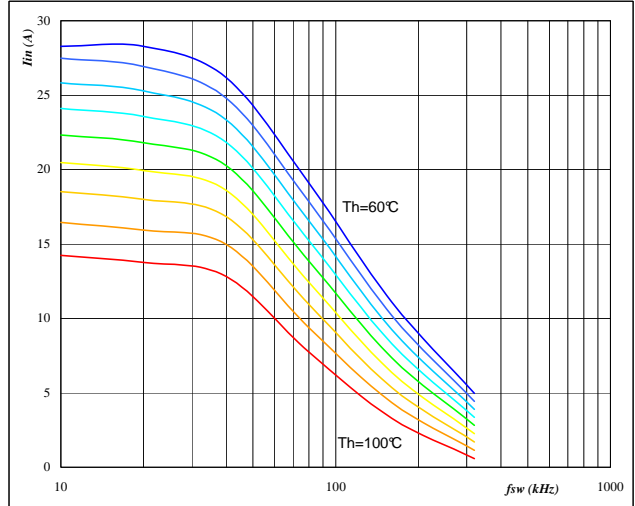


**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,8$   
 Th from 60 °C to 100 °C in steps of 5 °C

**Figure 7** PFC

**Typical available input current as a function of  $V_{inpk}/V_{out}$  and switching frequency**

$$I_{in} = f(f_{sw}, V_{inpk}/V_{out})$$

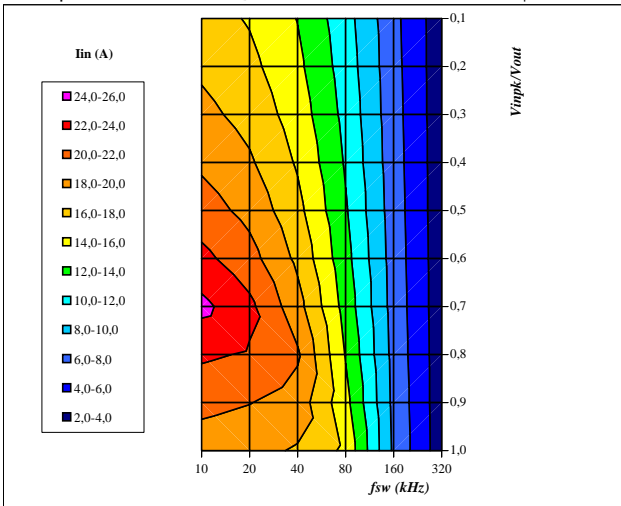


**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $T_n = 80 \text{ } ^\circ\text{C}$

**Figure 8** PFC


**Typical available input current as a function of switching frequency**

$$I_{in} = f(f_{sw})$$

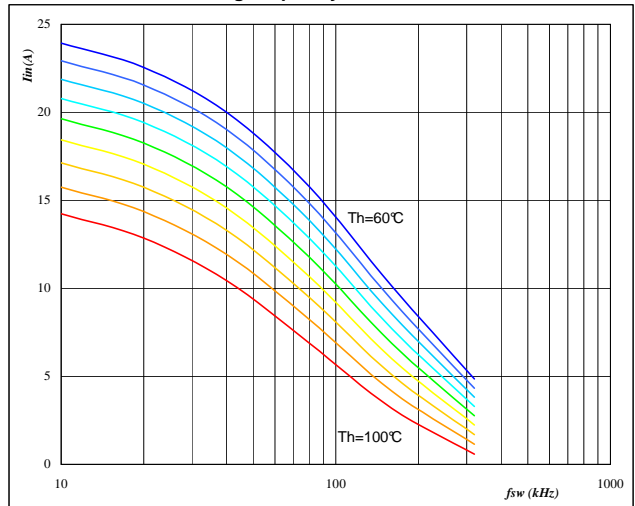


**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,4$   
 Th from 60 °C to 100 °C in steps of 5 °C

**Figure 9** PFC

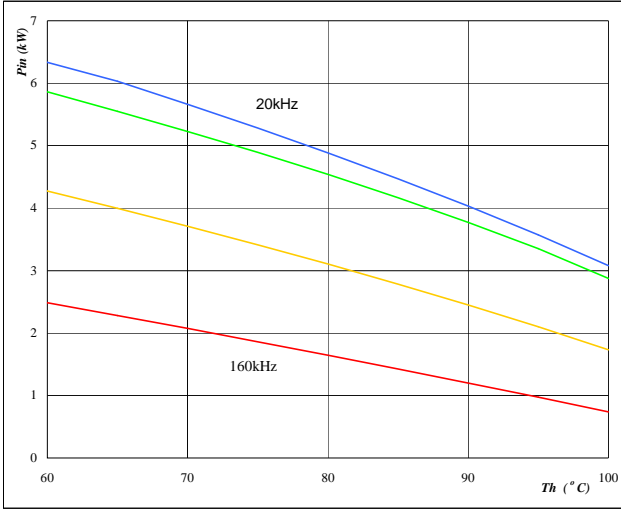**Typical available electric input power as a function of heatsink temperature**  
 $P_{in} = f(T_h)$ 


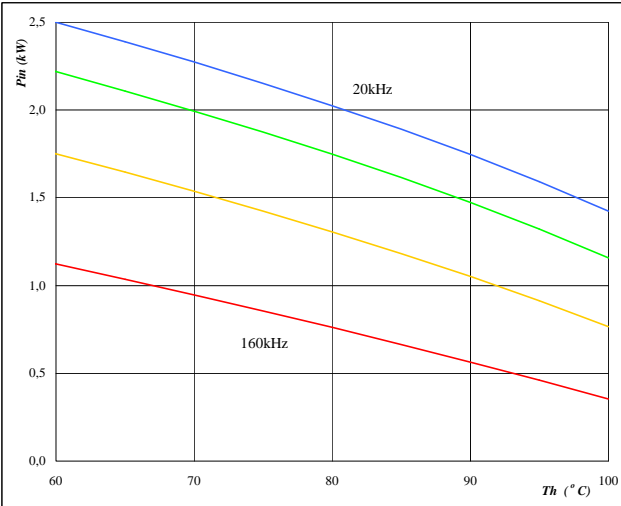
**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,8$  kHz  
 fsw from 20 kHz to 160 kHz in steps of factor 2

**Figure 10** PFC

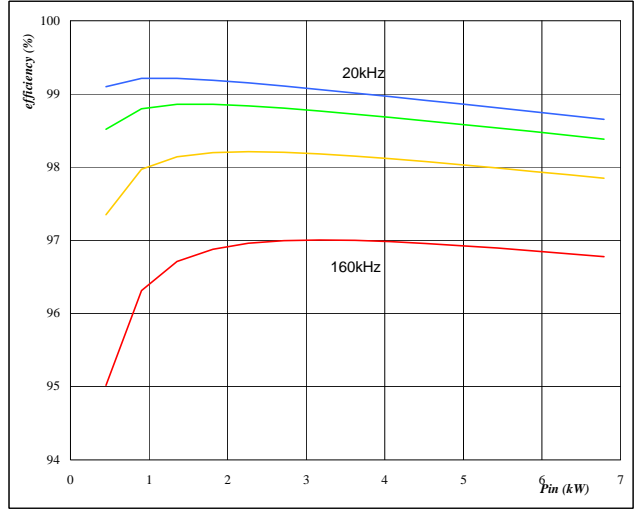**Typical efficiency as a function of input power**  
 efficiency =  $f(P_{in})$ 


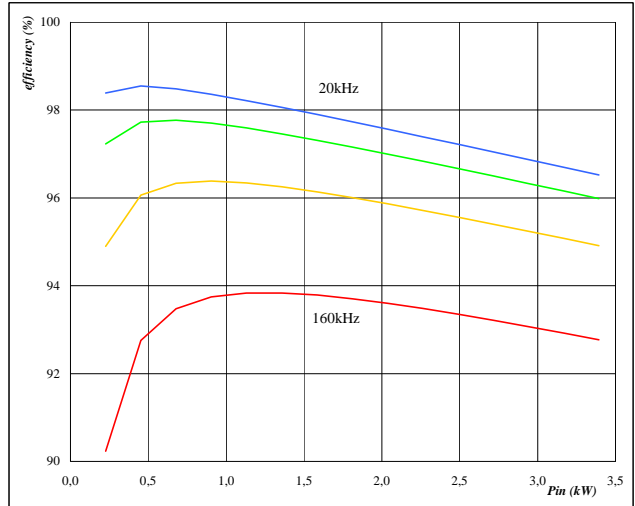
**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,8$  kHz  
 fsw from 20 kHz to 160 kHz in steps of factor 2

**Figure 11** PFC

**Typical available electric input power as a function of heatsink temperature**  
 $P_{in} = f(T_h)$ 


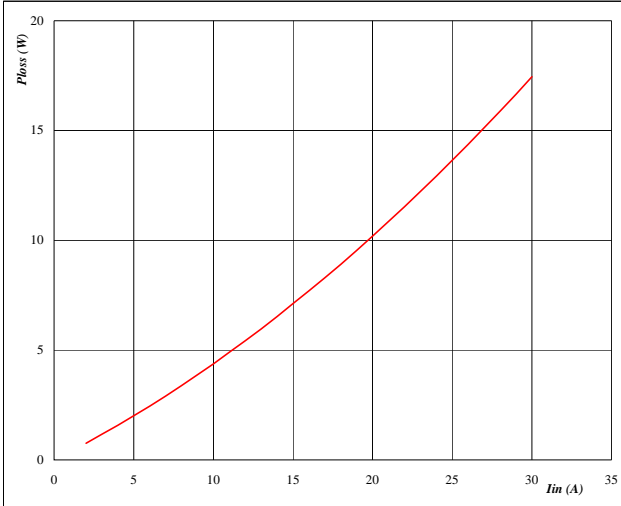
**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,4$   
 fsw from 20 kHz to 160 kHz in steps of factor 2


**Figure 12** PFC


**Typical efficiency as a function of input power**  
 efficiency =  $f(P_{in})$ 


**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,4$   
 fsw from 20 kHz to 160 kHz in steps of factor 2


**Figure 13** Rectifier

**Typical average static loss as a function of input current**  
 $P_{loss} = f(I_{in})$ 

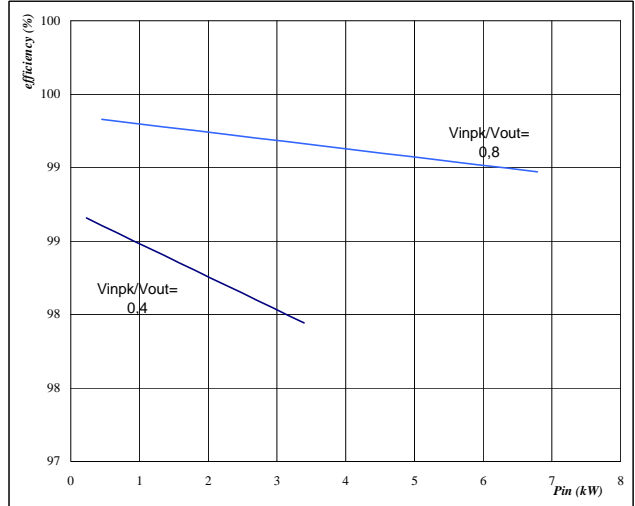**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$ 
**Figure 14** Rectifier Bridge

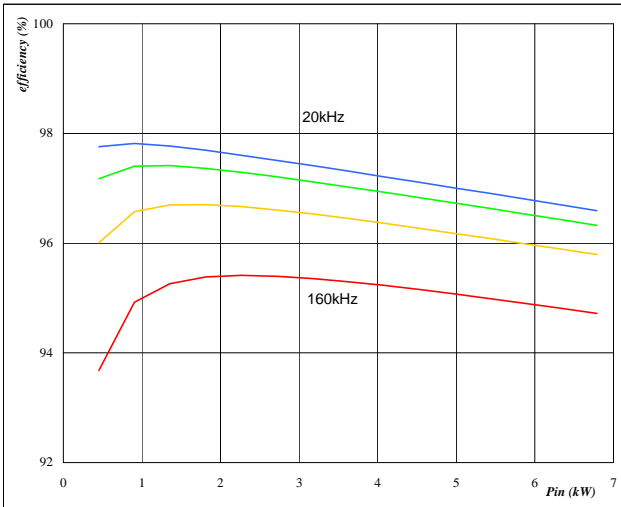**Typical efficiency as a function of input power**  
 $\text{efficiency} = f(P_{in})$ 

**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$ 
**Figure 15** Overall

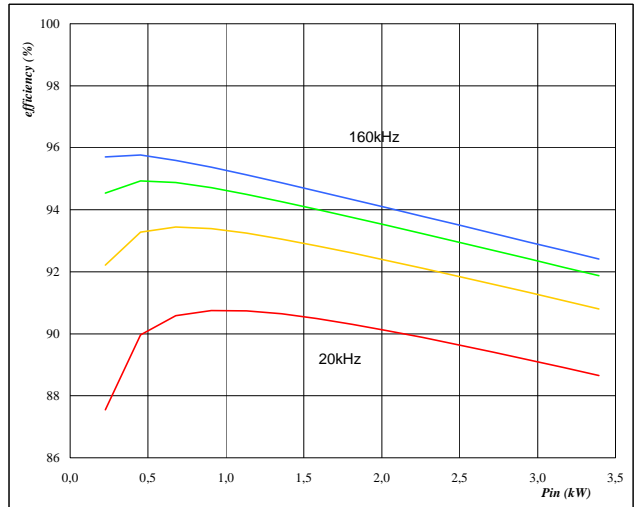**Typical efficiency as a function of input power**  
 $\text{efficiency} = f(P_{in})$ 

**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,8 \text{ kHz}$   
 fsw from 20 kHz to 160 kHz in steps of factor 2

**Figure 16** Overall

**Typical efficiency as a function of input power**  
 $\text{efficiency} = f(P_{in})$ 

**At**  
 $T_j = 125 \text{ } ^\circ\text{C}$   
 DC link = 400 V  
 $V_{inpk}/V_{out} = 0,4 \text{ kHz}$   
 fsw from 20 kHz to 160 kHz in steps of factor 2