


Figure 16. Boost IGBT

Typical average switching loss as a function of phase displacement

$$P_{loss} = f(\varphi)$$

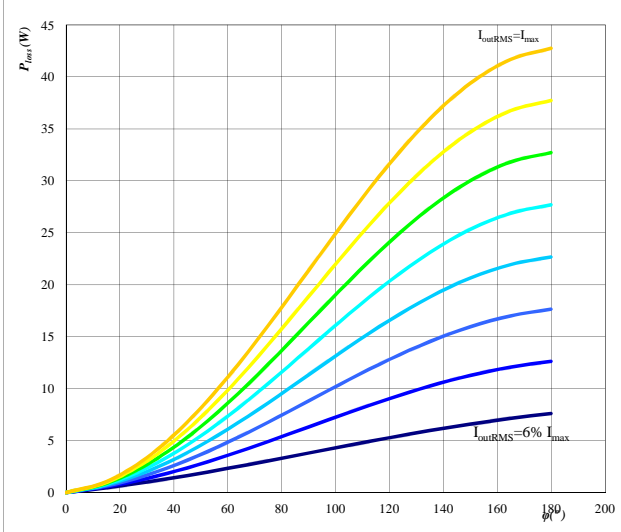


Conditions: $T_j = 150$ °C $f_{sw} = 20$ kHz
 DC link = 700 V
 parameter: I_{oRMS} from 5 A to 80 A
 in steps of 11 A A

Figure 17. Boost FWD

Typical average switching loss as a function of phase displacement

$$P_{loss} = f(\varphi)$$

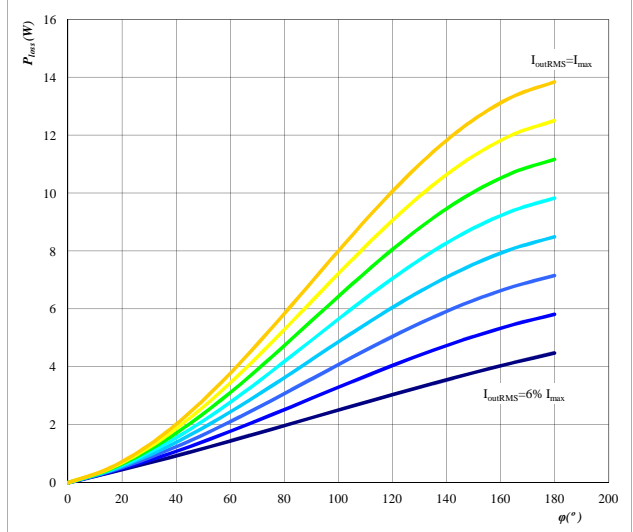


Conditions: $T_j = 150$ °C $f_{sw} = 20$ kHz
 DC link = 700 V
 parameter: I_{oRMS} from 5 A to 80 A
 in steps of 11 A A

Figure 18. Boost IGBT

Typical total loss as a function of phase displacement and I_{outRMS}

$$P_{loss} = f(I_{oRMS}; \varphi)$$

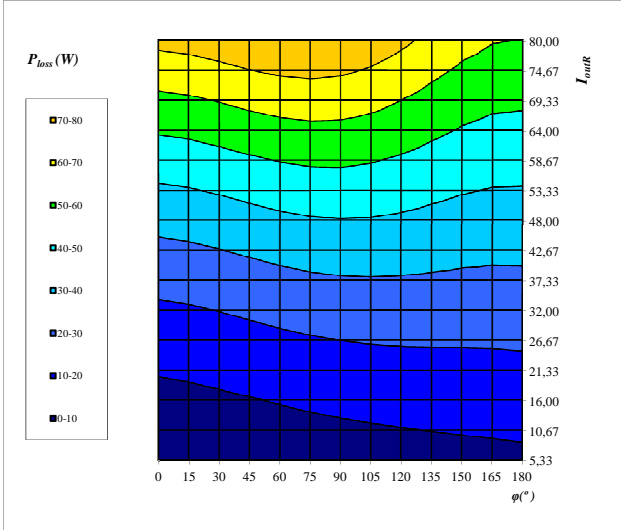


Conditions: $T_j = 150$ °C
 DC link = 700 V
 $f_{sw} = 20$ kHz

Figure 19. Boost FWD

Typical total loss as a function of phase displacement and I_{outRMS}

$$P_{loss} = f(I_{oRMS}; \varphi)$$

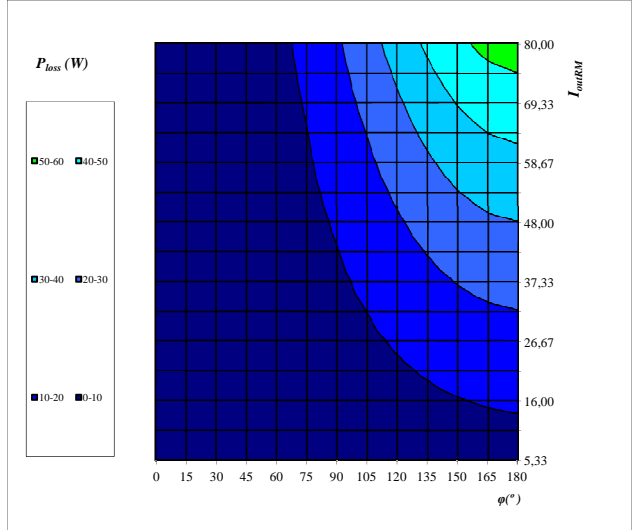


Conditions: $T_j = 150$ °C
 DC link = 700 V
 $f_{sw} = 20$ kHz

Figure 20. Boost IGBT+FWD

Typical available output current as a function of phase displacement

$$I_{out} = f(\varphi)$$

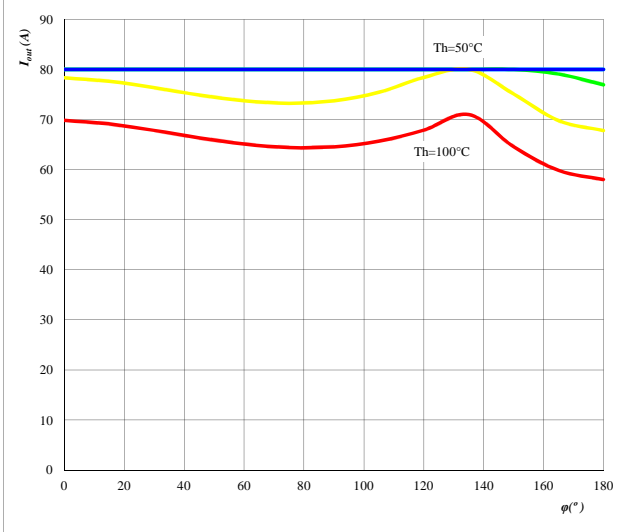


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$ $f_{sw} = 20 \text{ kHz}$
 DC link = 700 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 21. Boost IGBT+FWD

Typical available output current as a function of switching frequency

$$I_{out} = f(f_{sw})$$

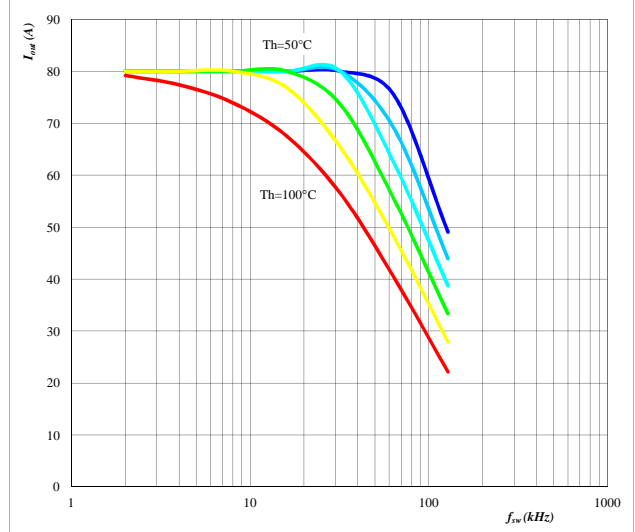


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$ $\varphi = 90^\circ$
 DC link = 700 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 22. Boost IGBT+FWD

Typical available 50Hz output current as a function of fsw and phase displacement

$$I_{out} = f(f_{sw}, \varphi)$$

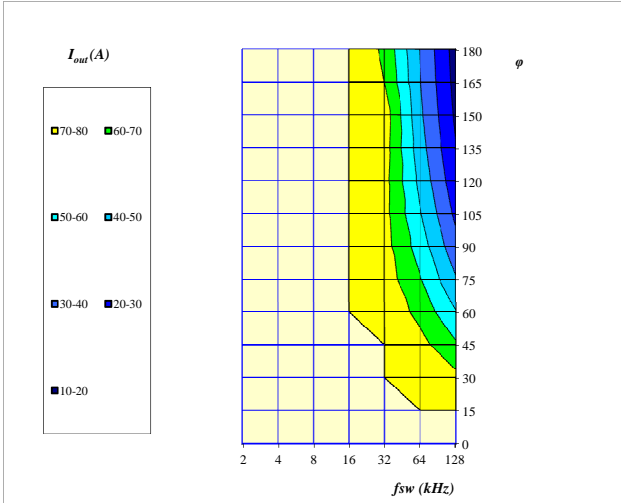


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$
 DC link = 700 V
 $T_h = 80 \text{ } ^\circ\text{C}$

Figure 23. per MODULE

Typical available output current as a function of heat sink temperature

$$I_{out}=f(T_h)$$

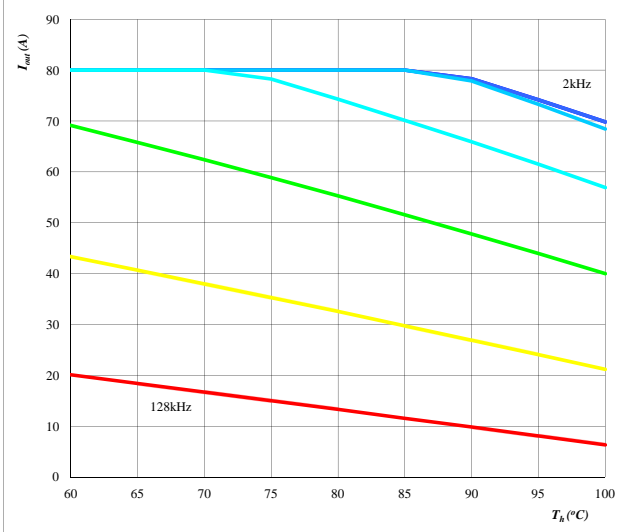


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$
 DC link= 700 V
 $\varphi = 0^\circ$

parameter: Switching freq.
 fsw from 2 kHz to 128 kHz
 in steps of factor 2

Figure 24. per MODULE

Typical available output current as a function of phase displacement

$$I_{out}=f(\varphi)$$

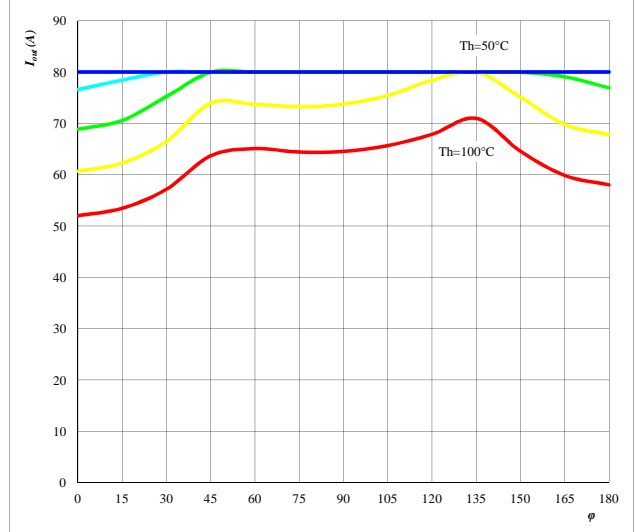


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$
 DC link= 700 V
 $f_{sw} = 20 \text{ kHz}$

parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 25. per MODULE

Typical available output current as a function of switching frequency

$$I_{out}=f(f_{sw})$$

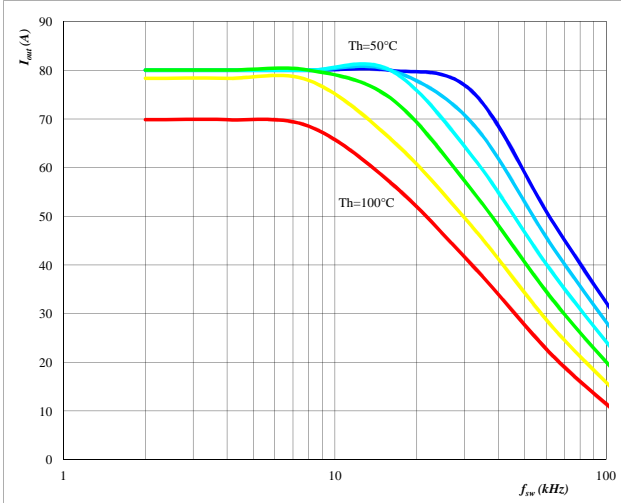


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$ $\varphi = 0^\circ$
 DC link= 700 V

parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 26. per MODULE

Typical available 50Hz output current as a function of fsw and phase displacement

$$I_{out}=f(f_{sw}, \varphi)$$

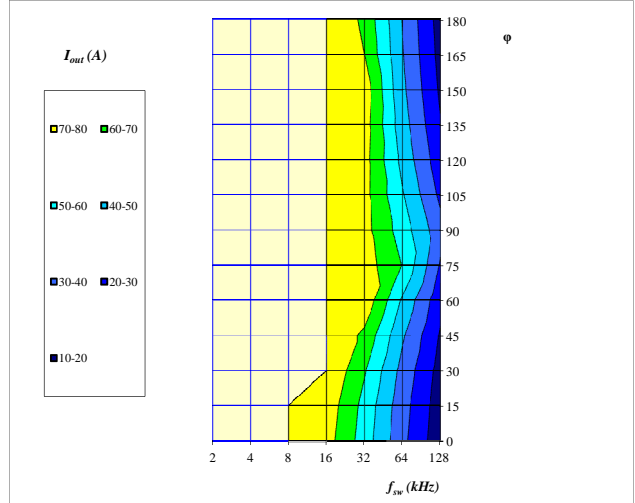


Conditions: $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$
 DC link= 700 V
 $T_h = 80 \text{ } ^\circ\text{C}$

flowNPC0 NPC Application 600V/75A

Figure 27. per MODULE

Typical efficiency as a function of output power

$\eta=f(P_{out})$

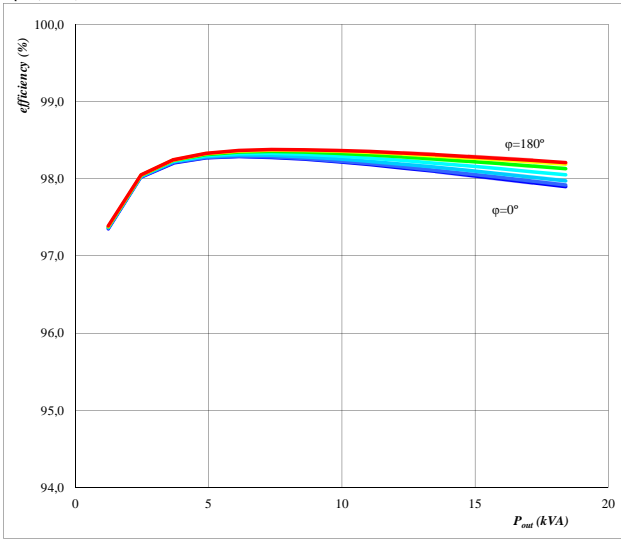


Conditions: $T_j = 150$ °C
 $f_{sw} = 20$ kHz
 DC link = 700 V
 parameter: phase displacement ϕ from 0° to 180° in steps of 30°

Figure 28. per MODULE

Typical efficiency as a function of output power

$\eta=f(P_{out})$

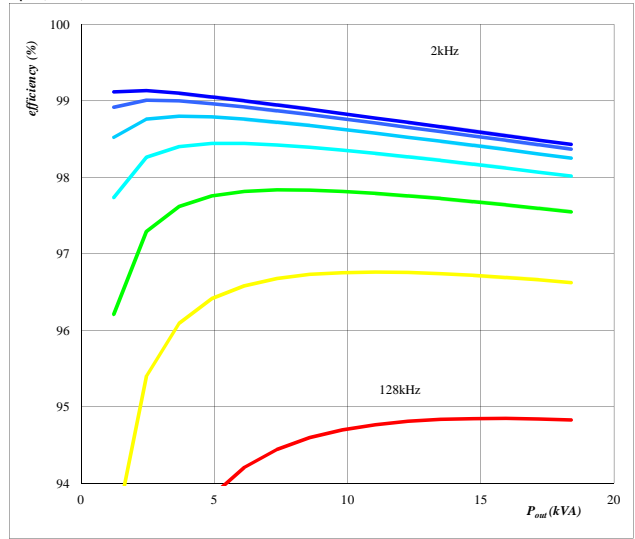


Conditions: $T_j = 150$ °C
 DC link = 700 V
 parameter: $\phi = 0$ °
 Switching freq. f_{sw} from 2 kHz to 128 kHz in steps of factor 2

Figure 29. per MODULE

Typical available output power as a function of heat sink temperature

$P_{out}=f(T_h)$

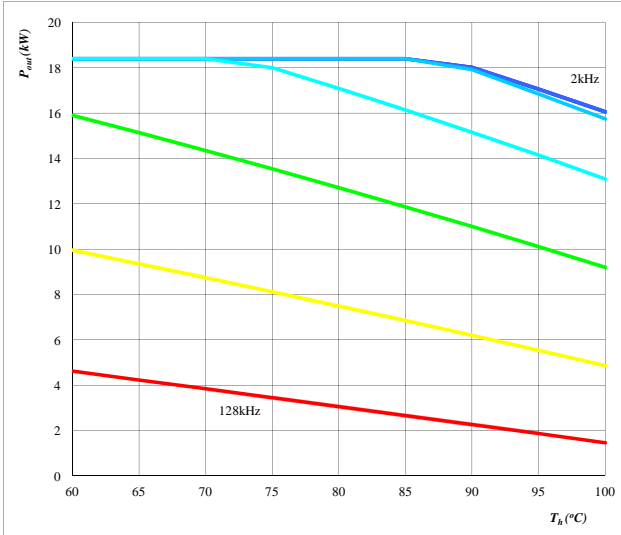

Conditions: $T_j = T_{jmax} - 25$ °C
 DC link = 700 V
 $\phi = 0$ °
 parameter: Switching freq. f_{sw} from 2 kHz to 128 kHz in steps of factor 2

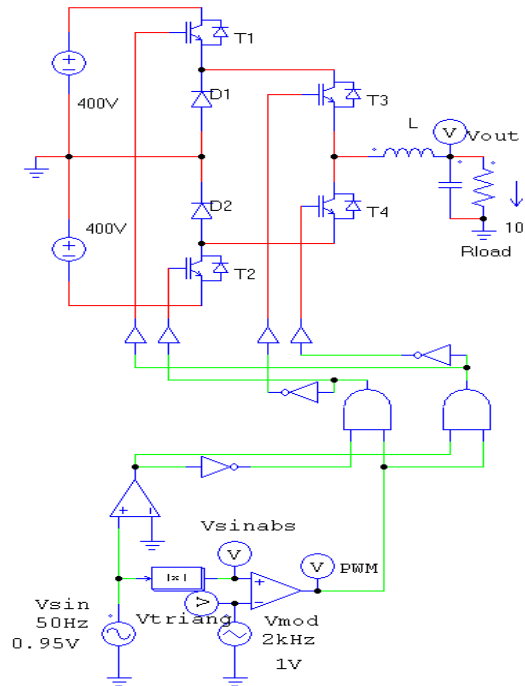
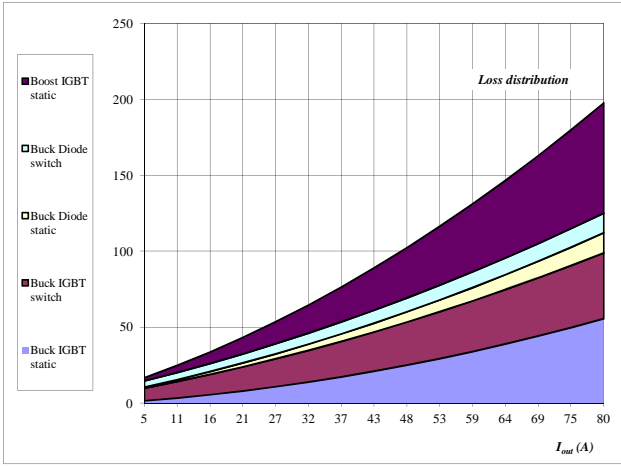


Figure 30. per MODULE


Typical loss distribution as a function of output current

$P_{out}=f(T_h)$


 Conditions: $T_j = 150$ °C
 $f_{sw} = 20$ kHz
 DC link = 700 V
 $\varphi = 0^\circ$
Figure 31. per MODULE

Typical relativ loss distribution as a function of output current

$P_{out}=f(T_h)$

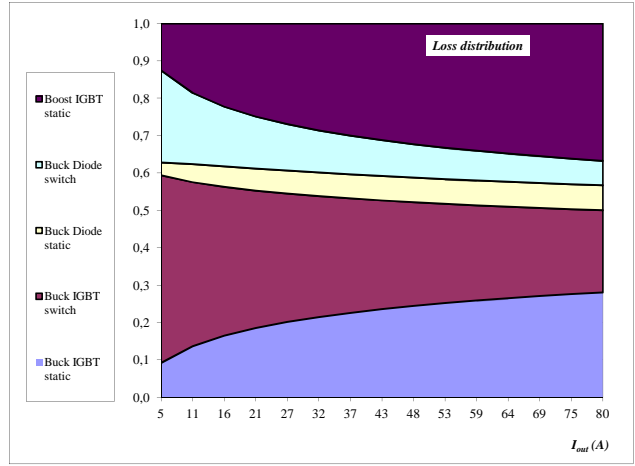
 Conditions: $T_j = 150$ °C
 $f_{sw} = 20$ kHz
 DC link = 700 V
 $\varphi = 0^\circ$