


General conditions

BOOST	
V_{GEon}	= 10 V
V_{GEOff}	= 0 V
R_{gon}	= 8 Ω
R_{goff}	= 8 Ω

Figure 1. INPUT BOOST MOSFET


Typical average static loss as a function of input current I_{IRMS}

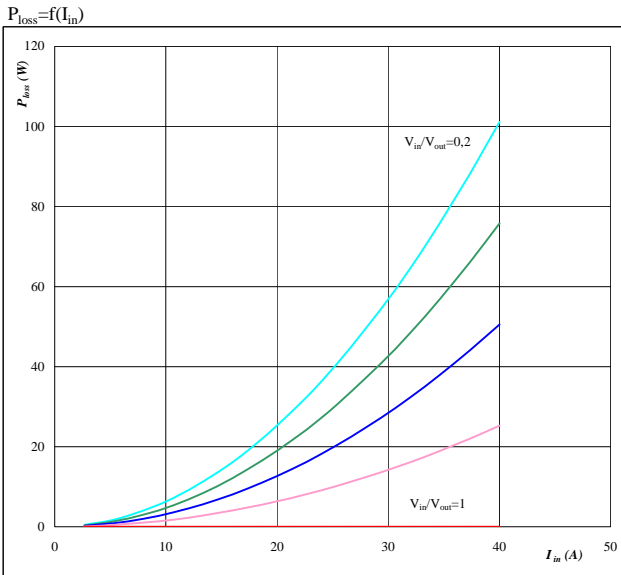

Conditions: $T_j = 125$ °C
Ratio of input DC voltage to output DC voltage parameter: V_{in}/V_{out} from 0,2 to 1,0 in 0,2 steps

Figure 2. INPUT BOOST FWD


Typical average static loss as a function of input current I_{IRMS}

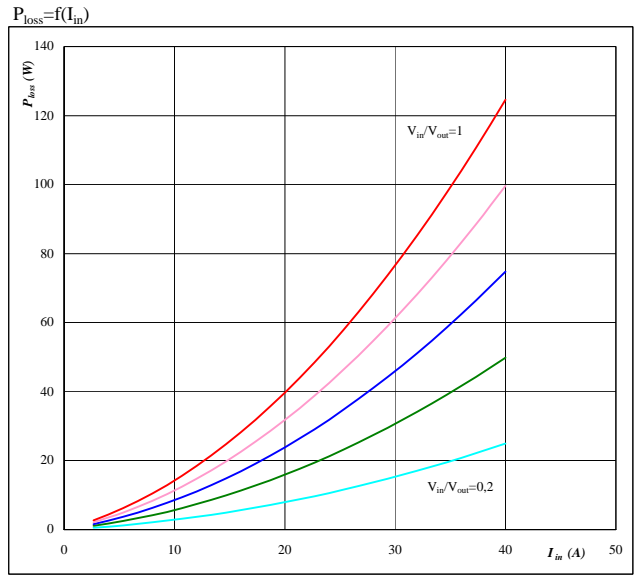

Conditions: $T_j = 125$ °C
Ratio of input DC voltage to output DC voltage parameter: V_{in}/V_{out} from 0,2 to 1,0 in 0,2 steps

Figure 3. INPUT BOOST MOSFET


Typical average switching loss as a function of input current

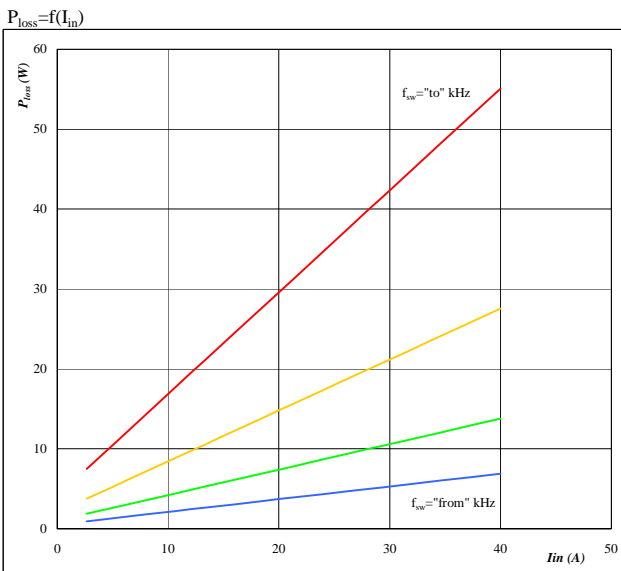

Conditions: $T_j = 125$ °C
 $V_{out} = 350$ V
Sw. freq. fsw from 16 kHz to 128 kHz in steps of factor 2

Figure 4. INPUT BOOST FWD

Typical average switching loss as a function of input current

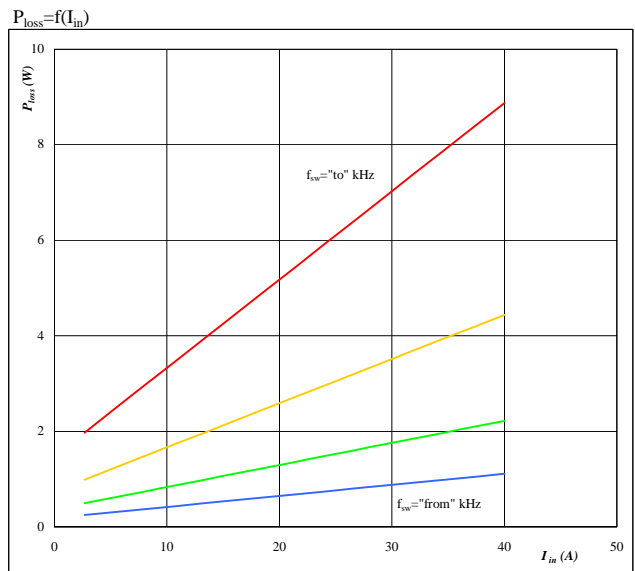


Conditions: $T_j = 125$ °C
 $V_{out} = 350$ V
Sw. freq. fsw from 16 kHz to 128 kHz in steps of factor 2

Figure 5. per PHASE

Typical available input current as a function of

$$V_{in}/V_{out}$$

$$I_{in}=f(V_{in}/V_{out})$$

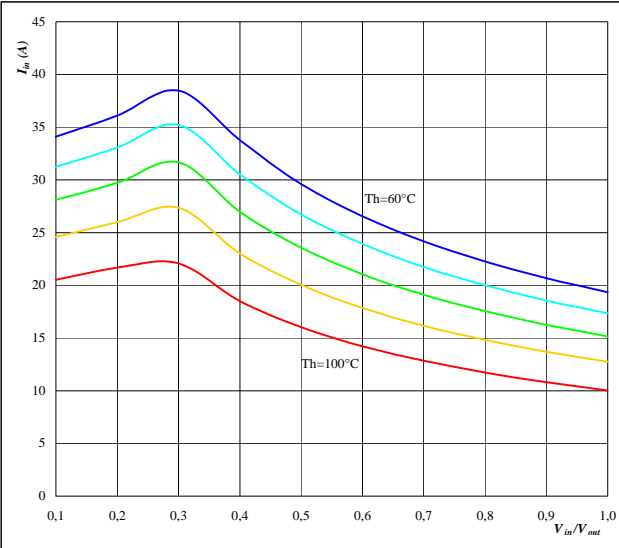


Conditions: $T_j = T_{jmax} - 25^\circ\text{C}$
 DC link= 350 V $f_{sw} = 20$ kHz
 parameter: Heatsink temp.
 Th from 60 °C to 100 °C
 in 10 °C steps

Figure 6. per PHASE

Typical available input current as a function of
 switching frequency

$$I_{in}=f(f_{sw})$$

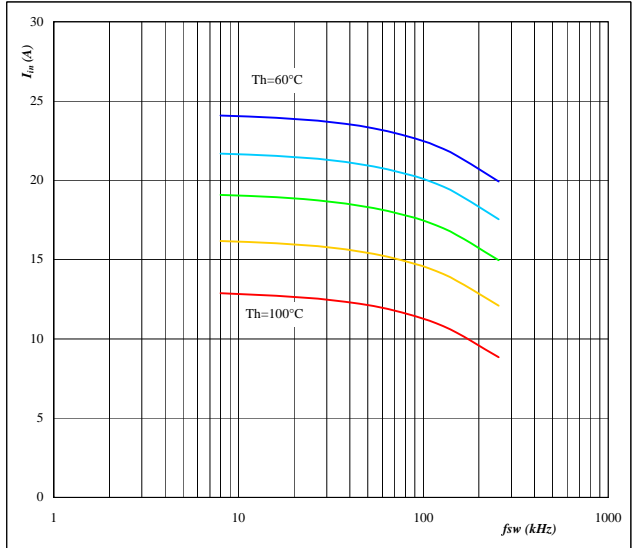


Conditions: $T_j = T_{jmax} - 25^\circ\text{C}$
 DC link= 350 V $V_{in} = 250$ V
 parameter: Heatsink temp.
 Th from 60 °C to 100 °C
 in 10 °C steps

Figure 7. per PHASE

Typical available input current as a function of

$$f_{sw} \text{ and } V_{in}/V_{out}$$

$$I_{in}=f(f_{sw}, V_{in}/V_{out})$$

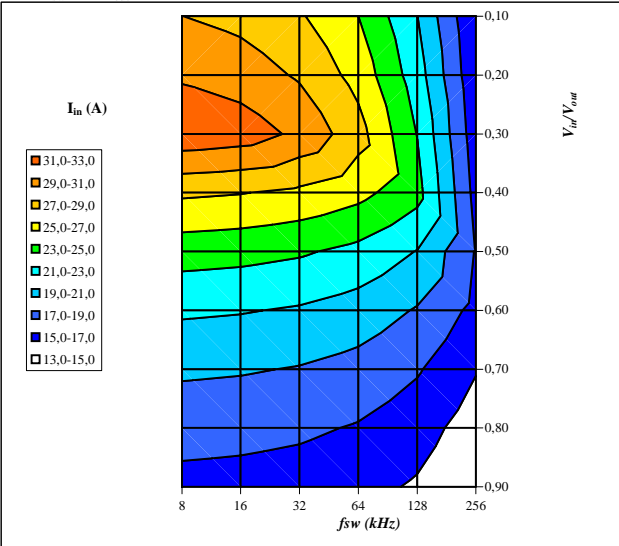


Conditions: $T_j = T_{jmax} - 25^\circ\text{C}$
 DC link= 350 V
 Th= 80 °C


Figure 8. per PHASE

Typical available electric input power as a function of
 heatsink temperature

$$P_{in}=f(T_h)$$

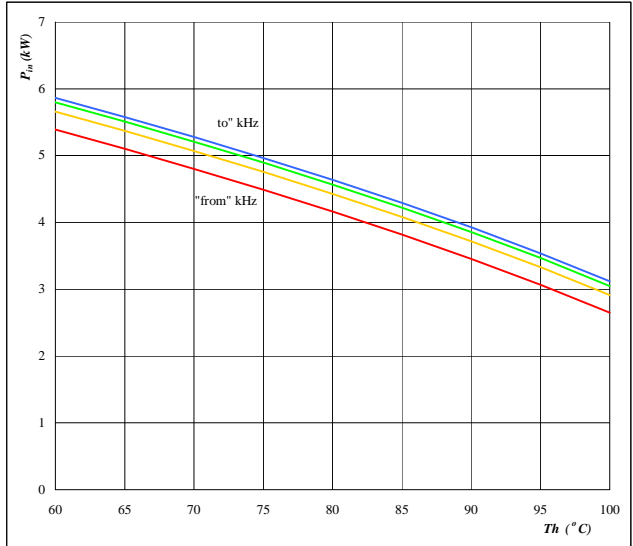

Conditions: $T_j = T_{jmax} - 25^\circ\text{C}$
 $V_{in} = 250$ V DC link= 350 V
 Sw. freq. f_{sw} from 16 kHz to 128 kHz

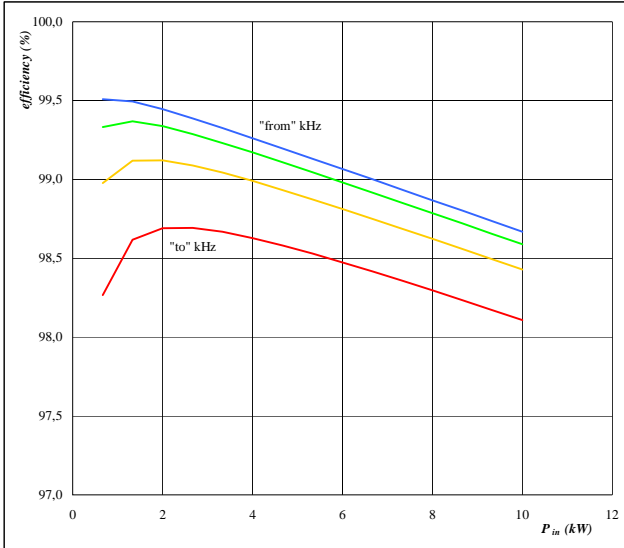flowBOOST0 **DC Boost Application** **600V/41mΩ**
Figure 9. per PHASE
Typical efficiency as a function of input power
 $\eta = f(P_{in})$


Conditions: $T_j = T_{jmax} - 25^\circ\text{C}$
 Vin = 250 V DC link = 350 V
 parameter:
 Sw. freq. fsw from 16 kHz to 128 kHz