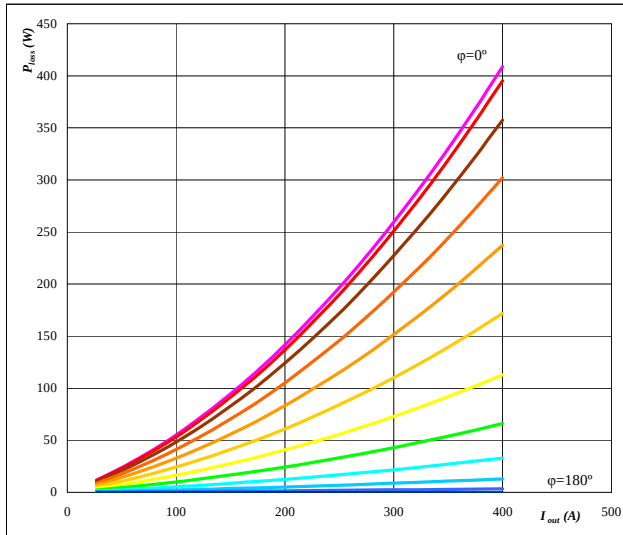


flowNPC 4w
NPC Application
2400V/400A
General conditions


BUCK			
V_{GEon}	=	15 V	
V_{GEoff}	=	-15 V	
R_{gon}	=	1 Ω	
R_{goff}	=	1 Ω	

 $V_{out} = 400 \text{ VAC}$


BOOST			
V_{GEon}	=	15 V	
V_{GEoff}	=	-15 V	
R_{gon}	=	1 Ω	
R_{goff}	=	1 Ω	

Figure 1. Buck T1,T4 / D5,D6 IGBT
Typical average static loss as a function of output current I_{ORMS}


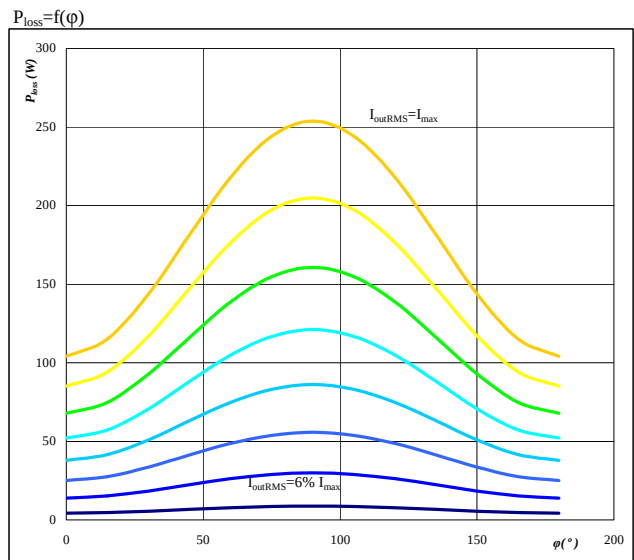
Conditions: $T_j = 125 \text{ }^\circ\text{C}$
 parameter: ϕ from 0° to 180°
 in 12 steps

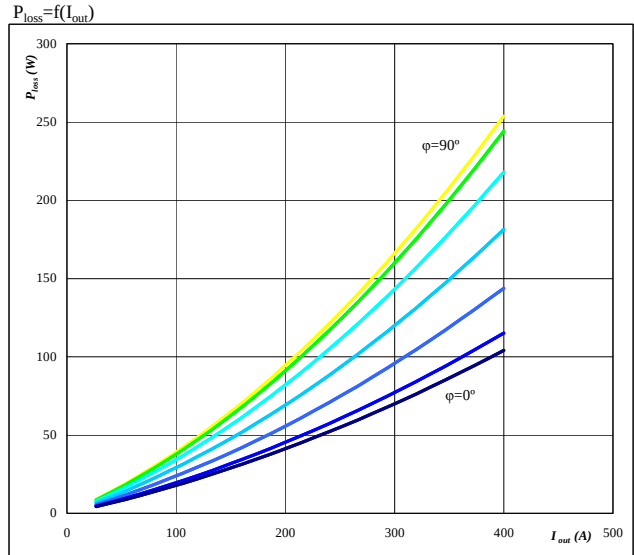Figure 2. Buck T1,T4 / D5,D6 FWD
Typical average static loss as a function of output current I_{ORMS}


Conditions: $T_j = 125 \text{ }^\circ\text{C}$
 parameter: ϕ from 0° to 180°
 in 12 steps

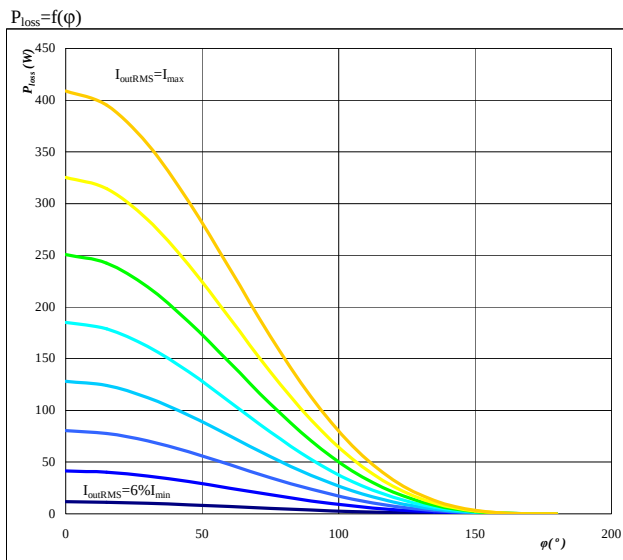Figure 3. Buck T1,T4 / D5,D6 IGBT
Typical average static loss as a function of phase displacement ϕ


Conditions: $T_j = 125 \text{ }^\circ\text{C}$
 parameter: I_{ORMS} from 26,67 A to 400 A
 in steps of 53 A


Figure 4. Buck T1,T4 / D5,D6 FWD
Typical average static loss as a function of phase displacement ϕ


Conditions: $T_j = 125 \text{ }^\circ\text{C}$
 parameter: I_{ORMS} from 26,67 A to 400 A
 in steps of 53 A

Figure 5. Buck T1,T4 / D5,D6 IGBT

Typical average switching loss as a function of phase displacement ϕ

$$P_{\text{loss}} = f(\phi)$$

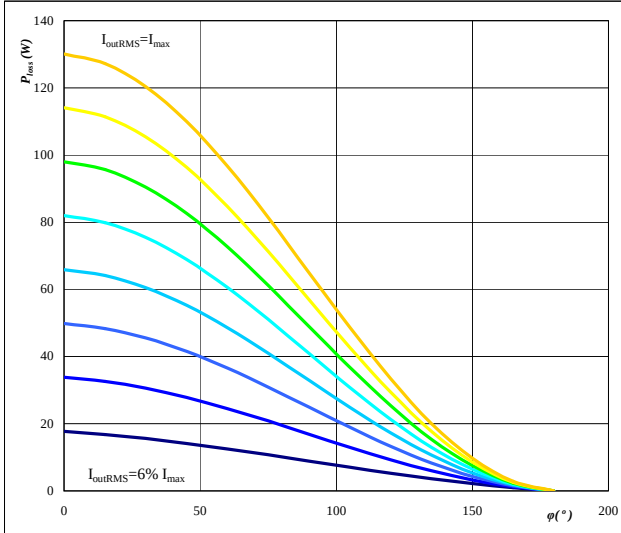


Conditions: $T_j = 125$ °C
 $f_{\text{sw}} = 8$ kHz
 DC link = 1200 V
 parameter: I_{ORMS} from 26,67 A to 400 A
 in steps of 53 A

Figure 6. Buck T1,T4 / D5,D6 FWD

Typical average switching loss as a function of phase displacement ϕ

$$P_{\text{loss}} = f(\phi)$$

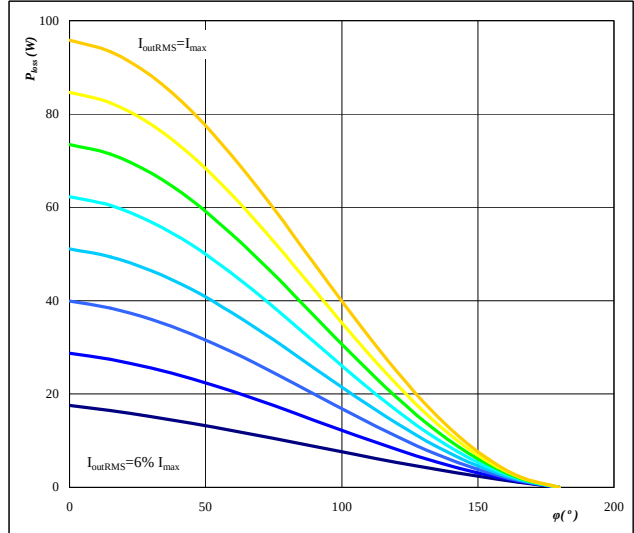


Conditions: $T_j = 125$ °C
 $f_{\text{sw}} = 8$ kHz
 DC link = 1200 V
 parameter: I_{ORMS} from 26,67 A to 400 A
 in steps of 53 A

Figure 7. Buck T1,T4 / D5,D6 IGBT

Typical total loss as a function of phase displacement ϕ and output current I_{ORMS}

$$P_{\text{loss}} = f(I_{\text{ORMS}}; \phi)$$

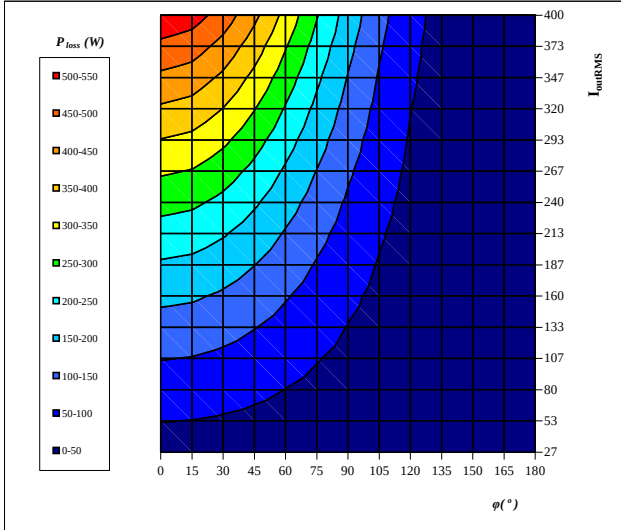


Conditions: $T_j = 125$ °C
 DC link = 1200 V
 $f_{\text{sw}} = 8$ kHz

Figure 8. Buck T1,T4 / D5,D6 FWD

Typical total loss as a function of phase displacement ϕ and output current I_{ORMS}

$$P_{\text{loss}} = f(I_{\text{ORMS}}; \phi)$$

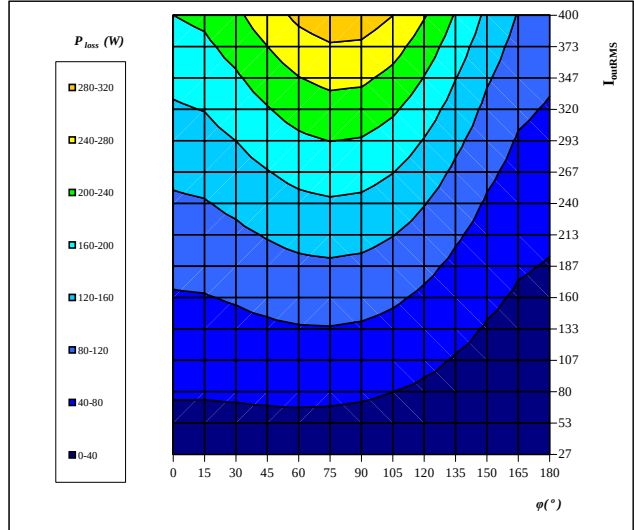


Conditions: $T_j = 125$ °C
 DC link = 1200 V
 $f_{\text{sw}} = 8$ kHz

Figure 9. for Buck T1,T4 / D5,D6 IGBT+FWD

Typical available output current as a function of phase displacement φ

$$I_{out}=f(\varphi)$$

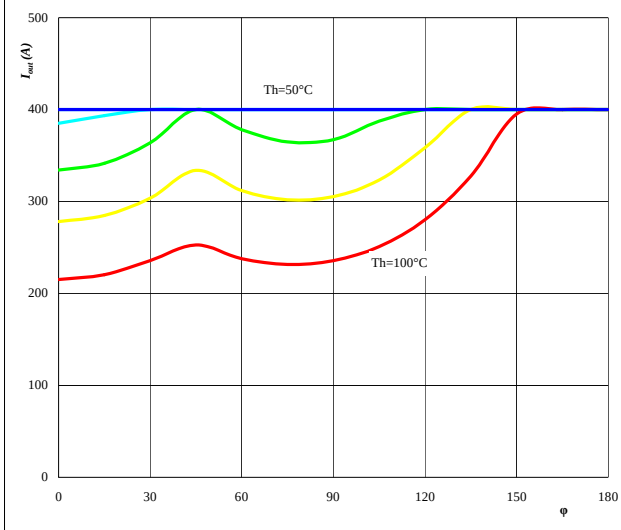


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $f_{sw} = 8 \text{ kHz}$
 DC link= 1200 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 10. for Buck T1,T4 / D5,D6 IGBT+FWD

Typical available output current as a function of switching frequency f_{sw}

$$I_{out}=f(f_{sw})$$

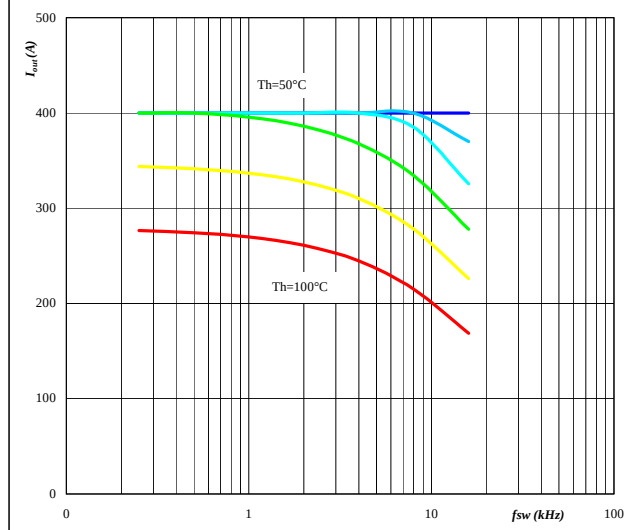


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $\varphi = 0 \text{ } ^\circ$
 DC link= 1200 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 11. for Buck T1,T4 / D5,D6 IGBT+FRED

Typical available 50Hz output current as a function of f_{sw} and phase displacement φ


$$I_{out}=f(f_{sw},\varphi)$$

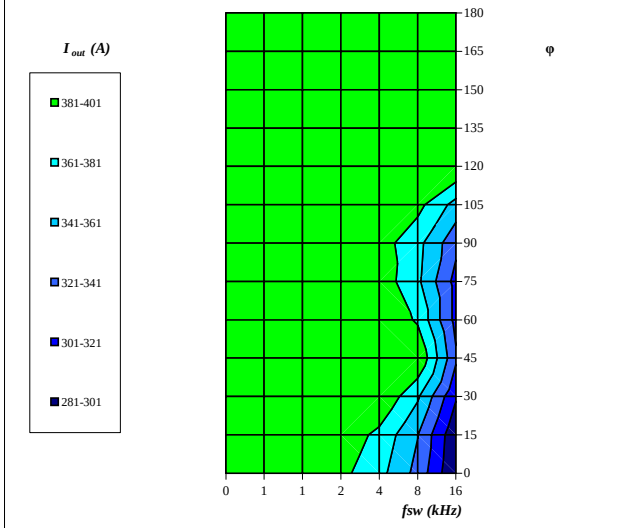

Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
 DC link= 1200 V
 $T_h = 80 \text{ } ^\circ\text{C}$

3x flowNPC 4w
NPC Application
2400V/400A
Figure 12. Boost T2,T3 / D2,D3 IGBT
Typical average static loss as a function of output current


$$P_{loss} = f(I_{out})$$

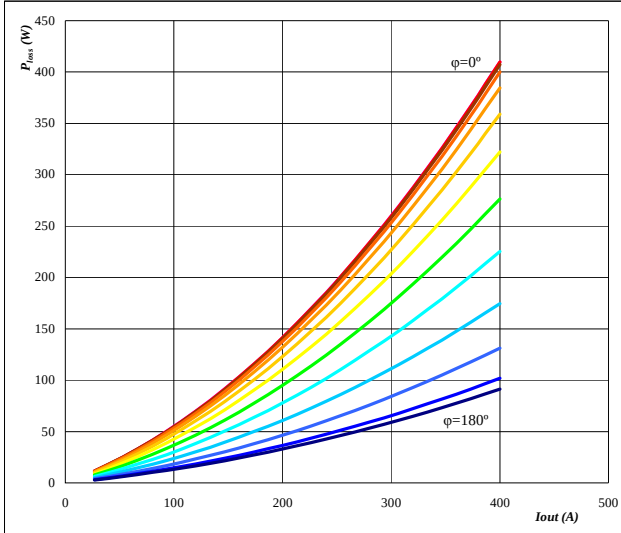

Conditions: $T_J = 125$ °C
 parameter: ϕ from 0° to 180°
 in 12 steps

Figure 13. Boost T2,T3 / D2,D3 FRED
Typical average static loss as a function of output current


$$P_{loss} = f(I_{out})$$

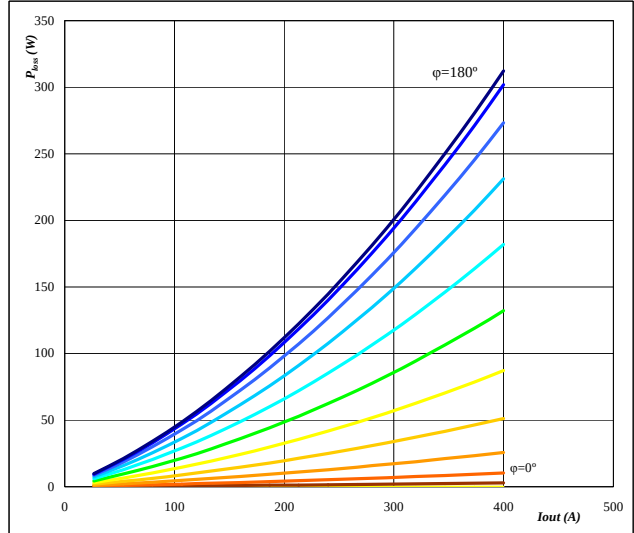

Conditions: $T_J = 125$ °C
 parameter: ϕ from 0° to 180°
 in 12 steps

Figure 14. Boost T2,T3 / D2,D3 IGBT
Typical average static loss as a function of phase displacement


$$P_{loss} = f(\phi)$$

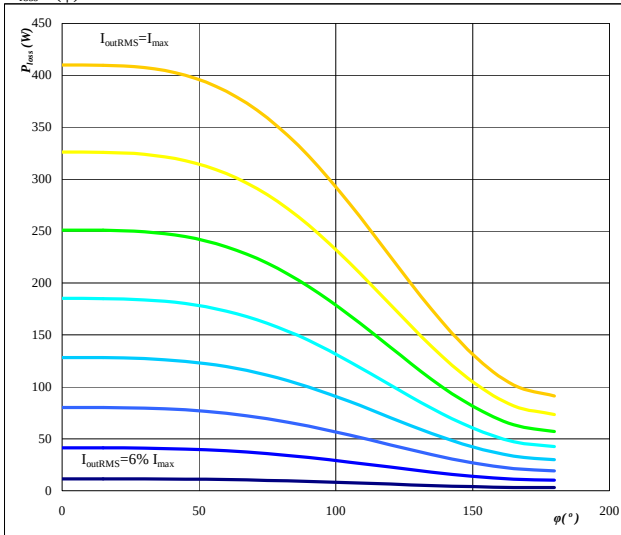

Conditions: $T_J = 125$ °C
 parameter: I_{outRMS} from 27 A to 400 A
 in steps of 53 A

Figure 15. Boost T2,T3 / D2,D3 FRED
Typical average static loss as a function of phase displacement


$$P_{loss} = f(\phi)$$

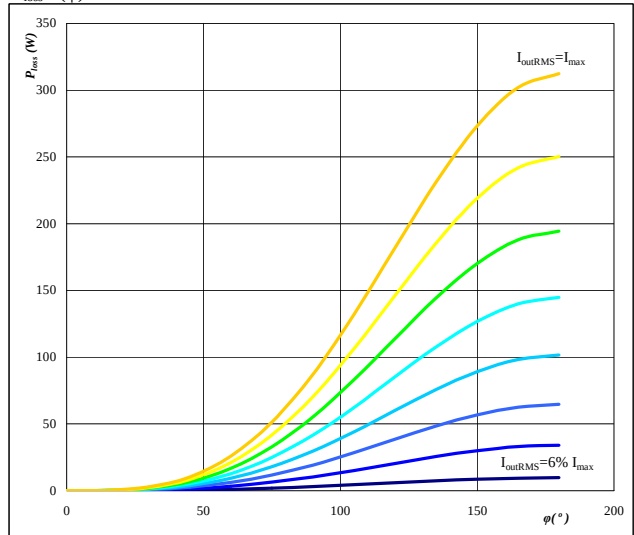

Conditions: $T_J = 125$ °C
 parameter: I_{outRMS} from 27 A to 400 A
 in steps of 53 A

3x flowNPC 4w
NPC Application
2400V/400A
Figure 16. Boost T2,T3 / D2,D3 IGBT
Typical average switching loss as a function of phase displacement


$$P_{loss} = f(\varphi)$$

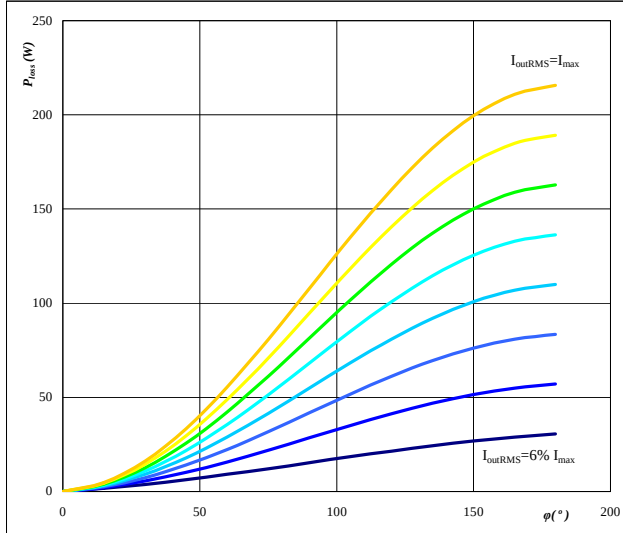

Conditions: $T_j = 125$ °C $f_{sw} = 8$ kHz
 DC link = 1200 V
 parameter: I_{oRMS} from 27 A to 400 A
 in steps of 53 A A

Figure 17. Boost T2,T3 / D2,D3 FRED
Typical average switching loss as a function of phase displacement


$$P_{loss} = f(\varphi)$$

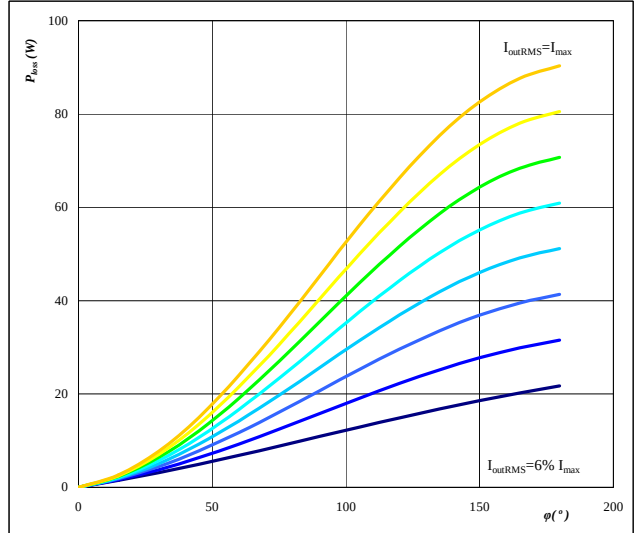

Conditions: $T_j = 125$ °C $f_{sw} = 8$ kHz
 DC link = 1200 V
 parameter: I_{oRMS} from 27 A to 400 A
 in steps of 53 A A

Figure 18. Boost T2,T3 / D2,D3 IGBT
Typical total loss as a function of phase displacement and I_{outRMS}


$$P_{loss} = f(I_{oRMS}; \varphi)$$

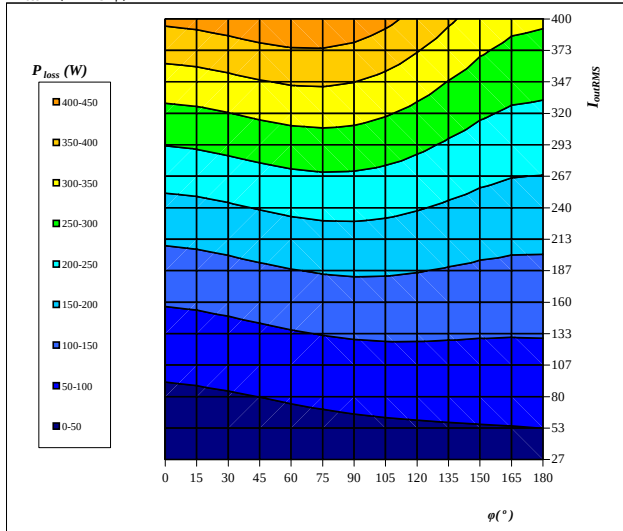

Conditions: $T_j = 125$ °C
 DC link = 1200 V
 $f_{sw} = 8$ kHz

Figure 19. Boost T2,T3 / D2,D3 FRED
Typical total loss as a function of phase displacement and I_{outRMS}


$$P_{loss} = f(I_{oRMS}; \varphi)$$

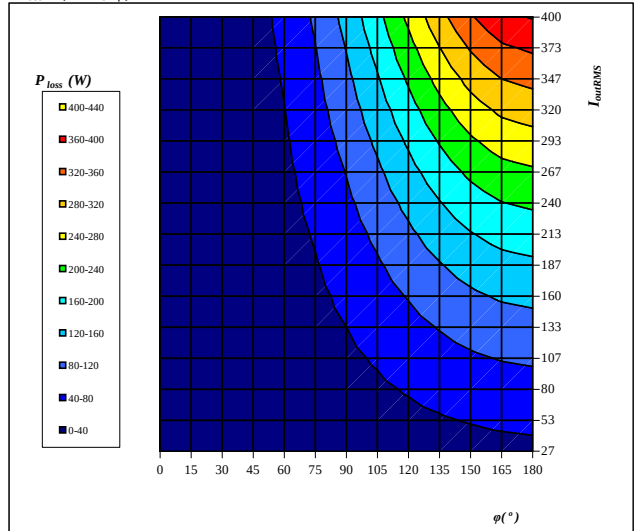

Conditions: $T_j = 125$ °C
 DC link = 1200 V
 $f_{sw} = 8$ kHz

Figure 20. Boost T2,T3 / D2,D3 IGBT+FWD
Typical available output current as a function of phase displacement


$$I_{out}=f(\varphi)$$

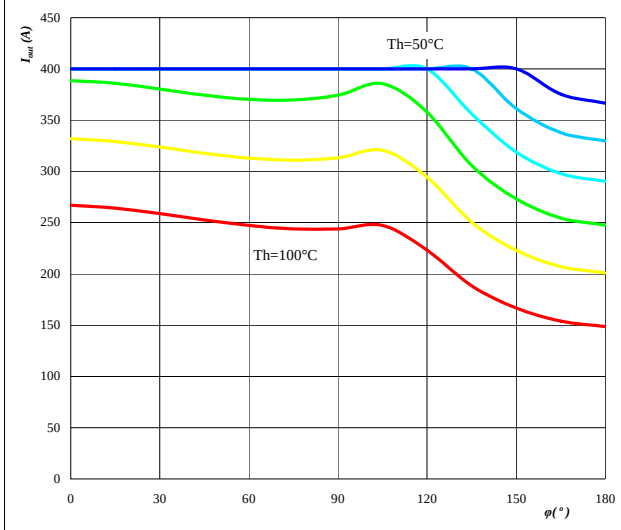

Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $f_{sw} = 8 \text{ kHz}$
 DC link= 1200 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 21. Boost T2,T3 / D2,D3 IGBT+FWD
Typical available output current as a function of switching frequency


$$I_{out}=f(f_{sw})$$

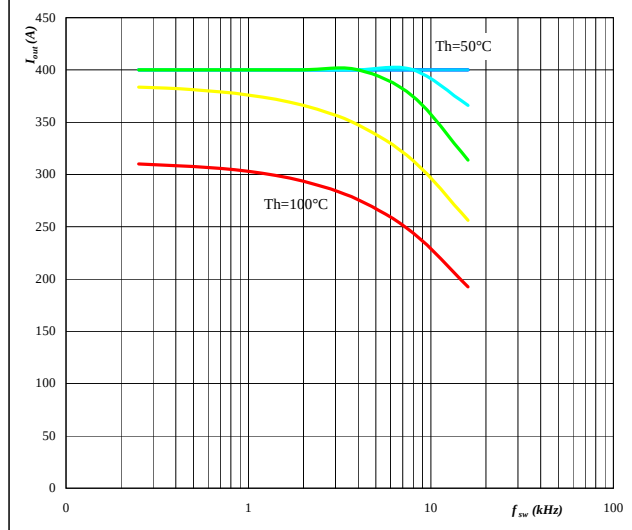

Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $\varphi = 90^\circ$
 DC link= 1200 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 22. Boost T2,T3 / D2,D3 IGBT+FRED
Typical available 50Hz output current as a function of fsw and phase displacement


$$I_{out}=f(f_{sw},\varphi)$$

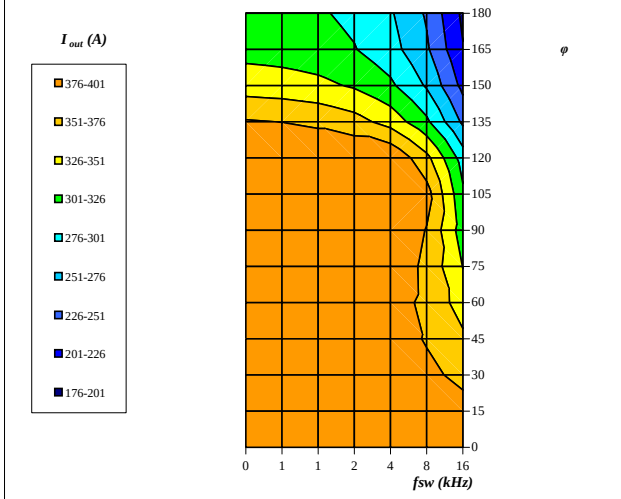

Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
 DC link= 1200 V
 $T_h = 80 \text{ } ^\circ\text{C}$

3x flowNPC 4w
NPC Application
2400V/400A
Figure 23. per MODULE
Typical available output current as a function of heat sink temperature

$$I_{out}=f(T_h)$$

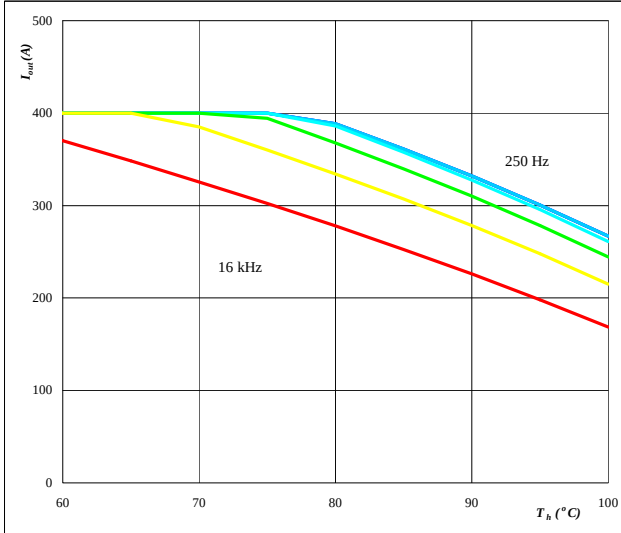


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
DC link= 1200 V
 $\varphi = 0^\circ$

parameter: Switching freq.
fsw from 0,25 kHz to 16 kHz
in steps of factor 2

Figure 24. per MODULE
Typical available output current as a function of phase displacement

$$I_{out}=f(\varphi)$$

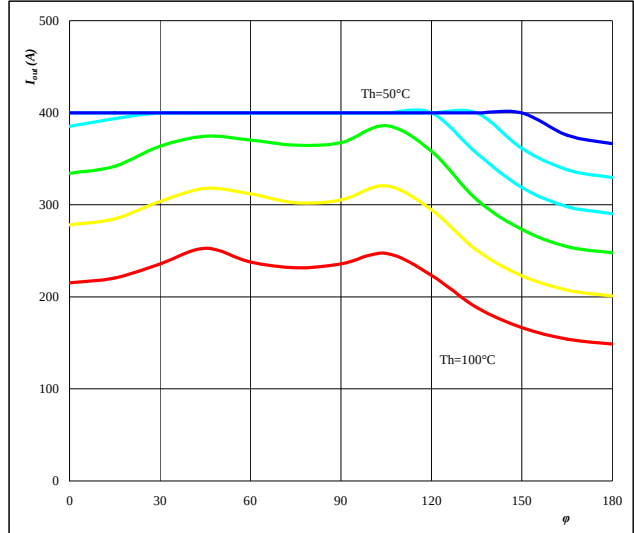


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
DC link= 1200 V
fsw= 8 kHz

parameter: Heatsink temp.
Th from 50 °C to 100 °C
in 10 °C steps

Figure 25. per MODULE
Typical available output current as a function of switching frequency

$$I_{out}=f(f_{sw})$$

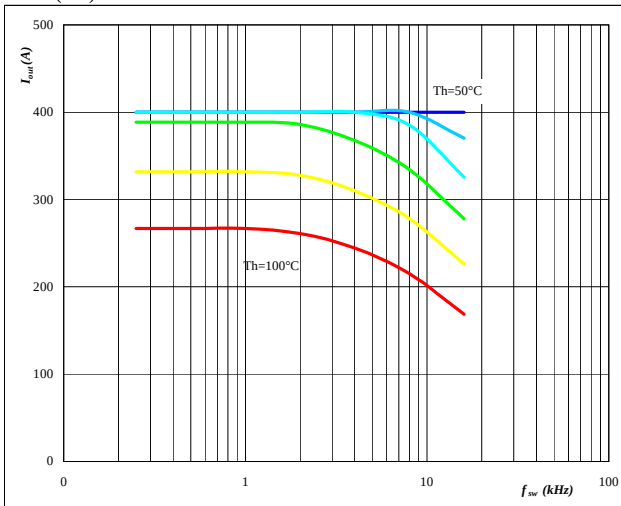


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $\varphi = 0^\circ$
DC link= 1200 V

parameter: Heatsink temp.
Th from 50 °C to 100 °C
in 10 °C steps

Figure 26. per MODULE
Typical available 50Hz output current as a function of fsw and phase displacement

$$I_{out}=f(f_{sw},\varphi)$$

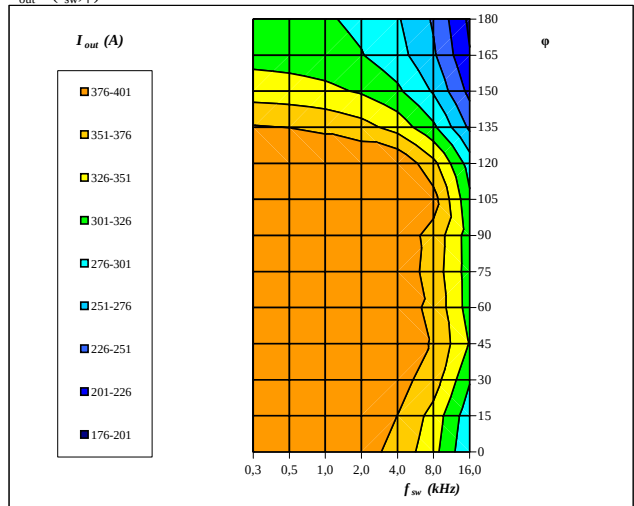


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
DC link= 1200 V
Th= 80 °C

3x flowNPC 4w
NPC Application
2400V/400A
Figure 27. per MODULE

Typical efficiency as a function of output power

$$\eta = f(P_{out})$$

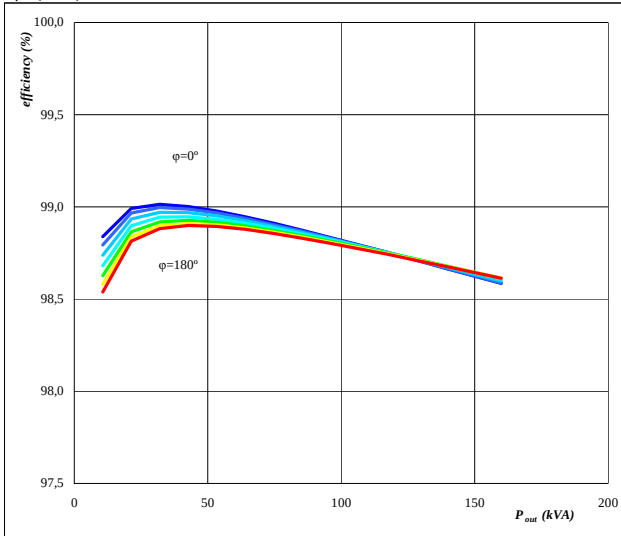


Conditions: $T_j = 125$ °C
 $f_{sw} = 8$ kHz
 DC link = 1200 V
 parameter: phase displacement
 φ from 0 ° to 180 °
 in steps of 30 °

Figure 28. per MODULE

Typical efficiency as a function of output power

$$\eta = f(P_{out})$$

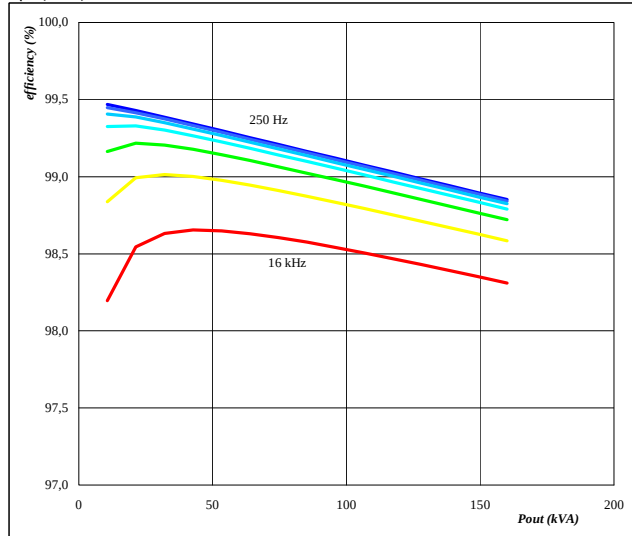


Conditions: $T_j = 125$ °C
 $\varphi = 0$ °
 DC link = 1200 V
 parameter: Switching freq.
 f_{sw} from 0,25 kHz to 16 kHz
 in steps of factor 2

Figure 29. per MODULE

Typical available output power as a function of heat sink temperature

$$P_{out} = f(T_h)$$

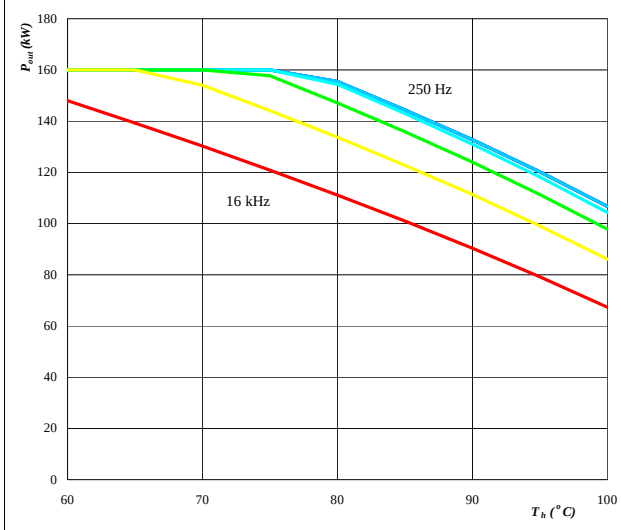


Conditions: $T_j = T_{jmax} - 25$ °C
 DC link = 1200 V
 $\varphi = 0$ °
 parameter: Switching freq.
 f_{sw} from 0 kHz to 16 kHz
 in steps of factor 2

Figure 30. per MODULE

Typical loss distribution as a function of output current

$$P_{out} = f(T_h)$$

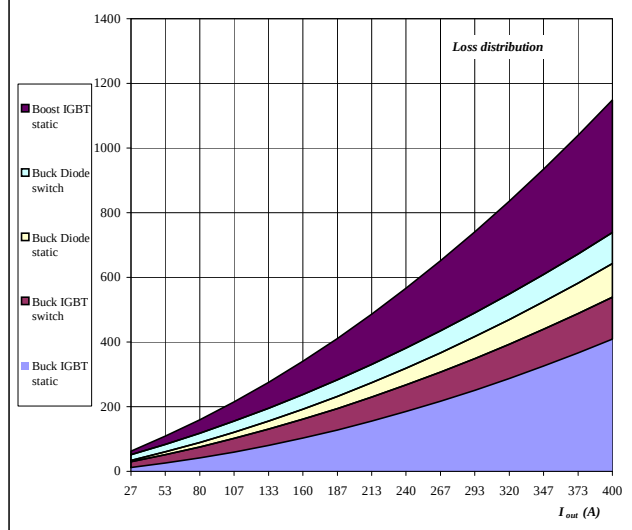


Conditions: $T_j = 125$ °C
 $f_{sw} = 8$ kHz
 DC link = 1200 V
 $\varphi = 0$ °

Figure 31. per MODULE

Typical relative loss distribution as a function of output current

$$P_{out}=f(T_h)$$

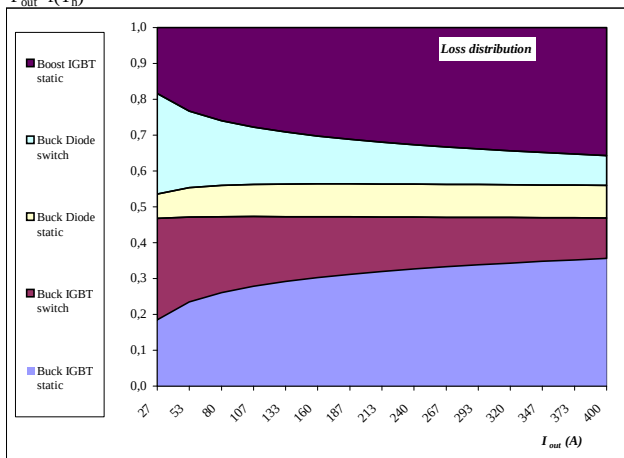
Conditions:

T_j =	125	°C
f_{sw} =	8	kHz
DC link=	1200	V
φ =	0°	