



Vincotech

flow NPC 12w

NPC Application

2400 V / 1200 A


General conditions

| BUCK        |                |
|-------------|----------------|
| $V_{GEon}$  | = 15 V         |
| $V_{GEoff}$ | = -10 V        |
| $R_{gon}$   | = 0,3 $\Omega$ |
| $R_{goff}$  | = 0,3 $\Omega$ |

 $V_{out} = 400 \text{ VAC}$ 


| BOOST       |                |
|-------------|----------------|
| $V_{GEon}$  | = 15 V         |
| $V_{GEoff}$ | = -10 V        |
| $R_{gon}$   | = 0,9 $\Omega$ |
| $R_{goff}$  | = 0,9 $\Omega$ |

Figure 1. Buck T1, T4 / D5, D6 IGBT

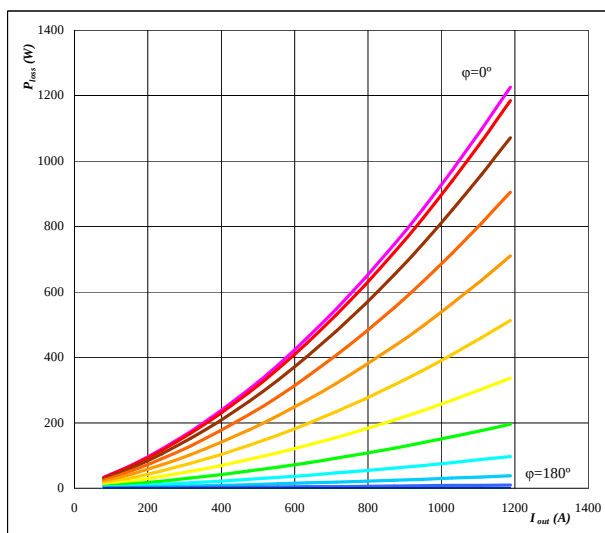Typical average static loss as a function of output current  $I_{ORMS}$ 


Conditions  $T_j = 125 \text{ }^\circ\text{C}$   
 parameter  $\phi$  from 0° to 180°  
 in 12 steps

Figure 2. Buck T1, T4 / D5, D6 FWD

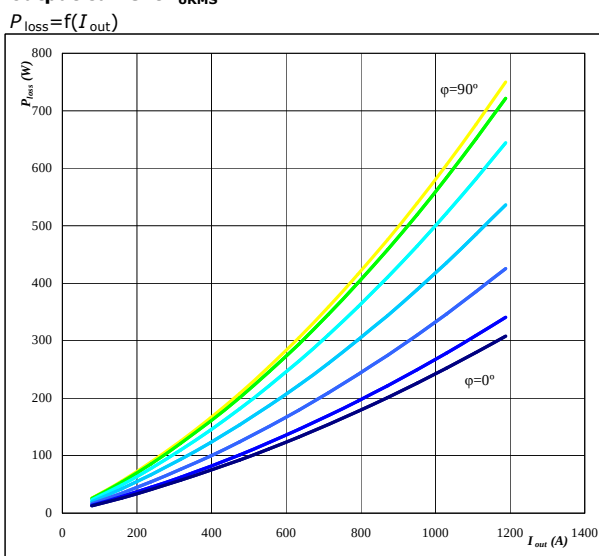Typical average static loss as a function of output current  $I_{ORMS}$ 


Conditions  $T_j = 125 \text{ }^\circ\text{C}$   
 parameter  $\phi$  from 0° to 180°  
 in 12 steps

Figure 3. Buck T1, T4 / D5, D6 IGBT

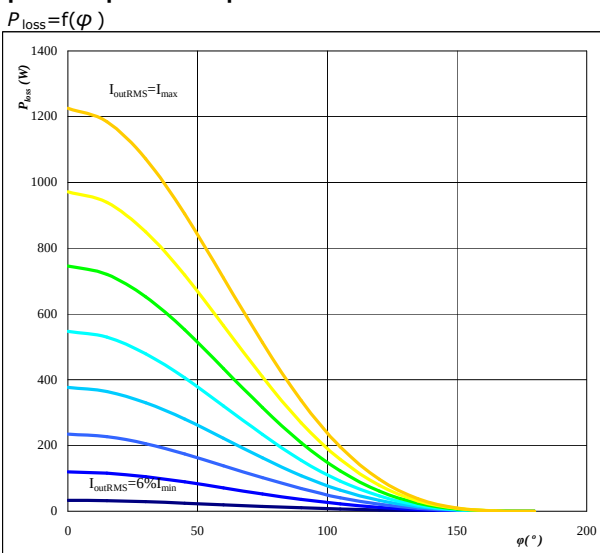Typical average static loss as a function of phase displacement  $\phi$ 

Conditions  $T_j = 125 \text{ }^\circ\text{C}$   
 parameter  $I_{ORMS}$  from 79,2 A to 1187 A  
 in steps of 158 A

Figure 4. Buck T1, T4 / D5, D6 FWD

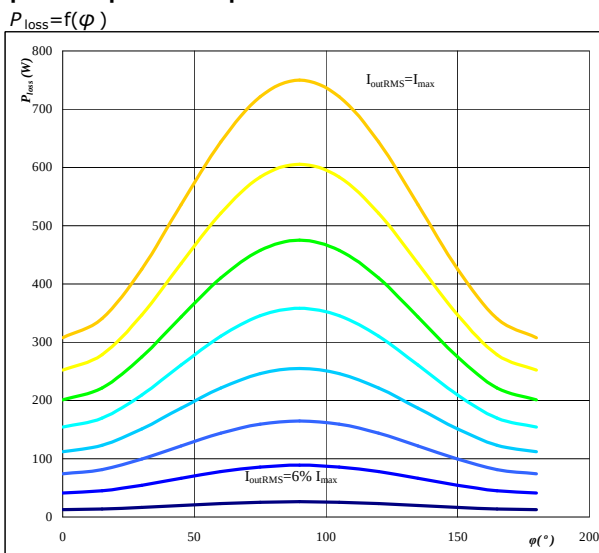Typical average static loss as a function of phase displacement  $\phi$ 

Conditions  $T_j = 125 \text{ }^\circ\text{C}$   
 parameter  $I_{ORMS}$  from 79,2 A to 1187 A  
 in steps of 158 A



Vincotech

70-W624N3A1K2SC-L400FP

Application sheet

flow NPC 12w


NPC Application

2400 V / 1200 A

Figure 5. Buck T1, T4 / D5, D6 IGBT

Typical average switching loss as a function of phase displacement  $\varphi$

$$P_{\text{loss}} = f(\varphi)$$

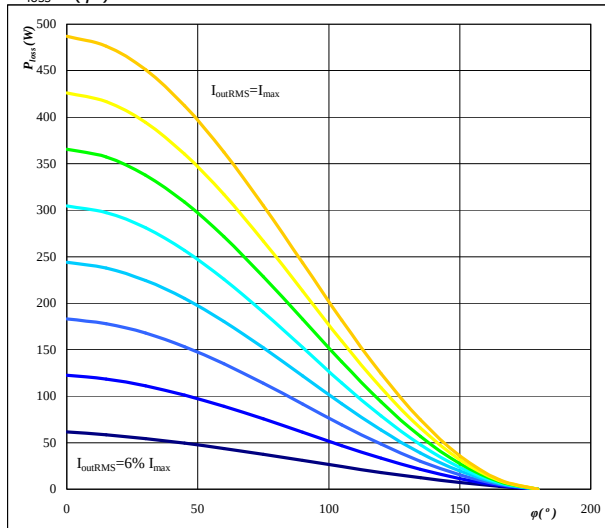


Conditions  $T_j = 125$  °C  
 $f_{\text{sw}} = 8$  kHz  
 DC-link = 1200 V  
 parameter  $I_{\text{oRMS}}$  from 79,2 A to 1187 A  
 in steps of 158 A

Figure 6. Buck T1, T4 / D5, D6 FWD

Typical average switching loss as a function of phase displacement  $\varphi$

$$P_{\text{loss}} = f(\varphi)$$

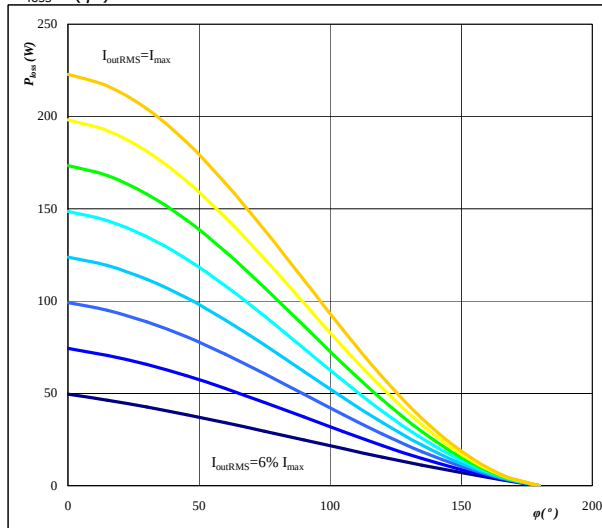


Conditions  $T_j = 125$  °C  
 $f_{\text{sw}} = 8$  kHz  
 DC-link = 1200 V  
 parameter  $I_{\text{oRMS}}$  from 79,2 A to 1187 A  
 in steps of 158 A

Figure 7. Buck T1, T4 / D5, D6 IGBT

Typical total loss as a function of phase displacement  $\varphi$  and output current  $I_{\text{oRMS}}$

$$P_{\text{loss}} = f(I_{\text{oRMS}}; \varphi)$$

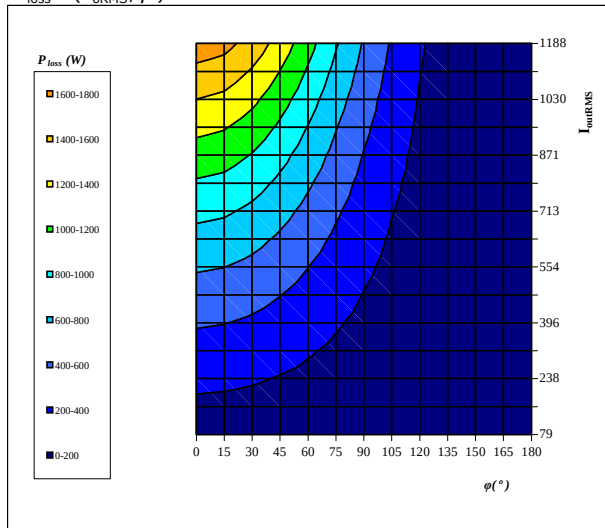


Conditions  $T_j = 125$  °C  
 DC-link = 1200 V  
 $f_{\text{sw}} = 8$  kHz

Figure 8. Buck T1, T4 / D5, D6 FWD

Typical total loss as a function of phase displacement  $\varphi$  and output current  $I_{\text{oRMS}}$

$$P_{\text{loss}} = f(I_{\text{oRMS}}; \varphi)$$

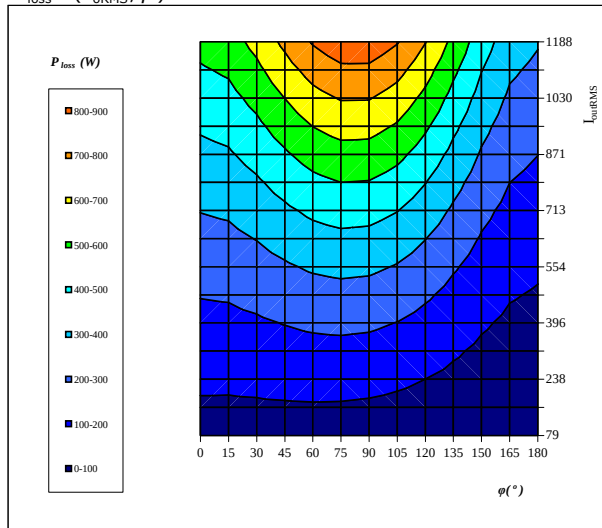

Conditions  $T_j = 125$  °C  
 DC-link = 1200 V  
 $f_{\text{sw}} = 8$  kHz



Vincotech

70-W624N3A1K2SC-L400FP

Application sheet

flow NPC 12w


NPC Application

2400 V / 1200 A

Figure 9. for Buck T1, T4 / D5, D6 IGBT+FWD

Typical available output current as a function of phase displacement  $\varphi$

$$I_{out}=f(\varphi)$$

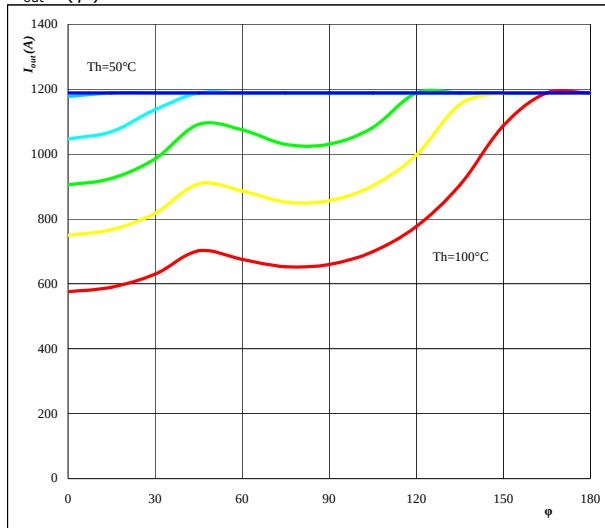


Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$   $f_{sw} = 8 \text{ kHz}$   
 DC-link = 1200 V  
 parameter: Heatsink temp.  
 $T_h$  from 50  $^\circ\text{C}$  to 100  $^\circ\text{C}$   
 in 10  $^\circ\text{C}$  steps

Figure 10. for Buck T1, T4 / D5, D6 IGBT+FWD

Typical available output current as a function of switching frequency  $f_{sw}$

$$I_{out}=f(f_{sw})$$

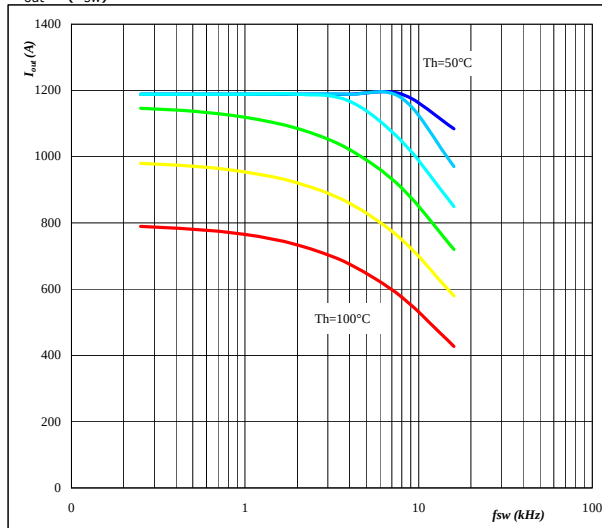


Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$   $\varphi = 0 \text{ } ^\circ$   
 DC-link = 1200 V  
 parameter: Heatsink temp.  
 $T_h$  from 50  $^\circ\text{C}$  to 100  $^\circ\text{C}$   
 in 10  $^\circ\text{C}$  steps

Figure 11. for Buck T1, T4 / D5, D6 IGBT+FRED

Typical available 50Hz output current as a function of  $f_{sw}$  and phase displacement  $\varphi$

$$I_{out}=f(f_{sw}, \varphi)$$

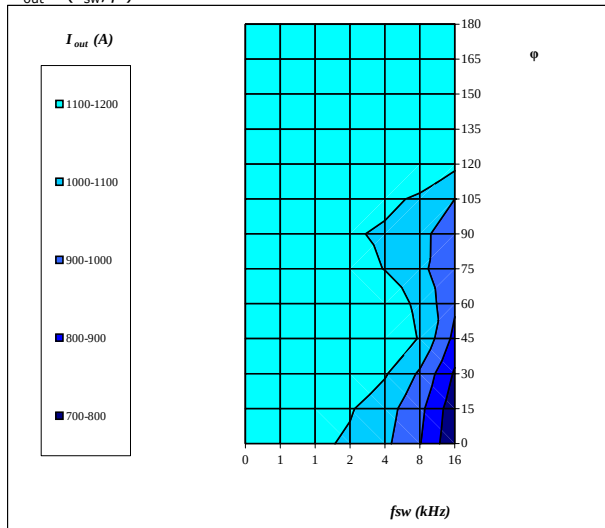

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$   
 DC-link = 1200 V  
 $T_h = 80 \text{ } ^\circ\text{C}$



Vincotech

flow NPC 12w


NPC Application

2400 V / 1200 A

Figure 12. Boost T2, T3 / D2, D3 IGBT

Typical average static loss as a function of output current

$$P_{\text{loss}} = f(I_{\text{out}})$$

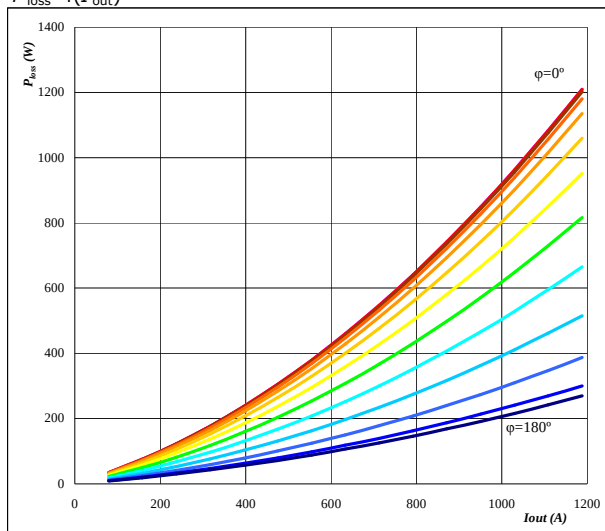


Conditions  $T_j = 125$  °C  
parameter  $\varphi$  from 0° to 180°  
in 12 steps

Figure 13. Boost T2, T3 / D2, D3 FRED

Typical average static loss as a function of output current

$$P_{\text{loss}} = f(I_{\text{out}})$$

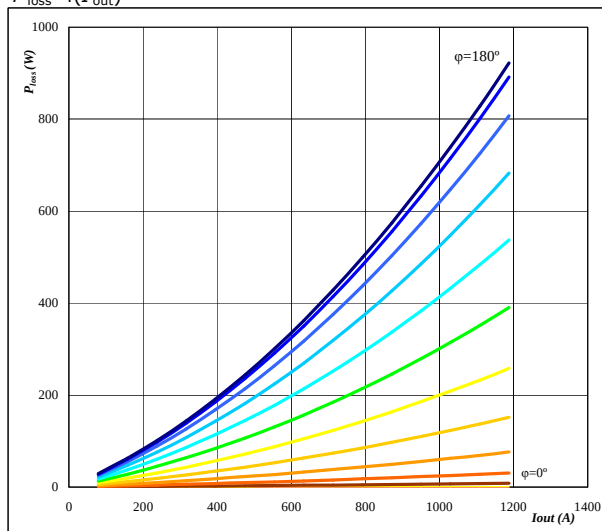


Conditions  $T_j = 125$  °C  
parameter  $\varphi$  from 0° to 180°  
in 12 steps

Figure 14. Boost T2, T3 / D2, D3 IGBT

Typical average static loss as a function of phase displacement

$$P_{\text{loss}} = f(\varphi)$$

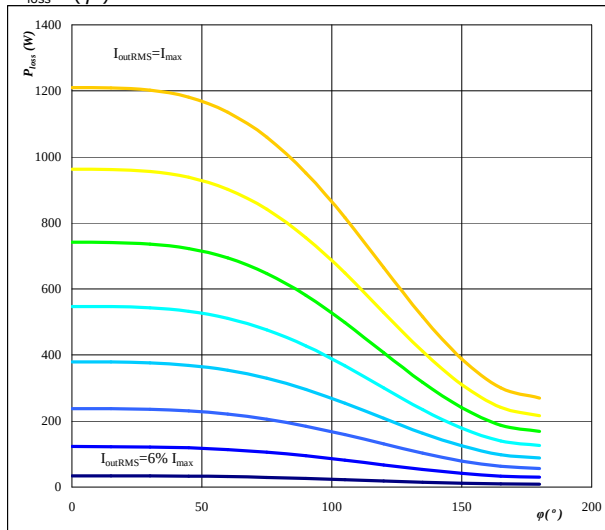


Conditions  $T_j = 125$  °C  
parameter  $I_{\text{ORMS}}$  from 79 A to 1187 A  
in steps of 158 A

Figure 15. Boost T2, T3 / D2, D3 FRED

Typical average static loss as a function of phase displacement

$$P_{\text{loss}} = f(\varphi)$$

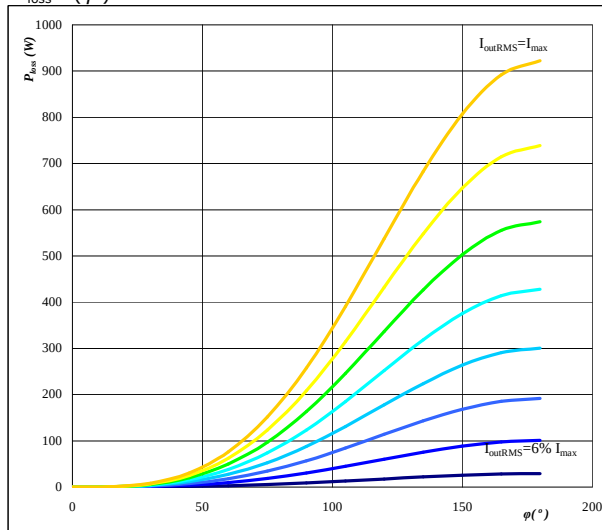

Conditions  $T_j = 125$  °C  
parameter  $I_{\text{ORMS}}$  from 79 A to 1187 A  
in steps of 158 A



Vincotech

flow NPC 12w


NPC Application

2400 V / 1200 A

Figure 16. Boost T2, T3 / D2, D3 IGBT

Typical average switching loss as a function of phase displacement

$$P_{\text{loss}} = f(\varphi)$$

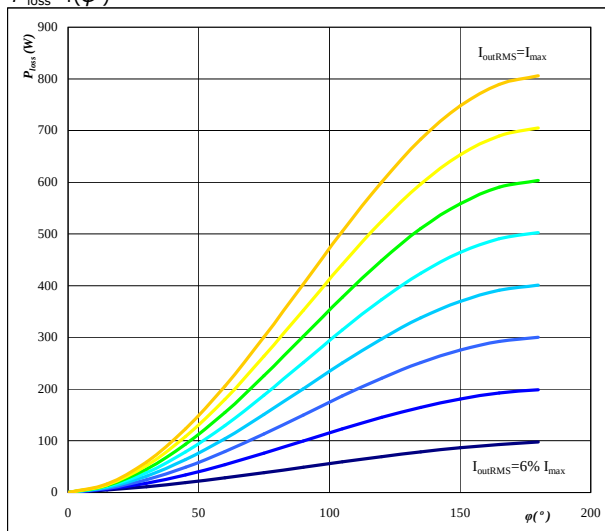


Conditions  $T_j = 125$  °C  $f_{\text{sw}} = 8$  kHz  
 DC-link = 1200 V  
 parameter  $I_{\text{ORMS}}$  from 79 A to 1187 A  
 in steps of 158 A

Figure 17. Boost T2, T3 / D2, D3 FRED

Typical average switching loss as a function of phase displacement

$$P_{\text{loss}} = f(\varphi)$$

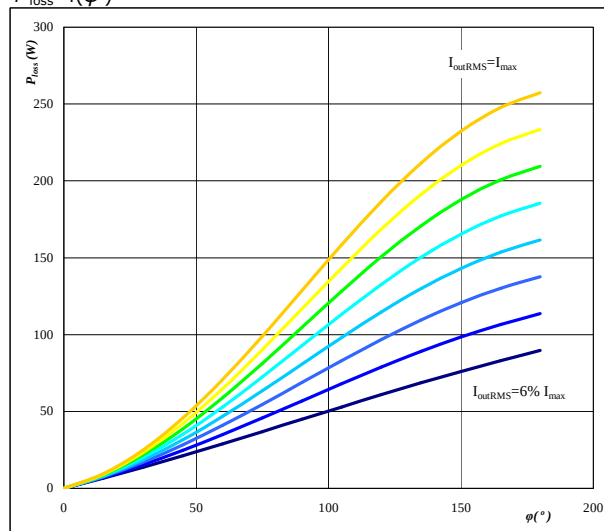


Conditions  $T_j = 125$  °C  $f_{\text{sw}} = 8$  kHz  
 DC-link = 1200 V  
 parameter  $I_{\text{ORMS}}$  from 79 A to 1187 A  
 in steps of 158 A

Figure 18. Boost T2, T3 / D2, D3 IGBT

Typical total loss as a function of phase displacement and  $I_{\text{outRMS}}$

$$P_{\text{loss}} = f(I_{\text{ORMS}}; \varphi)$$

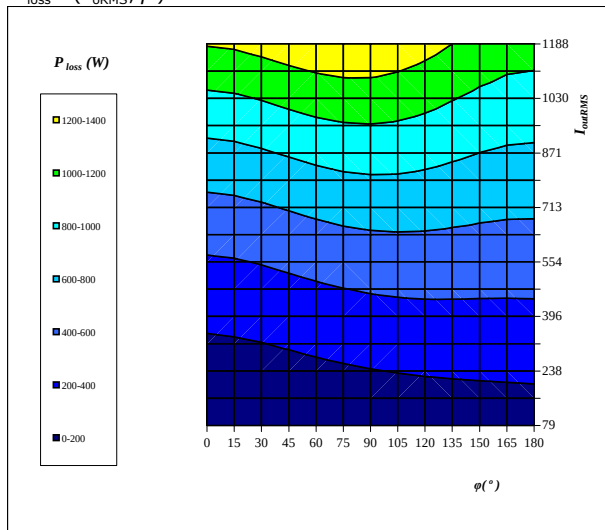


Conditions  $T_j = 125$  °C  
 DC-link = 1200 V  
 $f_{\text{sw}} = 8$  kHz

Figure 19. Boost T2, T3 / D2, D3 FRED

Typical total loss as a function of phase displacement and  $I_{\text{outRMS}}$

$$P_{\text{loss}} = f(I_{\text{ORMS}}; \varphi)$$

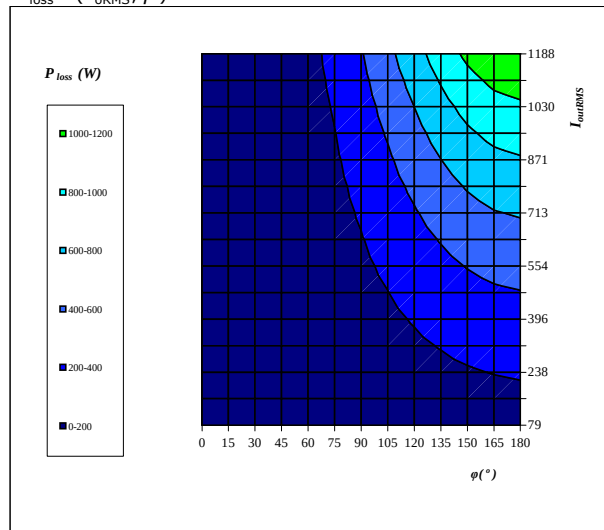

Conditions  $T_j = 125$  °C  
 DC-link = 1200 V  
 $f_{\text{sw}} = 8$  kHz



Vincotech


flow NPC 12w

NPC Application

2400 V / 1200 A

**Figure 20. Boost T2, T3 / D2, D3 IGBT+FWD****Typical available output current as a function of phase displacement**


$$I_{out}=f(\varphi)$$

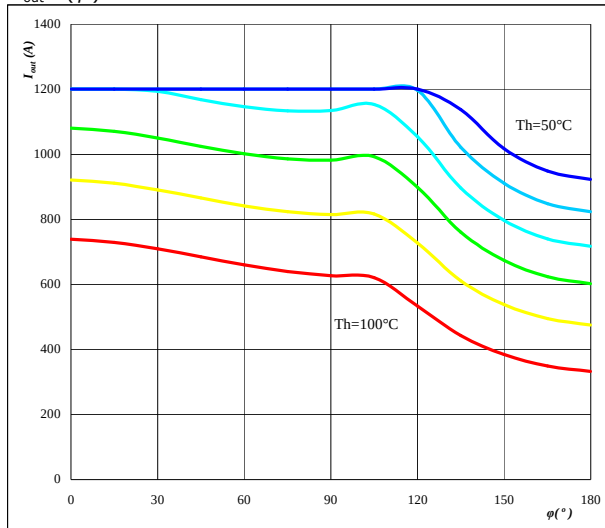

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$   $f_{sw} = 8 \text{ kHz}$   
 DC-link = 1200 V  
 parameter: Heatsink temp.  
 $T_h$  from 50  $^\circ\text{C}$  to 100  $^\circ\text{C}$   
 in 10  $^\circ\text{C}$  steps

**Figure 21. Boost T2, T3 / D2, D3 IGBT+FWD****Typical available output current as a function of switching frequency**


$$I_{out}=f(f_{sw})$$

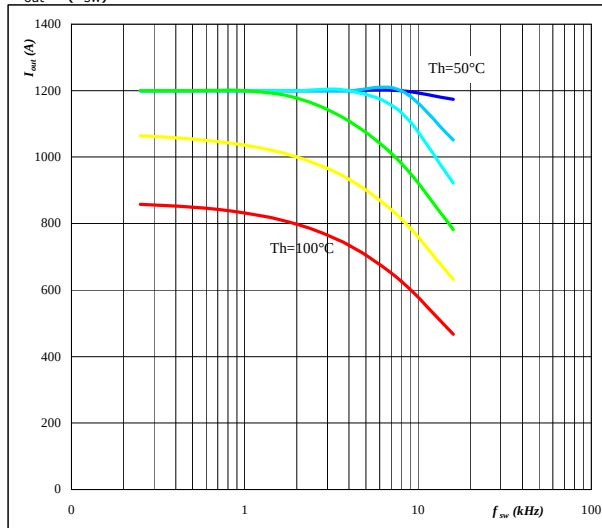

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$   $\varphi = 90^\circ$   
 DC-link = 1200 V  
 parameter: Heatsink temp.  
 $T_h$  from 50  $^\circ\text{C}$  to 100  $^\circ\text{C}$   
 in 10  $^\circ\text{C}$  steps

**Figure 22. Boost T2, T3 / D2, D3 IGBT+FRED****Typical available 50Hz output current as a function of  $f_{sw}$  and phase displacement**

$$I_{out}=f(f_{sw}, \varphi)$$

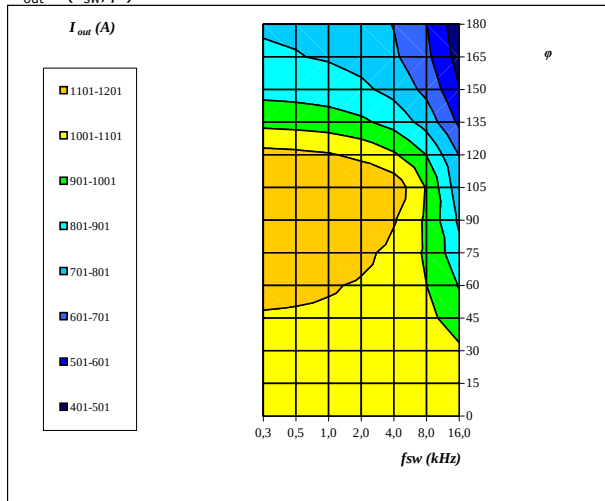

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$   
 DC-link = 1200 V  
 $T_h = 80 \text{ } ^\circ\text{C}$



Vincotech

**70-W624N3A1K2SC-L400FP**

Application sheet

**flow NPC 12w**


**NPC Application**

**2400 V / 1200 A**

**Figure 23.** per MODULE

**Typical available output current as a function of heat sink temperature**

$$I_{out} = f(T_h)$$

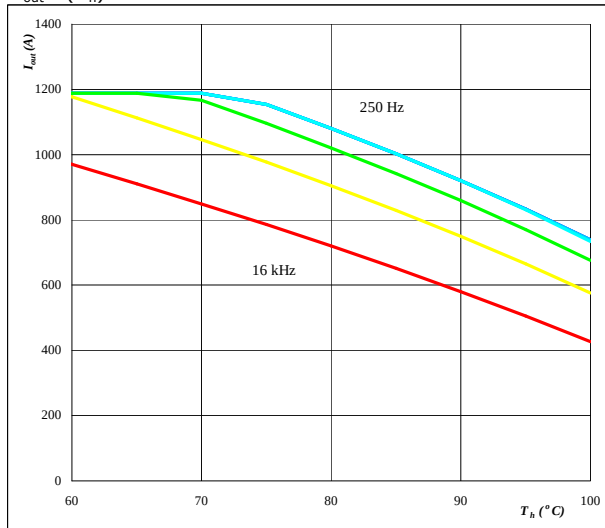

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$

DC-link = 1200 V

$\varphi = 0^\circ$

parameter: Switching freq.


$f_{sw}$  from 0,25 kHz to 16 kHz

in steps of factor 2

**Figure 24.** per MODULE

**Typical available output current as a function of phase displacement**

$$I_{out} = f(\varphi)$$

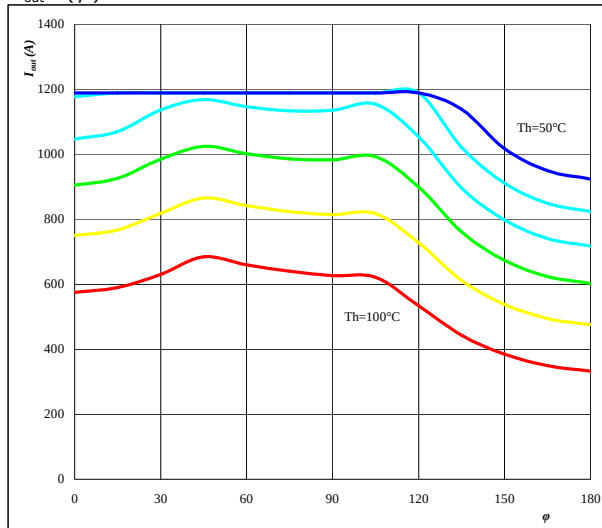

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$

DC-link = 1200 V

$f_{sw} = 8 \text{ kHz}$

parameter: Heatsink temp.


$T_h$  from 50 °C to 100

in 10 °C steps

**Figure 25.** per MODULE

**Typical available output current as a function of switching frequency**

$$I_{out} = f(f_{sw})$$

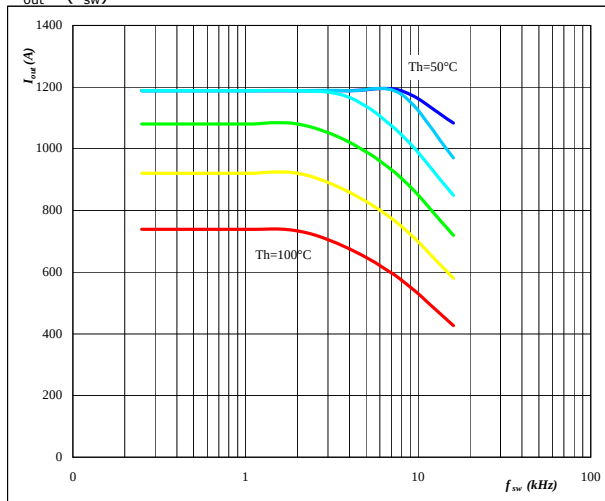

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$

DC-link = 1200 V

$\varphi = 0^\circ$

parameter: Heatsink temp.


$T_h$  from 50 °C to 100

in 10 °C steps

**Figure 26.** per MODULE

**Typical available 50Hz output current as a function of  $f_{sw}$  and phase displacement**

$$I_{out} = f(f_{sw}, \varphi)$$

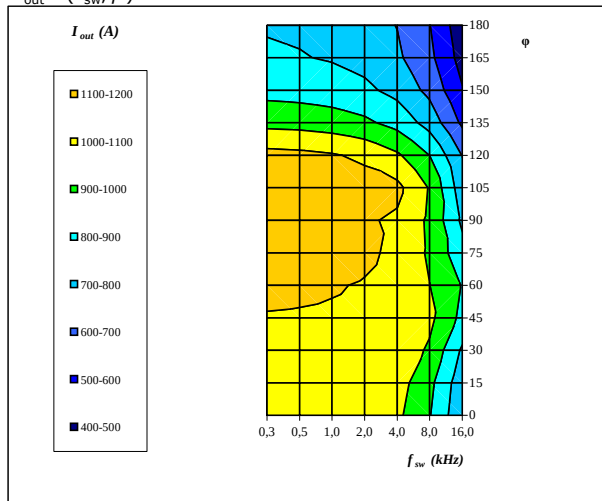

Conditions  $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$

DC-link = 1200 V

$T_h = 80 \text{ } ^\circ\text{C}$



Vincotech

flow NPC 12w


NPC Application

2400 V / 1200 A

Figure 27. per MODULE

Typical efficiency as a function of output power

$\eta = f(P_{out})$

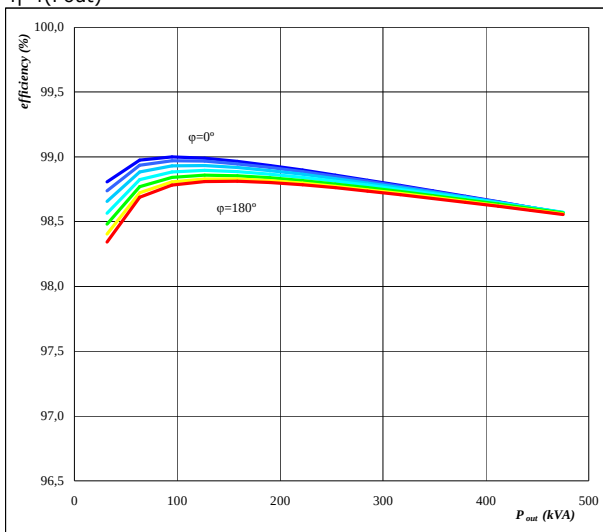


Conditions  $T_j = 125$  °C  
 $f_{sw} = 8$  kHz  
 DC-link = 1200 V  
 parameter: phase displacement  
 $\varphi$  from 0 ° to 180 °  
 in steps of 30 °

Figure 28. per MODULE

Typical efficiency as a function of output power

$\eta = f(P_{out})$

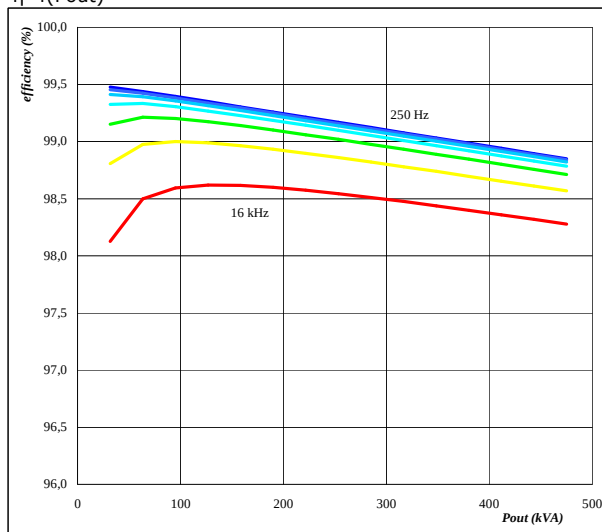


Conditions  $T_j = 125$  °C  $\varphi = 0$  °  
 DC-link = 1200 V  
 parameter: Switching freq.  
 $f_{sw}$  from 0,25 kHz to 16 kHz  
 in steps of factor 2

Figure 29. per MODULE

Typical available output power as a function of heat sink temperature

$P_{out} = f(T_h)$

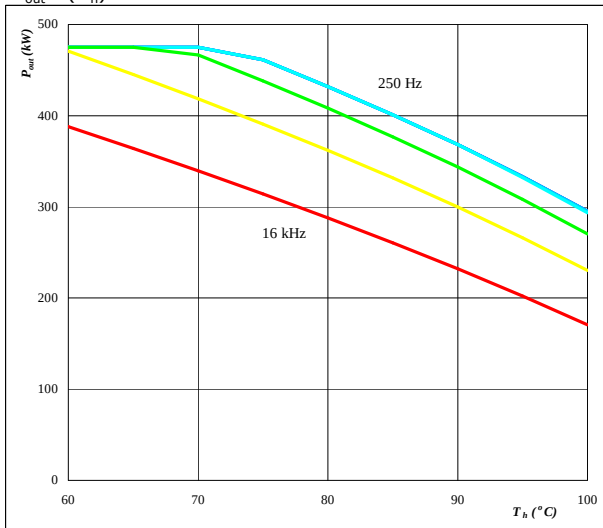


Conditions  $T_j = T_{jmax} - 25$  °C  
 DC-link = 1200 V  
 $\varphi = 0$  °  
 parameter: Switching freq.  
 $f_{sw}$  from 0 kHz to 16 kHz  
 in steps of factor 2

Figure 30. per MODULE

Typical loss distribution as a function of output current

$P_{out} = f(T_h)$

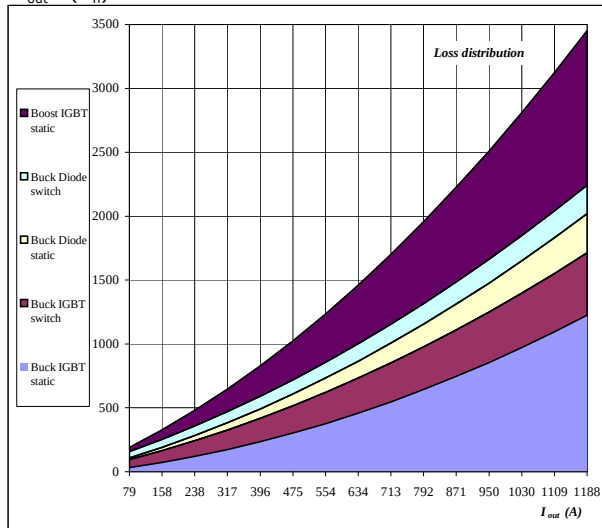

Conditions  $T_j = 125$  °C  
 $f_{sw} = 8$  kHz  
 DC-link = 1200 V  
 $\varphi = 0$  °






Vincotech

**flow NPC 12w****NPC Application****2400 V / 1200 A****Figure 31.** per MODULE**Typical relativ loss distribution as a function of output current**

$$P_{out}=f(T_h)$$

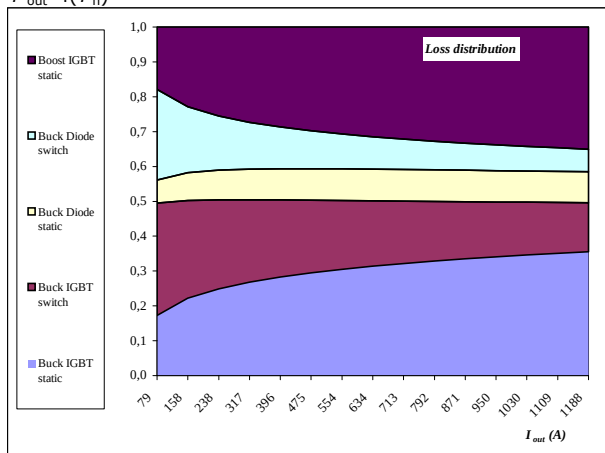

Conditions  $T_j = 125$  °C  
 $f_{sw} = 8$  kHz  
DC-link = 1200 V  
 $\varphi = 0^\circ$