
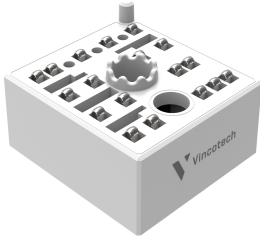


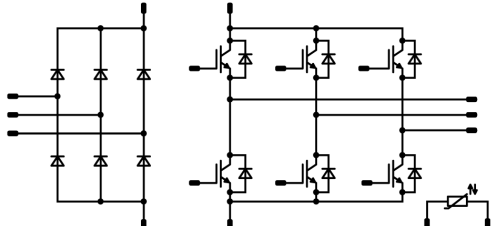

| | | | |
|--|--|--|--|
| MiniSKiiP PIM 0 | | 1200 V / 8 A | |
| Topology features <ul style="list-style-type: none">• Converter+Inverter• Temperature sensor | | MiniSKiiP® 0 16 mm housing  | |
| Component features <ul style="list-style-type: none">• Easy paralleling• Low turn-off losses• Low collector emitter saturation voltage• Positive temperature coefficient• Short tail current | | | |
| Housing features <ul style="list-style-type: none">• Base isolation: Al₂O₃• Easy assembly in one mounting step• Flexible PCB design w/o pin holes• Rugged solderless spring contacts | | | |
| Extra features <ul style="list-style-type: none">• Equivalent: SKiiP 03NAC12T4V1 | | | |
| Target applications <ul style="list-style-type: none">• Industrial Drives• Embedded Drives | | | |
| Types <ul style="list-style-type: none">• 80-M012PNB008SC-K619C41 | | Schematic  | |

**Maximum Ratings** $T_j = 25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|-----------------------------------|------------|--|-------------------|--------------------|
| Inverter Switch | | | | |
| Collector-emitter voltage | V_{CES} | | 1200 | V |
| Collector current (DC current) | I_C | $T_j = T_{jmax}$ $T_s \leq 80\text{ °C}$ | 24 ⁽¹⁾ | A |
| Repetitive peak collector current | I_{CRM} | t_p limited by T_{jmax} | 24 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 65 | W |
| Gate-emitter voltage | V_{GES} | | ± 20 | V |
| Short circuit ratings | i_{SC} | $V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$ | 10 | μs |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |

⁽¹⁾ limited by I_{CRM} **Inverter Diode**

| | | | | |
|--|------------|--|------|----------------------|
| Peak repetitive reverse voltage | V_{RRM} | | 1200 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 15 | A |
| Surge (non-repetitive) forward current | I_{FSM} | Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$ | 36 | A |
| Surge current capability | I^2t | | 6 | A^2s |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 53 | W |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |

Rectifier Diode

| | | | | |
|--|------------|--|------|----------------------|
| Peak repetitive reverse voltage | V_{RRM} | | 1600 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 32 | A |
| Surge (non-repetitive) forward current | I_{FSM} | Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$ | 150 | A |
| Surge current capability | I^2t | | 112 | A^2s |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 51 | W |
| Maximum junction temperature | T_{jmax} | | 150 | $^{\circ}\text{C}$ |



Vincotech

80-M012PNB008SC-K619C41
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|-----------|--------|------------|-------|------|
|-----------|--------|------------|-------|------|

Module Properties

Thermal Properties

| | | | | |
|---|-----------|--|----------------------------|----|
| Storage temperature | T_{stg} | | -40...+125 | °C |
| Operation temperature under switching condition | T_{jop} | | -40...+($T_{jmax} - 25$) | °C |

Isolation Properties

| | | | | |
|----------------------------|------------|---|-------|----|
| Isolation voltage | V_{isol} | DC Test Voltage* $t_p = 2\text{ s}$ | 5500 | V |
| Isolation voltage | V_{isol} | AC Voltage $t_p = 1\text{ min}$ | 2500 | V |
| Creepage distance | | With std lid For more informations see handling instructions | 6,3 | mm |
| Clearance | | With std lid For more informations see handling instructions | 6,3 | mm |
| Comparative Tracking Index | CTI | | ≥ 200 | |

*100 % tested in production



Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|--------------|--------------|--------------|-----------|-----------|------------|-----|-----|------|
| | | V_{GS} [V] | V_{GE} [V] | V_{DS} [V] | I_D [A] | I_F [A] | T_j [°C] | Min | Typ | |

Inverter Switch

Static

| | | | | | | | | | | |
|--------------------------------------|---------------|---------------------|----|------|---------|-----------|------|--------------|---------------------|----|
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}$ | | | 0,00015 | 25 | 5,3 | 5,8 | 6,3 | V |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | | 15 | | 8 | 25 150 | 1,58 | 1,93 2,32 | 2,07 ⁽²⁾ | V |
| Collector-emitter cut-off current | I_{CES} | | 0 | 1200 | | 25 | | | 1 | μA |
| Gate-emitter leakage current | I_{GES} | | 20 | 0 | | 25 | | | 120 | nA |
| Internal gate resistance | r_g | | | | | | | None | | Ω |
| Input capacitance | C_{ies} | $f = 1 \text{ Mhz}$ | 0 | 25 | | 25 | | 490 | | pF |
| Reverse transfer capacitance | C_{res} | | | | | | | 30 | | pF |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 2,5 \text{ W/mK}$ (HPTP) | | | | | | 1,45 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|-----------------------------|--------------|---|----------|-----|---|-----|--|--------|--|-----|
| Turn-on delay time | $t_{d(on)}$ | $R_{gon} = 32 \Omega$ $R_{goff} = 32 \Omega$ | ± 15 | 600 | 8 | 25 | | 61,2 | | ns |
| Rise time | t_r | | | | | 150 | | 29,2 | | ns |
| Turn-off delay time | $t_{d(off)}$ | | | | | 25 | | 170,8 | | ns |
| Fall time | t_f | | | | | 150 | | 240,2 | | ns |
| Turn-on energy (per pulse) | E_{on} | | | | | 25 | | 59,77 | | ns |
| Turn-off energy (per pulse) | E_{off} | | | | | 150 | | 119,61 | | ns |
| | | | | | | 25 | | 0,458 | | mWs |
| | | | | | | 150 | | 0,747 | | mWs |
| | | | | | | 25 | | 0,407 | | mWs |
| | | | | | | 150 | | 0,735 | | mWs |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------------------------|---|-------------------------------------|------------|-----|--------|-----|--|------|
| | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | | |

Inverter Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|----------------|--|--|---|-----------|--|--------------|--|----|
| Forward voltage | V_F | | | | 8 | 25 150 | | 2,57 2,49 | 2,65 ⁽²⁾ 2,68 ⁽²⁾ | V |
| Reverse leakage current | I_R | $V_r = 1200$ V | | | | 25 150 | | | 0,06 0,7 | mA |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 2,5$ W/mK (HPTP) | | | | | | 1,78 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|---------------------------------------|----------------------|--|----------|-------|---|------------|--|--------|--|---------|
| Peak recovery current | I_{RM} | $di/dt=220$ A/ μ s $di/dt=233$ A/ μ s | ± 15 | 600 | 8 | 25 | | 4,85 | | A |
| | | | | | | 150 | | 6,62 | | |
| Reverse recovery time | t_{rr} | | | | | 25 | | 257,71 | | ns |
| | | | | | | 150 | | 477,1 | | |
| Recovered charge | Q_r | | | | | 25 | | 0,495 | | μ C |
| | | | | | | 150 | | 1,31 | | |
| Reverse recovered energy | E_{rec} | | | | | mWs | | | | |
| | | 25 | | 0,192 | | | | | | |
| | | 150 | | 0,557 | | | | | | |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ | | | | | A/ μ s | | | | |
| | | 25 | | 63,63 | | | | | | |
| | | 150 | | 46,58 | | | | | | |



Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------------------------|---|-------------------------------------|------------|-----|--------|-----|--|------|
| | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | | |

Rectifier Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|----------------|--|--|---|-----------|--|---------------|---|----|
| Forward voltage | V_F | | | | 8 | 25 125 | | 1,05 0,976 | 1,21 ⁽²⁾ 1,1 ⁽²⁾ | V |
| Reverse leakage current | I_R | $V_r = 1600$ V | | | | 25 | | | 100 | μA |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 2,5$ W/mK (HPTP) | | | | | | 1,37 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Thermistor

Static

| | | | | | | | | | | |
|--------------------------------|----------------|--------------------|--|--|--|-----|----|------------------------|---|------------------|
| Rated resistance | R | | | | | 25 | | 1 | | kΩ |
| Deviation of R100 | $\Delta_{R/R}$ | $R_{100} = 1670$ Ω | | | | 100 | -2 | | 2 | % |
| Maximum Current | I_{max} | | | | | | | 3 | | mA |
| Power dissipation constant | d | | | | | 25 | | 0,76 | | mW/K |
| A-value | A | | | | | | | $7,635 \times 10^{-3}$ | | 1/K |
| B-value | B | | | | | | | $1,73 \times 10^{-5}$ | | 1/K ² |
| Vincotech Thermistor Reference | | | | | | | | | E | |

⁽²⁾ Value at chip level

⁽³⁾ Only valid with pre-applied Vincotech thermal interface material.




Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

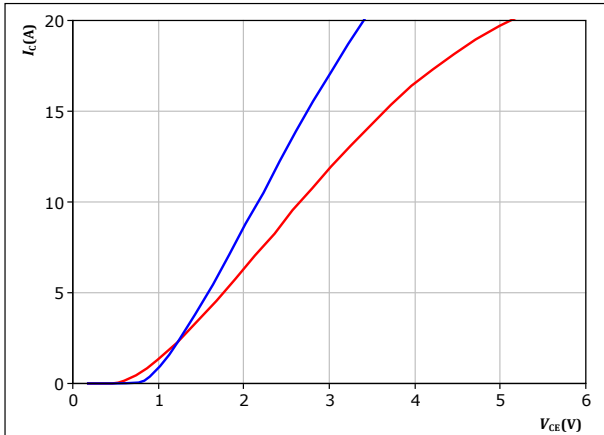


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j:$ — 25 °C
— 150 °C

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

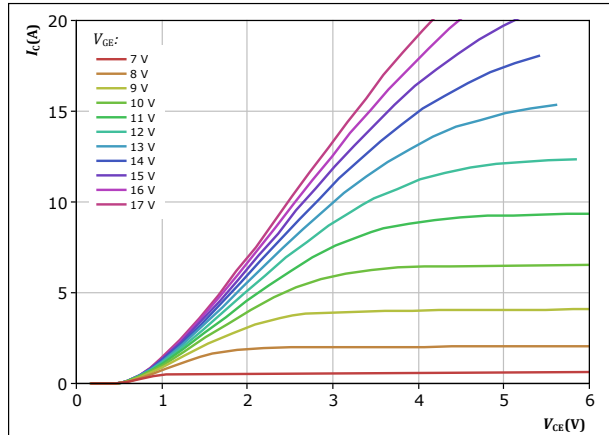


$t_p = 250 \mu s$
 $T_j = 150 \text{ °C}$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

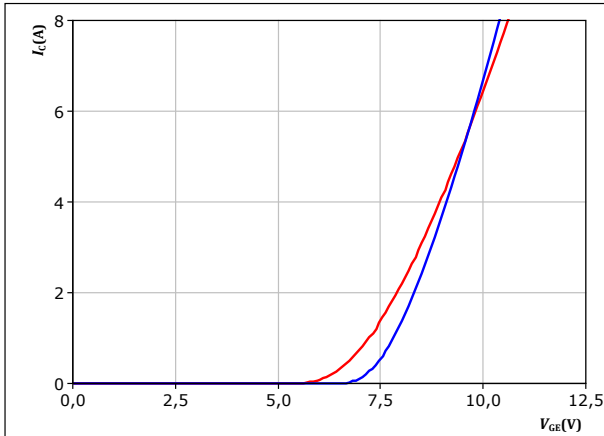


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_j:$ — 25 °C
— 150 °C

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

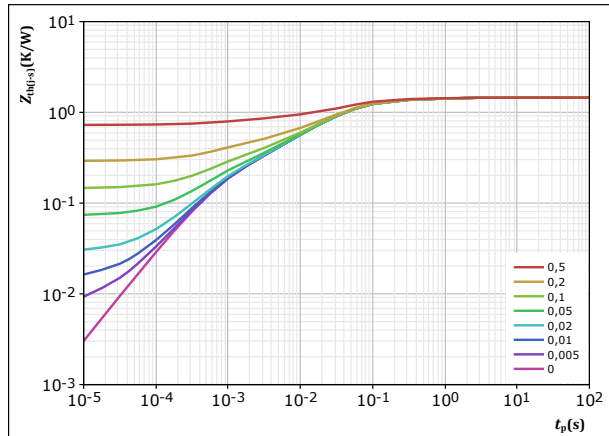

$D = t_p / T$
 $R_{th(j-s)} = 1,454 \text{ K/W}$
IGBT thermal model values

| R (K/W) | τ (s) |
|----------|------------|
| 8,07E-02 | 1,16E+00 |
| 2,38E-01 | 1,30E-01 |
| 7,61E-01 | 3,19E-02 |
| 2,12E-01 | 5,31E-03 |
| 1,63E-01 | 6,85E-04 |




Inverter Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

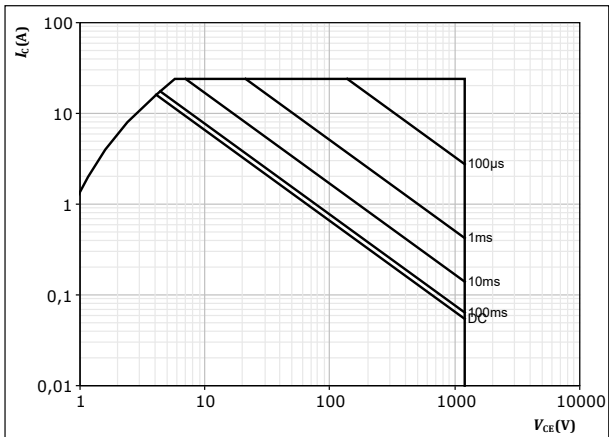

$D =$ single pulse
 $T_s = 80$ °C
 $V_{GE} = 15$ V
 $T_j = T_{jmax}$



Inverter Diode Characteristics

figure 6. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


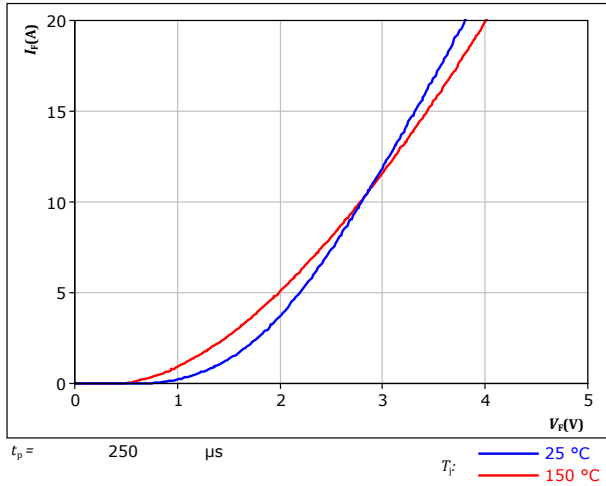


figure 7. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

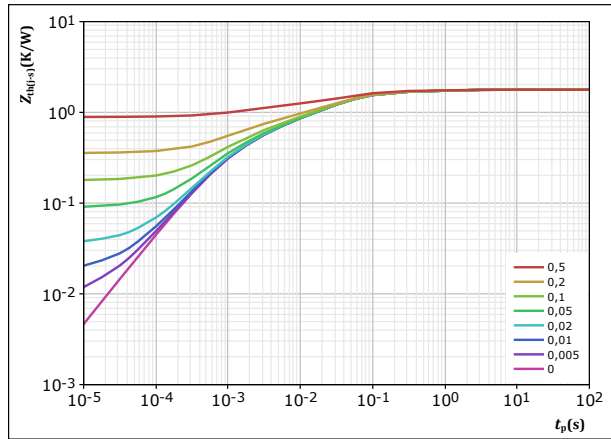

$D = t_p / T$

$R_{th(j-s)} = 1,777 \text{ K/W}$

FWD thermal model values

| $R \text{ (K/W)}$ | $\tau \text{ (s)}$ |
|-------------------|--------------------|
| 1,03E-01 | 1,17E+00 |
| 3,00E-01 | 9,78E-02 |
| 7,08E-01 | 2,95E-02 |
| 3,52E-01 | 4,46E-03 |
| 3,15E-01 | 8,74E-04 |



Rectifier Diode Characteristics

figure 8. Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


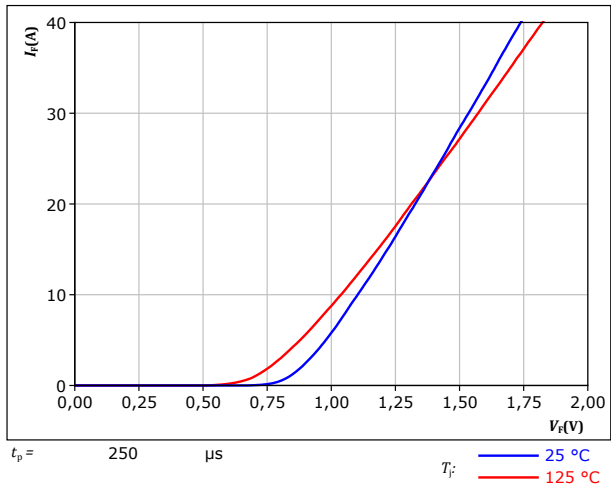


figure 9. Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

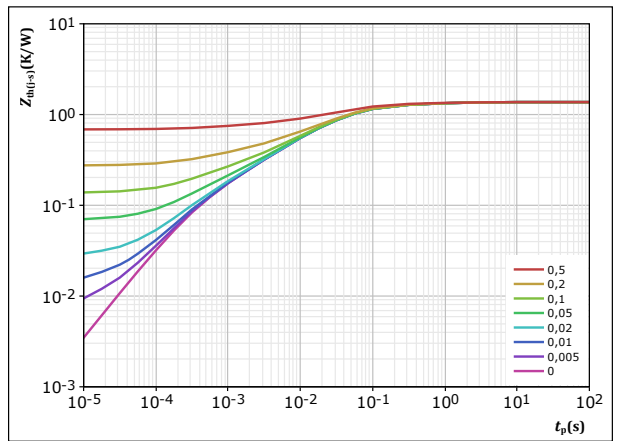

$D = t_p / T$

$R_{th(j-s)} = 1,371 \text{ K/W}$

Rectifier thermal model values

| $R \text{ (K/W)}$ | $\tau \text{ (s)}$ |
|-------------------|--------------------|
| 6,75E-02 | 1,56E+00 |
| 1,34E-01 | 2,41E-01 |
| 6,34E-01 | 4,40E-02 |
| 3,25E-01 | 9,85E-03 |
| 1,24E-01 | 2,12E-03 |
| 8,71E-02 | 3,56E-04 |




Thermistor Characteristics

figure 10. Thermistor

Typical PTC characteristic as function of temperature

$$R_T = f(T)$$

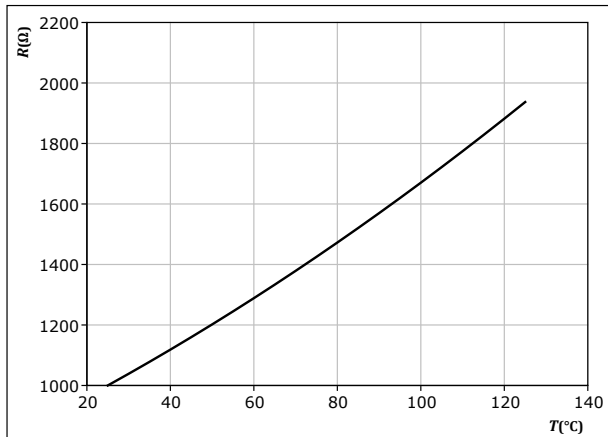




Inverter Switching Characteristics

figure 11. IGBT

Typical switching energy losses as a function of collector current
 $E = f(I_c)$

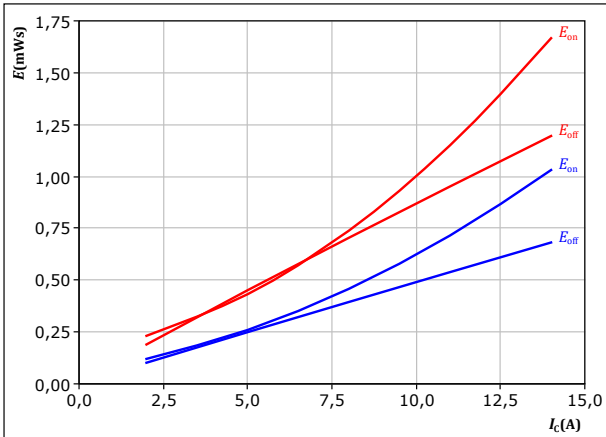


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω
 $R_{goff} = 32$ Ω

T_j : — 25 °C
 — 150 °C

figure 12. IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor
 $E = f(R_g)$

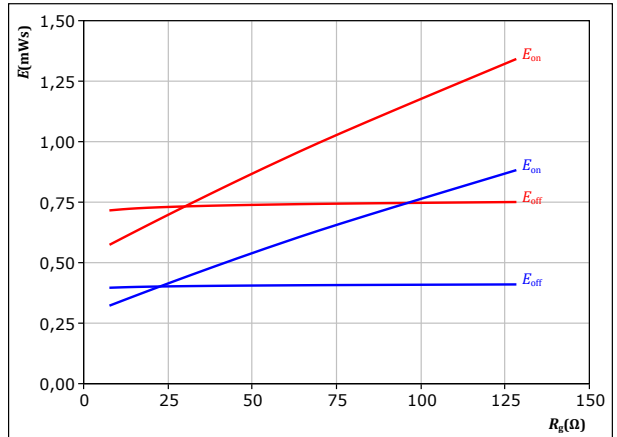


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 8$ A

T_j : — 25 °C
 — 150 °C

figure 13. FWD

Typical reverse recovered energy loss as a function of collector current
 $E_{rec} = f(I_c)$

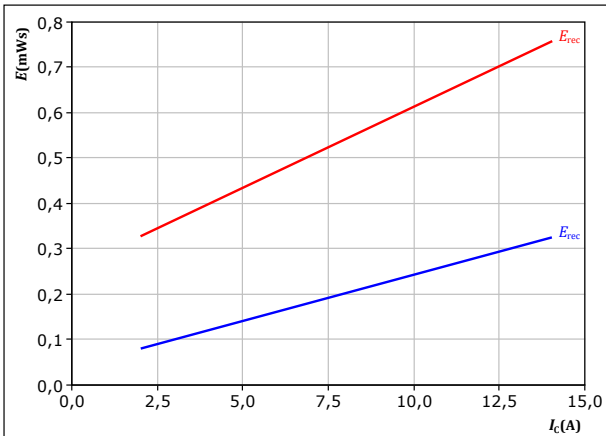


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω

T_j : — 25 °C
 — 150 °C

figure 14. FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor
 $E_{rec} = f(R_g)$

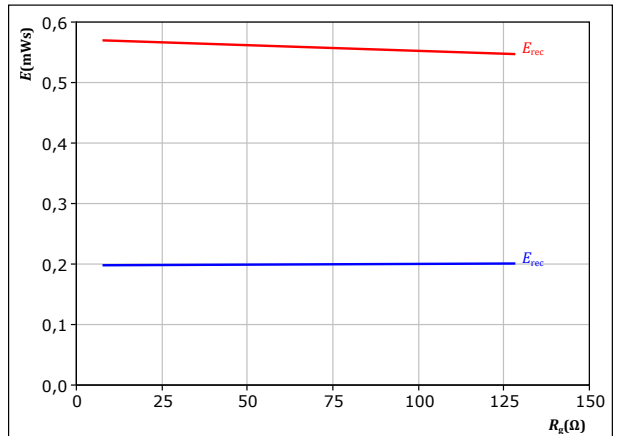

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 8$ A


T_j : — 25 °C
 — 150 °C



Inverter Switching Characteristics

figure 15. IGBT


Typical switching times as a function of collector current
 $t = f(I_c)$

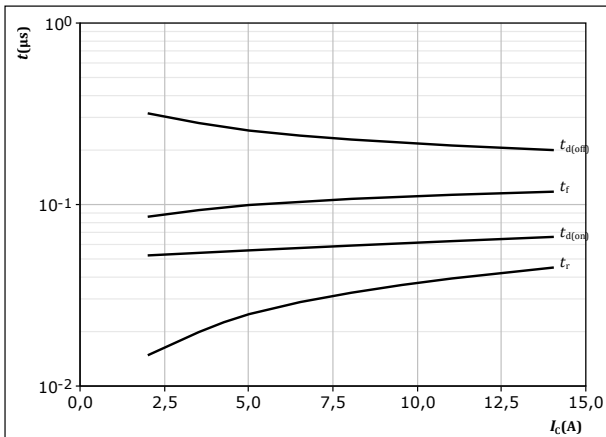

With an inductive load at
 $T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω
 $R_{goff} = 32$ Ω

figure 16. IGBT


Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

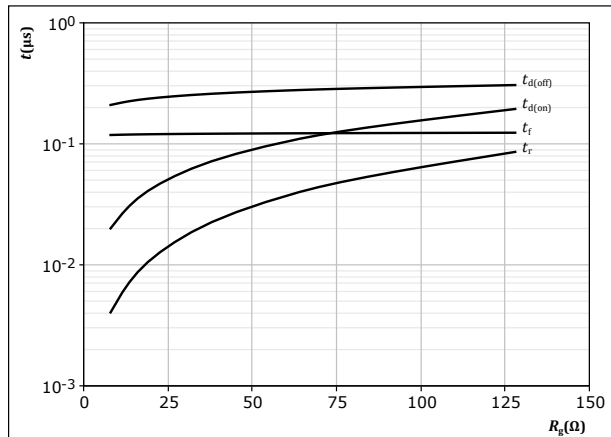

With an inductive load at
 $T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 8$ A

figure 17. FWD


Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_c)$

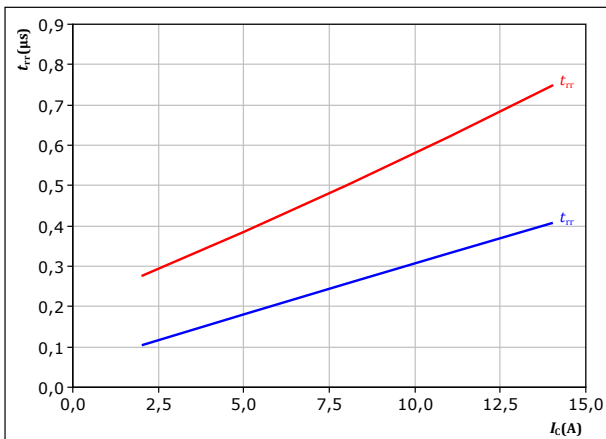

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω
 T_j : — 25 °C
— 150 °C

figure 18. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

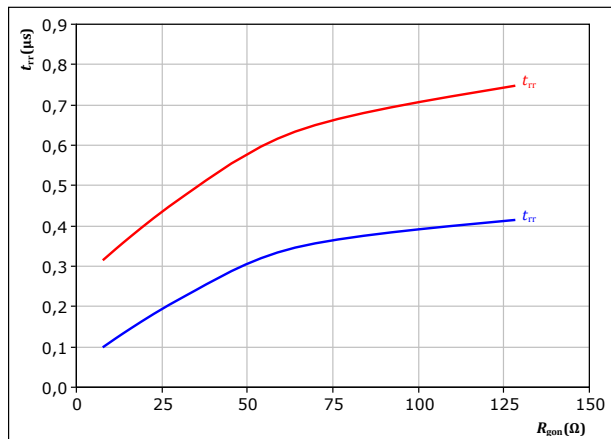

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 8$ A
 T_j : — 25 °C
— 150 °C




Inverter Switching Characteristics

figure 19. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

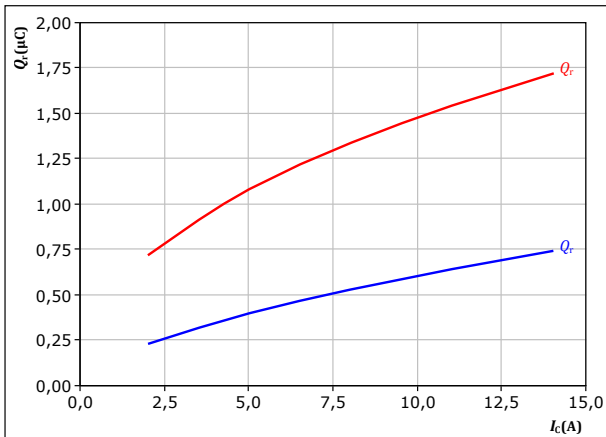

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω

T_j : — 25 °C
— 150 °C

figure 20. FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

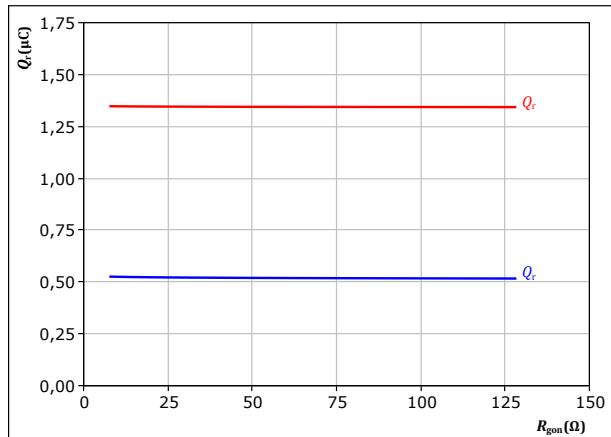

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 8$ A

T_j : — 25 °C
— 150 °C

figure 21. FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

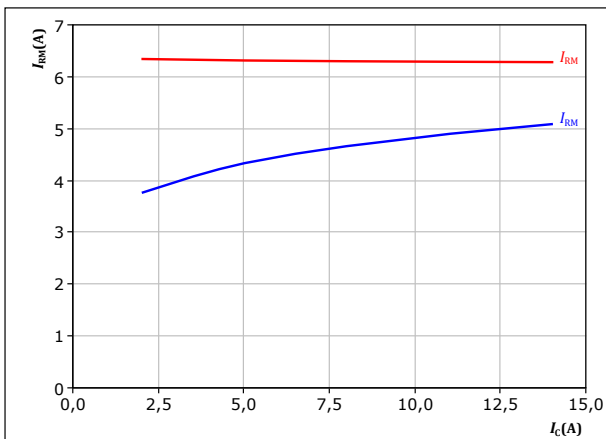

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω

T_j : — 25 °C
— 150 °C

figure 22. FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

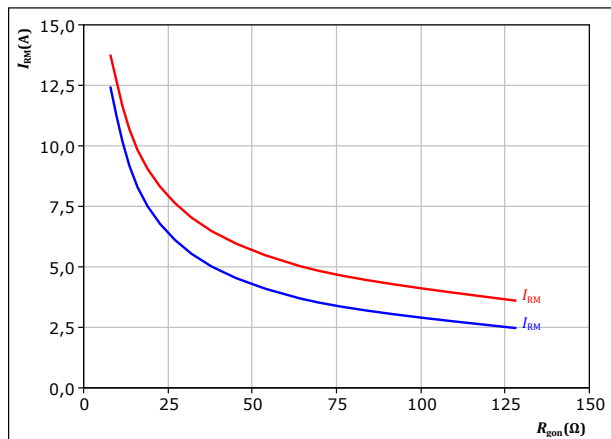

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 8$ A


T_j : — 25 °C
— 150 °C



Inverter Switching Characteristics

figure 23. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_{rr}/dt = f(I_C)$

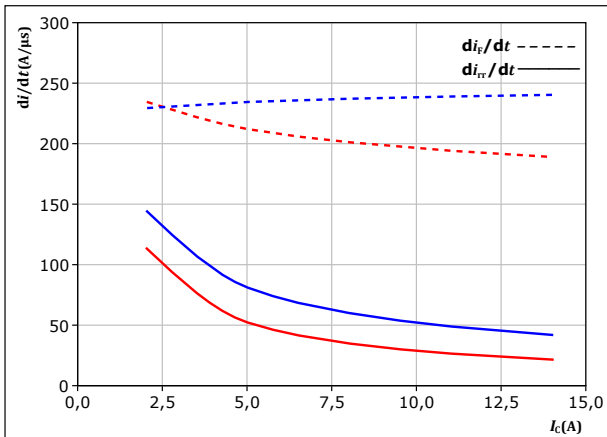


With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 32 \text{ } \Omega$

T_j : — 25 °C
 — 150 °C

figure 24. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{gon})$

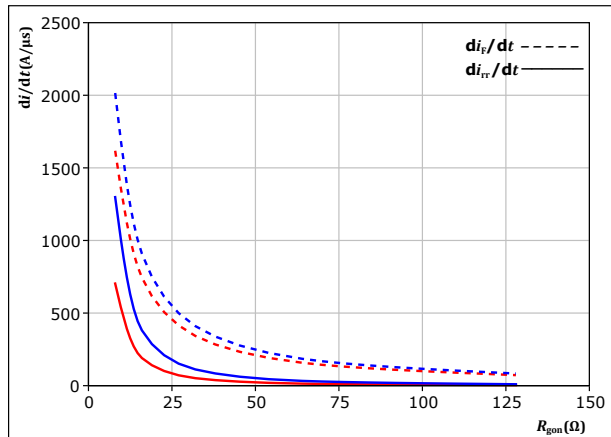

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 8 \text{ A}$

T_j : — 25 °C
 — 150 °C

figure 25. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

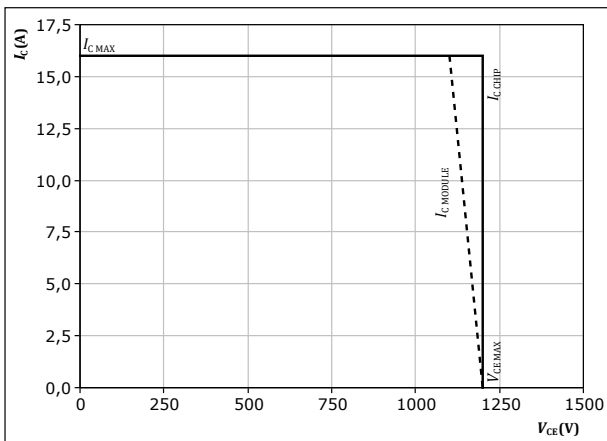

At $T_j = 150 \text{ } ^\circ\text{C}$
 $R_{gon} = 32 \text{ } \Omega$
 $R_{goff} = 32 \text{ } \Omega$



Inverter Switching Definitions

figure 26. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

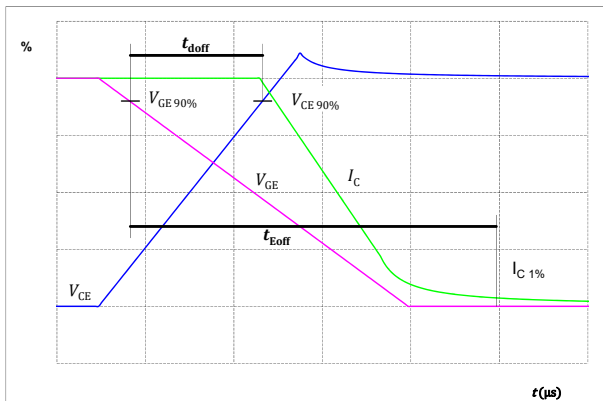


figure 27. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

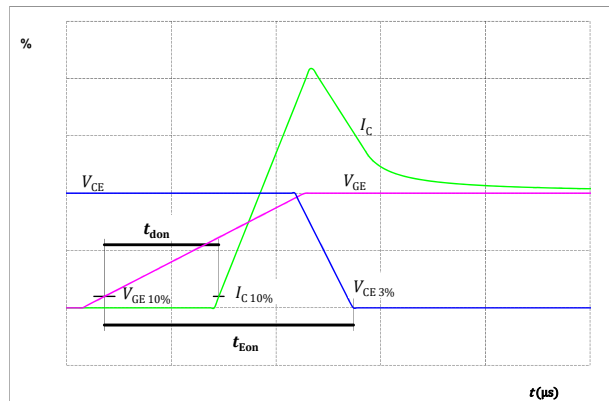


figure 28. IGBT

Turn-off Switching Waveforms & definition of t_f


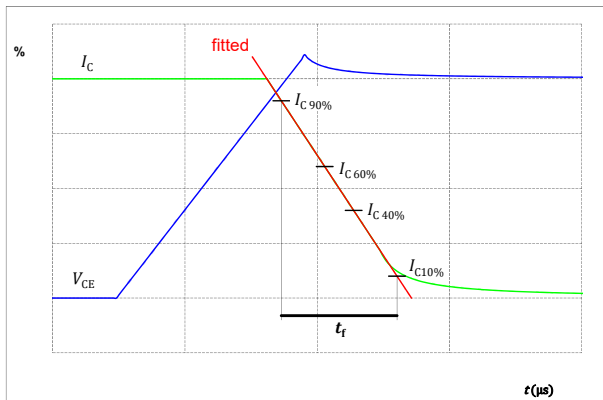


figure 29. IGBT

Turn-on Switching Waveforms & definition of t_r



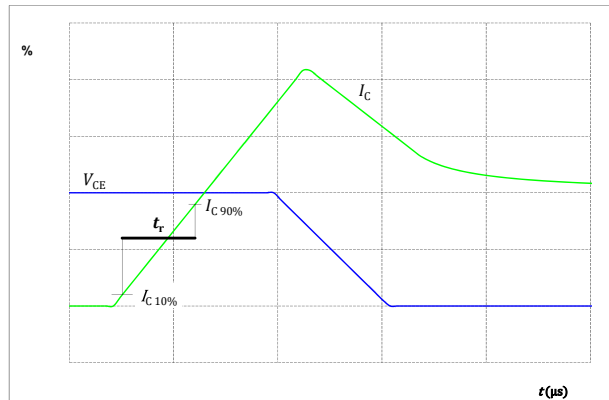

Inverter Switching Definitions

figure 30. FWD

Turn-off Switching Waveforms & definition of t_{rr}


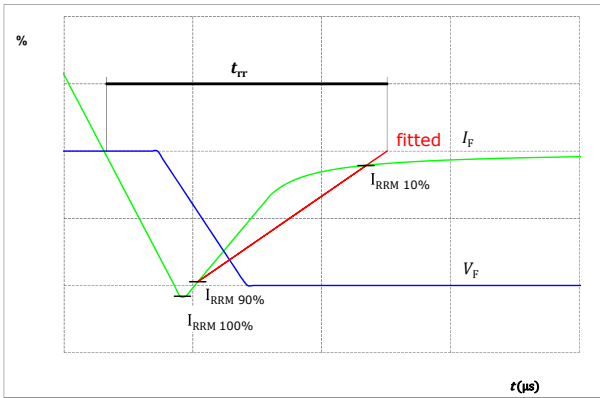


figure 31. FWD


Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)



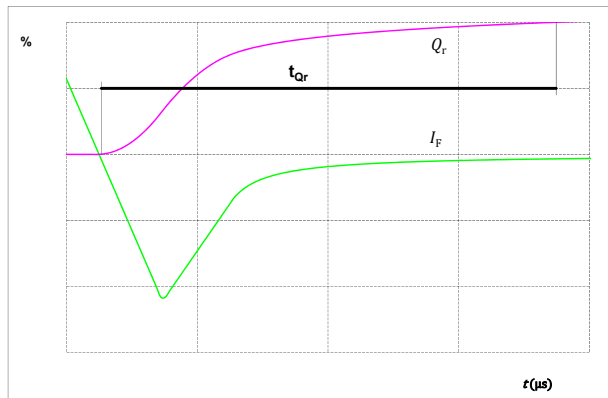


Vincotech

| Ordering Code | |
|--|------------------------------|
| Version | Ordering Code |
| With std lid (6.5mm height) + no thermal grease | 80-M012PNB008SC-K619C41-/0A/ |
| With thin lid (2.8mm height) + no thermal grease | 80-M012PNB008SC-K619C41-/0B/ |
| With std lid (6.5mm height) + thermal grease (0,8 W/mK, P12, silicone-based) | 80-M012PNB008SC-K619C41-/1A/ |
| With thin lid (2.8mm height) + thermal grease (0,8 W/mK, P12, silicone-based) | 80-M012PNB008SC-K619C41-/1B/ |
| With std lid (6.5mm height) + thermal grease (2,5 W/mK, TG20032, silicone-free) | 80-M012PNB008SC-K619C41-/4A/ |
| With thin lid (2.8mm height) + thermal grease (2,5 W/mK, TG20032, silicone-free) | 80-M012PNB008SC-K619C41-/4B/ |
| With std lid (6.5mm height) + thermal grease (2,5 W/mK, HPTP, silicone-based) | 80-M012PNB008SC-K619C41-/5A/ |
| With thin lid (2.8mm height) + thermal grease (2,5 W/mK, HPTP, silicone-based) | 80-M012PNB008SC-K619C41-/5B/ |

| Marking | | | | | | | |
|---|------------|---------------------|------------|-----------|-----------|-----------|-----------|
|  | Text | Name | | Type&Ver | Date code | VIN & Lot | Serial&UL |
| | | NN-NNNNNNNNNNNNNNNN | | TTTTTTTVV | WWYY | VIN LLLLL | SSSS UL |
| | Datamatrix | Type&Ver | Lot number | Serial | Date code | | |
| | TTTTTTTVV | LLLLL | SSSS | WWYY | | | |


| Outline | | | | |
|----------------|--------|-------|----------|--|
| Pin table [mm] | | | | |
| Pin | X | Y | Function | |
| 1 | 11,93 | -11,5 | G5 | |
| 2 | 11,93 | -6,9 | W | |
| 3 | 11,93 | 4,71 | G6 | |
| 4 | 11,93 | 8,3 | +T | |
| 5 | 11,93 | 11,5 | -T | |
| 6 | 4,33 | -11,5 | G3 | |
| 7 | 4,33 | -5,8 | V | |
| 8 | 4,33 | 6,95 | G4 | |
| 9 | 4,33 | 10,15 | -DC | |
| 10 | -3,27 | -11,5 | G1 | |
| 11 | -3,27 | -5,8 | U | |
| 12 | -3,27 | 5,5 | -RECT | |
| 13 | -3,27 | 11,5 | G2 | |
| 14 | -11,07 | -11,5 | +DC | |
| 15 | -11,07 | -8,3 | +RECT | |
| 16 | -11,07 | -1,68 | L3 | |
| 17 | -11,07 | 4,93 | L2 | |
| 18 | -11,07 | 11,5 | L1 | |



Pad positions refers to center point. For more informations on pad design please see package data



Vincotech

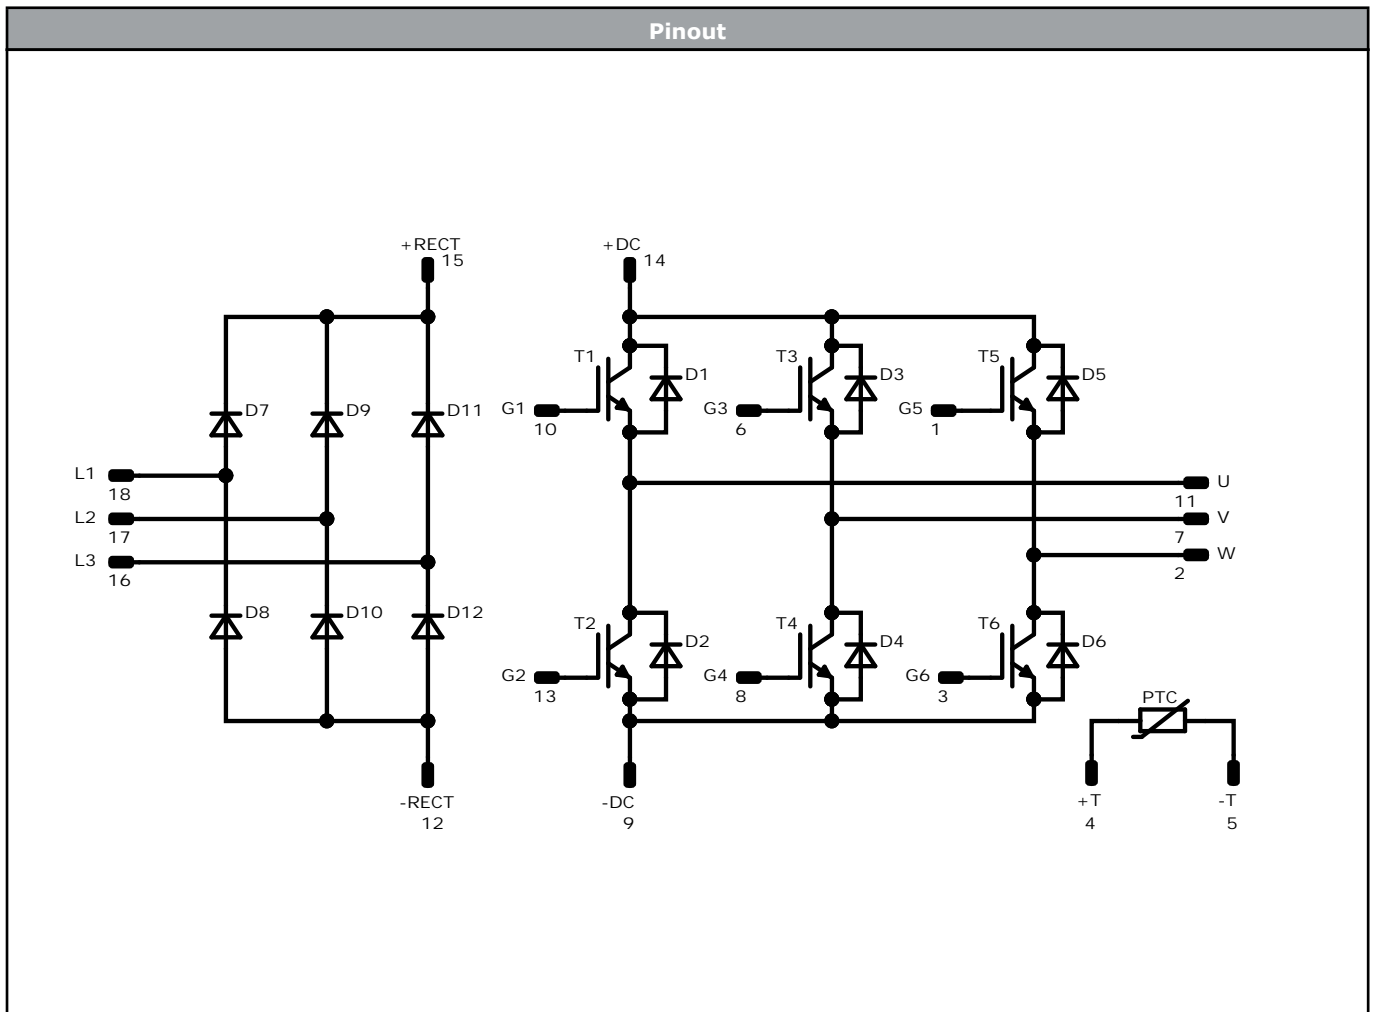

| Identification | | | | | |
|---------------------------|------------|---------|---------|-----------------|---------|
| ID | Component | Voltage | Current | Function | Comment |
| T2, T1, T4, T3, T6, T5 | IGBT | 1200 V | 8 A | Inverter Switch | |
| D1, D2, D3, D4, D5, D6 | FWD | 1200 V | 8 A | Inverter Diode | |
| D8, D7, D10, D9, D12, D11 | Rectifier | 1600 V | 14 A | Rectifier Diode | |
| Rt | Thermistor | | | Thermistor | |




| Packaging instruction | | | | |
|---------------------------------------|------|----------|------|--------|
| Standard packaging quantity (SPQ) 198 | >SPQ | Standard | <SPQ | Sample |

| Handling instruction |
|--|
| Handling instructions for MiniSKiiP® 0 packages see vincotech.com website. |

| Package data |
|---|
| Package data for MiniSKiiP® 0 packages see vincotech.com website. |

| Vincotech thermistor reference |
|--|
| See Vincotech thermistor reference table at vincotech.com website. |

| UL recognition and file number |
|---|
| This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.  |

| Document No.: | Date: | Modification: | Pages |
|-------------------------------|--------------|---|-------|
| 80-M012PNB008SC-K619C41-D3-14 | 1 May. 2022 | New Datasheet format, module is unchanged Introduce Rth values with HPTP | |
| 80-M012PNB008SC-K619C41-D4-14 | 30 Aug. 2023 | Rectifier diode, surge (non-repetitive) forward current | |

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.