

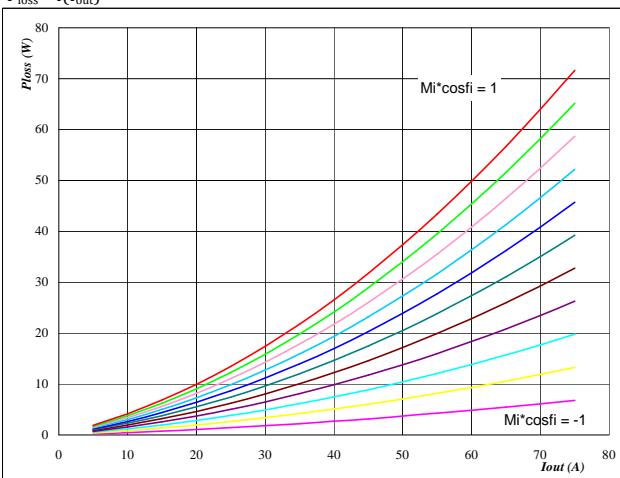
Output Inverter Application

600 V / 50 A
General conditions

3phase SPWM	
V_{GEon}	= 15 V
V_{GEoff}	= -15 V
R_{gon}	= 8 Ω
R_{goff}	= 8 Ω

Figure 1
IGBT
Typical average static loss as a function of output current

$$P_{loss} = f(I_{out})$$

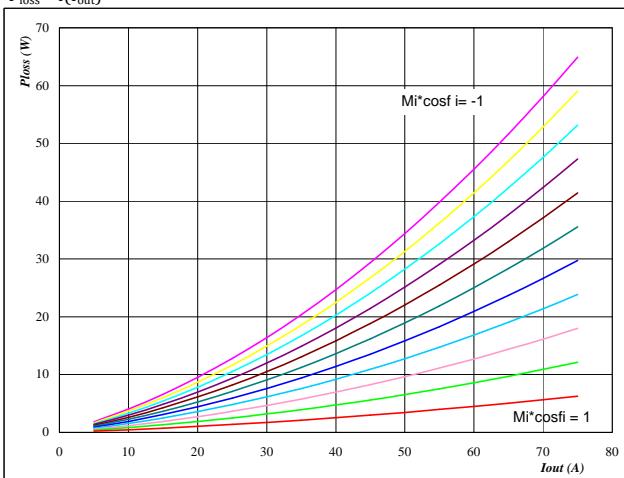

At

$$T_j = 150 \quad ^\circ C$$

Mi*cosfi from -1 to 1 in steps of 0,2

Figure 2
FWD
Typical average static loss as a function of output current

$$P_{loss} = f(I_{out})$$

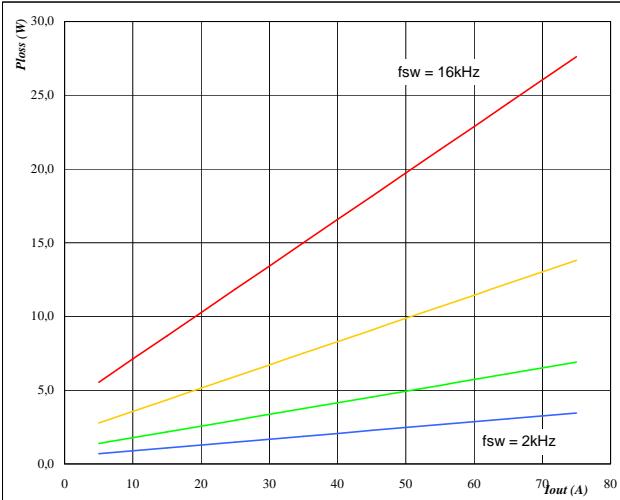

At

$$T_j = 150 \quad ^\circ C$$

Mi*cosfi from -1 to 1 in steps of 0,2

Figure 3
IGBT
Typical average switching loss
as a function of output current

$$P_{loss} = f(I_{out})$$


At

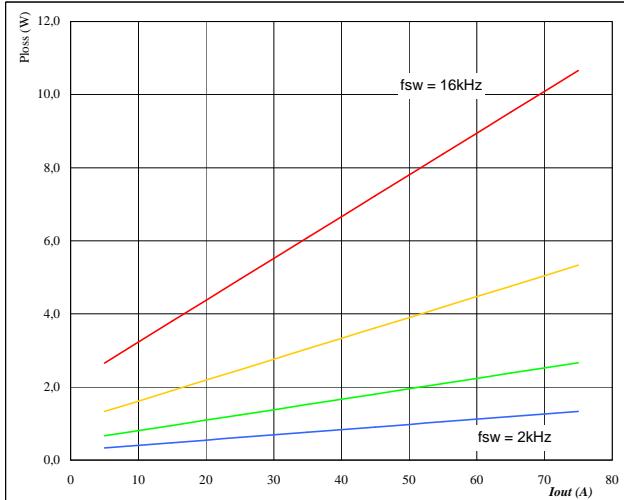
$$T_j = 150 \quad ^\circ C$$

$$DC \text{ link} = 320 \quad V$$

fsw from 2 kHz to 16 kHz in steps of factor 2

Figure 4
FWD
Typical average switching loss
as a function of output current

$$P_{loss} = f(I_{out})$$


At

$$T_j = 150 \quad ^\circ C$$

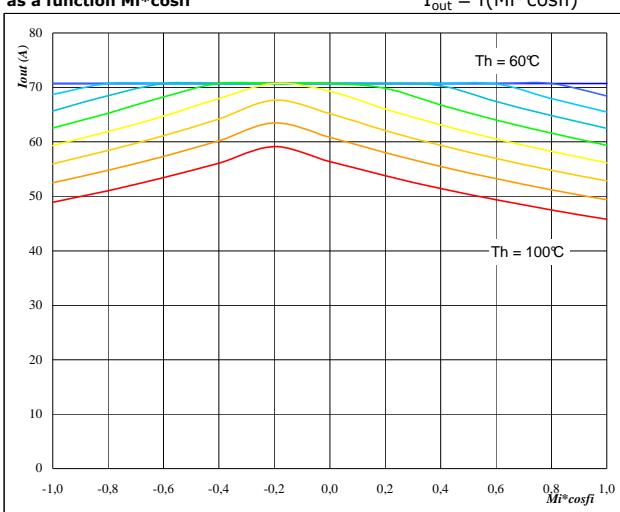
$$DC \text{ link} = 320 \quad V$$

fsw from 2 kHz to 16 kHz in steps of factor 2

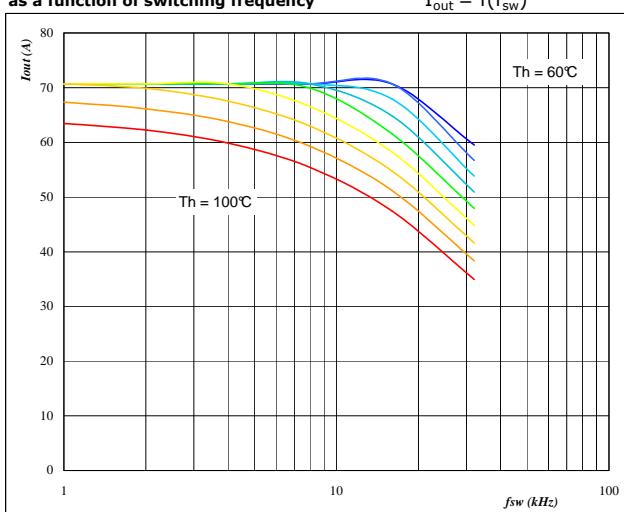
Output Inverter Application

600 V / 50 A
Figure 5

**Typical available 50Hz output current
as a function $M_i \cdot \cos f_i$**

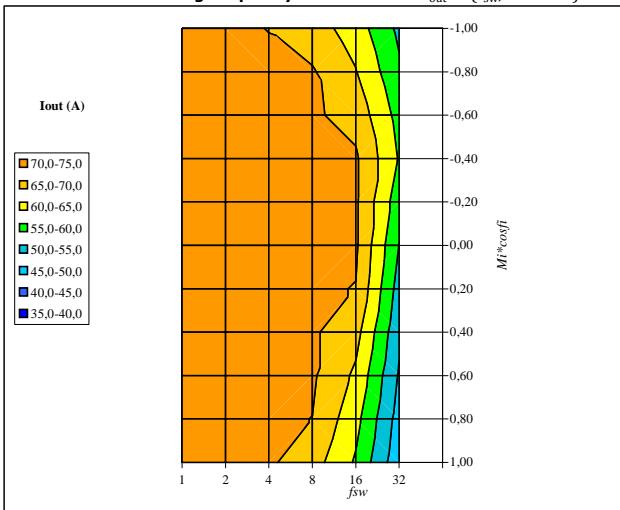

At
 $T_j = 150 \quad ^\circ C$
 $DC \text{ link} = 320 \quad V$
 $f_{sw} = 16 \quad kHz$
 $Th \text{ from } 60 \text{ } ^\circ C \text{ to } 100 \text{ } ^\circ C \text{ in steps of } 5 \text{ } ^\circ C$
Phase
Figure 6

**Typical available 50Hz output current
as a function of switching frequency**


At
 $T_j = 150 \quad ^\circ C$
 $DC \text{ link} = 320 \quad V$
 $M_i \cdot \cos f_i = 0,8$
 $Th \text{ from } 60 \text{ } ^\circ C \text{ to } 100 \text{ } ^\circ C \text{ in steps of } 5 \text{ } ^\circ C$
Figure 7

Typical available 50Hz output current as a function of

$M_i \cdot \cos f_i$ and switching frequency


At
 $T_j = 150 \quad ^\circ C$
 $DC \text{ link} = 320 \quad V$
 $T_h = 80 \quad ^\circ C$
Phase
Figure 8

**Typical available 0Hz output current as a function
of switching frequency**

$I_{outpeak} = f(f_{sw})$

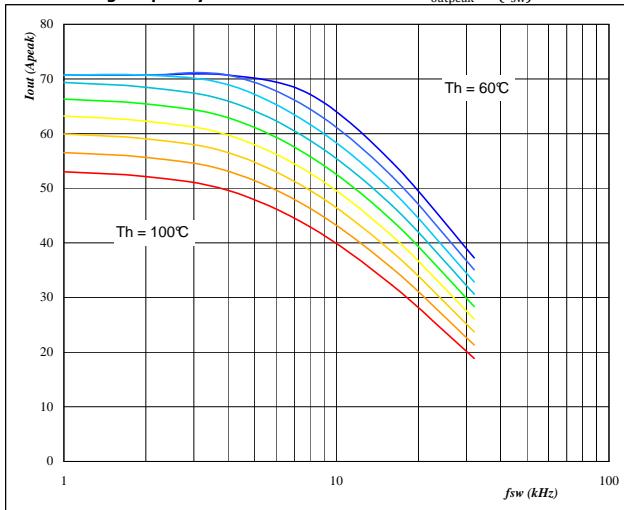
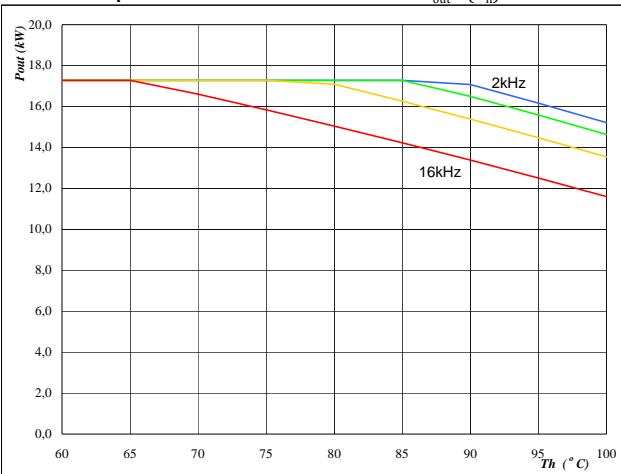

At
 $T_j = 150 \quad ^\circ C$
 $DC \text{ link} = 320,00 \quad V$
 $Th \text{ from } 60 \text{ } ^\circ C \text{ to } 100 \text{ } ^\circ C \text{ in steps of } 5 \text{ } ^\circ C$

Figure 9

Inverter

Typical available peak output power as a function of heatsink temperature
 $P_{out}=f(T_h)$
**At**T_j = 150 °C

DC link = 320 V

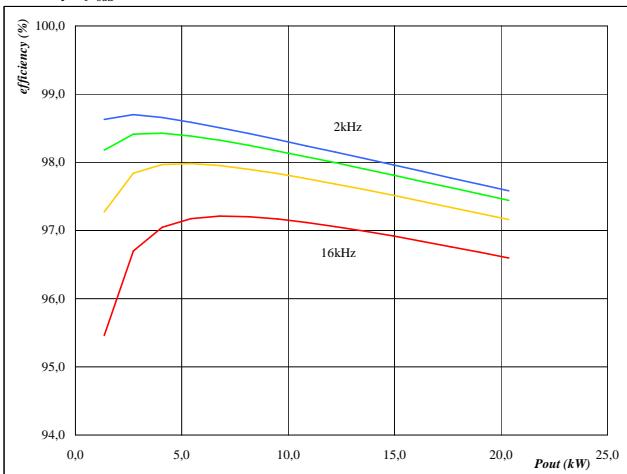
Mi = 1

cosfi = 0,80

fsw from 2 kHz to 16 kHz in steps of factor 2

Figure 10

Inverter

Typical efficiency as a function of output power
 $\text{efficiency}=f(P_{out})$
**At**T_j = 150 °C

DC link = 320 V

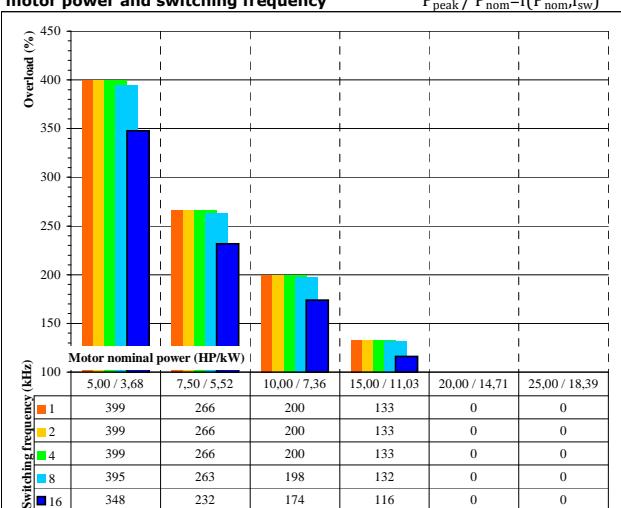
Mi = 1

cosfi = 0,80

fsw from 2 kHz to 16 kHz in steps of factor 2

Figure 11

Inverter

Typical available overload factor as a function of motor power and switching frequency
 $P_{peak} / P_{nom}=f(P_{nom}, f_{sw})$
**At**T_j = 150 °C

DC link = 320 V

Mi = 1

cosfi = 0,8

fsw from 1 kHz to 16 kHz in 2 steps

Th = 80 °C

Motor eff = 0,85