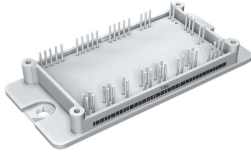
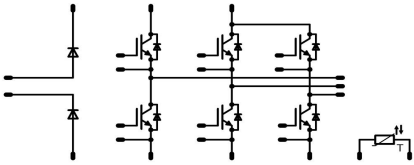


| | |
|---|--|
| <i>flowPACK 2</i> | 1200 V/75 A |
| <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Features</p> <ul style="list-style-type: none"> Inverter, blocking diodes Built-in thermistor IGBT4 technology for low saturation losses </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Target Applications</p> <ul style="list-style-type: none"> Power Regeneration </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Types</p> <ul style="list-style-type: none"> 30-F212R6A075SC-M448E 30-F212R6A075SC01-M448E10 </div> | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;"><i>flow 2 housing</i></p>  </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Schematic</p>  </div> |

Maximum Ratings

$T_j=25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Symbol | Condition | Value | Unit |
|--|----------------------|--|------------|--------------------|
| D7a,b-D8a,b | | | | |
| Repetitive peak reverse voltage | V_{RRM} | | 1600 | V |
| DC forward current | I_{FAV} | $T_j=T_{jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$ | 154 208 | A |
| Surge forward current | I_{FSM} | $t_p=10\text{ms}$ $T_j=25^{\circ}\text{C}$ | 1270 | A |
| I ² t-value | I^2t | | 2400 | A ² s |
| Power dissipation per Diode | P_{tot} | $T_j=T_{jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$ | 189 287 | W |
| Maximum Junction Temperature | T_{jmax} | | 150 | °C |
| T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b | | | | |
| Collector-emitter break down voltage | V_{CE} | | 1200 | V |
| DC collector current | I_C | $T_j=T_{jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$ | 85 109 | A |
| Pulsed collector current | I_{Cpulse} | t_p limited by T_{jmax} | 210 | A |
| Turn off safe operating area | | $V_{CE} \leq 1200\text{V}$, $T_j \leq T_{op max}$ | 140 | A |
| Power dissipation per IGBT | P_{tot} | $T_j=T_{jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$ | 239 361 | W |
| Gate-emitter peak voltage | V_{GE} | | 20 | V |
| Short circuit ratings | t_{SC} V_{CC} | $T_j \leq 150^{\circ}\text{C}$ $V_{GE}=15\text{V}$ | 10 800 | μs V |
| Maximum Junction Temperature | T_{jmax} | | 175 | °C |

Maximum Ratings

 $T_j=25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Symbol | Condition | Value | Unit | |
|---------------------------------|------------|-----------------------------|--------------------------|--------------------|---|
| D1,D2,D3,D4,D5,D6 | | | | | |
| Peak Repetitive Reverse Voltage | V_{RRM} | | 1200 | V | |
| DC forward current | I_F | $T_j=T_{jmax}$ | $T_h=80^{\circ}\text{C}$ | 64 | A |
| | | | $T_c=80^{\circ}\text{C}$ | 84 | |
| Repetitive peak forward current | I_{FRM} | t_p limited by T_{jmax} | 100 | A | |
| Power dissipation per Diode | P_{tot} | $T_j=T_{jmax}$ | $T_h=80^{\circ}\text{C}$ | 127 | W |
| | | | $T_c=80^{\circ}\text{C}$ | 192 | |
| Maximum Junction Temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ | |

Thermal Properties

| | | | | |
|---|-----------|--|----------------------------|--------------------|
| Storage temperature | T_{stg} | | -40...+125 | $^{\circ}\text{C}$ |
| Operation temperature under switching condition | T_{op} | | -40...+($T_{jmax} - 25$) | $^{\circ}\text{C}$ |

Insulation Properties

| | | | | |
|----------------------------|----------|--------------------------|----------|----|
| Insulation voltage | V_{is} | $t=2\text{s}$ DC voltage | 4000 | V |
| Creepage distance | | | min 12,7 | mm |
| Clearance | | | min 12,7 | mm |
| Comparative tracking index | CTI | | >200 | |


Characteristic Values

| Parameter | Symbol | Conditions | | | | | Value | | | Unit |
|---|-----------------|-------------------------------------|--|----------------------------------|--------|---------------------------------------|---------------------|------------|-----|------------|
| | | $V_{GE}[V]$ or $V_{GS}[V]$ | $V_r[V]$ or $V_{CE}[V]$ or $V_{DS}[V]$ | $I_c[A]$ or $I_F[A]$ or $I_b[A]$ | T_j | Min | Typ | Max | | |
| D7a,b-D8a,b | | | | | | | | | | |
| Forward voltage | V_F | | | | 100 | $T_j=25^\circ C$ $T_j=125^\circ C$ | 1,12 1,07 | 1,21 | | V |
| Threshold voltage (for power loss calc. only) | V_{to} | | | | 100 | $T_j=25^\circ C$ $T_j=125^\circ C$ | 0,89 0,76 | | | V |
| Slope resistance (for power loss calc. only) | r_t | | | | 100 | $T_j=25^\circ C$ $T_j=125^\circ C$ | 2 3 | | | m Ω |
| Reverse current | I_r | | | 1600 | | $T_j=25^\circ C$ $T_j=125^\circ C$ | | 0,05 | | mA |
| Thermal resistance chip to heatsink per chip | R_{thJH} | Phase-Change Material | | | | | | 0,37 | | K/W |
| Thermal resistance chip to heatsink per chip | R_{thJC} | | | | | | | 0,24 | | |
| T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b | | | | | | | | | | |
| Gate emitter threshold voltage | $V_{GE(th)}$ | $V_{CE}=V_{GE}$ | | | 0,0024 | $T_j=25^\circ C$ $T_j=150^\circ C$ | 5 5,8 | 6,5 | | V |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | | 15 | | 75 | $T_j=25^\circ C$ $T_j=150^\circ C$ | 1,6 2 2,41 | 2,1 | | V |
| Collector-emitter cut-off current incl. Diode | I_{CES} | | 0 | 1200 | | $T_j=25^\circ C$ $T_j=150^\circ C$ | | 0,02 | | μA |
| Gate-emitter leakage current | I_{GES} | | 20 | 0 | | $T_j=25^\circ C$ $T_j=150^\circ C$ | | 240 | | nA |
| Integrated Gate resistor | R_{gint} | | | | | | | none | | Ω |
| Turn-on delay time | $t_{d(on)}$ | Rgoff=8 Ω Rgon=8 Ω | ± 15 | 600 | 75 | $T_j=25^\circ C$ $T_j=150^\circ C$ | 92,8 93 | | ns | |
| Rise time | t_r | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 23 27 | | | |
| Turn-off delay time | $t_{d(off)}$ | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 202 275 | | | |
| Fall time | t_f | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 65 125 | | | |
| Turn-on energy loss per pulse | E_{on} | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 4,49 6,5 | mWs | | |
| Turn-off energy loss per pulse | E_{off} | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 3,91 6,91 | | | |
| Input capacitance | C_{ies} | | | | | | 3900 | | pF | |
| Output capacitance | C_{oss} | f=1MHz | 0 | 25 | | $T_j=25^\circ C$ | 310 | | | |
| Reverse transfer capacitance | C_{rss} | | | | | | 230 | | | |
| Gate charge | Q_{Gate} | | ± 15 | 960 | 75 | $T_j=25^\circ C$ | | 380 | nC | |
| Thermal resistance chip to heatsink per chip | R_{thJH} | Phase-Change Material | | | | | | 0,4 | K/W | |
| Thermal resistance chip to case per chip | R_{thJC} | | | | | | | 0,26 | | |
| D1,D2,D3,D4,D5,D6 | | | | | | | | | | |
| Diode forward voltage | V_F | | | | 50 | $T_j=25^\circ C$ $T_j=150^\circ C$ | 1,1 1,74 1,77 | 2,3 | | V |
| Peak reverse recovery current | I_{RRM} | Rgon=8 Ω | ± 15 | 600 | 75 | $T_j=25^\circ C$ $T_j=150^\circ C$ | 71,53 85,7 | | A | |
| Reverse recovery time | t_{rr} | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 271,4 308,2 | | | |
| Reverse recovered charge | Q_{rr} | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 6,03 11,73 | μC | | |
| Peak rate of fall of recovery current | $di(rec)max/dt$ | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 2648 602 | A/ μs | | |
| Reverse recovered energy | E_{rec} | | | | | $T_j=25^\circ C$ $T_j=150^\circ C$ | 2,28 4,71 | mWs | | |
| Thermal resistance chip to heatsink per chip | R_{thJH} | | | | | Phase-Change Material | | | | |
| Thermal resistance chip to case per chip | R_{thJC} | | | | | | | 0,49 | | |
| Thermistor | | | | | | | | | | |
| Rated resistance | R | | | | | $T_j=25^\circ C$ | | 22000 | | Ω |
| Deviation of R100 | $\Delta R/R$ | R100=1486 Ω | | | | T=100 $^\circ C$ | -12 | 14 | | % |
| Power dissipation | P | | | | | Tc=100 $^\circ C$ | | 200 | | mW |
| Power dissipation constant | | | | | | $T_j=25^\circ C$ | | 2 | | mW/K |
| B-value | $B_{(25/50)}$ | Tol. $\pm 3\%$ | | | | $T_j=25^\circ C$ | | 3950 | | K |
| B-value | $B_{(25/100)}$ | Tol. $\pm 3\%$ | | | | $T_j=25^\circ C$ | | 3998 | | K |
| Vincotech NTC Reference | | | | | | $T_j=25^\circ C$ | | | B | |

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6
Figure 1 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Typical output characteristics

$I_C = f(V_{CE})$

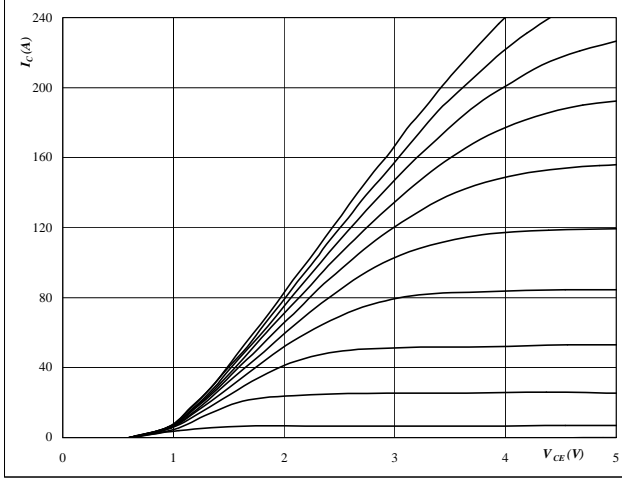


At
 $t_p = 250 \mu s$
 $T_j = 25 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Typical output characteristics

$I_C = f(V_{CE})$

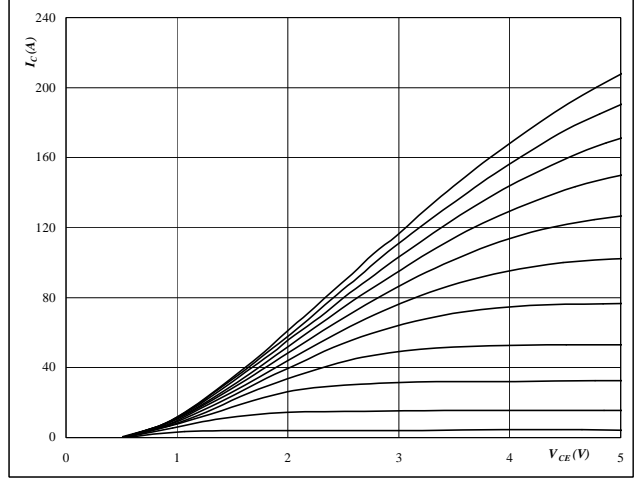


At
 $t_p = 250 \mu s$
 $T_j = 150 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Typical transfer characteristics

$I_C = f(V_{GE})$

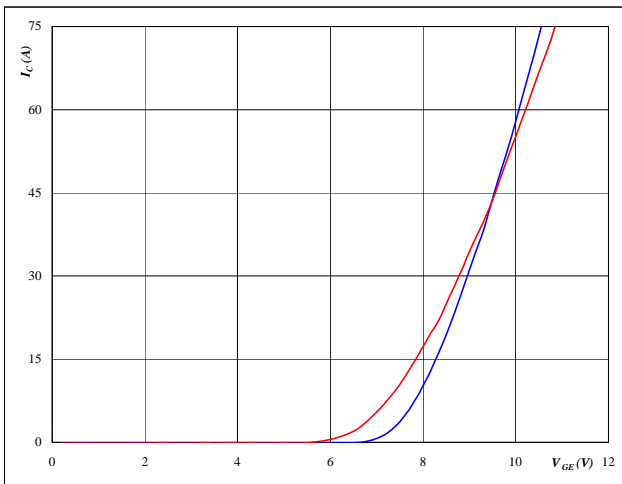


At
 $T_j = 25/150 \text{ } ^\circ C$
 $t_p = 250 \mu s$
 $V_{CE} = 10 \text{ V}$

Figure 4 D1,D2,D3,D4,D5,D6 FWD

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

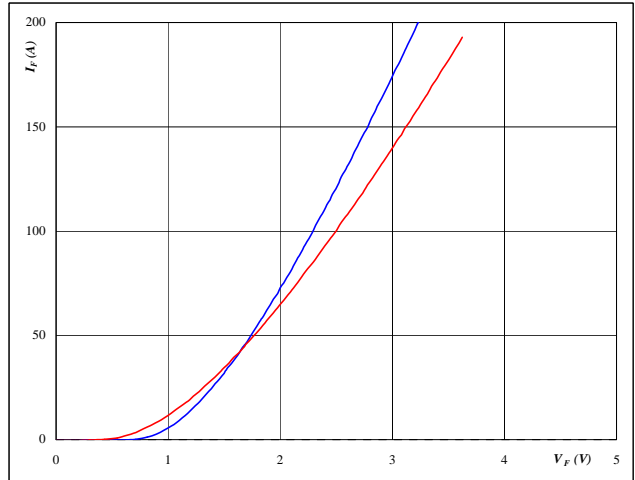


At
 $T_j = 25/150 \text{ } ^\circ C$
 $t_p = 250 \mu s$

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6
Figure 5 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

**Typical switching energy losses
as a function of collector current**

$$E = f(I_C)$$

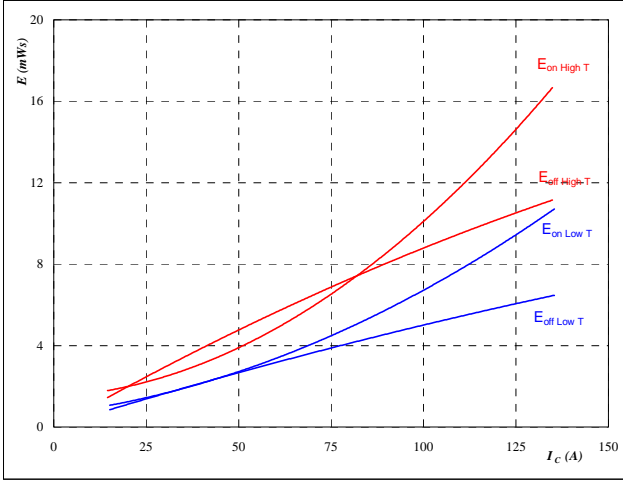


With an inductive load at

| | | |
|--------------|--------|----|
| $T_j =$ | 25/150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $R_{gon} =$ | 8 | Ω |
| $R_{goff} =$ | 8 | Ω |

Figure 6 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

**Typical switching energy losses
as a function of gate resistor**

$$E = f(R_G)$$

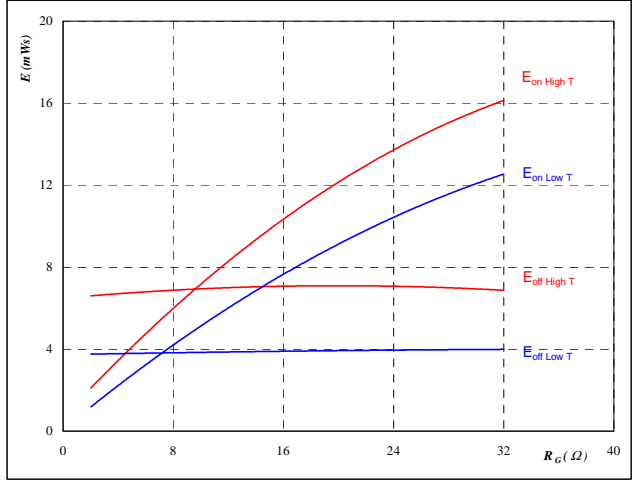


With an inductive load at

| | | |
|------------|--------|----|
| $T_j =$ | 25/150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $I_C =$ | 75 | A |

Figure 7 D1,D2,D3,D4,D5,D6 FWD

**Typical reverse recovery energy loss
as a function of collector current**

$$E_{rec} = f(I_C)$$

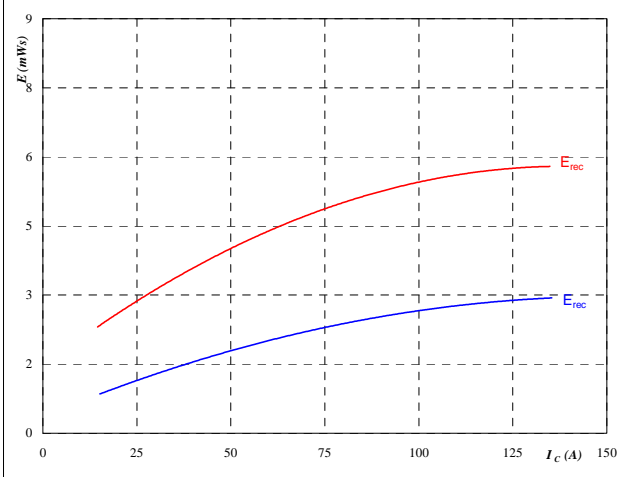


With an inductive load at

| | | |
|-------------|--------|----|
| $T_j =$ | 25/150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $R_{gon} =$ | 8 | Ω |

Figure 8 D1,D2,D3,D4,D5,D6 FWD

**Typical reverse recovery energy loss
as a function of gate resistor**

$$E_{rec} = f(R_G)$$

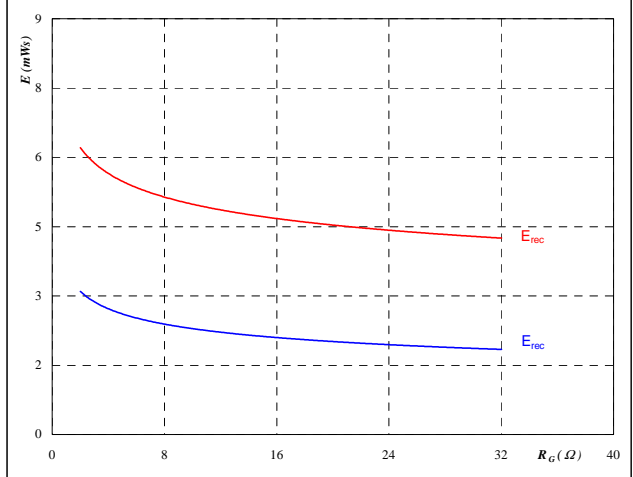


With an inductive load at

| | | |
|------------|--------|----|
| $T_j =$ | 25/150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $I_C =$ | 75 | A |

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6
Figure 9 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Typical switching times as a function of collector current

$t = f(I_C)$

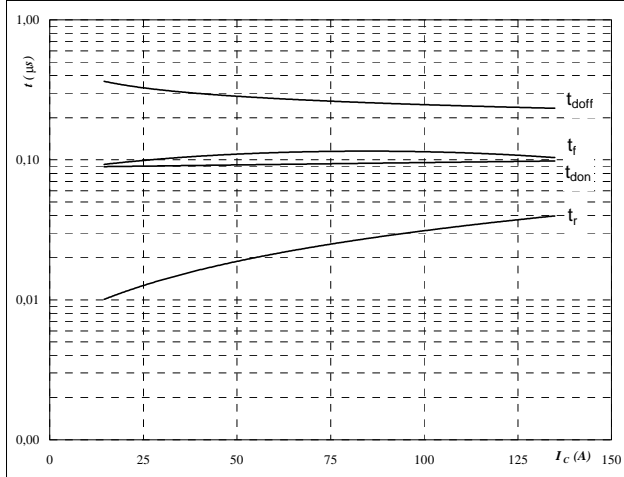


With an inductive load at

| | | |
|--------------|-----|----|
| $T_J =$ | 150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $R_{gon} =$ | 8 | Ω |
| $R_{goff} =$ | 8 | Ω |

Figure 10 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Typical switching times as a function of gate resistor

$t = f(R_G)$

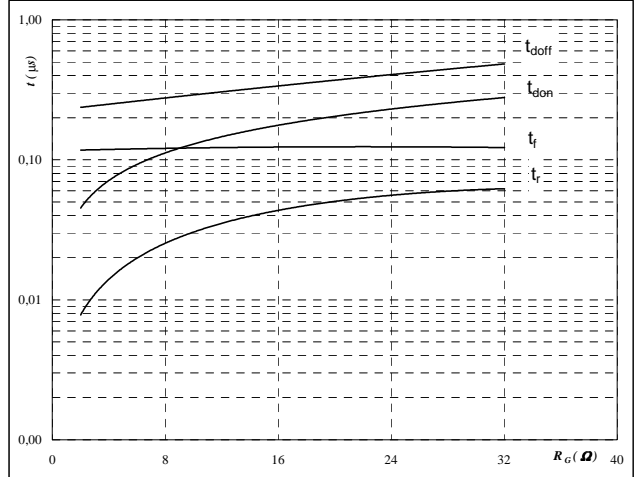


With an inductive load at

| | | |
|------------|-----|----|
| $T_J =$ | 150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $I_C =$ | 75 | A |

Figure 11 D1,D2,D3,D4,D5,D6 FWD

Typical reverse recovery time as a function of collector current

$t_{rr} = f(I_C)$

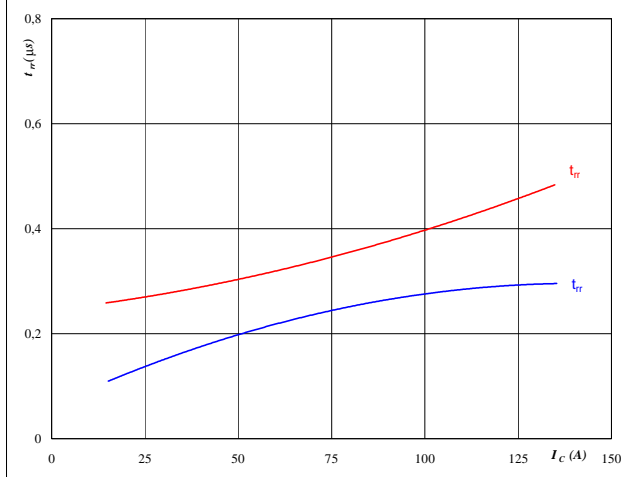

At

| | | |
|-------------|--------|----|
| $T_J =$ | 25/150 | °C |
| $V_{CE} =$ | 600 | V |
| $V_{GE} =$ | ±15 | V |
| $R_{gon} =$ | 8 | Ω |

Figure 12 D1,D2,D3,D4,D5,D6 FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$t_{rr} = f(R_{gon})$

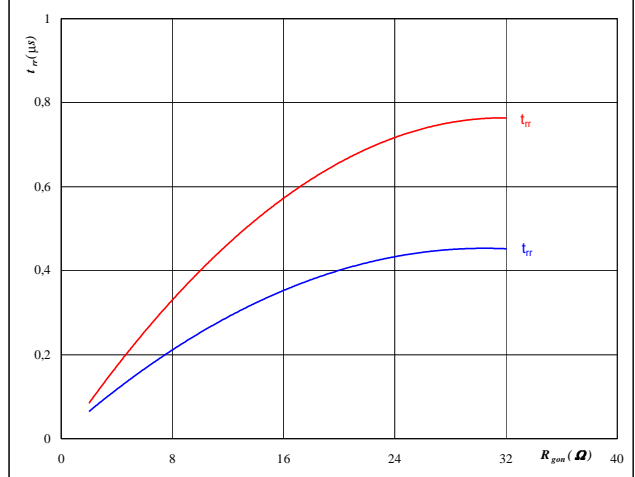
At

| | | |
|------------|--------|----|
| $T_J =$ | 25/150 | °C |
| $V_R =$ | 600 | V |
| $I_F =$ | 75 | A |
| $V_{GE} =$ | ±15 | V |

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6
Figure 13 D1,D2,D3,D4,D5,D6 FWD

Typical reverse recovery charge as a function of collector current

$Q_{rr} = f(I_C)$

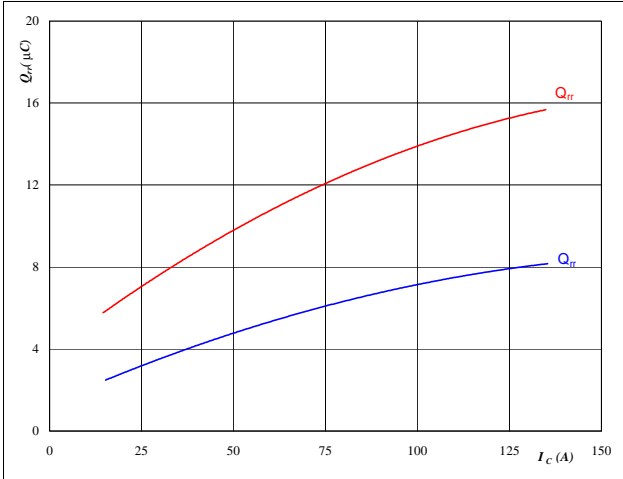

At
 $T_j = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

Figure 14 D1,D2,D3,D4,D5,D6 FWD

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$Q_{rr} = f(R_{gon})$

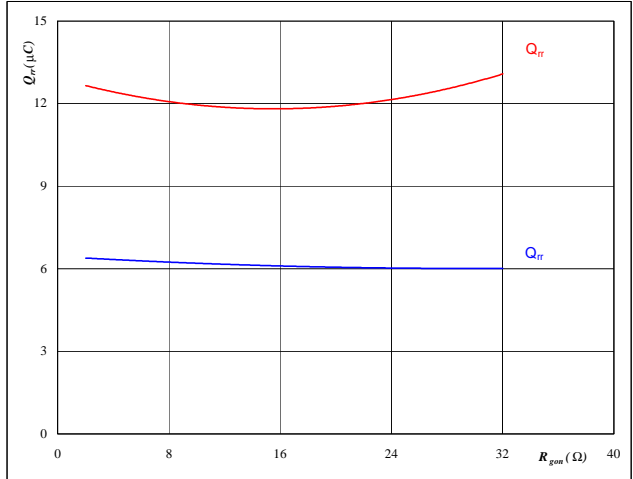

At
 $T_j = 25/150$ °C
 $V_R = 600$ V
 $I_F = 75$ A
 $V_{GE} = \pm 15$ V

Figure 15 D1,D2,D3,D4,D5,D6 FWD

Typical reverse recovery current as a function of collector current

$I_{RRM} = f(I_C)$

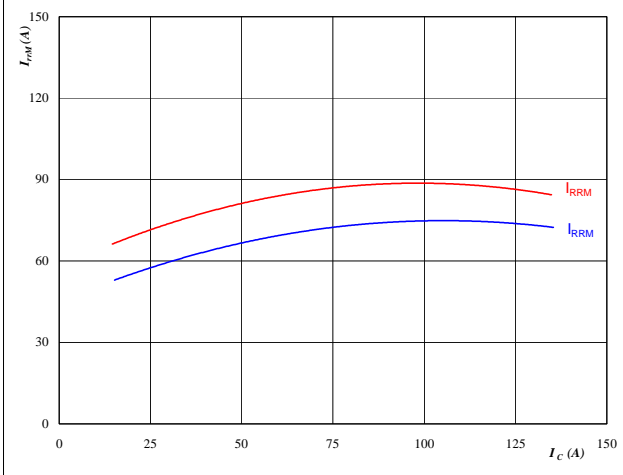
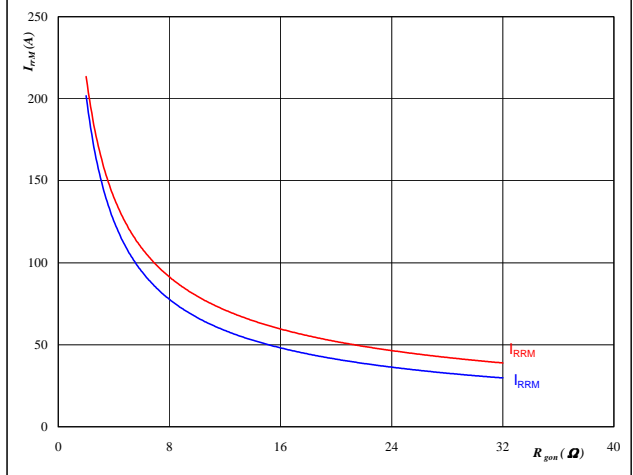

At
 $T_j = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

Figure 16 D1,D2,D3,D4,D5,D6 FWD

Typical reverse recovery current as a function of IGBT turn on gate resistor


$I_{RRM} = f(R_{gon})$


At
 $T_j = 25/150$ °C
 $V_R = 600$ V
 $I_F = 75$ A
 $V_{GE} = \pm 15$ V

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6

Figure 17 D1,D2,D3,D4,D5,D6 FWD


Typical rate of fall of forward and reverse recovery current as a function of collector current
 $dI_f/dt, dI_{rec}/dt = f(I_C)$

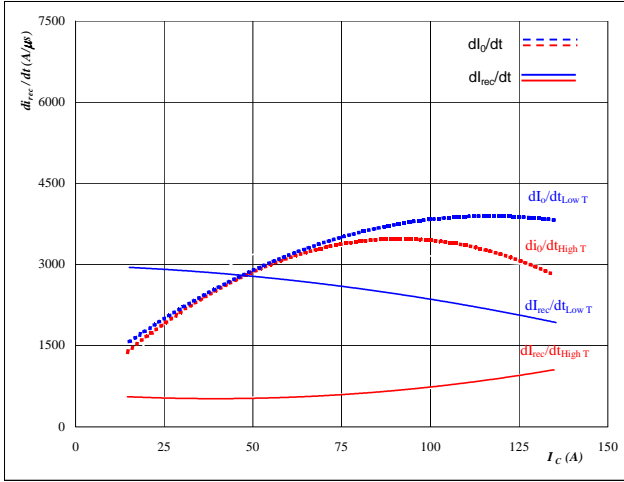

At
 $T_j = 25/150 \text{ } ^\circ\text{C}$
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 8 \text{ } \Omega$

Figure 18 D1,D2,D3,D4,D5,D6 FWD


Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor
 $dI_f/dt, dI_{rec}/dt = f(R_{gon})$

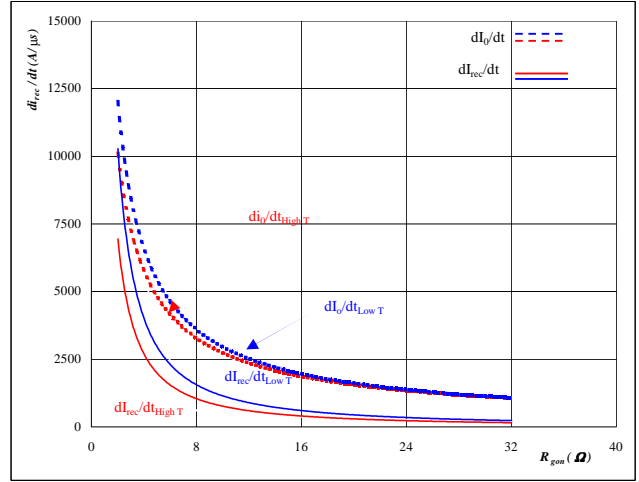

At
 $T_j = 25/150 \text{ } ^\circ\text{C}$
 $V_R = 600 \text{ V}$
 $I_F = 75 \text{ A}$
 $V_{GE} = \pm 15 \text{ V}$

Figure 19 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

IGBT transient thermal impedance as a function of pulse width
 $Z_{thJH} = f(t_p)$

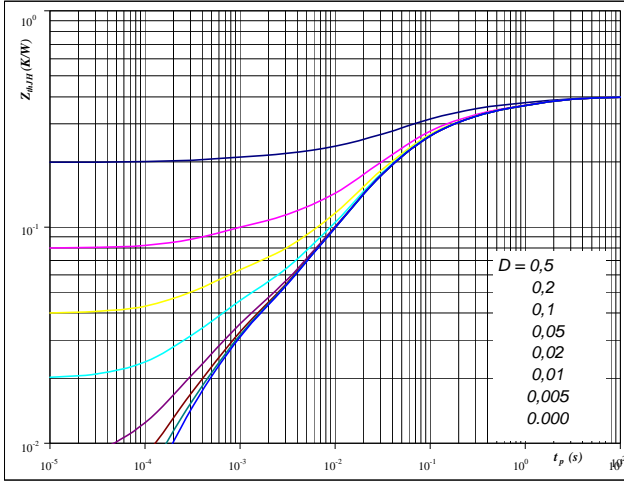


At
 $D = t_p / T$
 $R_{thJH} = 0,40 \text{ K/W}$

IGBT thermal model values

| Phase-Change Material | R (C/W) | Tau (s) |
|-----------------------|---------|---------|
| | 0,06 | 1,6E+00 |
| | 0,09 | 2,1E-01 |
| | 0,14 | 5,1E-02 |
| | 0,07 | 1,6E-02 |
| | 0,02 | 3,1E-03 |
| | 0,02 | 4,6E-04 |

Figure 20 D1,D2,D3,D4,D5,D6 FWD

FWD transient thermal impedance as a function of pulse width
 $Z_{thJH} = f(t_p)$

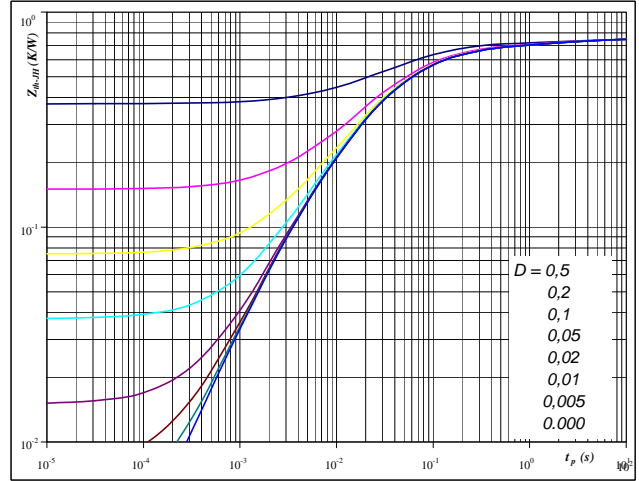

At
 $D = t_p / T$
 $R_{thJH} = 0,75 \text{ K/W}$


FWD thermal model values

| Phase-Change Material | R (C/W) | Tau (s) |
|-----------------------|---------|---------|
| | 0,04 | 3,6E+00 |
| | 0,07 | 6,2E-01 |
| | 0,25 | 8,6E-02 |
| | 0,32 | 2,1E-02 |
| | 0,06 | 3,5E-03 |

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6
Figure 21 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

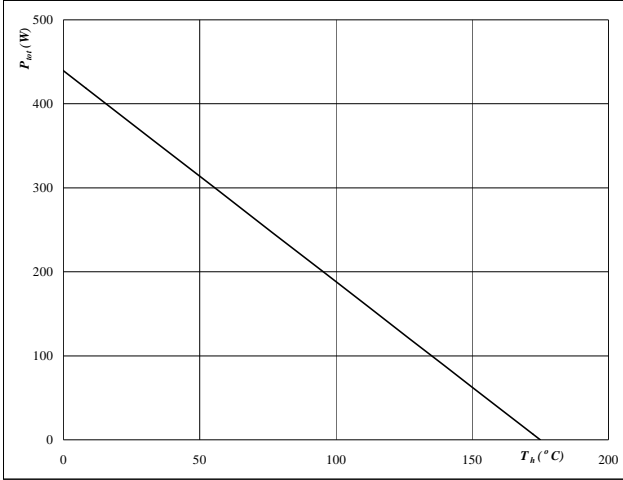
At
 $T_j = 175 \text{ } ^\circ\text{C}$
Figure 22 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT


Collector current as a function of heatsink temperature

$$I_C = f(T_h)$$

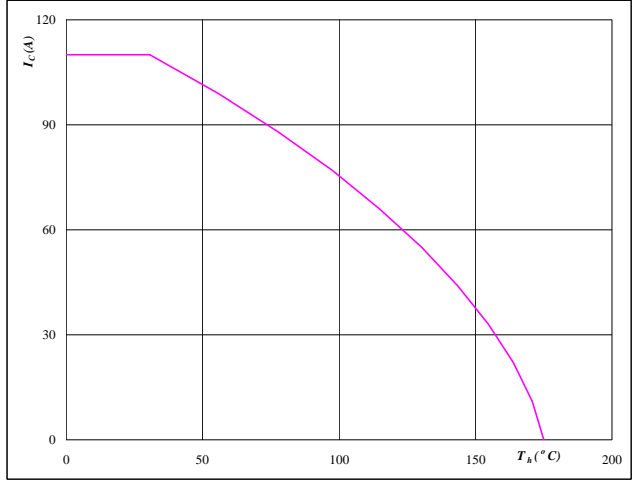
At
 $T_j = 175 \text{ } ^\circ\text{C}$
 $V_{GE} = 15 \text{ V}$
Figure 23 D1,D2,D3,D4,D5,D6 FWD


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

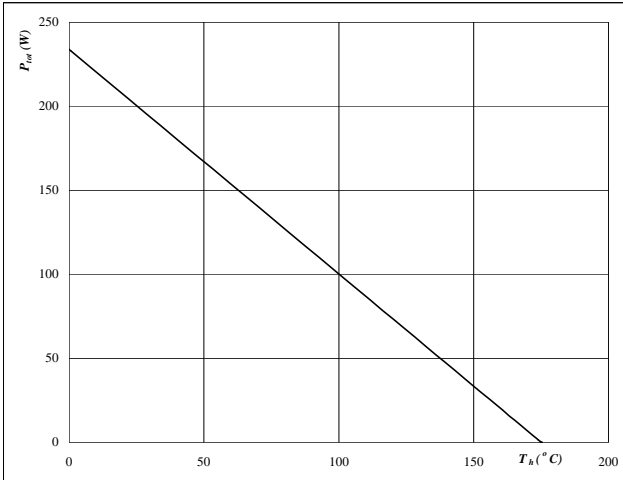
At
 $T_j = 175 \text{ } ^\circ\text{C}$
Figure 24 D1,D2,D3,D4,D5,D6 FWD

Forward current as a function of heatsink temperature


$$I_F = f(T_h)$$

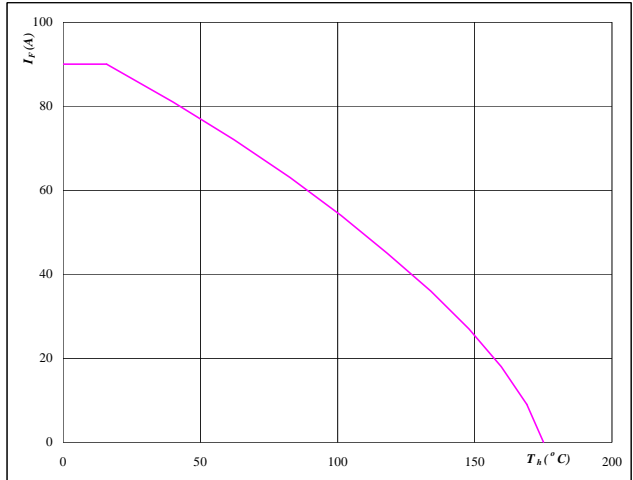
At
 $T_j = 175 \text{ } ^\circ\text{C}$

T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b/D1,D2,D3,D4,D5,D6
Figure 25 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Safe operating area as a function of collector-emitter voltage

$$I_C = f(V_{CE})$$

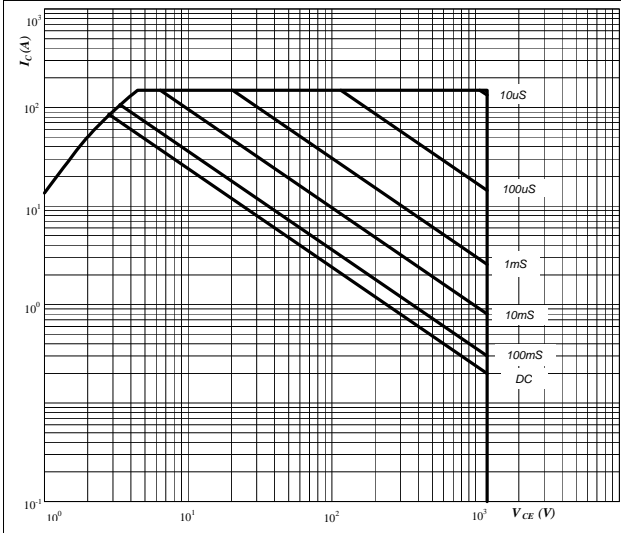


At
 D = single pulse
 $T_h = 80$ °C
 $V_{GE} = \pm 15$ V
 $T_j = T_{jmax}$ °C

Figure 26 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Gate voltage vs Gate charge

$$V_{GE} = f(Q_{GE})$$

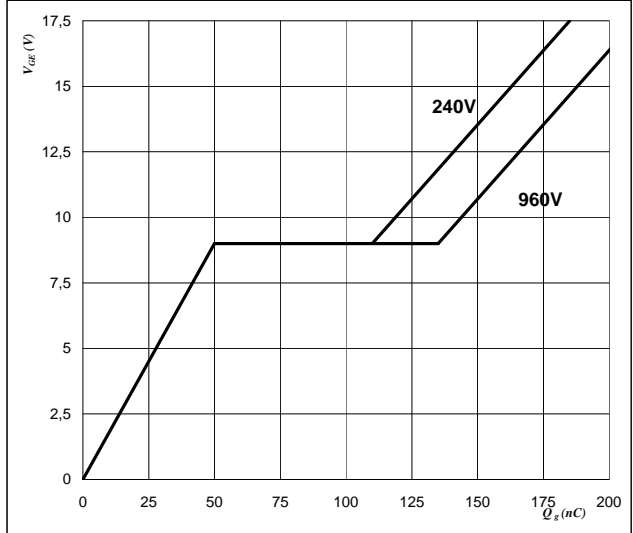


At
 $I_C = 75$ A

Figure 27 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Short circuit withstand time as a function of gate-emitter voltage

$$t_{sc} = f(V_{GE})$$

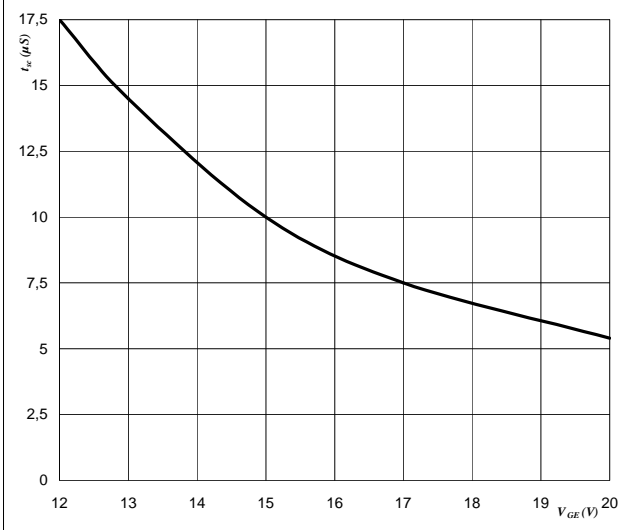


At
 $V_{CE} = 1200$ V
 $T_j \leq 175$ °C

Figure 28 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT


Typical short circuit collector current as a function of gate-emitter voltage

$$V_{GE} = f(Q_{GE})$$

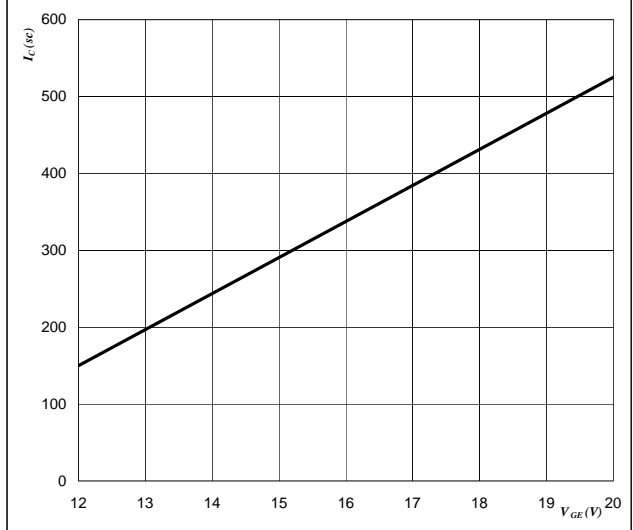

At
 $V_{CE} \leq 1200$ V
 $T_j = 175$ °C

Figure 29 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT
Reverse bias safe operating area

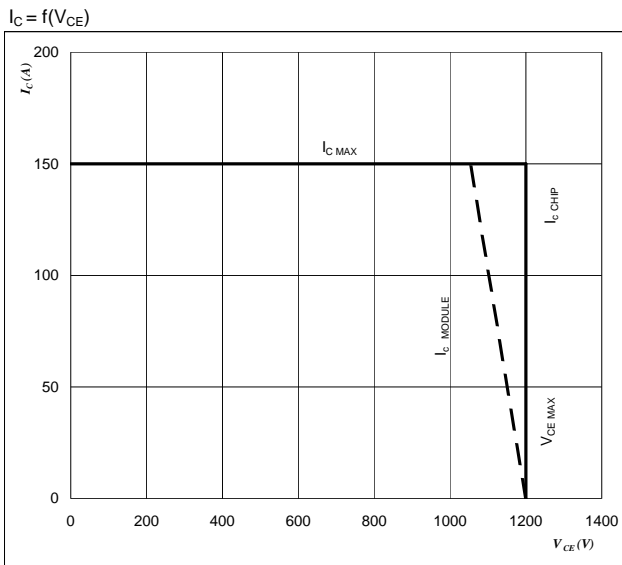


At
 $T_J = 150\ ^\circ\text{C}$
 $R_{gon} = 8\ \Omega$
 $R_{goff} = 8\ \Omega$

D7a-b,D8a-b
Figure 1 D7a-b,D8a-b diode


Typical diode forward current as a function of forward voltage

$$I_F = f(V_F)$$

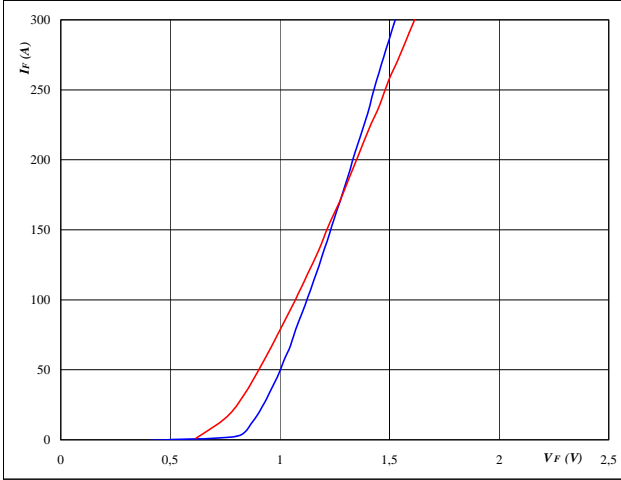
At
 $T_j = 25/125 \text{ } ^\circ\text{C}$
 $t_p = 250 \text{ } \mu\text{s}$
Figure 2 D7a-b,D8a-b diode


Diode transient thermal impedance as a function of pulse width

$$Z_{thJH} = f(t_p)$$

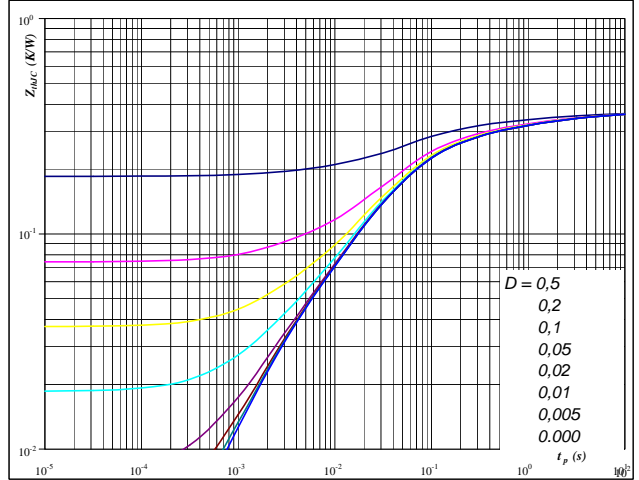
At
 $D = t_p / T$
 $R_{thJH} = 0,370 \text{ K/W}$
Figure 3 D7a-b,D8a-b diode


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

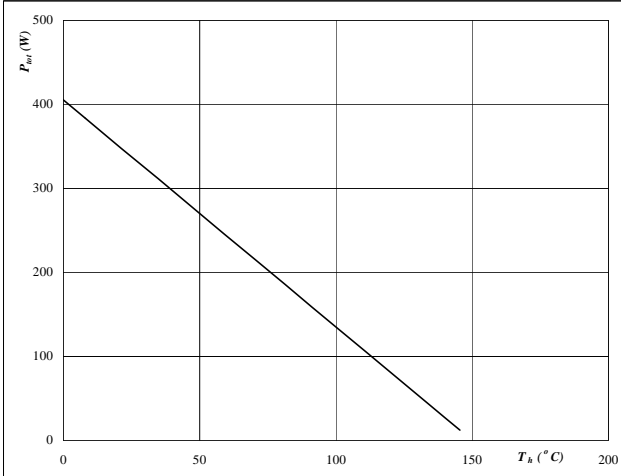
At
 $T_j = 150 \text{ } ^\circ\text{C}$
Figure 4 D7a-b,D8a-b diode

Forward current as a function of heatsink temperature

$$I_F = f(T_h)$$

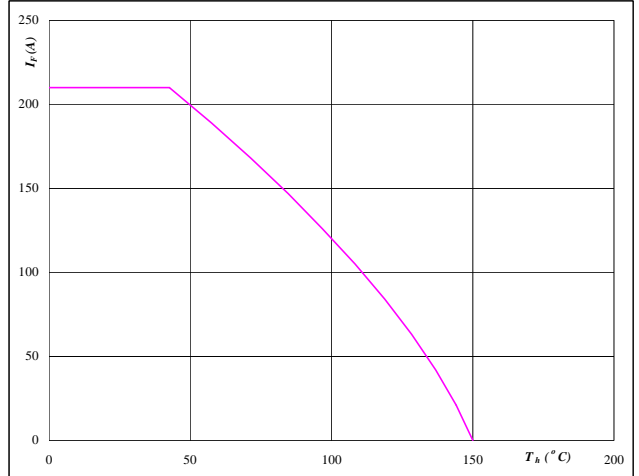

At
 $T_j = 150 \text{ } ^\circ\text{C}$

Thermistor

Figure 1 Thermistor

**Typical NTC characteristic
as a function of temperature**


$R_T = f(T)$

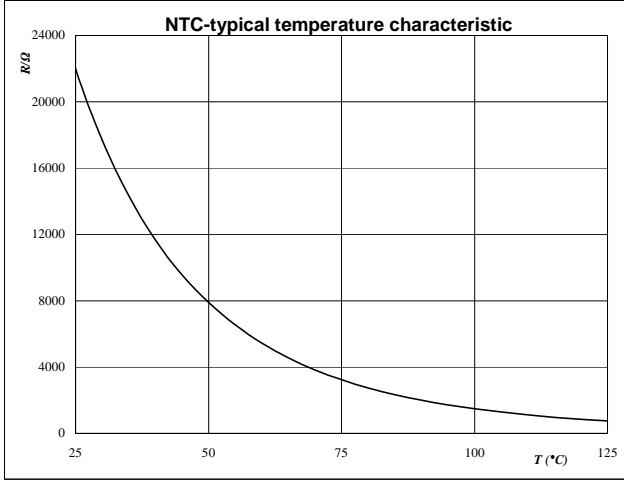

Switching Definitions Output Inverter


| General conditions | |
|--------------------|--------------|
| T_j | = 150 °C |
| R_{gon} | = 8 Ω |
| R_{goff} | = 8 Ω |

Figure 1 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

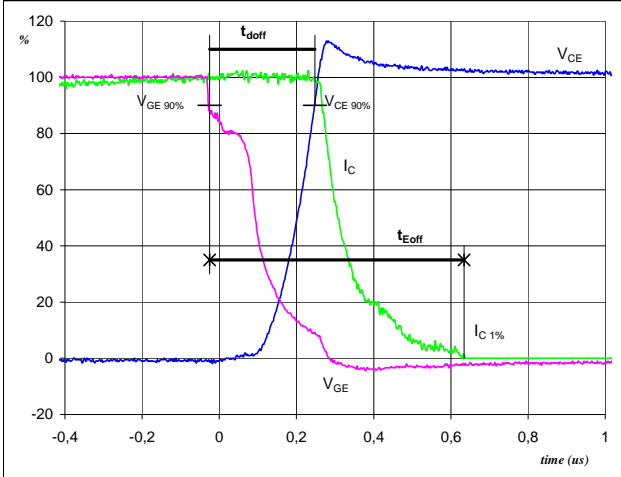Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff}
(t_{Eoff} = integrating time for E_{off})


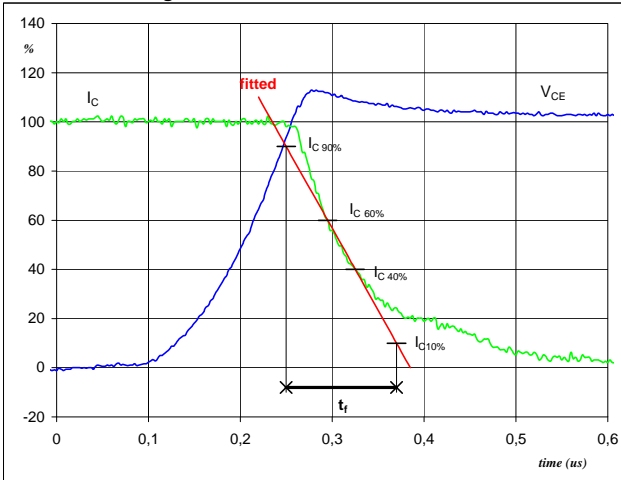
| | | |
|-------------------|------|---------|
| V_{GE} (0%) = | -15 | V |
| V_{GE} (100%) = | 15 | V |
| V_C (100%) = | 600 | V |
| I_C (100%) = | 75 | A |
| t_{doff} = | 0,28 | μ s |
| t_{Eoff} = | 0,66 | μ s |

Figure 2 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

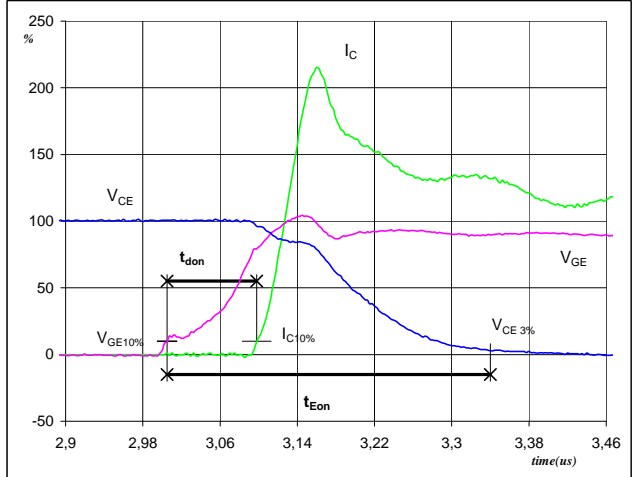Turn-on Switching Waveforms & definition of t_{don} , t_{Eon}
(t_{Eon} = integrating time for E_{on})


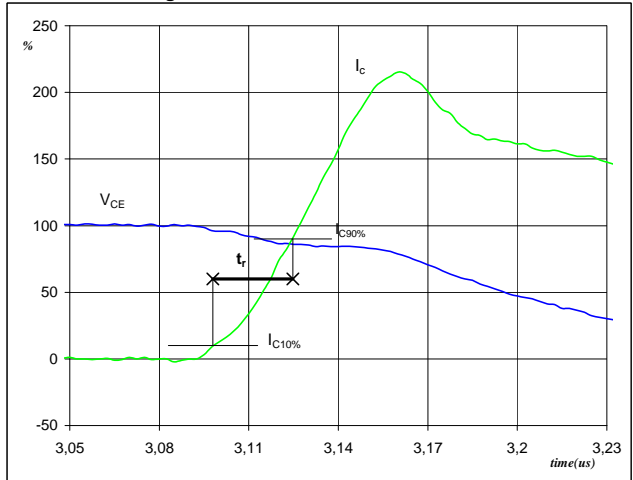
| | | |
|-------------------|------|---------|
| V_{GE} (0%) = | -15 | V |
| V_{GE} (100%) = | 15 | V |
| V_C (100%) = | 600 | V |
| I_C (100%) = | 75 | A |
| t_{don} = | 0,09 | μ s |
| t_{Eon} = | 0,33 | μ s |

Figure 3 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Turn-off Switching Waveforms & definition of t_f


| | | |
|----------------|------|---------|
| V_C (100%) = | 600 | V |
| I_C (100%) = | 75 | A |
| t_f = | 0,12 | μ s |


Figure 4 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

Turn-on Switching Waveforms & definition of t_r


| | | |
|----------------|------|---------|
| V_C (100%) = | 600 | V |
| I_C (100%) = | 75 | A |
| t_r = | 0,03 | μ s |


Switching Definitions Output Inverter

Figure 5 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

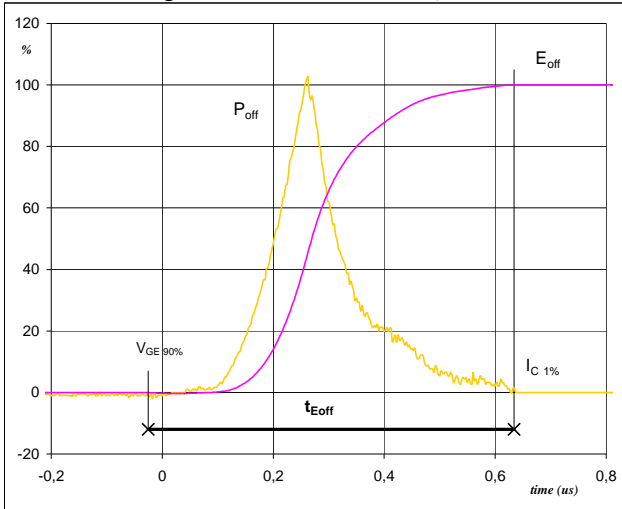Turn-off Switching Waveforms & definition of t_{Eoff}


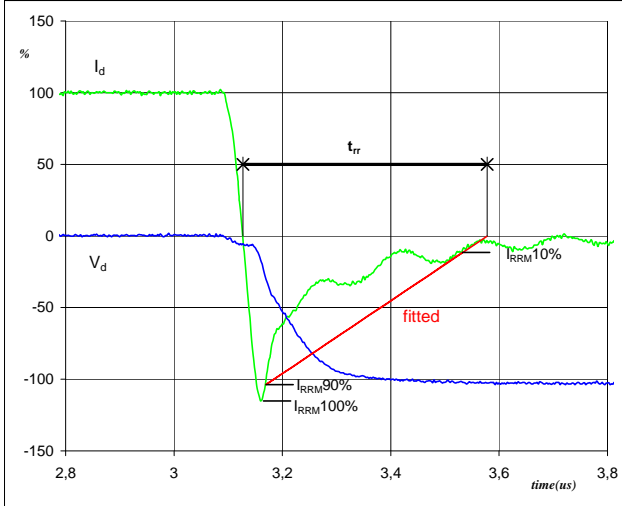
$P_{off}(100\%) = 44,82 \text{ kW}$
 $E_{off}(100\%) = 6,91 \text{ mJ}$
 $t_{Eoff} = 0,66 \text{ }\mu\text{s}$

Figure 6 T1a-b,T2a-b,T3a-b,T4a-b,T5a-b,T6a-b IGBT

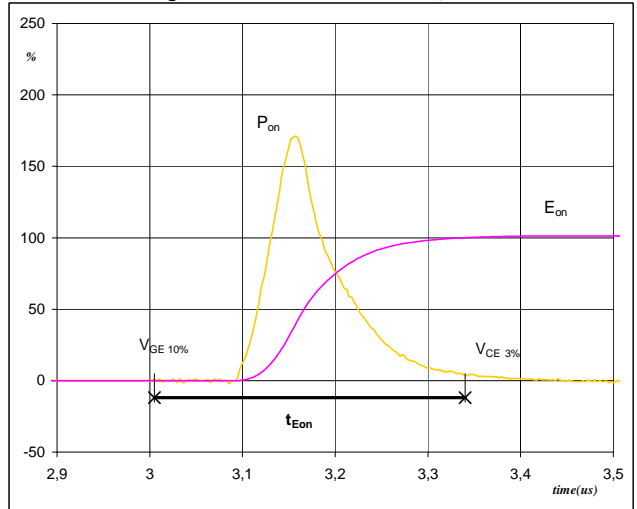Turn-on Switching Waveforms & definition of t_{Eon}


$P_{on}(100\%) = 44,82 \text{ kW}$
 $E_{on}(100\%) = 6,50 \text{ mJ}$
 $t_{Eon} = 0,33 \text{ }\mu\text{s}$

Figure 7 D1,D2,D3,D4,D5,D6 FWD


Turn-off Switching Waveforms & definition of t_{rr}


$V_d(100\%) = 600 \text{ V}$
 $I_d(100\%) = 75 \text{ A}$
 $I_{RRM}(100\%) = -86 \text{ A}$
 $t_{rr} = 0,31 \text{ }\mu\text{s}$

Switching Definitions Output Inverter

Figure 8 D1,D2,D3,D4,D5,D6 FWD


Turn-on Switching Waveforms & definition of t_{Qrr}
 (t_{Qrr} = integrating time for Q_{rr})

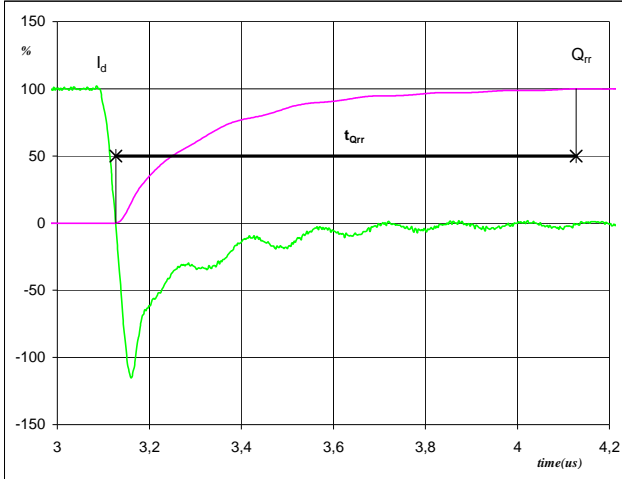

| | | |
|-------------------|-------|---------------|
| I_d (100%) = | 75 | A |
| Q_{rr} (100%) = | 11,73 | μC |
| t_{Qrr} = | 1,00 | μs |

Figure 9 D1,D2,D3,D4,D5,D6 FWD

Turn-on Switching Waveforms & definition of t_{Erec}
 (t_{Erec} = integrating time for E_{rec})

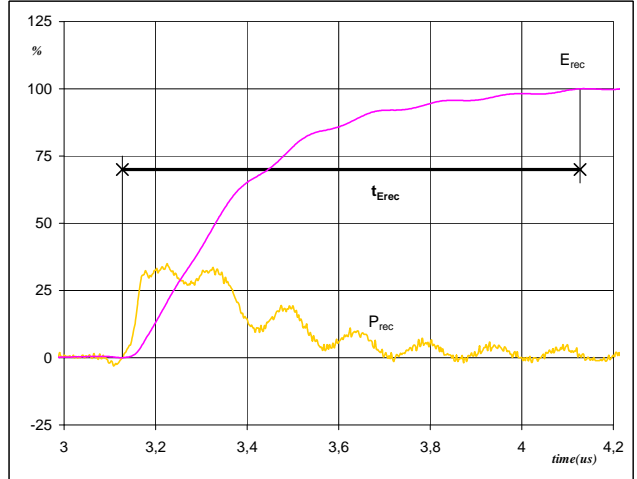


| | | |
|--------------------|-------|---------------|
| P_{rec} (100%) = | 44,82 | kW |
| E_{rec} (100%) = | 4,71 | mJ |
| t_{Erec} = | 1,00 | μs |

Switching Definitions Brake

General conditions


| | | |
|------------|---|--------|
| T_j | = | 150 °C |
| R_{gon} | = | 8 Ω |
| R_{goff} | = | 8 Ω |

Figure 1 PFC MOSFET / IGBT

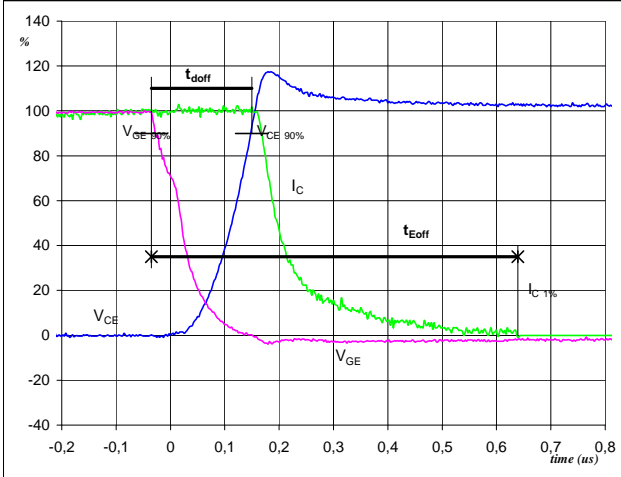Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff}
(t_{Eoff} = integrating time for E_{off})


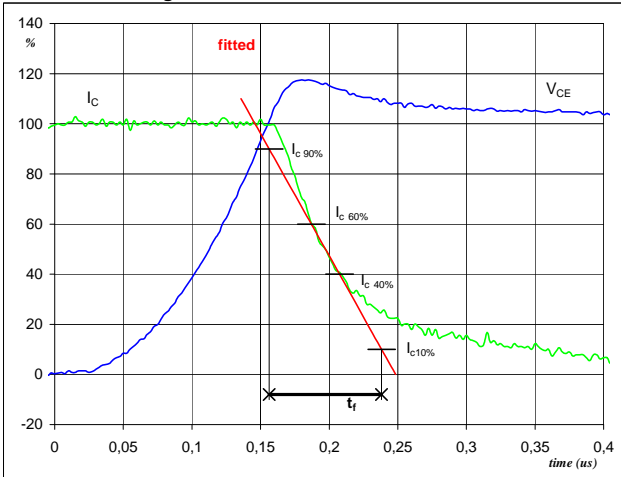
| | | |
|-------------------|------|----|
| $V_{GE}(0\%) =$ | -15 | V |
| $V_{GE}(100\%) =$ | 15 | V |
| $V_C(100\%) =$ | 600 | V |
| $I_C(100\%) =$ | 50 | A |
| $t_{doff} =$ | 0,18 | μs |
| $t_{Eoff} =$ | 0,67 | μs |

Figure 2 PFC MOSFET / IGBT

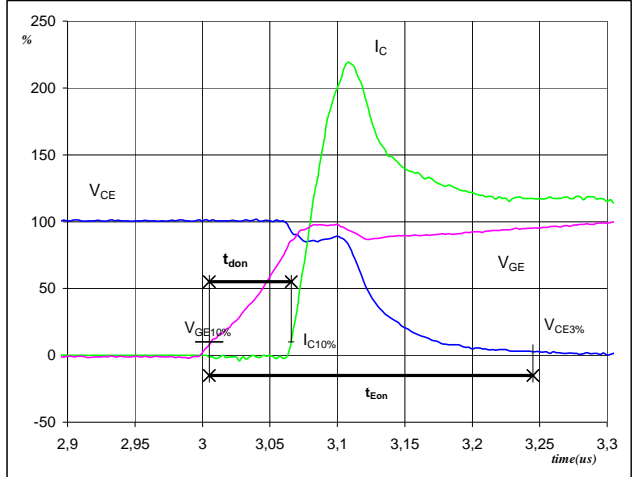Turn-on Switching Waveforms & definition of t_{don} , t_{Eon}
(t_{Eon} = integrating time for E_{on})


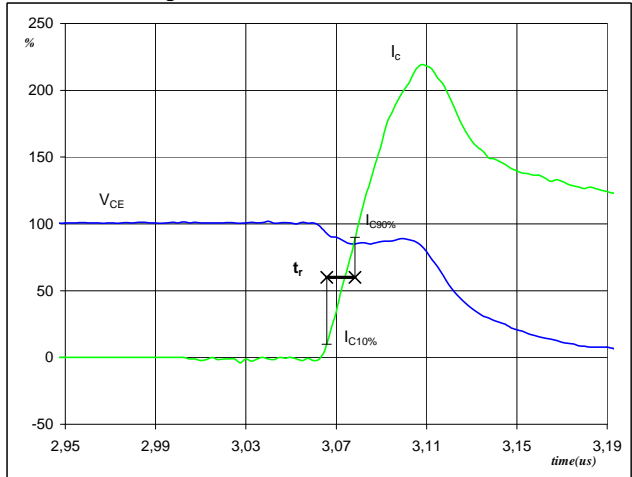
| | | |
|-------------------|------|----|
| $V_{GE}(0\%) =$ | -15 | V |
| $V_{GE}(100\%) =$ | 15 | V |
| $V_C(100\%) =$ | 600 | V |
| $I_C(100\%) =$ | 50 | A |
| $t_{don} =$ | 0,06 | μs |
| $t_{Eon} =$ | 0,24 | μs |

Figure 3 PFC MOSFET / IGBT

Turn-off Switching Waveforms & definition of t_f


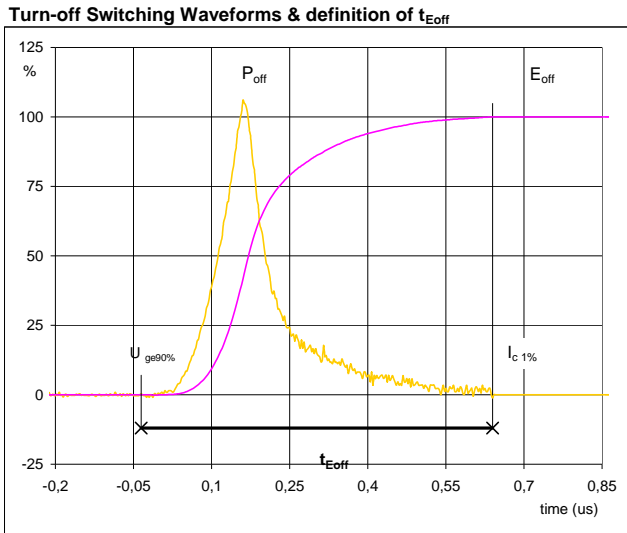
| | | |
|----------------|------|----|
| $V_C(100\%) =$ | 600 | V |
| $I_C(100\%) =$ | 50 | A |
| $t_f =$ | 0,08 | μs |

Figure 4 PFC MOSFET / IGBT


Turn-on Switching Waveforms & definition of t_r


| | | |
|----------------|------|----|
| $V_C(100\%) =$ | 600 | V |
| $I_C(100\%) =$ | 50 | A |
| $t_r =$ | 0,01 | μs |


Switching Definitions Brake

Figure 5 PFC MOSFET / IGBT


$P_{off} (100\%) = 30,05 \text{ kW}$
 $E_{off} (100\%) = 4,04 \text{ mJ}$
 $t_{Eoff} = 0,67 \text{ } \mu\text{s}$

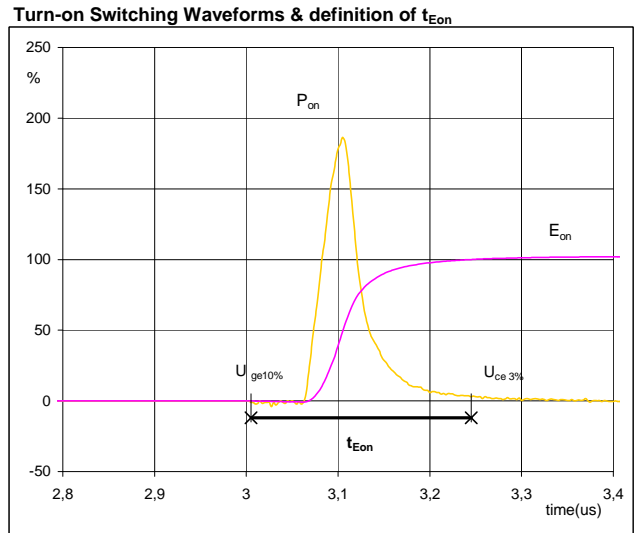Figure 6 PFC MOSFET / IGBT


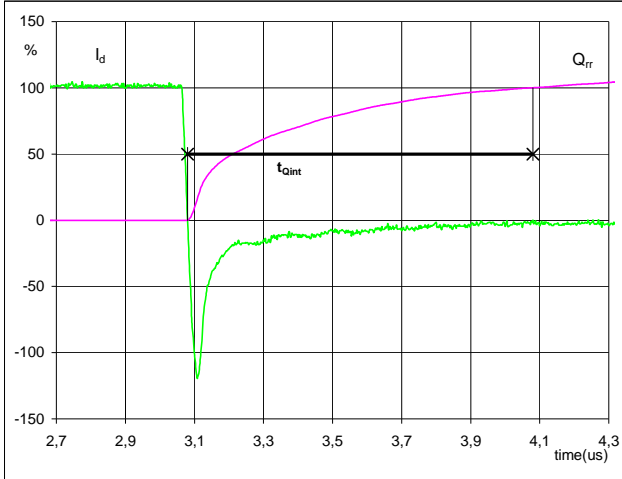
$P_{on} (100\%) = 30,0456 \text{ kW}$
 $E_{on} (100\%) = 2,80 \text{ mJ}$
 $t_{Eon} = 0,24 \text{ } \mu\text{s}$

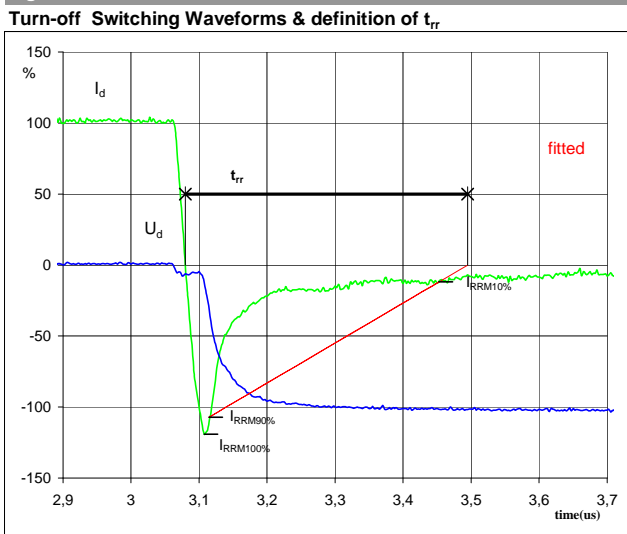Figure 7 PFC FWD


$V_d (100\%) = 600 \text{ V}$
 $I_d (100\%) = 50 \text{ A}$
 $I_{RRM} (100\%) = -60 \text{ A}$
 $t_{rr} = 0,28 \text{ } \mu\text{s}$

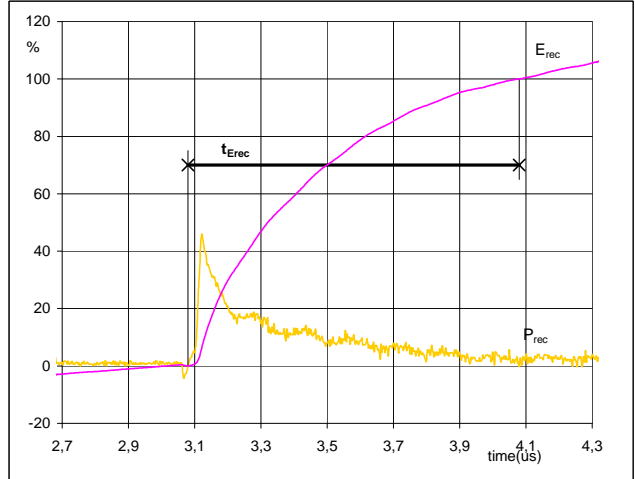
Switching Definitions Brake

Figure 8 PFC FWD

Turn-on Switching Waveforms & definition of t_{Qrr}
(t_{Qrr} = integrating time for Q_{rr})


| | | |
|-------------------|------|---------------|
| I_d (100%) = | 50 | A |
| Q_{rr} (100%) = | 6,52 | μC |
| t_{Qint} = | 1,00 | μs |

Figure 9 PFC FWD

Turn-on Switching Waveforms & definition of t_{Erec}
(t_{Erec} = integrating time for E_{rec})


| | | |
|--------------------|-------|---------------|
| P_{rec} (100%) = | 30,05 | kW |
| E_{rec} (100%) = | 2,86 | mJ |
| t_{Erec} = | 1,00 | μs |


Ordering Code and Marking - Outline - Pinout

| Ordering Code & Marking | | | |
|----------------------------------|---------------------------|------------------|-------------------------|
| Version | Ordering Code | in DataMatrix as | in packaging barcode as |
| 17mm housing | 30-F212R6A075SC-M448E | M448-E | M448-E |
| 17mm housing, without thermistor | 30-F212R6A075SC01-M448E10 | M448-E10 | M448-E10 |
| | | | |

Outline

| Pin table | | |
|-----------|-------|-----|
| Pin | X | Y |
| 1 | 71,2 | 0 |
| 2 | 68,7 | 0 |
| 3 | 66,2 | 0 |
| 4 | 63,7 | 0 |
| 5 | 55,95 | 0 |
| 6 | 53,45 | 0 |
| 7 | 55,95 | 2,8 |
| 8 | 53,45 | 2,8 |
| 9 | 48,4 | 0 |
| 10 | 45,9 | 0 |
| 11 | 38,9 | 0 |
| 12 | 36,1 | 0 |
| 13 | 38,9 | 2,8 |
| 14 | 36,1 | 2,8 |
| 15 | 31,3 | 0 |
| 16 | 28,5 | 0 |
| 17 | 31,3 | 2,8 |
| 18 | 28,5 | 2,8 |
| 19 | 19,3 | 0 |
| 20 | 19,3 | 2,8 |
| 21 | 12,3 | 0 |
| 22 | 9,8 | 0 |
| 23 | 12,3 | 2,8 |
| 24 | 9,8 | 2,8 |
| 25 | 2,8 | 0 |
| 26 | 0 | 0 |
| 27 | 2,8 | 2,8 |
| 28 | 0 | 2,8 |

| Pin table | | |
|-----------|-------|------|
| Pin | X | Y |
| 29 | 0 | 37,2 |
| 30 | 2,5 | 37,2 |
| 31 | 5 | 37,2 |
| 32 | 7,8 | 37,2 |
| 33 | 10,6 | 37,2 |
| 34 | 18,45 | 37,2 |
| 35 | 21,25 | 37,2 |
| 36 | 24,05 | 37,2 |
| 37 | 26,55 | 37,2 |
| 38 | 29,05 | 37,2 |
| 39 | 36,1 | 37,2 |
| 40 | 38,6 | 37,2 |
| 41 | 41,1 | 37,2 |
| 42 | 43,9 | 37,2 |
| 43 | 46,7 | 37,2 |
| 44 | 53,7 | 37,2 |
| 45 | 56,2 | 37,2 |
| 46 | 58,7 | 37,2 |
| 47 | 71,2 | 37,2 |
| 48 | 71,2 | 34,7 |
| 49 | 71,2 | 25,2 |
| 50 | 71,2 | 22,7 |
| 51 | 71,2 | 20,2 |
| 52 | 71,2 | 12,8 |
| 53 | 68,7 | 12,8 |

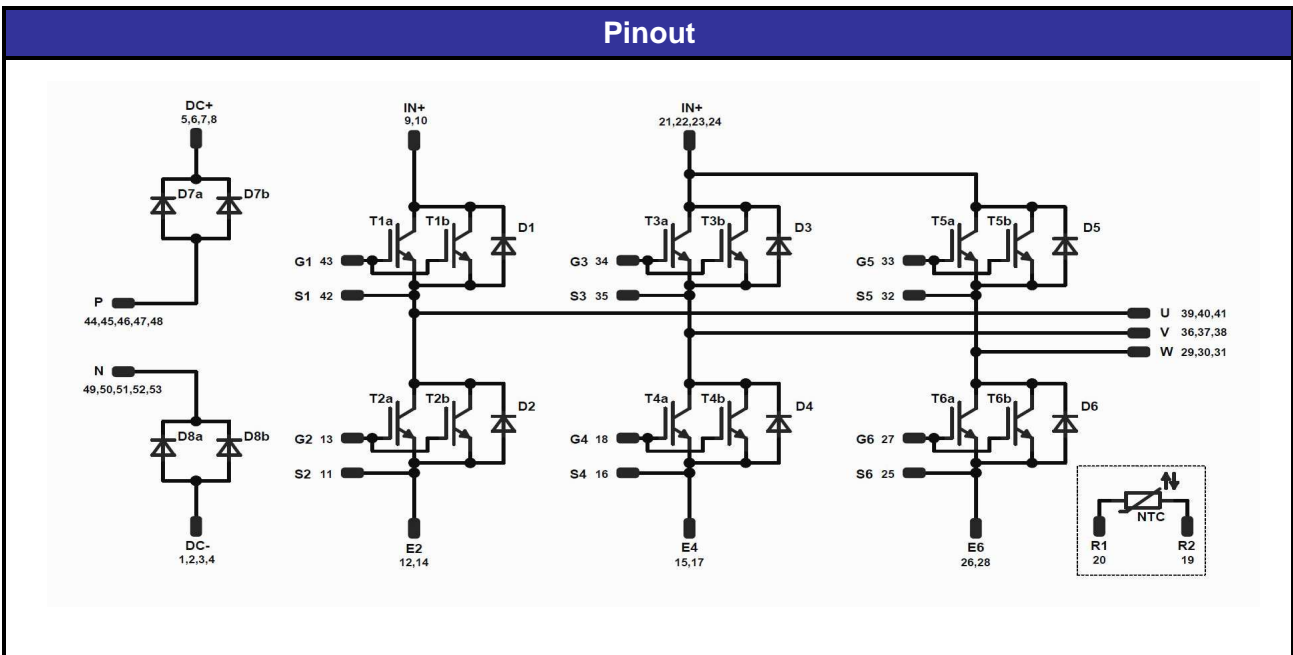

DISCLAIMER

The information given in this datasheet describes the type of component and does not represent assured characteristics. For tested values please contact Vincotech. Vincotech reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Vincotech does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.