



Vincotech

flowBOOST 1 symmetric dual		1200 V / 40 A
Features		flow 1 12 mm housing
<ul style="list-style-type: none">• Symmetric Boost for 1500 Vdc applications• Latest IGBT technology for high speed frequencies• Low inductance package• Integrated NTC• Cost effective alternative to L869L08• Same package and pin-out as L869L08		
Target applications		Schematic
<ul style="list-style-type: none">• Solar Inverters		
Types		
<ul style="list-style-type: none">• 10-FY12S2A040SH-L868L48		



10-FY12S2A040SH-L868L48

datasheet

Vincotech

Maximum Ratings

$T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Boost Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80^\circ\text{C}$	43	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	120	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80^\circ\text{C}$	111	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150^\circ\text{C}$	10	μs
Maximum junction temperature	T_{jmax}		175	$^\circ\text{C}$

Boost Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80^\circ\text{C}$	28	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	92	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 8,3\text{ ms}$ $T_j = 150^\circ\text{C}$	66	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80^\circ\text{C}$	87	W
Maximum junction temperature	T_{jmax}		175	$^\circ\text{C}$

Boost Sw. Protection Diode

Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80^\circ\text{C}$	25	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150^\circ\text{C}$	200	A
Surge current capability	I^t		200	A^2s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80^\circ\text{C}$	37	W
Maximum junction temperature	T_{jmax}		150	$^\circ\text{C}$



10-FY12S2A040SH-L868L48

datasheet

Vincotech

Maximum Ratings

$T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
ByPass Diode				
Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$	38	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10 \text{ ms}$	270	A
Surge current capability	P_t	$T_j = 150^\circ\text{C}$	370	A^2s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$	47	W
Maximum junction temperature	T_{jmax}		150	$^\circ\text{C}$

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	$^\circ\text{C}$
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	$^\circ\text{C}$

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage*	$t_p = 2 \text{ s}$	6000	V
Isolation voltage	V_{isol}	AC Voltage	$t_p = 1 \text{ min}$	2500	V
Creepage distance				min. 12,7	mm
Clearance				9,6	mm
Comparative Tracking Index	CTI			≥ 200	

*100 % tested in production



10-FY12S2A040SH-L868L48

datasheet

Vincotech

Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
		V_{GE} [V]	V_{GS} [V]	V_{CE} [V]	V_{DS} [V]	I_C [A]	I_D [A]	T_j [°C]	Min	Typ	Max

Boost Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0015	25	5,3	5,8	6,3	V
Collector-emitter saturation voltage	V_{CEsat}		15		40	25 125	1,78	1,95 2,29	2,42 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			5	µA
Gate-emitter leakage current	I_{GES}		20	0		25			120	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	$f = 1 \text{ MHz}$	0	25	25	25	2330		pF	
Output capacitance	C_{oes}									
Reverse transfer capacitance	C_{res}									
Gate charge	Q_g	$V_{CC} = 960 \text{ V}$	15		40	25		185		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{\text{paste}} = 3,4 \text{ W/mK (PSX)}$						0,86		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goft} = 8 \Omega$	0/15	700	40	25		25,6 24,64 24,48		ns
Rise time	t_r					25		16,8 18,24 18,56		ns
Turn-off delay time	$t_{d(off)}$					25		236,64 300,48 315,84		ns
Fall time	t_f	$Q_{tFWD}=0,108 \mu\text{C}$ $Q_{tFWD}=0,079 \mu\text{C}$ $Q_{tFWD}=0,08 \mu\text{C}$				25		41,88 82,25 97,94		ns
Turn-on energy (per pulse)	E_{on}					25		1,11 1,24 1,26		mWs
Turn-off energy (per pulse)	E_{off}					25		1,75 2,84 3,1		mWs



10-FY12S2A040SH-L868L48

datasheet

Vincotech

Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
		V_{GE} [V]	V_{GS} [V]	V_{CE} [V]	V_{DS} [V]	I_C [A]	I_D [A]	T_j [°C]	Min	Typ	Max

Boost Diode

Static

Forward voltage	V_F				20	25 125 150		1,43 1,74 1,84	1,6 ⁽¹⁾	V
Reverse leakage current	I_R	$V_F = 1200$ V			25 150		20 160	400	μ A	

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,09		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RRM}	$di/dt=2497$ A/ μ s $di/dt=2455$ A/ μ s	0/15	700	40	25 125 150		13,46 13,33 13,38		A
Reverse recovery time	t_{rr}					25 125 150		11,28 11,68 11,81		ns
Recovered charge	Q_r					25 125 150		0,108 0,079 0,08		μ C
Reverse recovered energy	E_{rec}					25 125 150		0,025 0,013 0,013		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		3711 3575 3448		A/ μ s



Vincotech

Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
		V_{GE} [V]	V_{GS} [V]	V_{CE} [V]	V_{DS} [V]	I_C [A]	I_D [A]	T_j [°C]	Min	Typ	Max

Boost Sw. Protection Diode

Static

Forward voltage	V_F				18	25 125 150		1,12 1,03 1,02	1,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_r = 1600$ V				25 150			100 1000	μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,87		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

ByPass Diode

Static

Forward voltage	V_F				28	25 125		1,15 1,1	1,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_r = 1600$ V				25 150			100 1000	μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,5		K/W
--	---------------	---------------------------------------	--	--	--	--	--	-----	--	-----



10-FY12S2A040SH-L868L48

datasheet

Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V]	V_{GS} [V]	V_{CE} [V]	V_{DS} [V]	I_C [A]	T_j [°C]	Min	Typ	Max

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$A_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	P							5		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ±1 %						3962		K
B-value	$B_{(25/100)}$	Tol. ±1 %						4000		K
Vincotech Thermistor Reference									I	





(1) Value at chip level

(2) Only valid with pre-applied Vincotech thermal interface material.



Vincotech


Boost Switch Characteristics

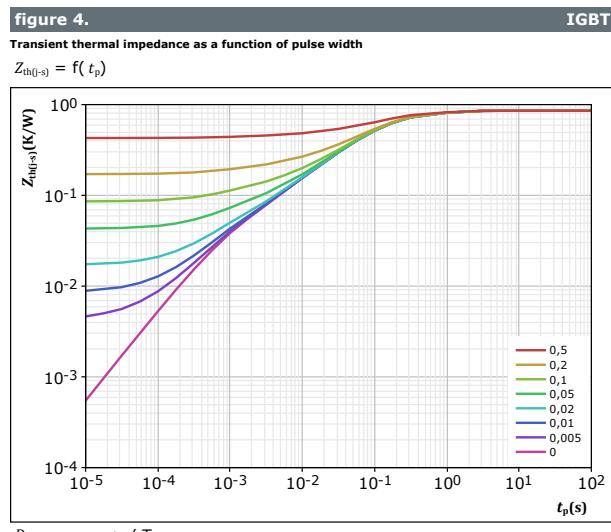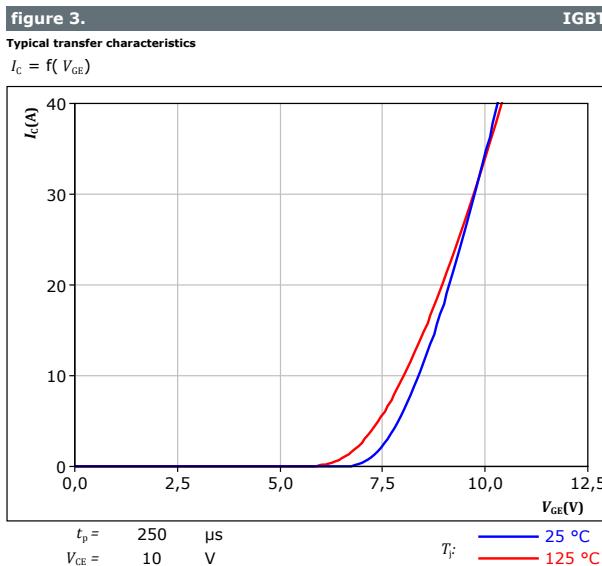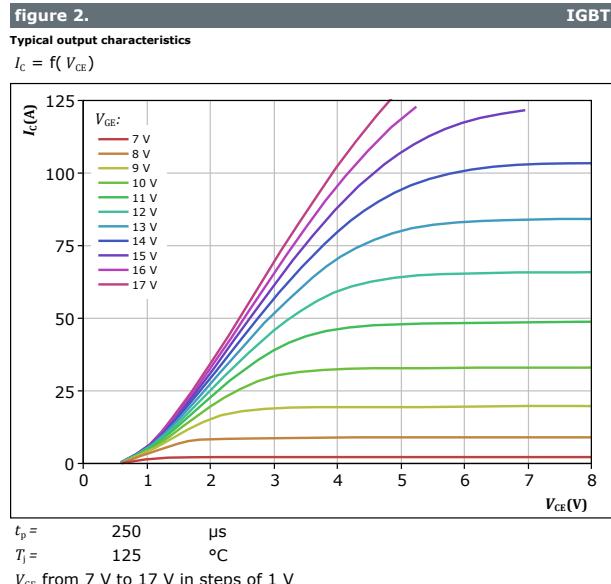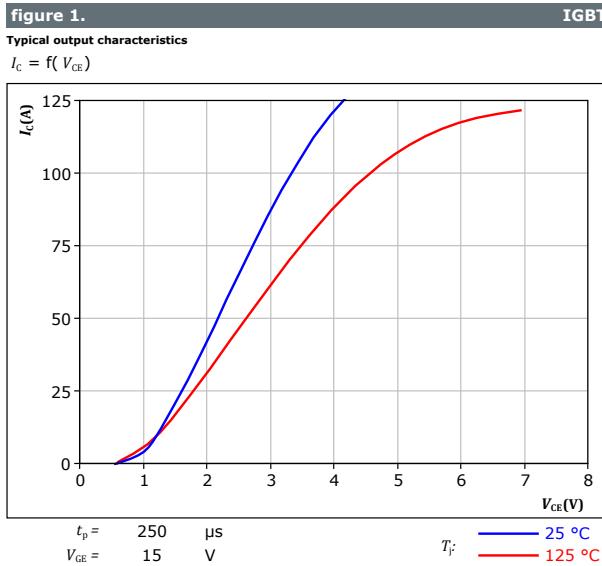

R (K/W)	τ (s)
1,40E-01	8,31E-01
4,53E-01	1,26E-01
1,58E-01	3,84E-02
7,23E-02	8,41E-03
3,25E-02	8,46E-04





Boost Switch Characteristics

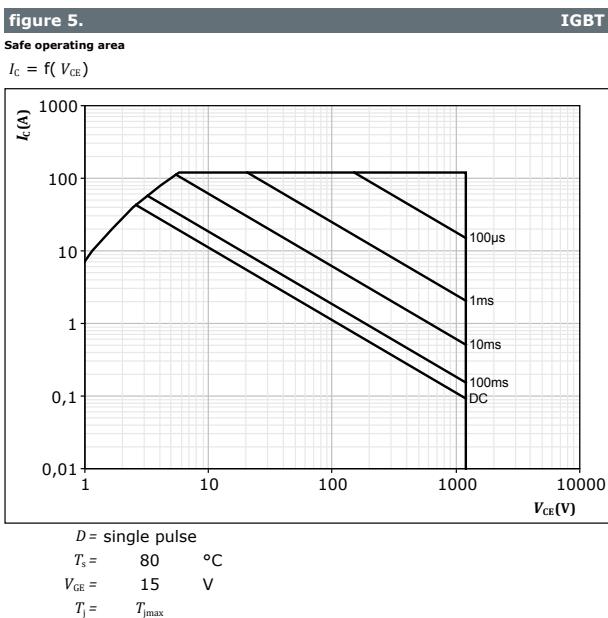





Boost Diode Characteristics

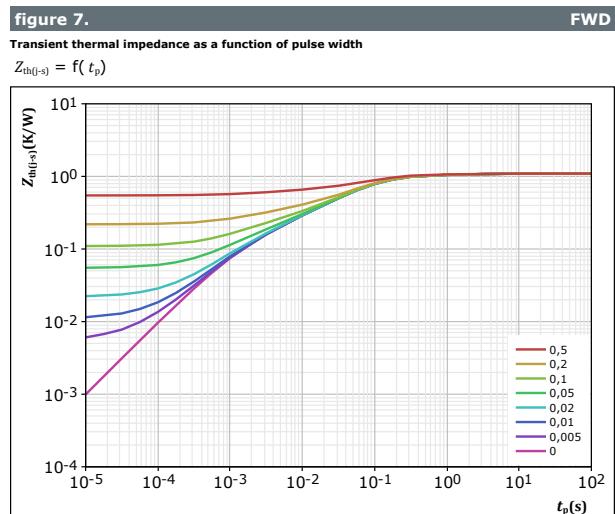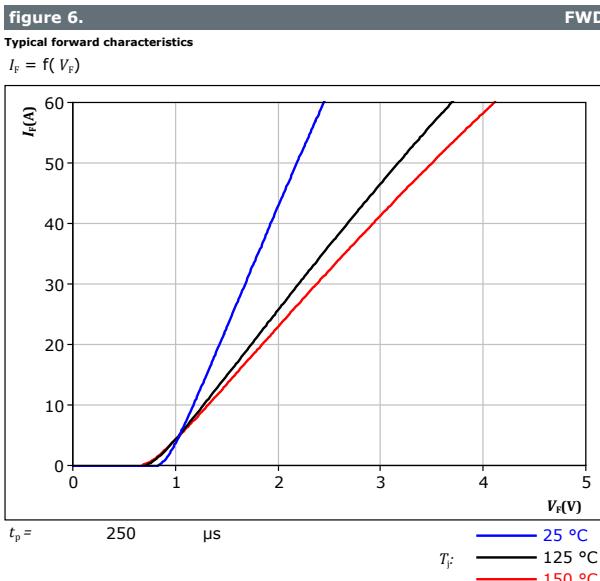



Boost Sw. Protection Diode Characteristics

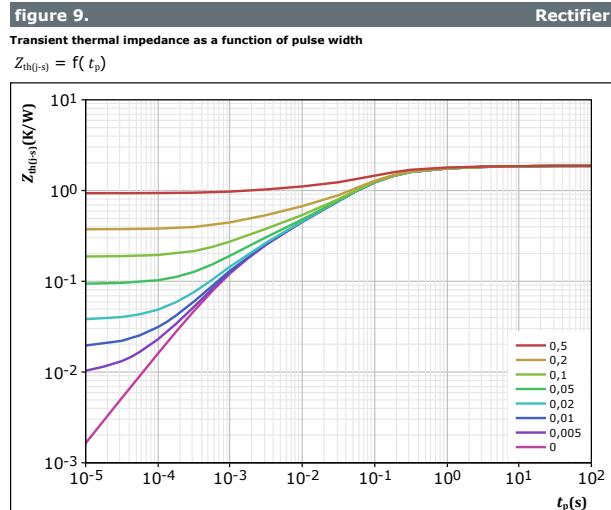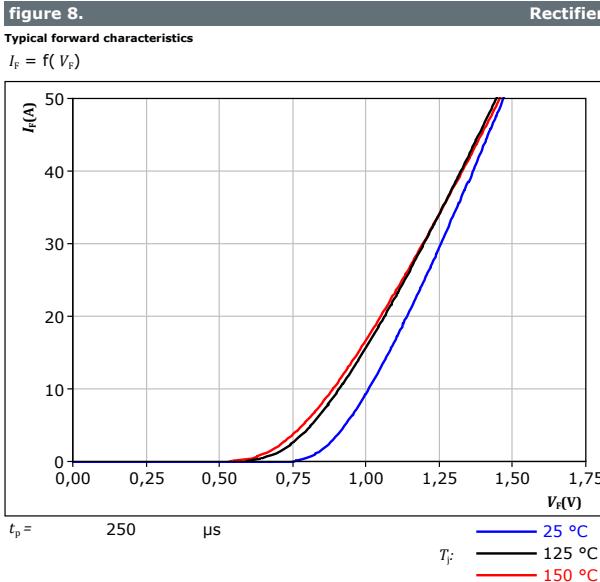



ByPass Diode Characteristics

figure 10.

Typical forward characteristics

$$I_F = f(V_F)$$


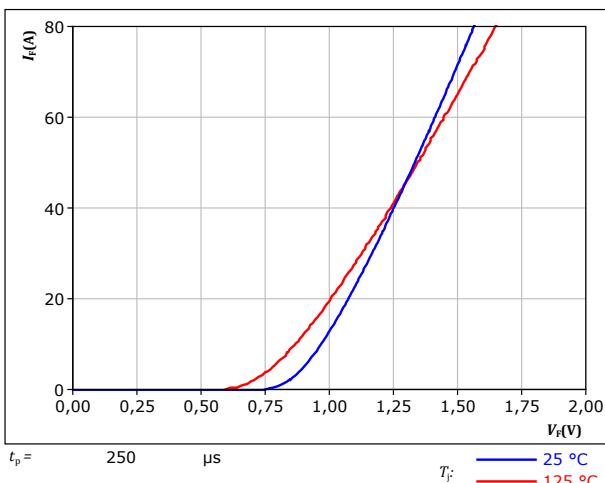


figure 11.

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

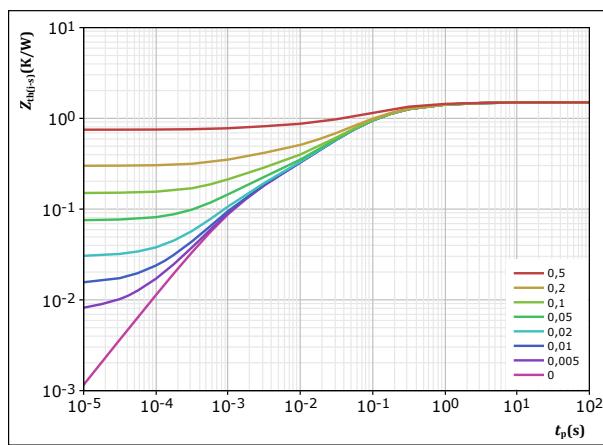


Rectifier thermal model values

$R (K/W)$	$\tau (s)$
9,44E-02	2,48E+00
3,47E-01	3,51E-01
7,44E-01	7,63E-02
2,04E-01	1,21E-02
1,11E-01	1,25E-03



Thermistor Characteristics

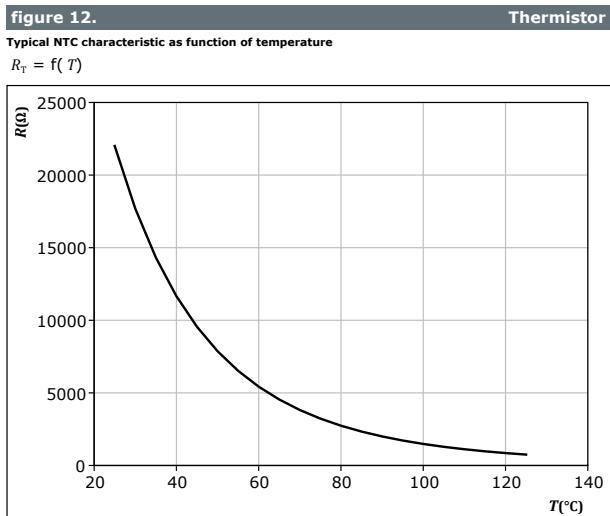




Vincotech

Boost Switching Characteristics

figure 13.

Typical switching energy losses as a function of collector current
 $E = f(I_c)$

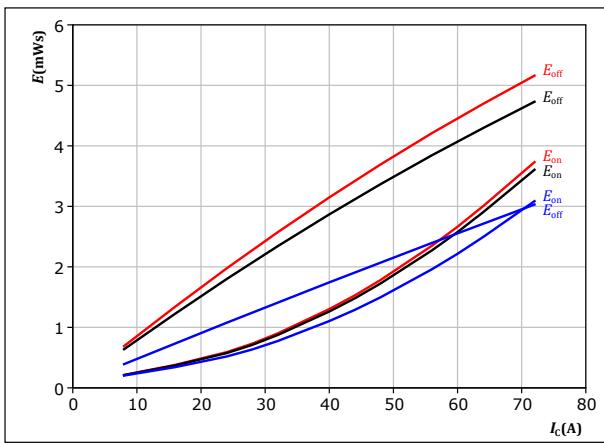


With an inductive load at

$V_{CE} = 700$ V $T_f:$ 25 °C
 $V_{GE} = 0/15$ V 125 °C
 $R_{gon} = 8$ Ω 150 °C
 $R_{goff} = 8$ Ω

IGBT

figure 14.

Typical switching energy losses as a function of gate resistor
 $E = f(R_g)$

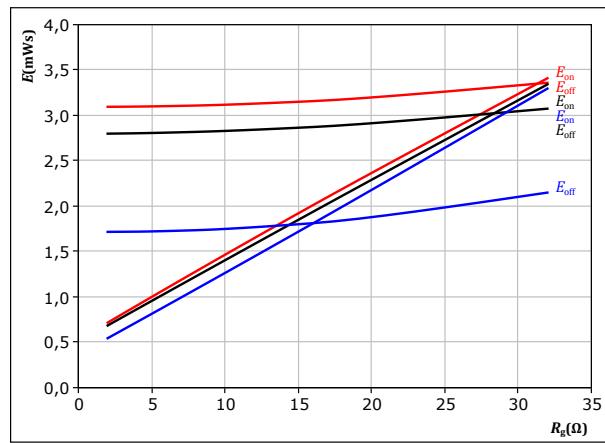

With an inductive load at


$V_{CE} = 700$ V $T_f:$ 25 °C
 $V_{GE} = 0/15$ V 125 °C
 $I_c = 40$ A 150 °C

IGBT

figure 15.

Typical reverse recovered energy loss as a function of collector current

$E_{rec} = f(I_c)$

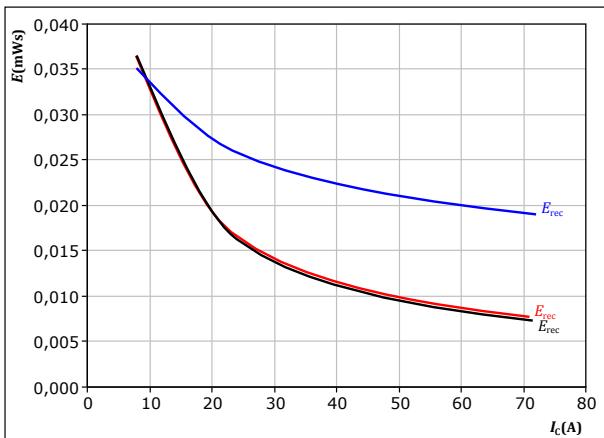

With an inductive load at


$V_{CE} = 700$ V $T_f:$ 25 °C
 $V_{GE} = 0/15$ V 125 °C
 $R_{gon} = 8$ Ω 150 °C

FWD

figure 16.

Typical reverse recovered energy loss as a function of gate resistor

$E_{rec} = f(R_g)$

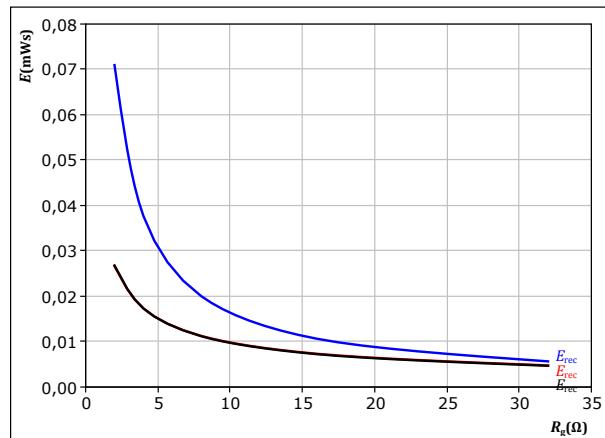

With an inductive load at

$V_{CE} = 700$ V $T_f:$ 25 °C
 $V_{GE} = 0/15$ V 125 °C
 $I_c = 40$ A 150 °C

FWD




Vincotech

Boost Switching Characteristics

figure 17. IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

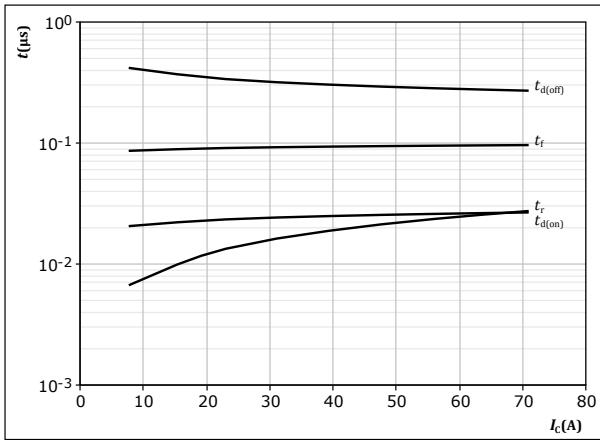


With an inductive load at

$T_j = 150^\circ\text{C}$
 $V_{CE} = 700 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $R_{gon} = 8 \Omega$
 $R_{goff} = 8 \Omega$

figure 19. FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

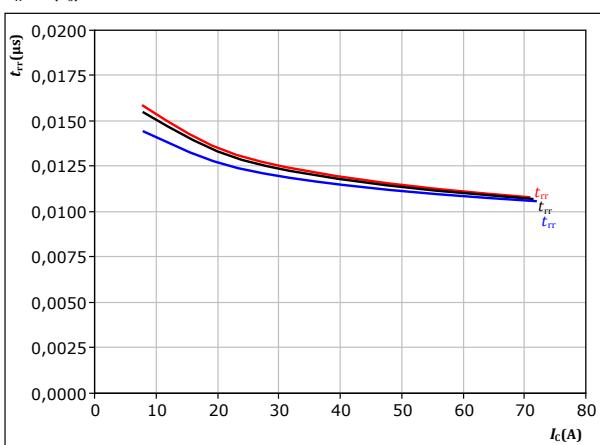


With an inductive load at

$V_{CE} = 700 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $R_{gon} = 8 \Omega$

figure 18. IGBT

Typical switching times as a function of gate resistor
 $t = f(R_g)$

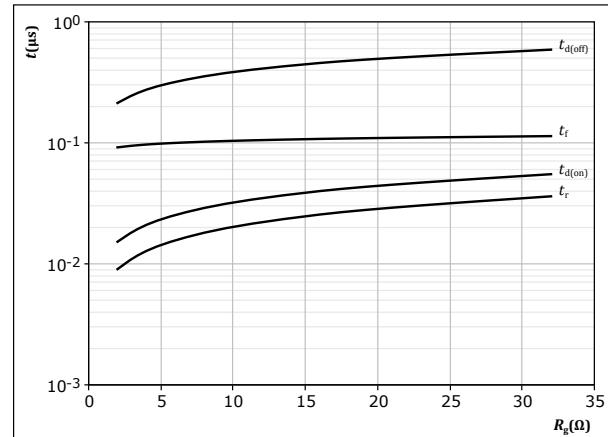


With an inductive load at

$T_j = 150^\circ\text{C}$
 $V_{CE} = 700 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $I_C = 40 \text{ A}$

figure 20. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

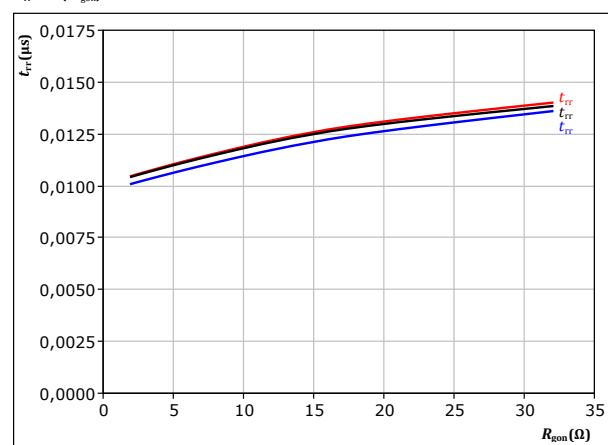

With an inductive load at

$V_{CE} = 700 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $I_C = 40 \text{ A}$




Vincotech

Boost Switching Characteristics

figure 21.

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

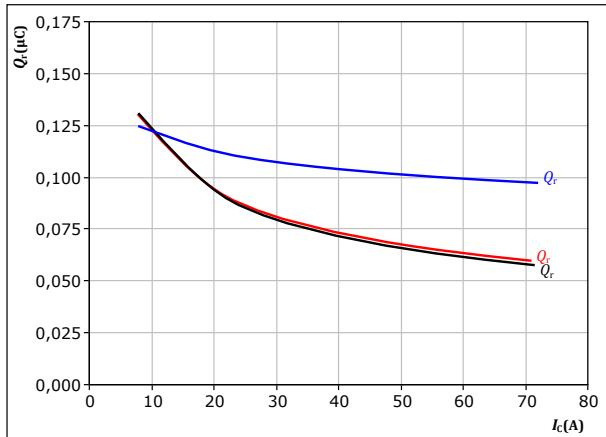

With an inductive load at


$$\begin{aligned} V_{CE} &= 700 \text{ V} & T_f &= 125 \text{ °C} \\ V_{GE} &= 0/15 \text{ V} & & \\ R_{gon} &= 8 \Omega & & \end{aligned}$$

FWD

figure 22.

Typical recovered charge as a function of turn on gate resistor

$$Q_r = f(R_{gon})$$

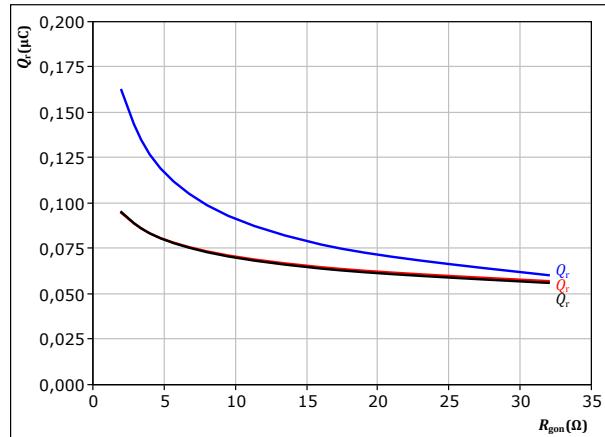

With an inductive load at


$$\begin{aligned} V_{CE} &= 700 \text{ V} & T_f &= 125 \text{ °C} \\ V_{GE} &= 0/15 \text{ V} & & \\ I_c &= 40 \text{ A} & & \end{aligned}$$

FWD

figure 23.

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

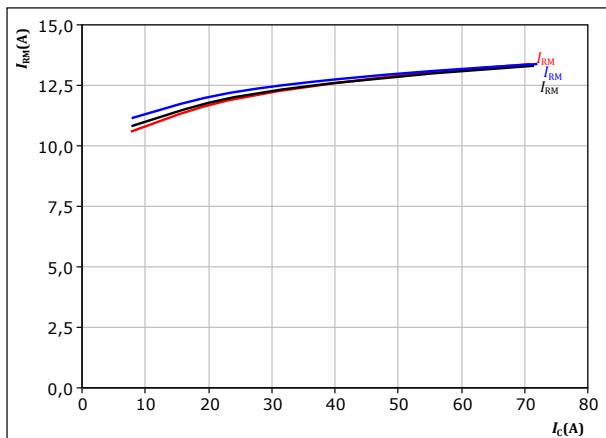

With an inductive load at


$$\begin{aligned} V_{CE} &= 700 \text{ V} & T_f &= 125 \text{ °C} \\ V_{GE} &= 0/15 \text{ V} & & \\ R_{gon} &= 8 \Omega & & \end{aligned}$$

FWD

figure 24.

Typical peak reverse recovery current as a function of turn on gate resistor

$$I_{RM} = f(R_{gon})$$

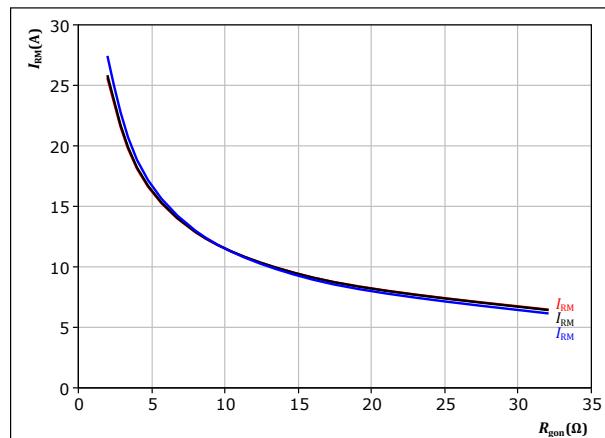

With an inductive load at

$$\begin{aligned} V_{CE} &= 700 \text{ V} & T_f &= 125 \text{ °C} \\ V_{GE} &= 0/15 \text{ V} & & \\ I_c &= 40 \text{ A} & & \end{aligned}$$

FWD




Vincotech

Boost Switching Characteristics

figure 25. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current

$di_f/dt, di_{rr}/dt = f(I_c)$

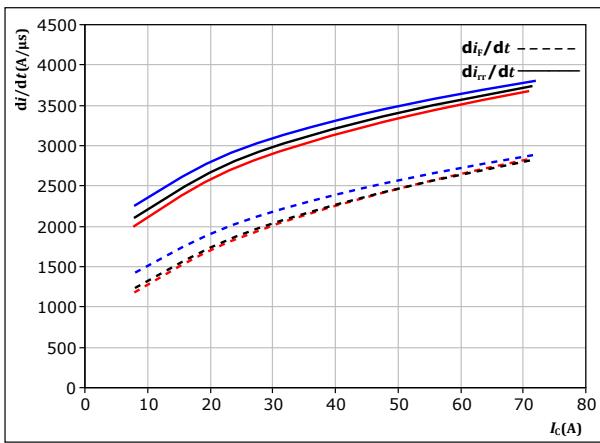

With an inductive load at


$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω

T_j : 25 °C
125 °C
150 °C

figure 26. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor

$di_f/dt, di_{rr}/dt = f(R_{gon})$

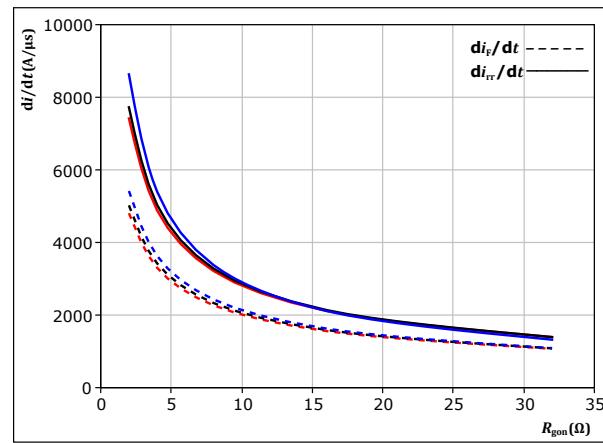


With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 40$ A

figure 27. IGBT

Reverse bias safe operating area

$I_c = f(V_{CE})$

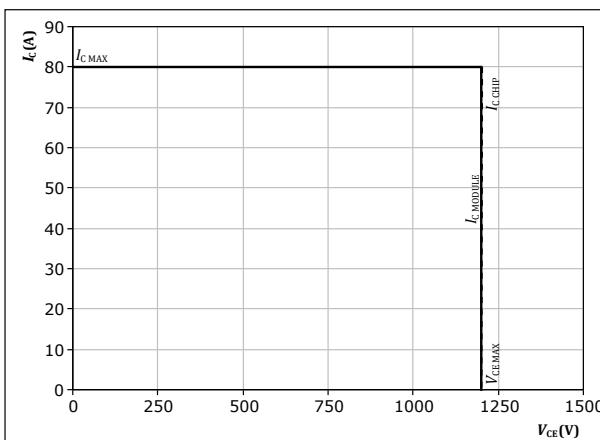

At $T_j = 150$ °C
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω



Vincotech

Boost Switching Definitions

figure 28. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

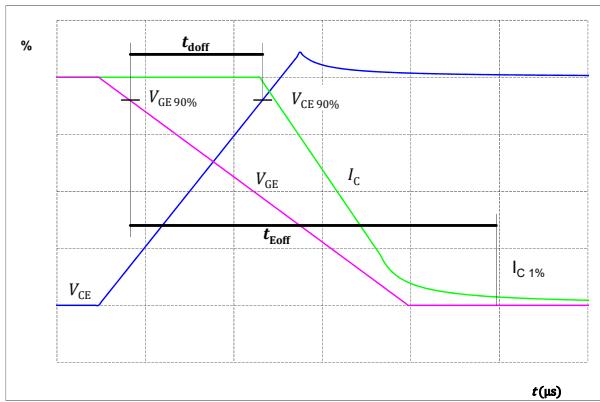


figure 30. IGBT

Turn-off Switching Waveforms & definition of t_f

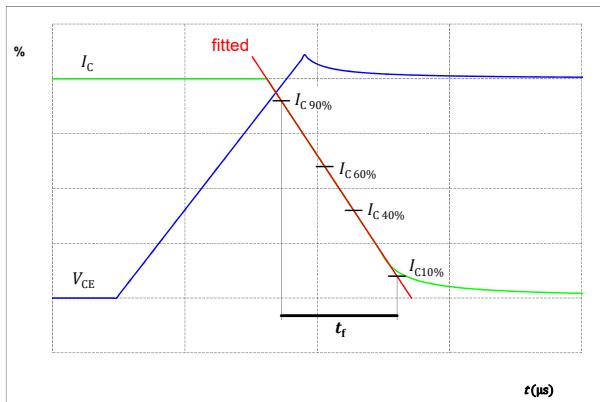


figure 29. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})


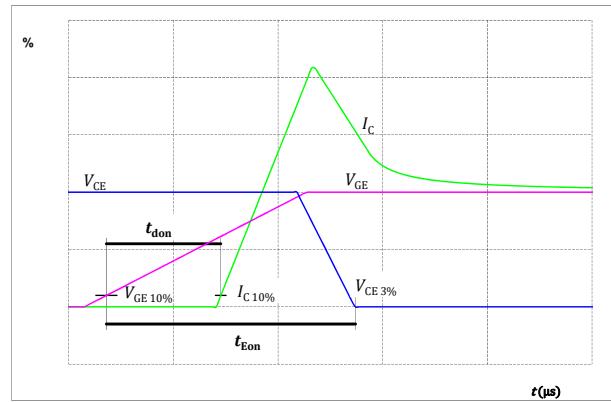


figure 31. IGBT

Turn-on Switching Waveforms & definition of t_r



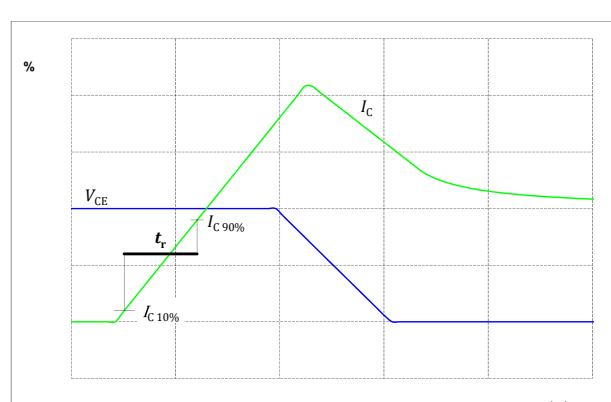

Boost Switching Definitions

figure 32.

Turn-off Switching Waveforms & definition of t_{tr}

FWD

Copyright Vincotech


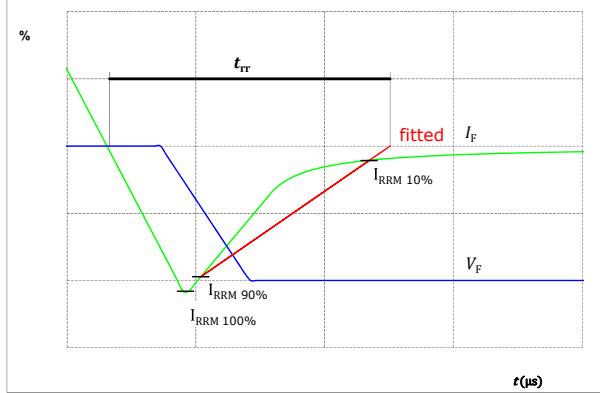


figure 33.

Turn-on Switching Waveforms & definition of t_{qr} (t_{qr} = integrating time for Q_r)

FWD



Copyright Vincotech

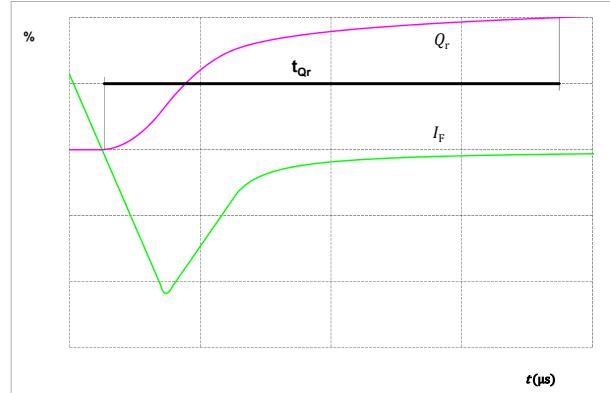

**10-FY12S2A040SH-L868L48**


datasheet

Vincotech

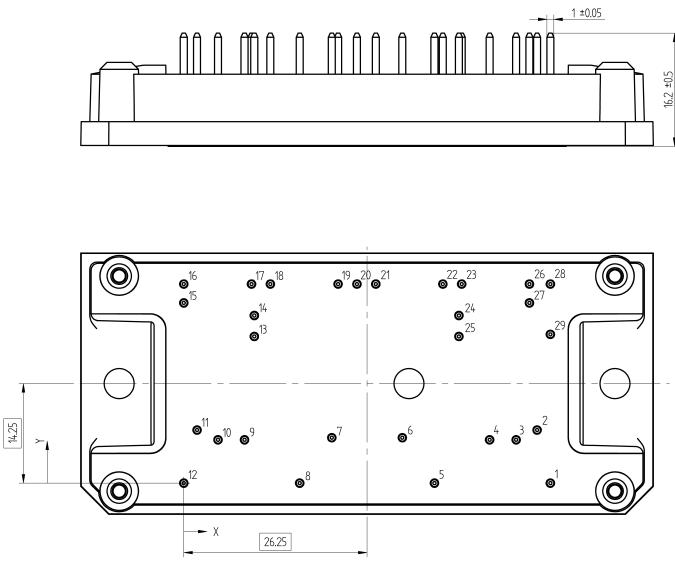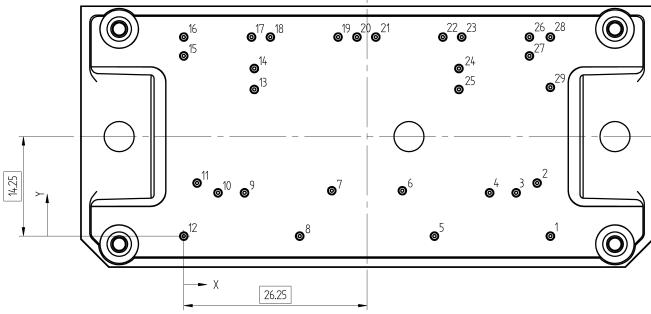Ordering Code																																																																																																																													
Version			Ordering Code																																																																																																																										
Without thermal paste			10-FY12S2A040SH-L868L48																																																																																																																										
With thermal paste			10-FY12S2A040SH-L868L48-/3/																																																																																																																										
Marking																																																																																																																													
	Text	Name NN-NNNNNNNNNNNNN- TTTTTVV	Date code WWYY	UL & VIN UL VIN	Lot LLLL																																																																																																																								
		Type&Ver TTTTTVV	Lot number LLLLL	Serial SSSS	Date code WWYY																																																																																																																								
Outline																																																																																																																													
Pin table [mm]	  <small>Tolerance of pinpositions: ±0.5mm at the end of pins Dimension of coordinate axis is only offset without tolerance</small>																																																																																																																												
<table border="1"><thead><tr><th>Pin</th><th>X</th><th>Y</th><th>Function</th></tr></thead><tbody><tr><td>1</td><td>52,5</td><td>0</td><td>DC-In2</td></tr><tr><td>2</td><td>50,6</td><td>7,6</td><td>S25</td></tr><tr><td>3</td><td>47,6</td><td>6,2</td><td>G25</td></tr><tr><td>4</td><td>43,8</td><td>6,2</td><td>Boost-2</td></tr><tr><td>5</td><td>35,9</td><td>0</td><td>DC+In2</td></tr><tr><td>6</td><td>31,3</td><td>6,5</td><td>Boost+2</td></tr><tr><td>7</td><td>21,2</td><td>6,5</td><td>Boost+1</td></tr><tr><td>8</td><td>16,6</td><td>0</td><td>DC+In1</td></tr><tr><td>9</td><td>8,7</td><td>6,2</td><td>Boost-1</td></tr><tr><td>10</td><td>4,9</td><td>6,2</td><td>G15</td></tr><tr><td>11</td><td>1,9</td><td>7,6</td><td>S15</td></tr><tr><td>12</td><td>0</td><td>0</td><td>DC-In1</td></tr><tr><td>13</td><td>10,1</td><td>21</td><td>G17</td></tr><tr><td>14</td><td>10,1</td><td>24</td><td>S17</td></tr><tr><td>15</td><td>0</td><td>25,8</td><td>DC- Boost1</td></tr><tr><td>16</td><td>0</td><td>28,5</td><td>DC- Boost1</td></tr><tr><td>17</td><td>9,7</td><td>28,5</td><td>N1</td></tr><tr><td>18</td><td>12,4</td><td>28,5</td><td>N1</td></tr><tr><td>19</td><td>22,1</td><td>28,5</td><td>DC+Boost</td></tr><tr><td>20</td><td>24,8</td><td>28,5</td><td>DC+Boost</td></tr><tr><td>21</td><td>27,5</td><td>28,5</td><td>DC+Boost</td></tr><tr><td>22</td><td>37,1</td><td>28,5</td><td>N2</td></tr><tr><td>23</td><td>39,8</td><td>28,5</td><td>N2</td></tr><tr><td>24</td><td>39,4</td><td>24</td><td>S27</td></tr><tr><td>25</td><td>39,4</td><td>21</td><td>G27</td></tr><tr><td>26</td><td>49,5</td><td>28,5</td><td>DC- Boost2</td></tr><tr><td>27</td><td>49,5</td><td>25,8</td><td>DC- Boost2</td></tr><tr><td>28</td><td>52,5</td><td>28,5</td><td>Therm1</td></tr><tr><td>29</td><td>52,5</td><td>21,3</td><td>Therm2</td></tr></tbody></table>	Pin	X	Y	Function	1	52,5	0	DC-In2	2	50,6	7,6	S25	3	47,6	6,2	G25	4	43,8	6,2	Boost-2	5	35,9	0	DC+In2	6	31,3	6,5	Boost+2	7	21,2	6,5	Boost+1	8	16,6	0	DC+In1	9	8,7	6,2	Boost-1	10	4,9	6,2	G15	11	1,9	7,6	S15	12	0	0	DC-In1	13	10,1	21	G17	14	10,1	24	S17	15	0	25,8	DC- Boost1	16	0	28,5	DC- Boost1	17	9,7	28,5	N1	18	12,4	28,5	N1	19	22,1	28,5	DC+Boost	20	24,8	28,5	DC+Boost	21	27,5	28,5	DC+Boost	22	37,1	28,5	N2	23	39,8	28,5	N2	24	39,4	24	S27	25	39,4	21	G27	26	49,5	28,5	DC- Boost2	27	49,5	25,8	DC- Boost2	28	52,5	28,5	Therm1	29	52,5	21,3	Therm2					
Pin	X	Y	Function																																																																																																																										
1	52,5	0	DC-In2																																																																																																																										
2	50,6	7,6	S25																																																																																																																										
3	47,6	6,2	G25																																																																																																																										
4	43,8	6,2	Boost-2																																																																																																																										
5	35,9	0	DC+In2																																																																																																																										
6	31,3	6,5	Boost+2																																																																																																																										
7	21,2	6,5	Boost+1																																																																																																																										
8	16,6	0	DC+In1																																																																																																																										
9	8,7	6,2	Boost-1																																																																																																																										
10	4,9	6,2	G15																																																																																																																										
11	1,9	7,6	S15																																																																																																																										
12	0	0	DC-In1																																																																																																																										
13	10,1	21	G17																																																																																																																										
14	10,1	24	S17																																																																																																																										
15	0	25,8	DC- Boost1																																																																																																																										
16	0	28,5	DC- Boost1																																																																																																																										
17	9,7	28,5	N1																																																																																																																										
18	12,4	28,5	N1																																																																																																																										
19	22,1	28,5	DC+Boost																																																																																																																										
20	24,8	28,5	DC+Boost																																																																																																																										
21	27,5	28,5	DC+Boost																																																																																																																										
22	37,1	28,5	N2																																																																																																																										
23	39,8	28,5	N2																																																																																																																										
24	39,4	24	S27																																																																																																																										
25	39,4	21	G27																																																																																																																										
26	49,5	28,5	DC- Boost2																																																																																																																										
27	49,5	25,8	DC- Boost2																																																																																																																										
28	52,5	28,5	Therm1																																																																																																																										
29	52,5	21,3	Therm2																																																																																																																										



Vincotech

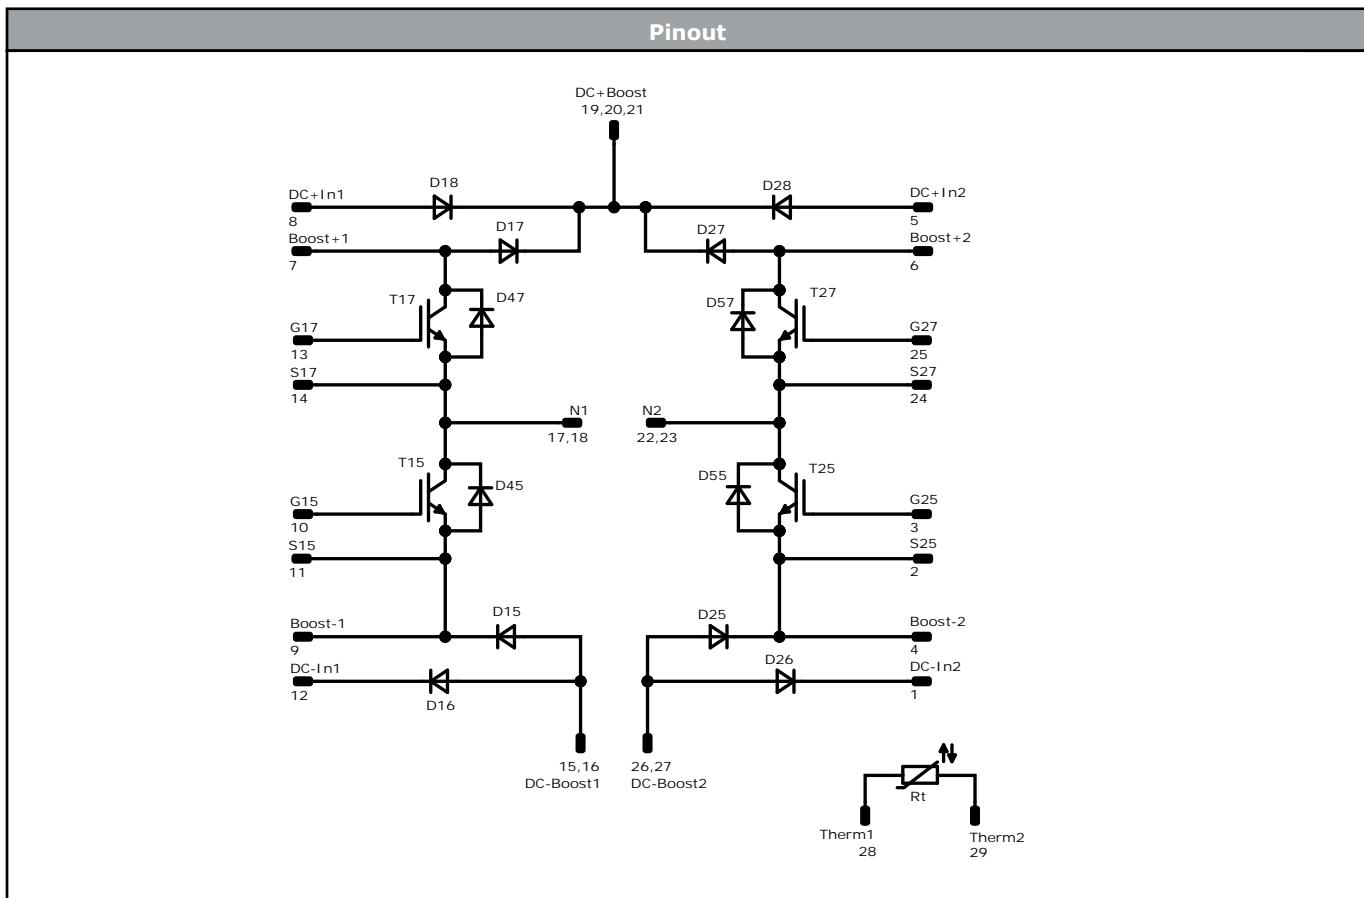

Identification

ID	Component	Voltage	Current	Function	Comment
T15, T17, T25, T27	IGBT	1200 V	40 A	Boost Switch	
D15, D17, D25, D27	FWD	1200 V	20 A	Boost Diode	
D45, D47, D55, D57	Rectifier	1600 V	18 A	Boost Sw. Protection Diode	
D16, D18, D26, D28	Rectifier	1600 V	28 A	ByPass Diode	
Rt	Thermistor			Thermistor	

**10-FY12S2A040SH-L868L48**

datasheet

Vincotech**Packaging instruction**

Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample
---------------------------------------	------	----------	------	--------

Handling instruction

Handling instructions for flow 1 packages see vincotech.com website.

Package data

Package data for flow 1 packages see vincotech.com website.

Vincotech thermistor reference

See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number

This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
10-FY12S2A040SH-L868L48-D1-14	16 Oct. 2020		

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.