
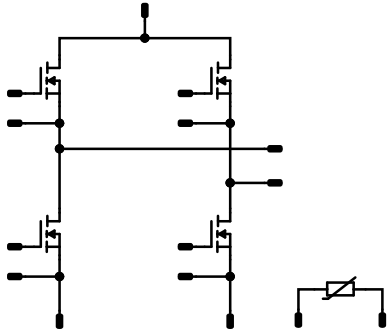




fastPACK E1 SiC		1200 V / 32 mΩ	
Features		flow E1 12 mm housing	
<ul style="list-style-type: none">• Compact and low inductive design• High frequency SiC MOSFET• Integrated NTC			
Target applications		Schematic	
<ul style="list-style-type: none">• Charging Stations• Power Supply			
Types			
<ul style="list-style-type: none">• 10-EZ124PA032ME-LQ17F18T			



Vincotech

10-EZ124PA032ME-LQ17F18T
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
H-Bridge Switch				
Drain-source voltage	V_{DSS}		1200	V
Drain current (DC current)	I_D	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	39	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	120	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	74	W
Gate-source voltage	V_{GSS}		-4 / 15	V
		dynamic	-8 / 19	
Maximum Junction Temperature	T_{jmax}		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	V_{isol}	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			8,62	mm
Comparative Tracking Index	CTI		≥ 600	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		

H-Bridge Switch

Static

Drain-source on-state resistance	$r_{DS(on)}$		15		40	25 125 150	22,4	34 42 46	41,6 ⁽¹⁾	mΩ
Gate-source threshold voltage	$V_{GS(th)}$		0		0,0115	25	1,8	2,5	3,6	V
Gate to Source Leakage Current	I_{GSS}		15	0		25		10	250	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	1200		25		1	19	μA
Internal gate resistance	r_g							1,7		Ω
Gate charge	Q_g		-4/15	800	40	25		118		nC
Short-circuit input capacitance	C_{iss}	$f = 100$ kHz	0	1000	0	25		3357		pF
Short-circuit output capacitance	C_{oss}							129		
Reverse transfer capacitance	C_{rss}							8		
Diode forward voltage	V_{SD}		0		20	25		4,6		V

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,28		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----



Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		
Dynamic										
Turn-on delay time	$t_{d(on)}$	$R_{gon} = 4 \Omega$ $R_{goff} = 4 \Omega$	0/15	600	30	25		16,64		ns
						125		14,08		
						150		14,4		
Rise time	t_r					25		7,36		
						125		7,36		ns
						150		6,72		
Turn-off delay time	$t_{d(off)}$					25		54,72		
						125		61,76		ns
						150		64		
Fall time	t_f					25		27,22		
						125		29,32		ns
						150		26,99		
Turn-on energy (per pulse)	E_{on}	$Q_{rFWD}=0,533 \mu C$ $Q_{rFWD}=0,649 \mu C$ $Q_{rFWD}=0,741 \mu C$				25		0,269		mWs
						125		0,227		
						150		0,236		
Turn-off energy (per pulse)	E_{off}					25		0,104		mWs
						125		0,112		
						150		0,117		
Peak recovery current	I_{RRM}					25		45,41		A
						125		53,84		
						150		60,69		
Reverse recovery time	t_{rr}					25		19,21		ns
						125		19,83		
						150		20,31		
Recovered charge	Q_r	$di/dt=5060 A/\mu s$ $di/dt=5483 A/\mu s$ $di/dt=5809 A/\mu s$				25		0,533		μC
						125		0,649		
						150		0,741		
Reverse recovered energy	E_{rec}					25		0,232		mWs
						125		0,272		
						150		0,299		
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25		6569		A/ μs
						125		8442		
						150		9620		



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	V_{CE} [V]	T_j [°C]	Min	Typ	Max	

Thermistor

Static

Rated resistance	R					25		5		kΩ
Deviation of R_{100}	$A_{R/R}$	$R_{100} = 493 \Omega$				100	-5		5	%
Power dissipation	P							245		mW
Power dissipation constant	d					25		1,4		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 2 \%$						3375		K
B-value	$B_{(25/100)}$	Tol. $\pm 2 \%$						3437		K
Vincotech Thermistor Reference									K	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.




H-Bridge Switch Characteristics

figure 1. MOSFET

Typical output characteristics

$$I_D = f(V_{DS})$$

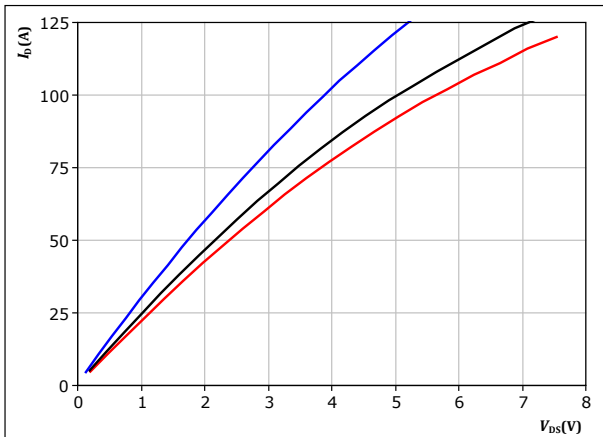


$t_p = 250 \mu s$
 $V_{GS} = 14 V$
 $T_j:$ 25 °C, 125 °C, 150 °C

figure 2. MOSFET

Typical output characteristics

$$I_D = f(V_{DS})$$

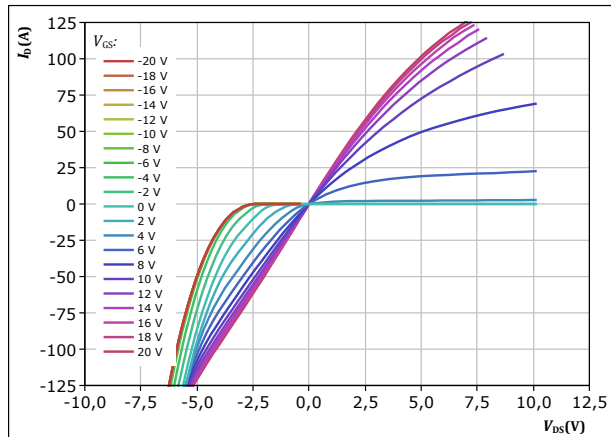


$t_p = 250 \mu s$
 $T_j = 150 \text{ °C}$
 V_{GS} from -20 V to 20 V in steps of 2 V

figure 3. MOSFET

Typical transfer characteristics

$$I_D = f(V_{GS})$$

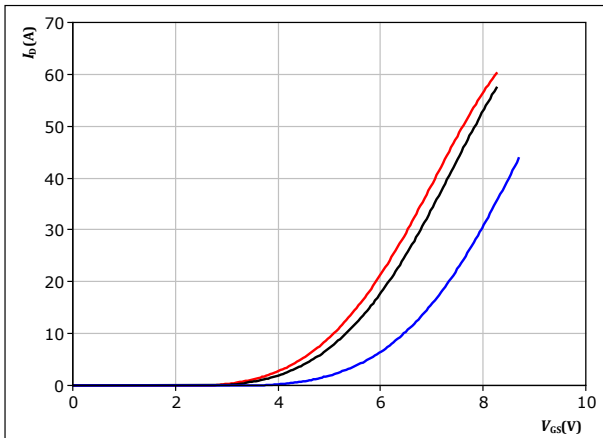


$t_p = 250 \mu s$
 $V_{DS} = 10 V$
 $T_j:$ 25 °C, 125 °C, 150 °C

figure 4. MOSFET

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

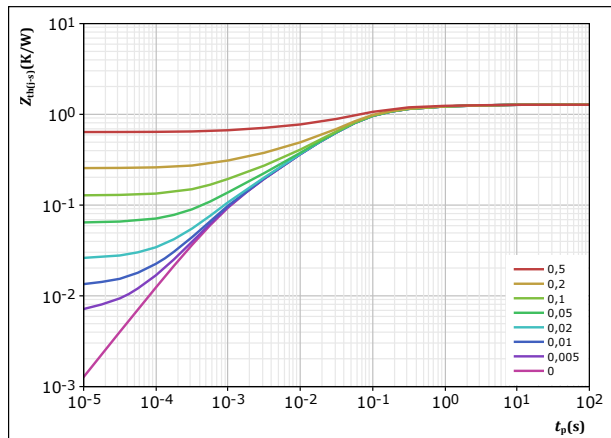

$D = t_p / T$
 $R_{th(j-s)} = 1,276 \text{ K/W}$
MOSFET thermal model values

R (K/W)	τ (s)
6,59E-02	2,75E+00
1,80E-01	3,21E-01
7,28E-01	5,55E-02
2,13E-01	8,37E-03
8,96E-02	1,01E-03




H-Bridge Switch Characteristics

figure 5. MOSFET

Safe operating area

$$I_D = f(V_{DS})$$

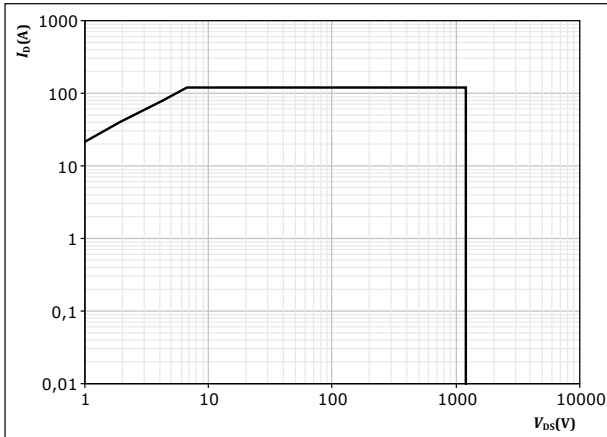

$D =$ single pulse

$T_s = 80$ °C

$V_{GS} = 14$ V

$T_j = T_{jmax}$




Thermistor Characteristics

figure 6. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

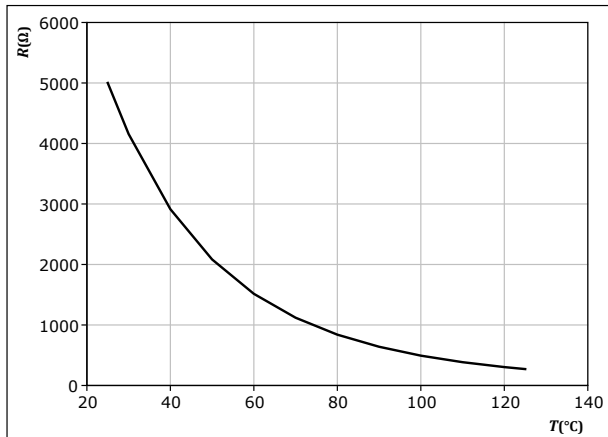




H-Bridge Switching Characteristics

figure 7. MOSFET

Typical switching energy losses as a function of drain current
 $E = f(I_D)$

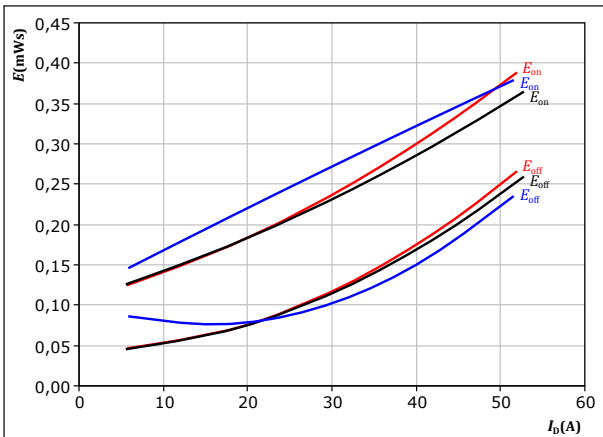


With an inductive load at
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $R_{gon} = 4 \ \Omega$
 $R_{goff} = 4 \ \Omega$

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 8. MOSFET

Typical switching energy losses as a function of gate resistor
 $E = f(R_g)$

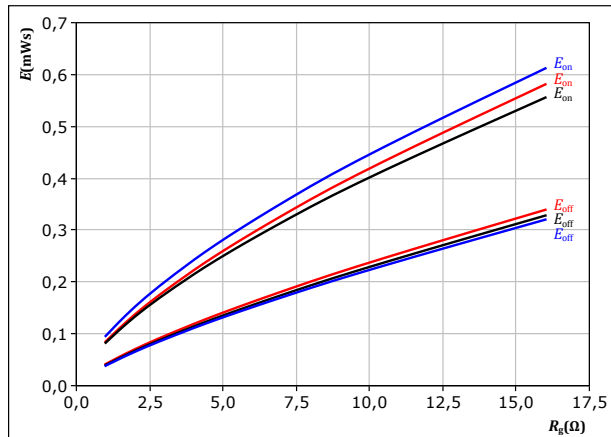


With an inductive load at
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $I_D = 30 \text{ A}$

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 9. MOSFET

Typical reverse recovered energy loss as a function of drain current
 $E_{rec} = f(I_D)$

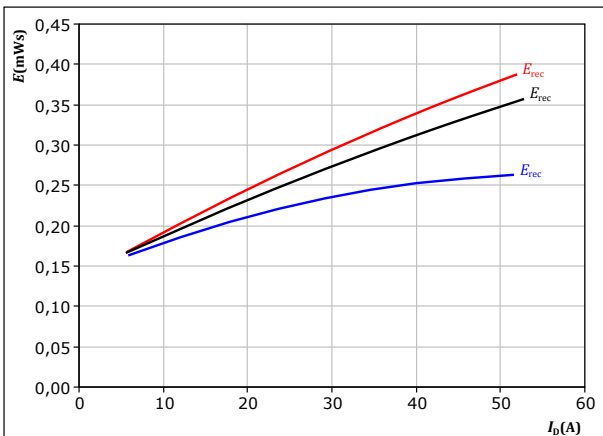


With an inductive load at
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $R_{gon} = 4 \ \Omega$

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 10. MOSFET

Typical reverse recovered energy loss as a function of gate resistor
 $E_{rec} = f(R_g)$

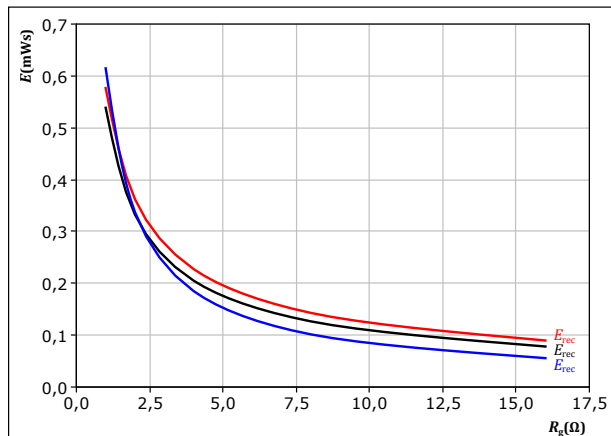

With an inductive load at
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $I_D = 30 \text{ A}$


T_j : — 25 °C
 — 125 °C
 — 150 °C



H-Bridge Switching Characteristics

figure 11. MOSFET


Typical switching times as a function of drain current
 $t = f(I_D)$

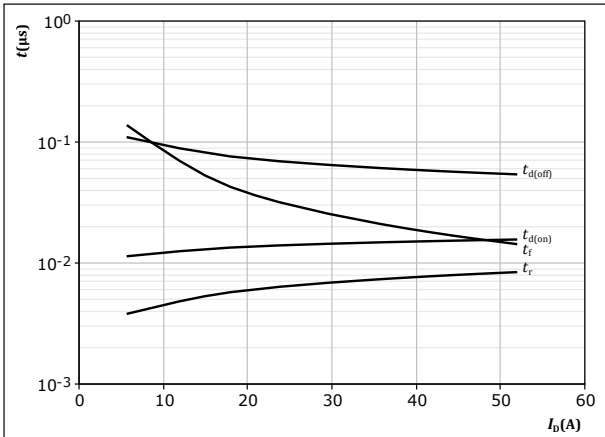

With an inductive load at
 $T_j = 150 \text{ }^\circ\text{C}$
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $R_{g(on)} = 4 \text{ } \Omega$
 $R_{g(off)} = 4 \text{ } \Omega$

figure 12. MOSFET


Typical switching times as a function of gate resistor
 $t = f(R_g)$

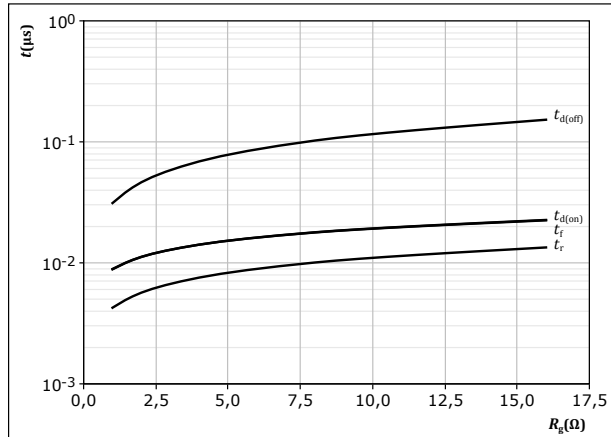

With an inductive load at
 $T_j = 150 \text{ }^\circ\text{C}$
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $I_D = 30 \text{ A}$

figure 13. MOSFET


Typical reverse recovery time as a function of drain current
 $t_{rr} = f(I_D)$

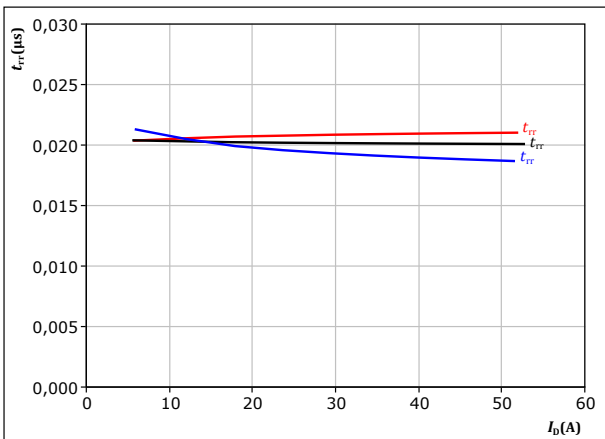

At $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $R_{g(on)} = 4 \text{ } \Omega$
 $T_j:$ — 25 °C
 — 125 °C
 — 150 °C

figure 14. MOSFET

Typical reverse recovery time as a function of turn off gate resistor
 $t_{rr} = f(R_{g(off)})$

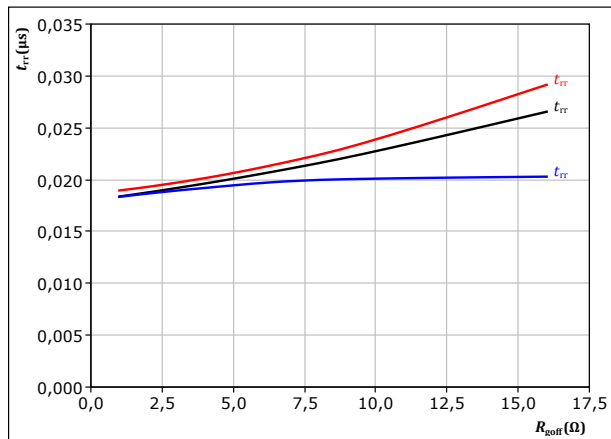

At $V_{DS} = 600 \text{ V}$
 $V_{GS} = 0/15 \text{ V}$
 $I_D = 30 \text{ A}$
 $T_j:$ — 25 °C
 — 125 °C
 — 150 °C




H-Bridge Switching Characteristics

figure 15. MOSFET

Typical recovered charge as a function of drain current

$$Q_r = f(I_D)$$

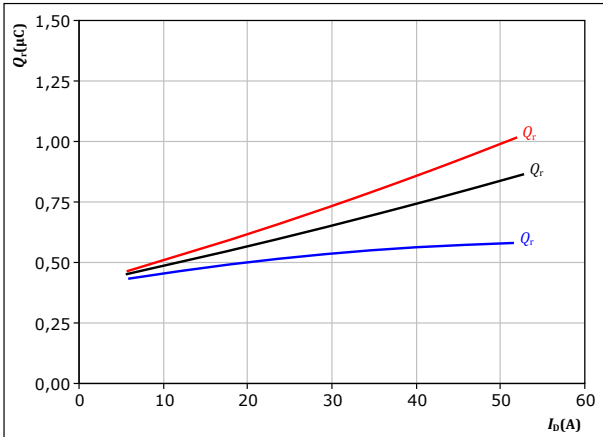


At $V_{DS} = 600$ V
 $V_{GS} = 0/15$ V
 $R_{goff} = 4$ Ω
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 16. MOSFET

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

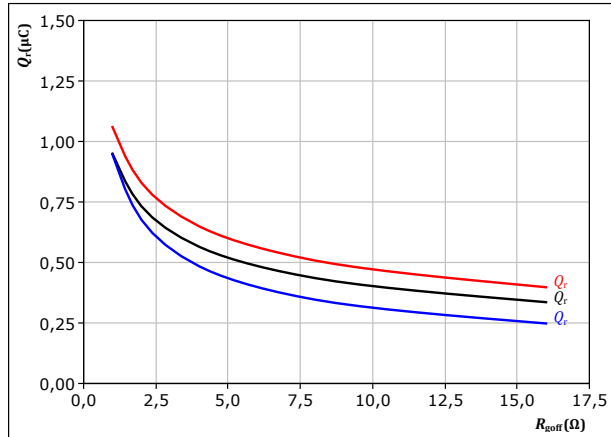


At $V_{DS} = 600$ V
 $V_{GS} = 0/15$ V
 $I_D = 30$ A
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 17. MOSFET

Typical peak reverse recovery current as a function of drain current

$$I_{RM} = f(I_D)$$

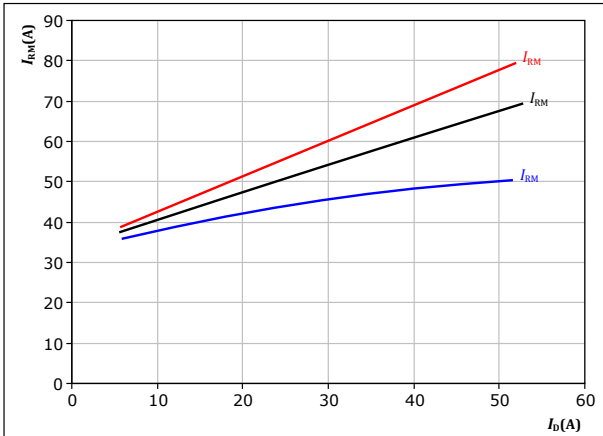


At $V_{DS} = 600$ V
 $V_{GS} = 0/15$ V
 $R_{goff} = 4$ Ω
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 18. MOSFET

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

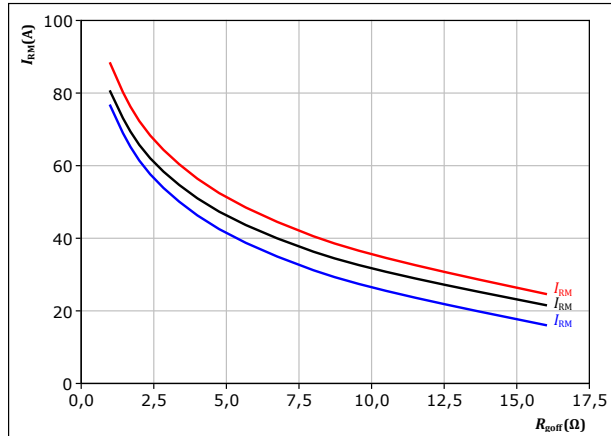


At $V_{DS} = 600$ V
 $V_{GS} = 0/15$ V
 $I_D = 30$ A
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)



H-Bridge Switching Characteristics

figure 19. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of drain current
 $di_f/dt, di_{rr}/dt = f(I_D)$

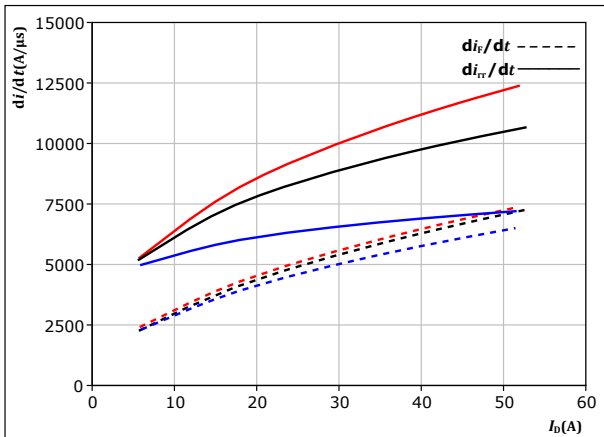


At $V_{DS} = 600$ V
 $V_{GS} = 0/15$ V
 $R_{g(on)} = 4$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 20. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{g(off)})$

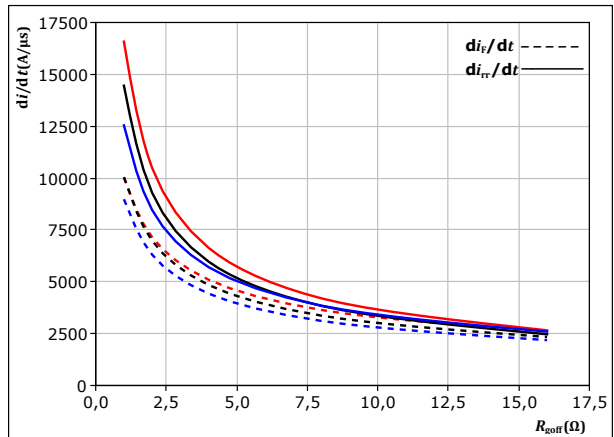


At $V_{DS} = 600$ V
 $V_{GS} = 0/15$ V
 $I_D = 30$ A

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 21. MOSFET

Reverse bias safe operating area
 $I_D = f(V_{DS})$

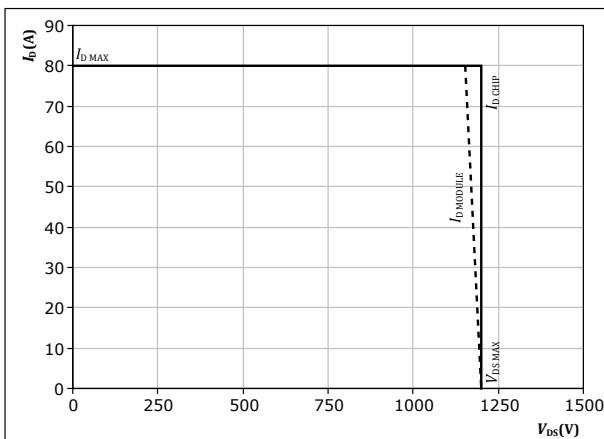

At $T_j = 150$ °C
 $R_{g(on)} = 4$ Ω
 $R_{g(off)} = 4$ Ω



H-Bridge Switching Definitions

figure 22. MOSFET

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

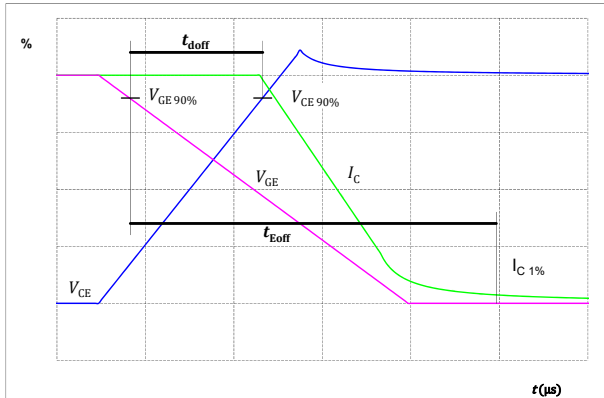


figure 23. MOSFET

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

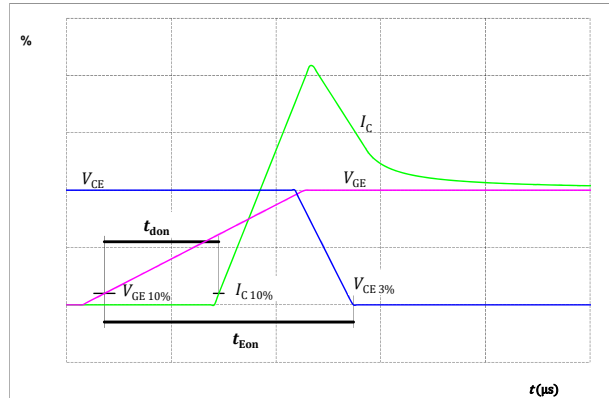


figure 24. MOSFET

Turn-off Switching Waveforms & definition of t_f


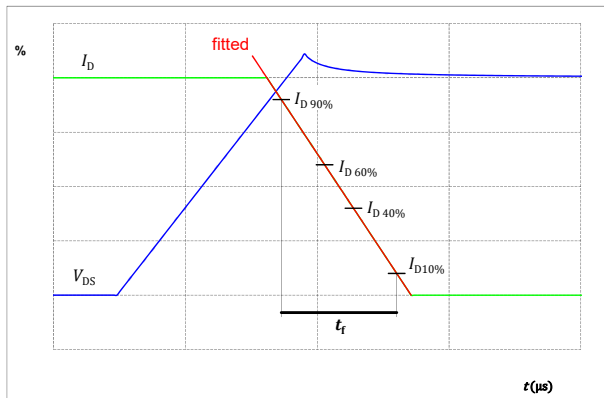


figure 25. MOSFET

Turn-on Switching Waveforms & definition of t_r



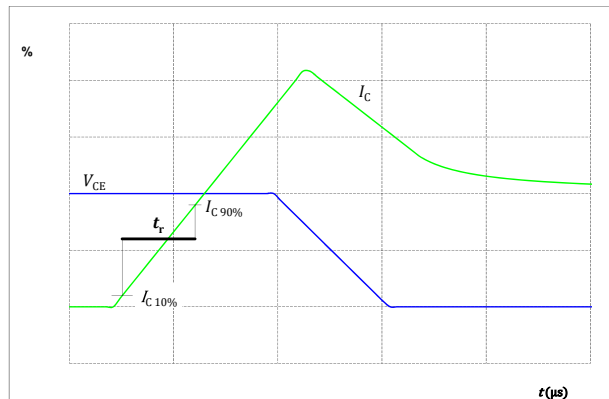

H-Bridge Switching Definitions

figure 26. FWD

Turn-off Switching Waveforms & definition of t_{tr}

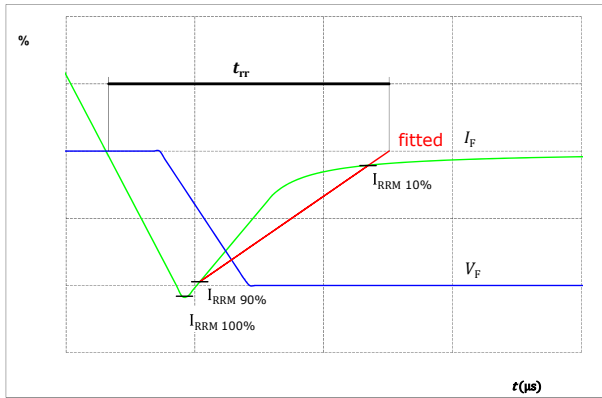


figure 27. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)


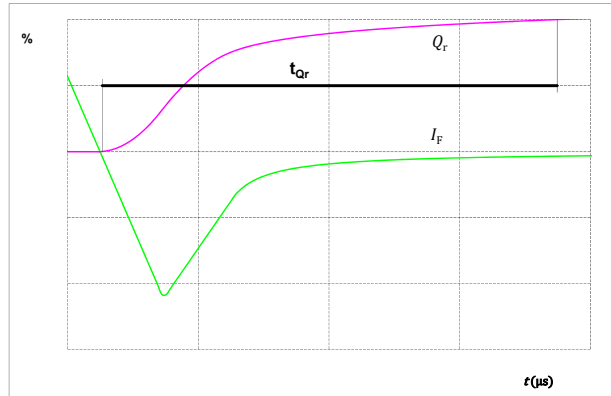


figure 28. FWD

Turn-on Switching Waveforms & definition of t_{Erec} (t_{Erec} = integrating time for E_{rec})



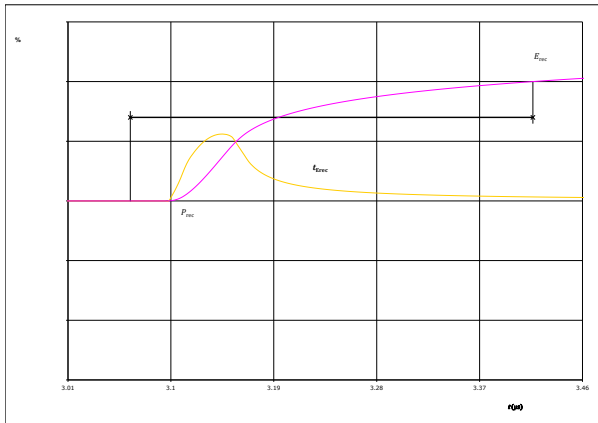

10-EZ124PA032ME-LQ17F18T

datasheet

Vincotech

Ordering Code	
Version	Ordering Code
Without thermal paste	10-EZ124PA032ME-LQ17F18T
With thermal paste (3,4 W/mK, PSX-P7)	10-EZ124PA032ME-LQ17F18T-/3/

Marking						
	Text	Name NN-NNNNNNNNNNNNNN- TTTTTVV	Date code WWYY	UL & VIN UL VIN	Lot LLLLL	Serial SSSS
	Datamatrix	Type&Ver TTTTTTTV	Lot number LLLLL	Serial SSSS	Date code WWYY	


Pin table [mm]				Outline
Pin	X	Y	Function	
1	32	3,2	DC-2	
2	32	0	DC-2	
3	28,8	3,2	G4	
4	28,8	0	S4	
5	12,8	0	T2	
6	9,6	0	T1	
7	0	0	AC2	
8	0	3,2	AC2	
9	0	6,4	S3	
10	0	9,6	G3	
11	0	16	G1	
12	0	19,2	S1	
13	0	22,4	AC1	
14	0	25,6	AC1	
15	28,8	25,6	S2	
16	28,8	22,4	G2	
17	32	25,6	DC-1	
18	32	22,4	DC-1	
19	22,4	12,8	DC+	
20	25,6	12,8	DC+	
21	28,8	12,8	DC+	
22	32	12,8	DC+	

center of press-fit pin head
pin head type "T" PCB plated through-hole Ø 1mm +0.09 / -0.06
for further PCB design rules refer to the latest handling instruction

Tolerance of pinposition: ±0.1mm at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

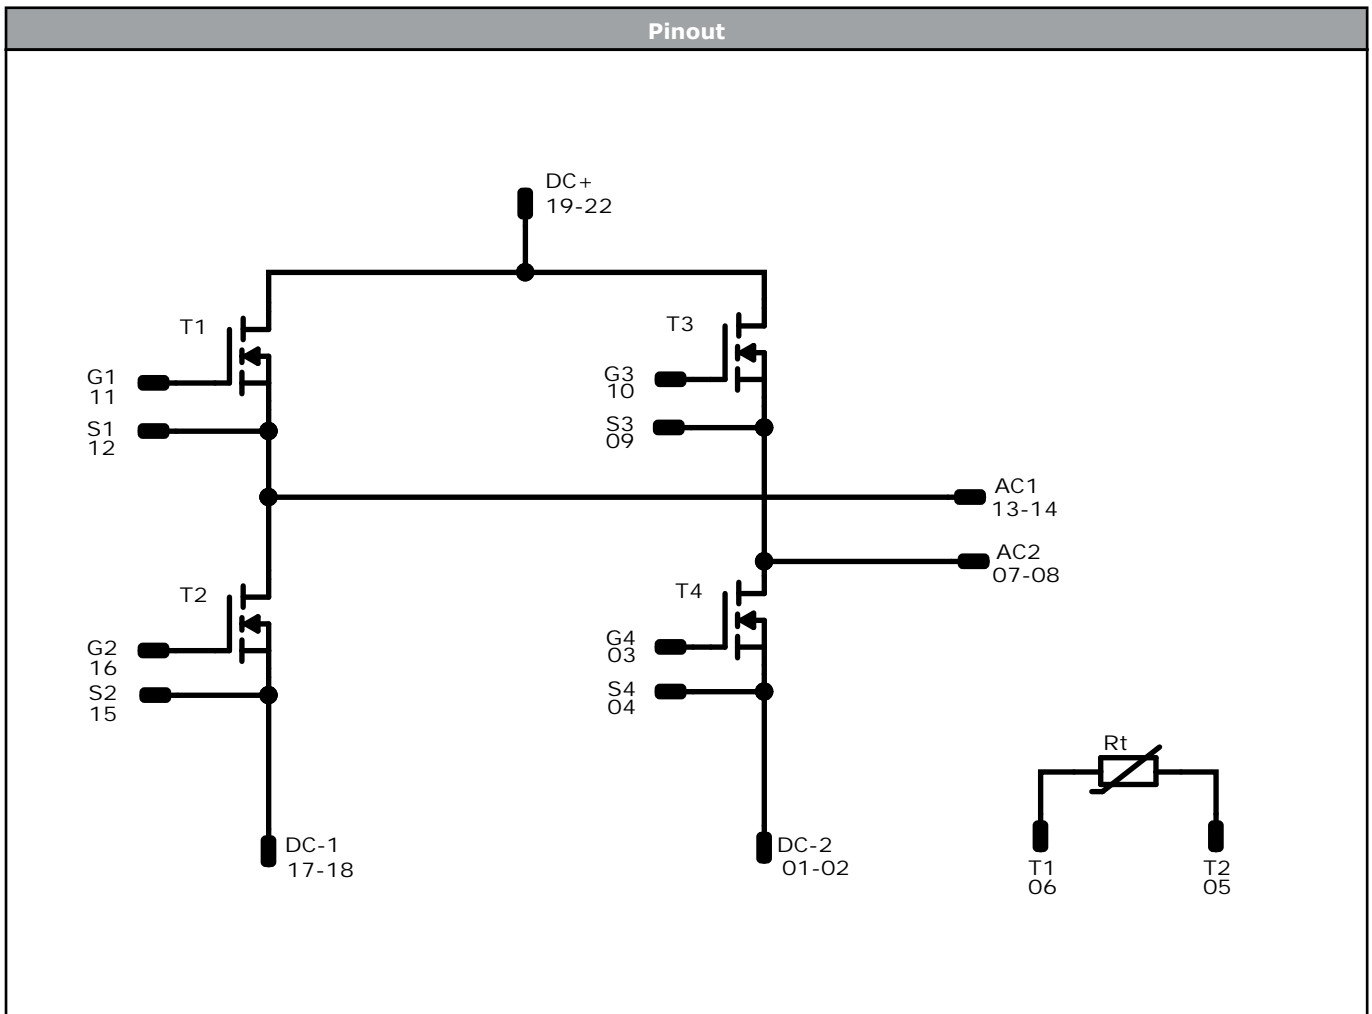

Identification					
ID	Component	Voltage	Current	Function	Comment
T2, T1, T4, T3	MOSFET	1200 V	32 mΩ	H-Bridge Switch	
Rt	Thermistor			Thermistor	




Vincotech

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow</i> E1 packages see vincotech.com website.

Package data
Package data for <i>flow</i> E1 packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-EZ124PA032ME-LQ17F18T-D3-14	5 Aug. 2021	Update of Outline & Pinout drawings	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.