



flow PIM 0	600 V / 20 A											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="background-color: #cccccc;">Features</th> </tr> <tr> <td> <ul style="list-style-type: none"> Vincotech clip-in housing Trenchstop™ IGBT3 for low saturation losses Optional w/o BRC </td> </tr> <tr> <th style="background-color: #cccccc;">Target Applications</th> </tr> <tr> <td> <ul style="list-style-type: none"> Industrial drives Embedded drives </td> </tr> <tr> <th style="background-color: #cccccc;">Types</th> </tr> <tr> <td> <ul style="list-style-type: none"> V23990-P545-A28-PM V23990-P545-A29-PM V23990-P545-B28-PM V23990-P545-B128-PM V23990-P545-B129-PM V23990-P545-C29-PM V23990-P545-D28-PM </td> </tr> </table>	Features	<ul style="list-style-type: none"> Vincotech clip-in housing Trenchstop™ IGBT3 for low saturation losses Optional w/o BRC 	Target Applications	<ul style="list-style-type: none"> Industrial drives Embedded drives 	Types	<ul style="list-style-type: none"> V23990-P545-A28-PM V23990-P545-A29-PM V23990-P545-B28-PM V23990-P545-B128-PM V23990-P545-B129-PM V23990-P545-C29-PM V23990-P545-D28-PM 	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="background-color: #cccccc;">flow 0 housing</th> </tr> <tr> <td style="text-align: center;"> </td> </tr> <tr> <td style="display: flex; justify-content: space-around;"> 12mm housing 17mm housing </td> </tr> <tr> <th style="background-color: #cccccc;">Schematic</th> </tr> <tr> <td style="text-align: center;"> </td> </tr> </table>	flow 0 housing		12mm housing 17mm housing	Schematic	
Features												
<ul style="list-style-type: none"> Vincotech clip-in housing Trenchstop™ IGBT3 for low saturation losses Optional w/o BRC 												
Target Applications												
<ul style="list-style-type: none"> Industrial drives Embedded drives 												
Types												
<ul style="list-style-type: none"> V23990-P545-A28-PM V23990-P545-A29-PM V23990-P545-B28-PM V23990-P545-B128-PM V23990-P545-B129-PM V23990-P545-C29-PM V23990-P545-D28-PM 												
flow 0 housing												
12mm housing 17mm housing												
Schematic												

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Rectifier Diode				
Repetitive peak reverse voltage	V_{RRM}		1600	V
DC forward current	I_{FAV}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	34	A
Surge (non-repetitive) forward current	I_{FSM}	$t_p = 10\text{ ms}$ 50 Hz half sine wave $T_j = 150\text{ °C}$	200	A
I ² t-value	I^2t		200	A ² s
Power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	43	W
Maximum Junction Temperature	T_{jmax}		150	°C
Inverter Switch				
Collector-emitter breakdown voltage	V_{CE}		600	V
DC collector current	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	26	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	60	A
Turn off safe operating area		$V_{CE} \leq 1200V, T_j \leq T_{op\ max}$	60	A
Power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	56	W
Gate-emitter peak voltage	V_{GE}		±20	V
Short circuit ratings	t_{SC}	$T_j \leq 150\text{ °C}$	6	µs
	V_{CC}	$V_{GE} = 15\text{ V}$	360	V
Maximum Junction Temperature	T_{jmax}		175	°C

**Maximum Ratings** $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
-----------	--------	-----------	-------	------

Inverter Diode

Peak Repetitive Reverse Voltage	V_{RRM}		600	V
DC forward current	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	21	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	40	A
Power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	37	W
Maximum Junction Temperature	T_{jmax}		175	°C

Brake Switch

Collector-emitter breakdown voltage	V_{CE}		600	V
DC collector current	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	21	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	45	A
Turn off safe operating area		$V_{CE} \leq 1200V, T_j \leq T_{op\ max}$	45	A
Power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	52	W
Gate-emitter peak voltage	V_{GE}		± 20	V
Short circuit ratings	t_{SC} V_{CC}	$T_j \leq 150\text{ °C}$ $V_{GE} = 15\text{ V}$	6 360	μs V
Maximum Junction Temperature	T_{jmax}		175	°C

Brake Diode

Peak Repetitive Reverse Voltage	V_{RRM}		600	V
DC forward current	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	18	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	30	A
Power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	35	W
Maximum Junction Temperature	T_{jmax}		175	°C

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{op}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{is}	$t = 2s$ DC voltage	4000	V
Creepage distance			min 12,7	mm
Clearance		12 mm / 17 mm housing	9,29 / min 12,7	mm
Comparative tracking index	CTI		>200	



Characteristic Values

Parameter	Symbol	Conditions					Value			Unit		
		V_{GE} [V]	V_{GS} [V]	V_{CE} [V]	V_{DS} [V]	I_C [A] I_F [A] I_D [A]	T_j [°C]	Min	Typ		Max	
Rectifier Diode												
Forward voltage	V_F					25 125		0,8	1,22 1,20	1,45	V	
Threshold voltage (for power loss calc. only)	V_{to}					25 125			0,95 0,81		V	
Slope resistance (for power loss calc. only)	r_t					25 125			10 20		mΩ	
Reverse current	I_r			1600		25 145				0,05 1,1	mA	
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)							1,61		K/W	
Inverter Switch												
Gate emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$				0,00029	25		5	5,8	6,5	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15			20	25 125		1	1,55 1,75	2,2	V
Collector-emitter cut-off current incl. Diode	I_{CES}		0	600			25				0,0011	mA
Gate-emitter leakage current	I_{GES}		20	0			25				300	nA
Integrated Gate resistor	R_{gint}									none		Ω
Turn-on delay time	$t_{d(on)}$	$R_{goff} = 8$ Ω $R_{gonn} = 16$ Ω	+15/0	300	20		25			15		ns
Rise time	t_r						125			14		
Turn-off delay time	$t_{d(off)}$						25			12		
Fall time	t_f						125			16		
Turn-on energy loss	E_{on}						25			198		
Turn-off energy loss	E_{off}	125			212				0,31 0,43		mWs	
Input capacitance	C_{ies}									1100		pF
Output capacitance	C_{oss}	$f = 1$ MHz	0	25		25				71		
Reverse transfer capacitance	C_{rss}									32		
Gate charge	Q_G		±15	480	20	25				120		nC
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)								1,70		K/W
Inverter Diode												
Diode forward voltage	V_F				20	25 125		1,25	1,81 1,76	1,95		V
Peak reverse recovery current	I_{RRM}					25 125			19 21			A
Reverse recovery time	t_{rr}					25 125			33 192			ns
Reverse recovered charge	Q_{rr}	$R_{gonn} = 16$ Ω	+15/0	300	20	25 125			0,45 1,35			μC
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125			1454 1052			A/μs
Reverse recovered energy	E_{rec}					25 125			0,06 0,27			mWs
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)								2,60		K/W



Characteristic Values

Parameter	Symbol	Conditions					Value			Unit	
		V_{GE} [V]	V_{GS} [V]	V_r [V]	V_{CE} [V]	V_{DS} [V]	I_C [A]	I_F [A]	I_D [A]		T_j [°C]

Brake Switch

Gate emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$				0,00021	25	5	5,8	6,5	V		
Collector-emitter saturation voltage	V_{CESat}		15			15	25 125	1,1	1,79 2,08	1,9	V		
Collector-emitter cut-off incl diode	I_{CES}		0	600			25			0,00085	mA		
Gate-emitter leakage current	I_{GES}		20	0			25			300	nA		
Integrated Gate resistor	R_{gint}								none		Ω		
Turn-on delay time	$t_{d(on)}$	$R_{goff} = 8 \Omega$ $R_{gon} = 16 \Omega$	+15/0	300	15	25 125	25 125		15 14		ns		
Rise time	t_r											25 125	11 14
Turn-off delay time	$t_{d(off)}$											25 125	128 145
Fall time	t_f											25 125	91 94
Turn-on energy loss	E_{on}											25 125	0,20 0,28
Turn-off energy loss	E_{off}											25 125	0,32 0,40
Input capacitance	C_{ies}	$f = 1 \text{ MHz}$	0	25	25	25			860		pF		
Output capacitance	C_{oss}								55				
Reverse transfer capacitance	C_{rss}								24				
Gate charge	Q_G		± 15	480	15	25			87		nC		
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{monte} = 3,4 \text{ W/mK}$ (PSX)							1,83		K/W		

Brake Diode

Diode forward voltage	V_F				15	25 125	1,25	1,86 1,75	1,95		V	
Reverse leakage current	I_r			600		25			27		μA	
Peak reverse recovery current	I_{RRM}	$R_{gon} = 16 \Omega$	+15/0	300	15	25 125	25 125		14 15		A	
Reverse recovery time	t_{rr}								25 125			128 201
Reverse recovered charge	Q_{rr}								25 125			0,52 1,02
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$								25 125			1307 657
Reverse recovery energy	E_{rec}								25 125			0,10 0,21
Thermal resistance junction to sink	$R_{th(j-s)}$								$\lambda_{monte} = 3,4 \text{ W/mK}$ (PSX)			

Thermistor

Rated resistance	R					25		22000			Ω
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5		%
Power dissipation	P					25		210			mW
Power dissipation constant						25		3,5			mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 3\%$				25					K
B-value	$B_{(25/100)}$	Tol. $\pm 3\%$				25		4000			K
Vincotech NTC Reference						25			A		




Inverter Charateristics

Figure 1 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

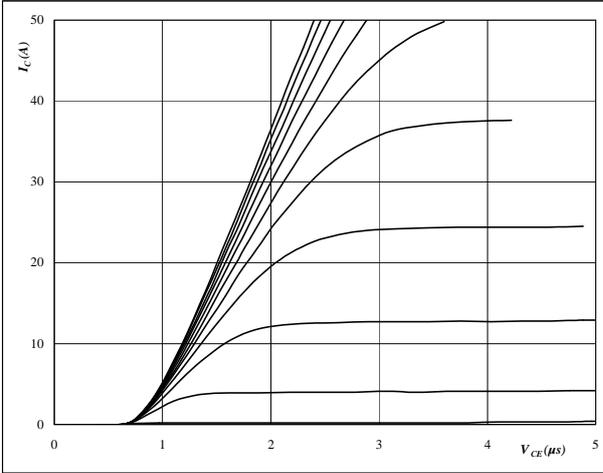


At

$t_p = 250 \mu s$
 $T_j = 25 \text{ }^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

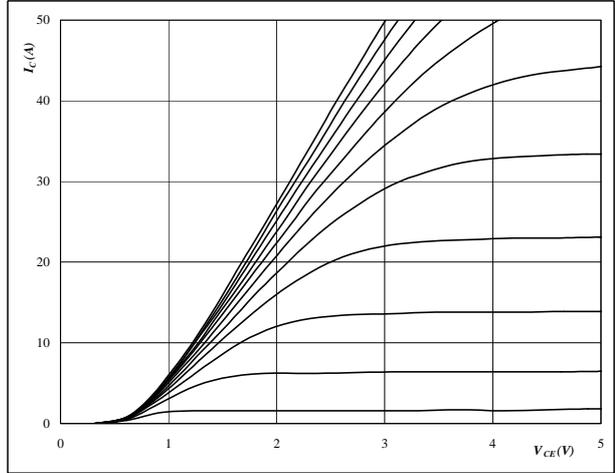


At

$t_p = 250 \mu s$
 $T_j = 125 \text{ }^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 IGBT

Typical transfer characteristics

$I_C = f(V_{GE})$

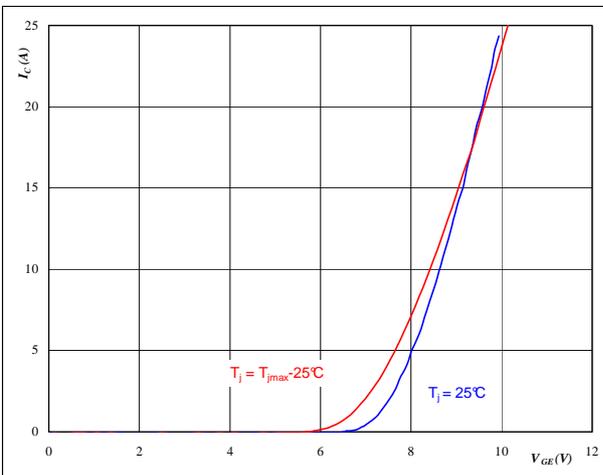


At

$t_p = 250 \mu s$
 $V_{CE} = 10 V$

Figure 4 FWD

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

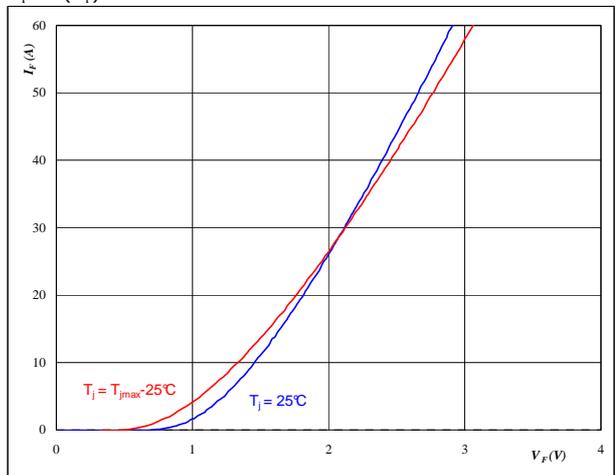

At

$t_p = 250 \mu s$




Inverter Charateristics

Figure 5 IGBT

Typical switching energy losses
as a function of collector current

$E = f(I_C)$

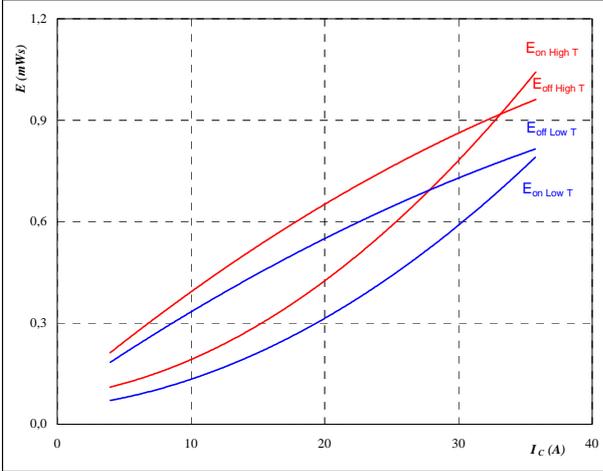


With an inductive load at

- $T_j = 25/125$ °C
- $V_{CE} = 300$ V
- $V_{GE} = 15$ V
- $R_{gon} = 16$ Ω
- $R_{goff} = 8$ Ω

Figure 6 IGBT

Typical switching energy losses
as a function of gate resistor

$E = f(R_G)$

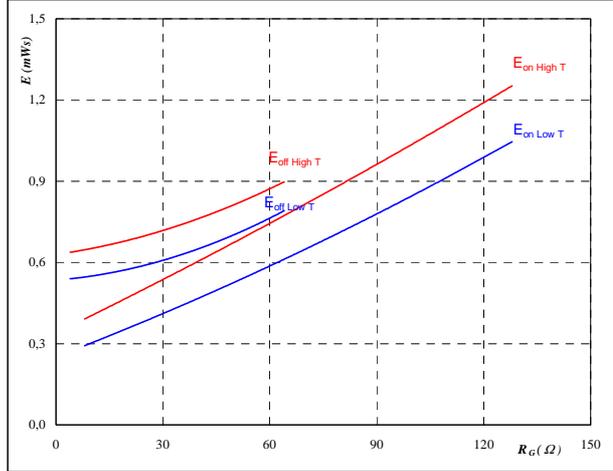


With an inductive load at

- $T_j = 25/125$ °C
- $V_{CE} = 300$ V
- $V_{GE} = 15$ V
- $I_C = 20$ A

Figure 7 FWD

Typical reverse recovery energy loss
as a function of collector current

$E_{rec} = f(I_C)$

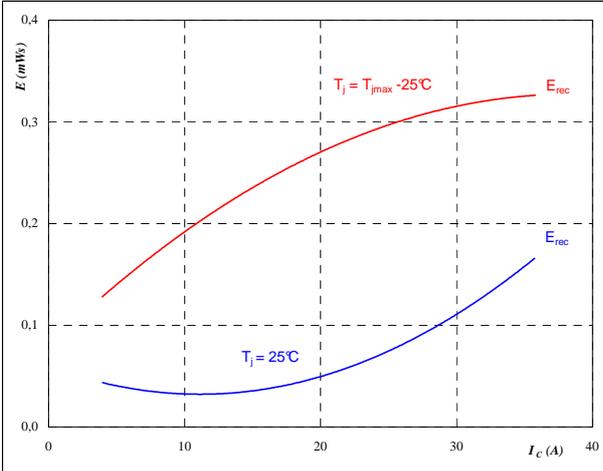


With an inductive load at

- $T_j = 25/125$ °C
- $V_{CE} = 300$ V
- $V_{GE} = 15$ V
- $R_{gon} = 16$ Ω

Figure 8 FWD

Typical reverse recovery energy loss
as a function of gate resistor

$E_{rec} = f(R_G)$

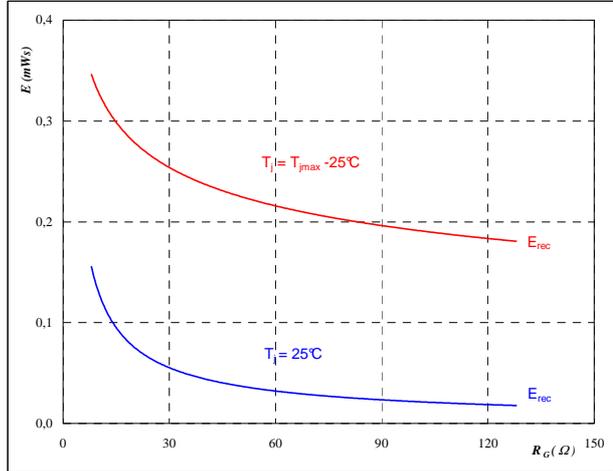

With an inductive load at

- $T_j = 25/125$ °C
- $V_{CE} = 300$ V
- $V_{GE} = 15$ V
- $I_C = 20$ A




Inverter Characteristics

Figure 9 IGBT

Typical switching times as a function of collector current

$t = f(I_C)$

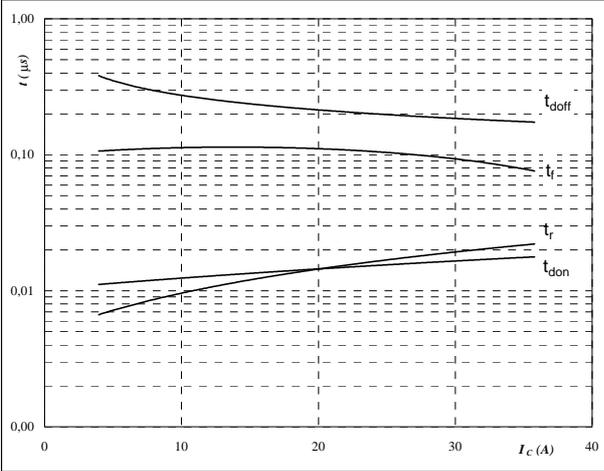


With an inductive load at

$T_j =$	125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$R_{gon} =$	16	Ω
$R_{goff} =$	8	Ω

Figure 10 IGBT

Typical switching times as a function of gate resistor

$t = f(R_G)$

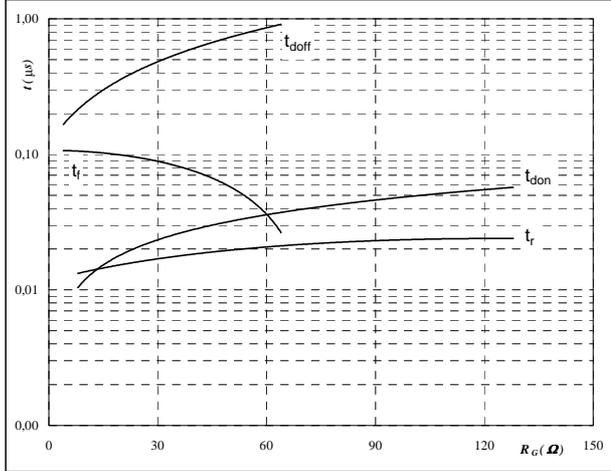


With an inductive load at

$T_j =$	125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$I_C =$	20	A

Figure 11 FWD

Typical reverse recovery time as a function of collector current

$t_{rr} = f(I_C)$

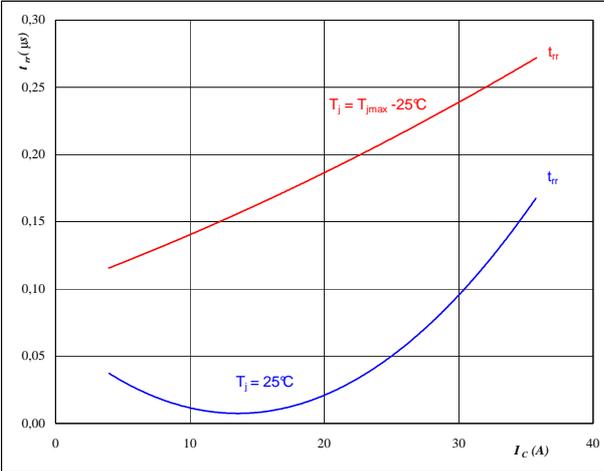


At

$T_j =$	25/125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$R_{gon} =$	16	Ω

Figure 12 FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$t_{rr} = f(R_{gon})$

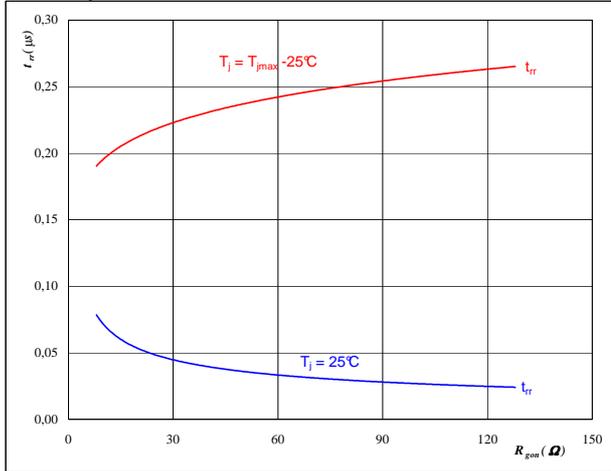

At

$T_j =$	25/125	°C
$V_R =$	300	V
$I_F =$	20	A
$V_{GE} =$	15	V




Inverter Characteristics

Figure 13 FWD

Typical reverse recovery charge as a function of collector current

$$Q_{rr} = f(I_c)$$

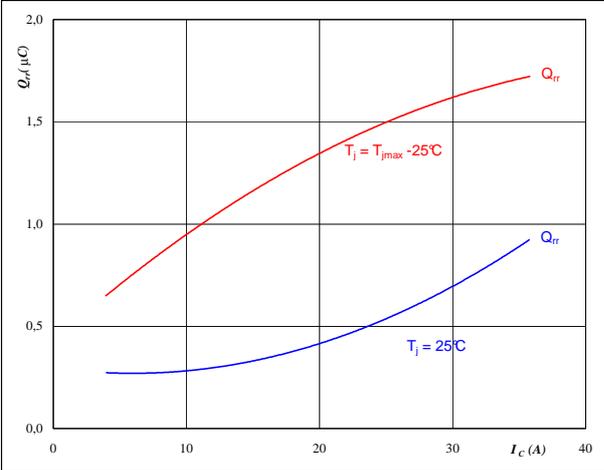


At
 $T_j = 25/125$ °C
 $V_{CE} = 300$ V
 $V_{GE} = 15$ V
 $R_{gon} = 16$ Ω

Figure 14 FWD

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$$Q_{rr} = f(R_{gon})$$

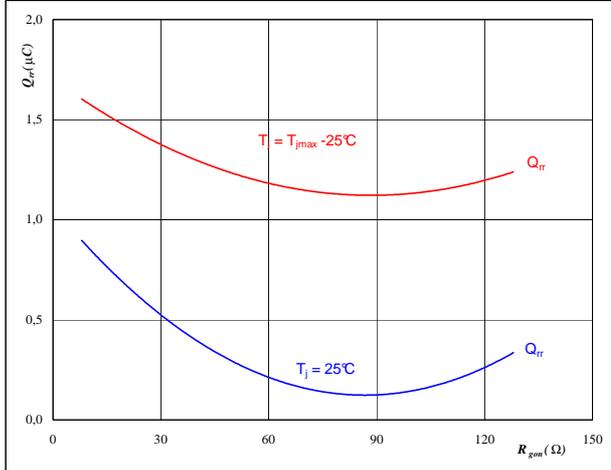


At
 $T_j = 25/125$ °C
 $V_R = 300$ V
 $I_F = 20$ A
 $V_{GE} = 15$ V

Figure 15 FWD

Typical reverse recovery current as a function of collector current

$$I_{RRM} = f(I_c)$$

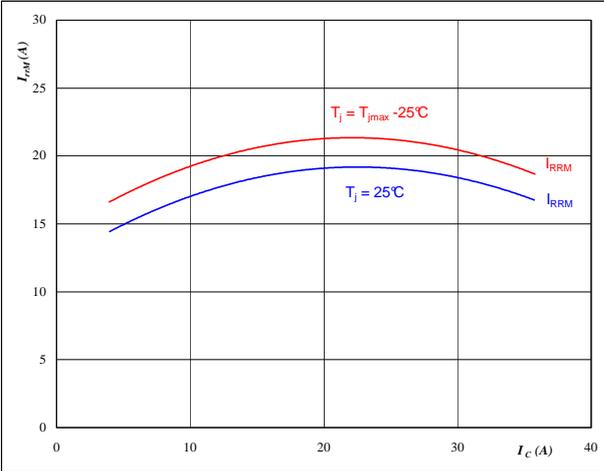


At
 $T_j = 25/125$ °C
 $V_{CE} = 300$ V
 $V_{GE} = 15$ V
 $R_{gon} = 16$ Ω

Figure 16 FWD

Typical reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RRM} = f(R_{gon})$$

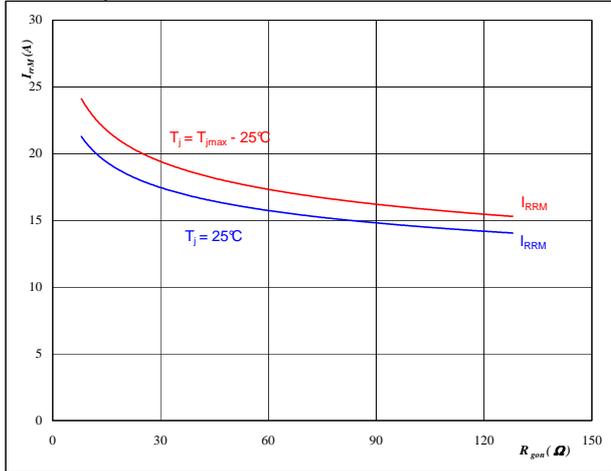

At
 $T_j = 25/125$ °C
 $V_R = 300$ V
 $I_F = 20$ A
 $V_{GE} = 15$ V




Inverter Characteristics

Figure 17 FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current

$$dI_0/dt, dI_{rec}/dt = f(I_c)$$

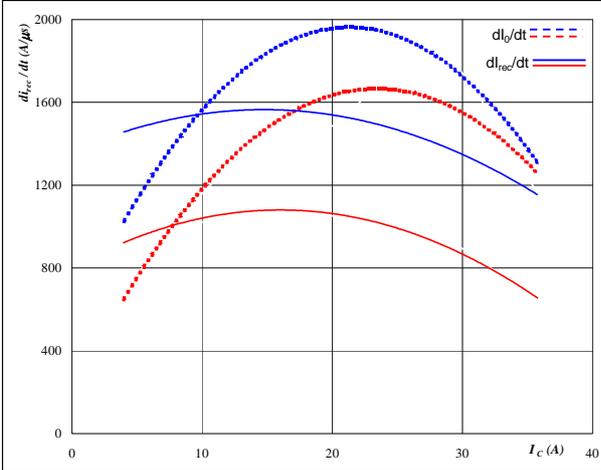


At
 $T_j = 25/125$ °C
 $V_{CE} = 300$ V
 $V_{GE} = 15$ V
 $R_{gon} = 16$ Ω

Figure 18 FWD

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$$dI_0/dt, dI_{rec}/dt = f(R_{gon})$$

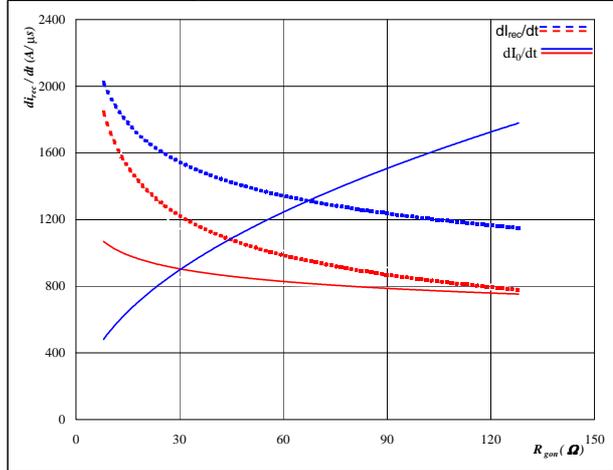


At
 $T_j = 25/125$ °C
 $V_R = 300$ V
 $I_F = 20$ A
 $V_{GE} = 15$ V

Figure 19 IGBT

IGBT transient thermal impedance as a function of pulse width

$$Z_{thj-s} = f(t_p)$$

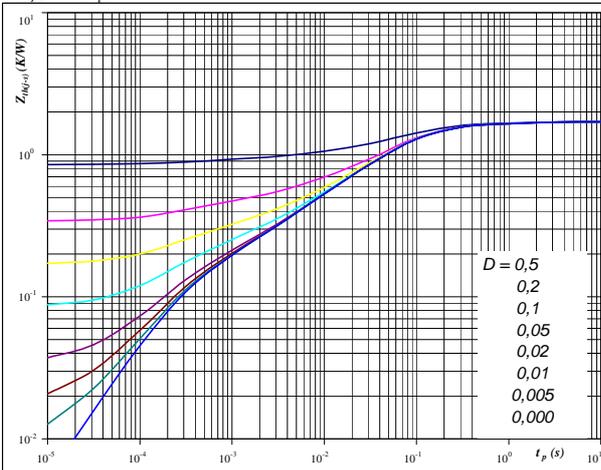

At
 $D = t_p / T$
 $R_{thjH} = 1,70$ K/W


IGBT thermal model values

R (K/W)	Tau (s)
9,97E-02	1,34E+00
3,46E-01	1,70E-01
8,15E-01	5,34E-02
2,54E-01	7,74E-03
7,70E-02	1,33E-03
1,09E-01	2,63E-04

Figure 20 FWD

FWD transient thermal impedance as a function of pulse width

$$Z_{thj-s} = f(t_p)$$

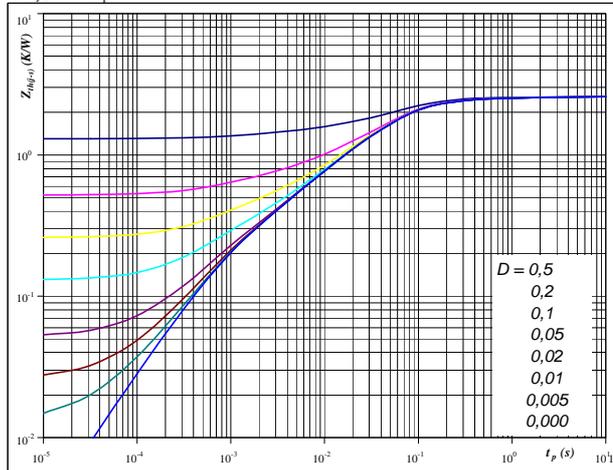

At
 $D = t_p / T$
 $R_{thjH} = 2,60$ K/W

FWD thermal model values

R (K/W)	Tau (s)
6,56E-02	4,59E+00
1,58E-01	5,68E-01
8,97E-01	8,42E-02
1,05E+00	3,29E-02
2,75E-01	4,96E-03
1,51E-01	7,65E-04




Inverter Characteristics

Figure 25 IGBT

Safe operating area as a function of collector-emitter voltage

$I_C = f(V_{CE})$

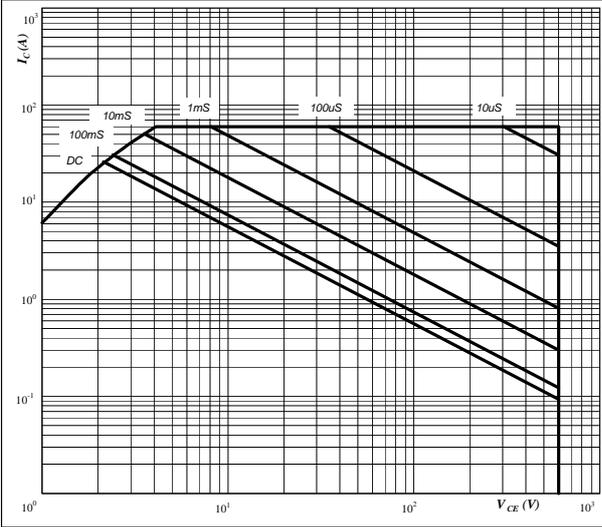


At
 $D =$ single pulse
 $T_s =$ 80 °C
 $V_{GE} =$ 15 V
 $T_j = T_{jmax}$

Figure 26 IGBT

Gate voltage vs Gate charge

$V_{GE} = f(Q_G)$

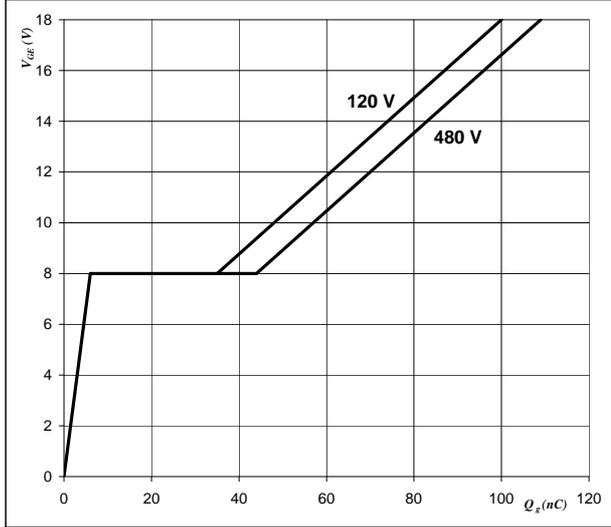


At
 $I_C =$ 20 A

Figure 27 IGBT

Short circuit withstand time as a function of gate-emitter voltage

$t_{sc} = f(V_{GE})$

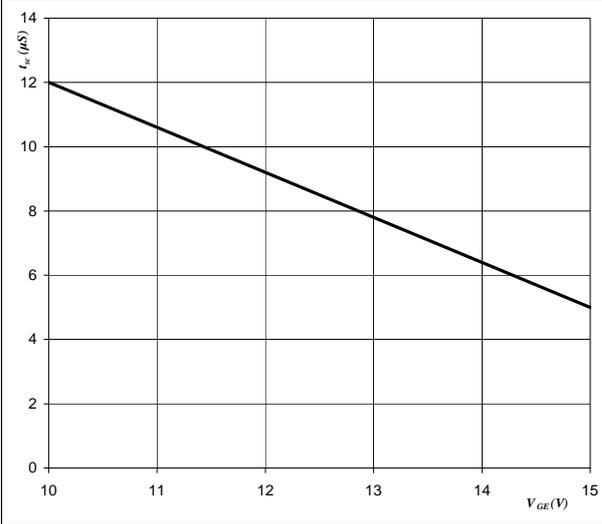


At
 $V_{CE} =$ 600 V
 $T_j \leq$ 175 °C

Figure 28 IGBT

Typical short circuit collector current as a function of gate-emitter voltage

$I_{sc} = f(V_{GE})$

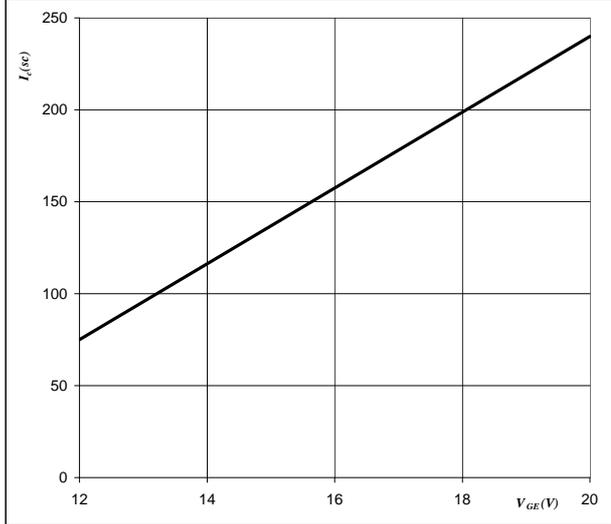


At
 $V_{CE} \leq$ 600 V
 $T_j =$ 175 °C



Inverter Characteristics

Figure 29 IGBT

Reverse bias safe operating area

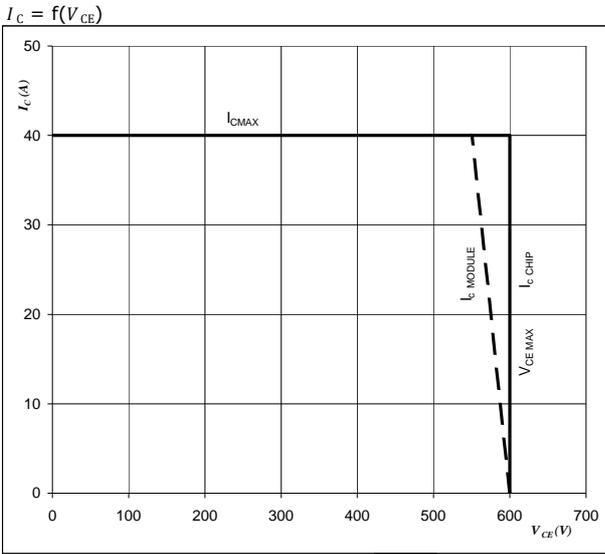

At

$$T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$$

Switching mode : 3phase SPWM




Brake Characteristics

Figure 1 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

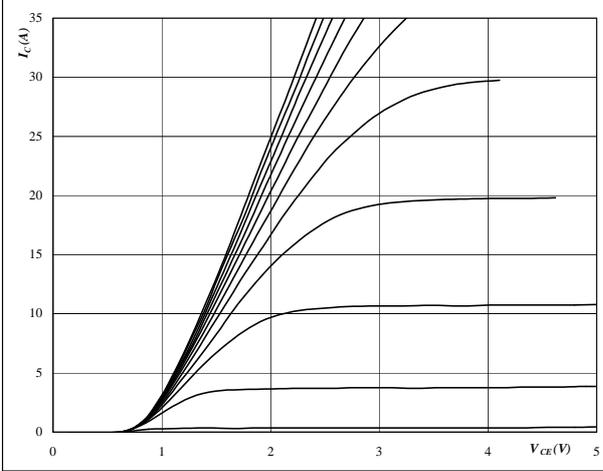


At

$t_p = 250 \mu s$
 $T_j = 25 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

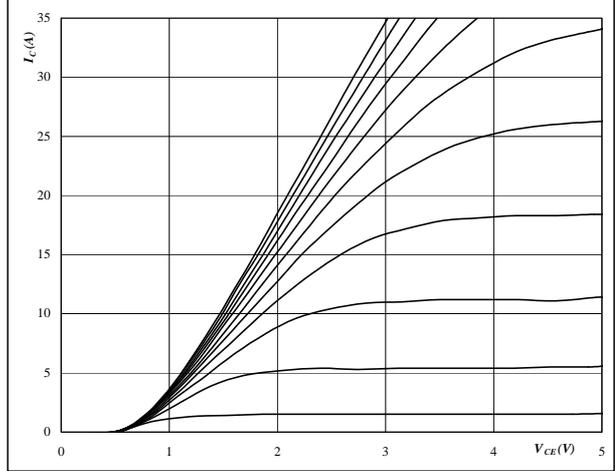


At

$t_p = 250 \mu s$
 $T_j = 125 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 IGBT

Typical transfer characteristics

$I_C = f(V_{GE})$

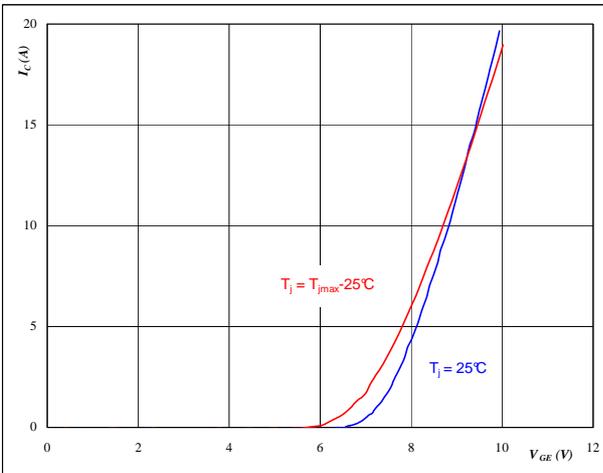


At

$t_p = 250 \mu s$
 $V_{CE} = 10 V$

Figure 4 IGBT

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

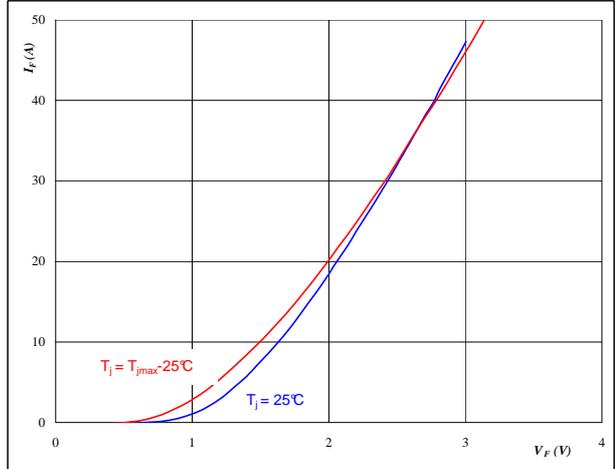

At

$t_p = 250 \mu s$




Brake Characteristics

Figure 5 IGBT

Typical switching energy losses
as a function of collector current

$$E = f(I_C)$$

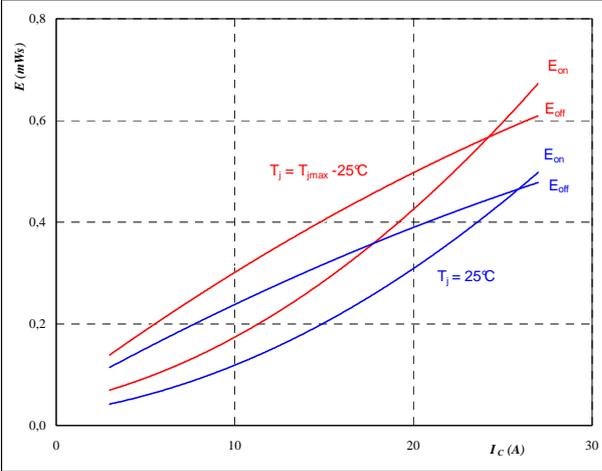


With an inductive load at

$T_j =$	25/125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$R_{gon} =$	16	Ω
$R_{goff} =$	8	Ω

Figure 6 IGBT

Typical switching energy losses
as a function of gate resistor

$$E = f(R_G)$$

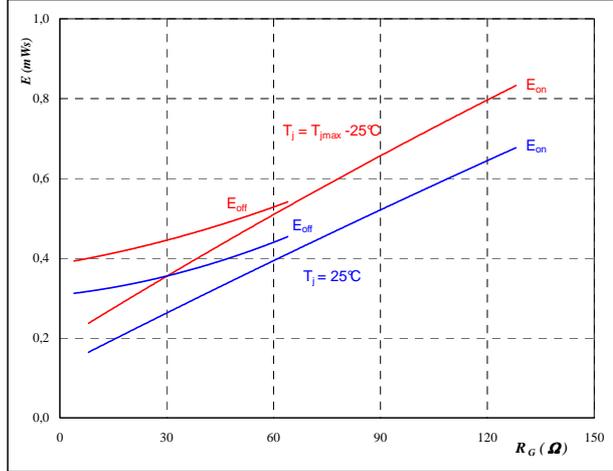


With an inductive load at

$T_j =$	25/125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$I_C =$	15	A

Figure 7 FWD

Typical reverse recovery energy loss
as a function of collector current

$$E_{rec} = f(I_C)$$

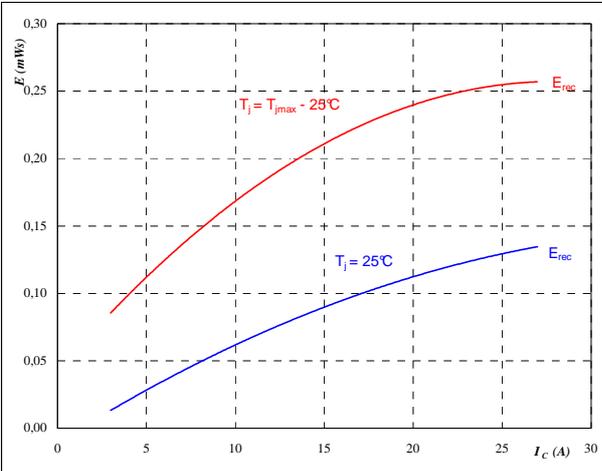


With an inductive load at

$T_j =$	25/125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$R_{gon} =$	16	Ω

Figure 8 FWD

Typical reverse recovery energy loss
as a function of gate resistor

$$E_{rec} = f(R_G)$$

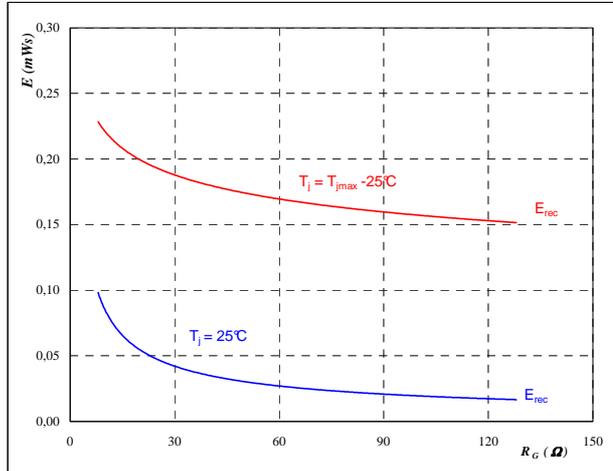

With an inductive load at

$T_j =$	25/125	°C
$V_{CE} =$	300	V
$V_{GE} =$	15	V
$I_C =$	15	A




Brake Charateristics

Figure 9 IGBT

Typical switching times as a function of collector current

$t = f(I_C)$

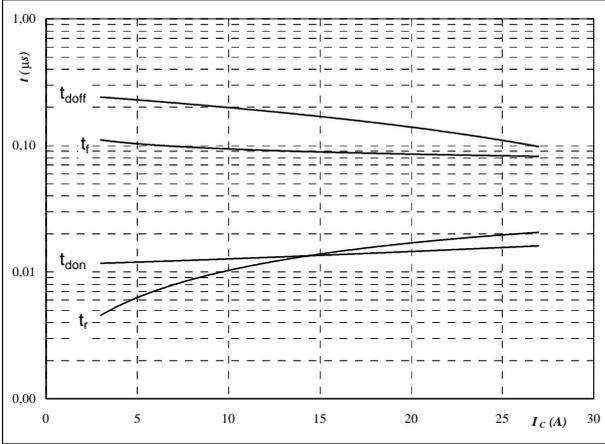


With an inductive load at
 $T_j = 125 \text{ } ^\circ\text{C}$
 $V_{CE} = 300 \text{ V}$
 $V_{GE} = 15 \text{ V}$
 $R_{gon} = 16 \text{ } \Omega$
 $R_{goff} = 8 \text{ } \Omega$

Figure 10 IGBT

Typical switching times as a function of gate resistor

$t = f(R_G)$

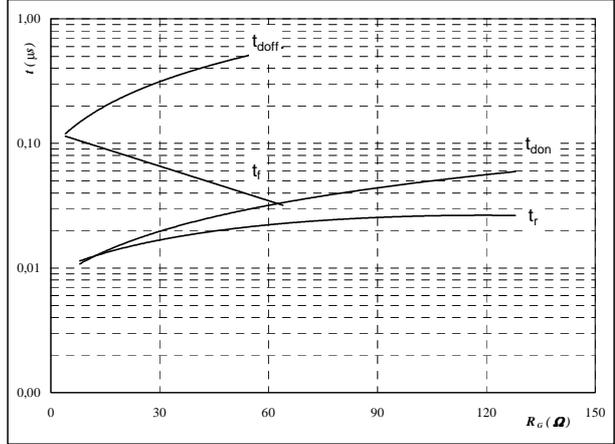


With an inductive load at
 $T_j = 125 \text{ } ^\circ\text{C}$
 $V_{CE} = 300 \text{ V}$
 $V_{GE} = 15 \text{ V}$
 $I_C = 15 \text{ A}$

Figure 11 IGBT

IGBT transient thermal impedance as a function of pulse width

$Z_{thj-s} = f(t_p)$

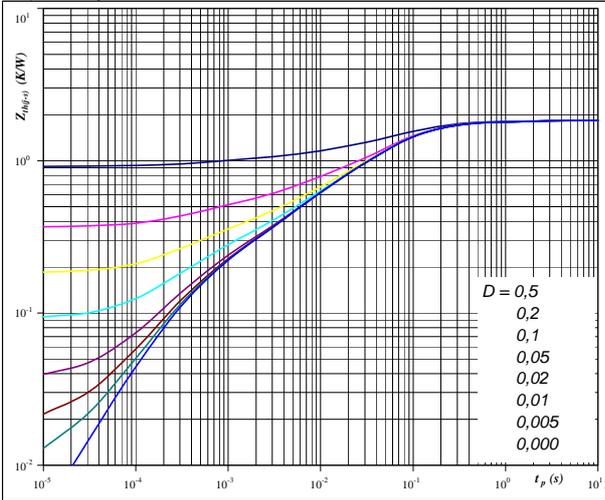


At $D = t_p / T$

$R_{thjH} = 1,83 \text{ K/W}$

Figure 12 FWD

FWD transient thermal impedance as a function of pulse width

$Z_{thj-s} = f(t_p)$

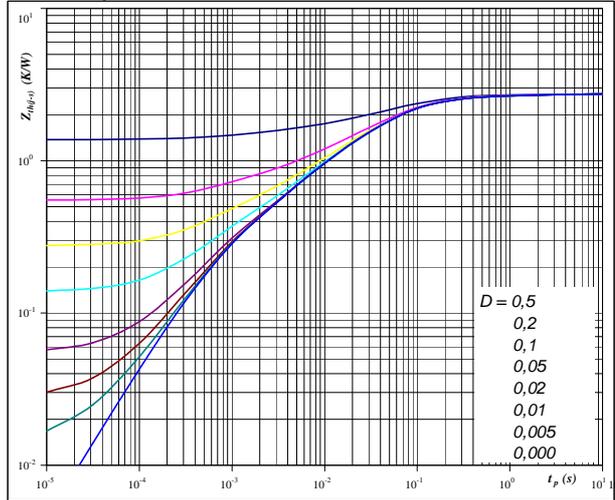

At $D = t_p / T$

$R_{thjH} = 2,75 \text{ K/W}$




Rectifier Diode Characteristics

Figure 1 Diode

Typical diode forward current as a function of forward voltage

$$I_F = f(V_F)$$

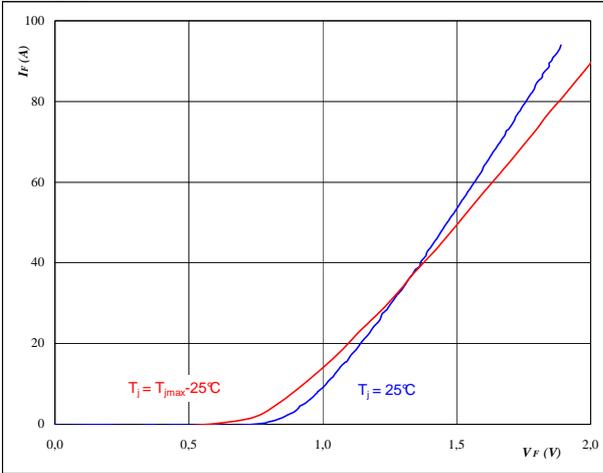


At

$$t_p = 250 \mu\text{s}$$

Figure 2 Diode

Diode transient thermal impedance as a function of pulse width

$$Z_{\text{th}(j-s)} = f(t_p)$$

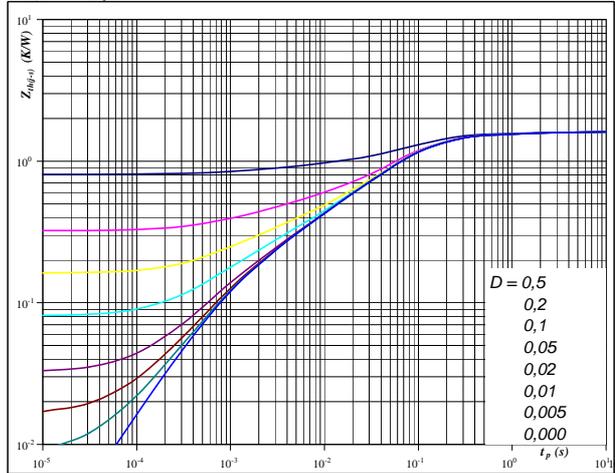

At

$$D = t_p / T$$


$$R_{\text{th}(H)} = 1,61 \text{ K/W}$$

Thermistor

Figure 1 Thermistor

Typical NTC characteristic as a function of temperature

$$R_T = f(T)$$

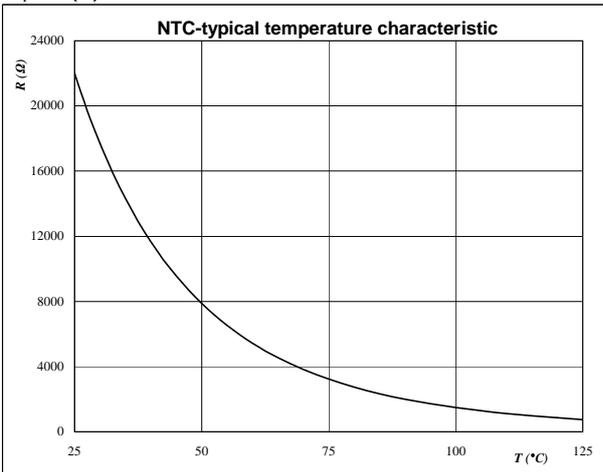




Switching Definitions Inverter

General conditions

T_j	=	125 °C
R_{gon}	=	16 Ω
R_{goff}	=	8 Ω

Figure 1 IGBT


Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff}
 (t_{Eoff} = integrating time for E_{off})

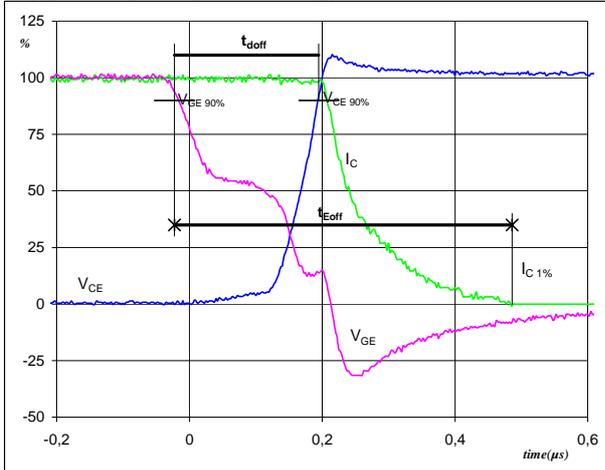

V_{GE} (0%) =	0	V
V_{GE} (100%) =	15	V
V_C (100%) =	300	V
I_C (100%) =	20	A
t_{doff} =	0,21	μ s
t_{Eoff} =	0,51	μ s

Figure 2 IGBT


Turn-on Switching Waveforms & definition of t_{donr} , t_{Eon}
 (t_{Eon} = integrating time for E_{on})

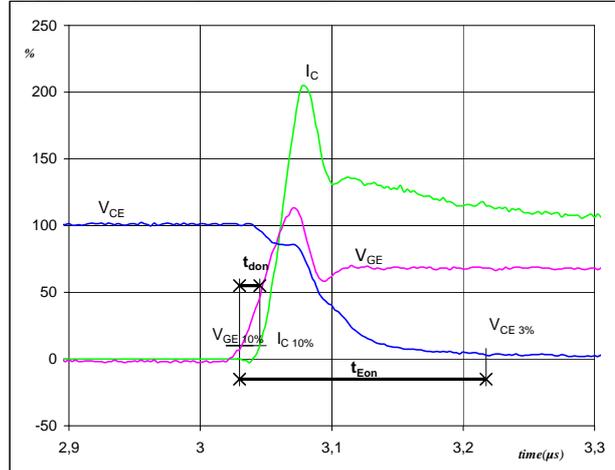

V_{GE} (0%) =	0	V
V_{GE} (100%) =	15	V
V_C (100%) =	300	V
I_C (100%) =	20	A
t_{donr} =	0,01	μ s
t_{Eon} =	0,19	μ s

Figure 3 IGBT


Turn-off Switching Waveforms & definition of t_f

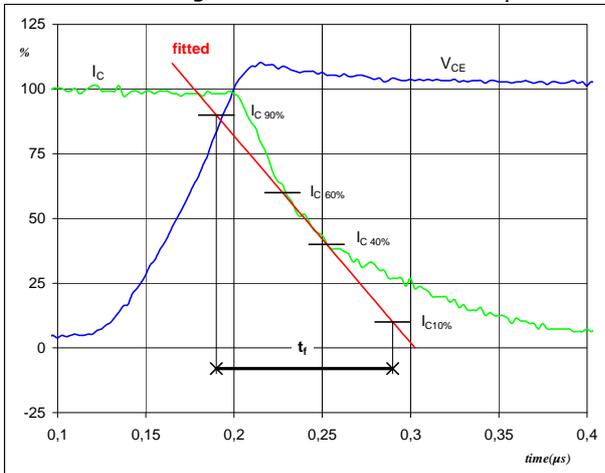

V_C (100%) =	300	V
I_C (100%) =	20	A
t_f =	0,10	μ s

Figure 4 IGBT

Turn-on Switching Waveforms & definition of t_r

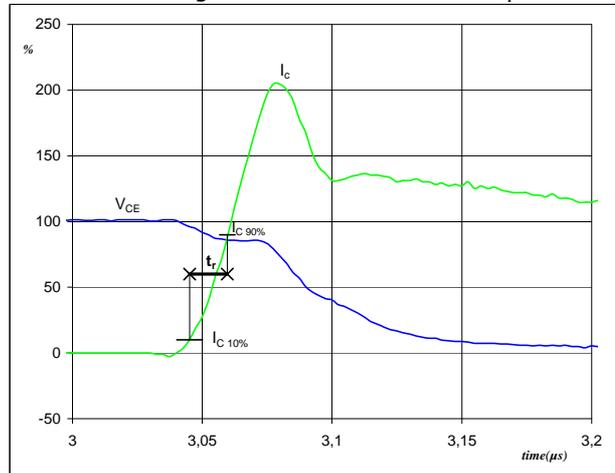


V_C (100%) =	300	V
I_C (100%) =	20	A
t_r =	0,02	μ s




Switching Definitions Inverter

Figure 5 IGBT
Turn-off Switching Waveforms & definition of t_{Eoff}

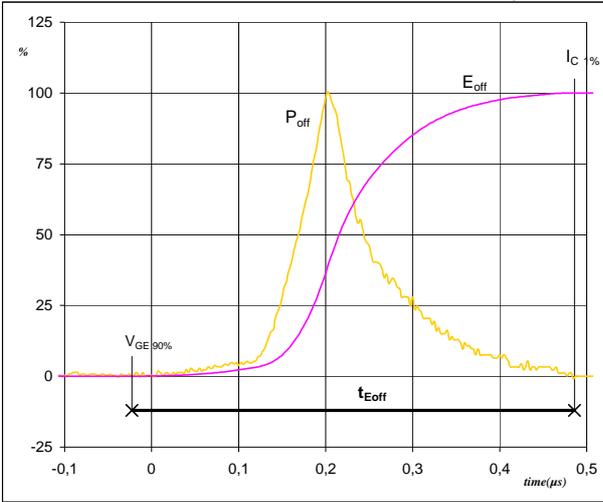


$P_{off} (100\%) = 5,99 \text{ kW}$
 $E_{off} (100\%) = 0,65 \text{ mJ}$
 $t_{Eoff} = 0,51 \text{ μs}$

Figure 6 IGBT
Turn-on Switching Waveforms & definition of t_{Eon}

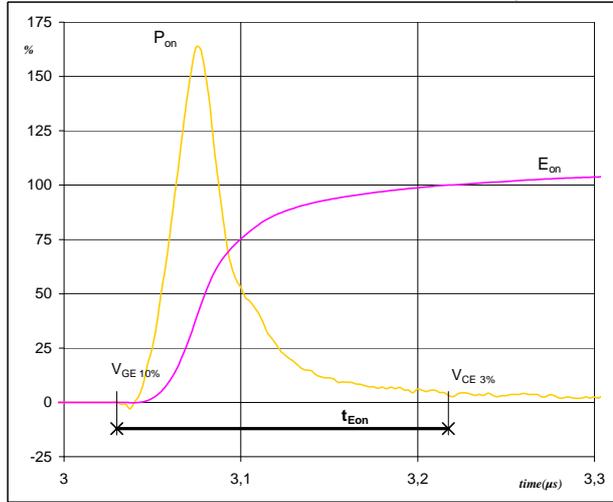

$P_{on} (100\%) = 5,99 \text{ kW}$
 $E_{on} (100\%) = 0,43 \text{ mJ}$
 $t_{Eon} = 0,19 \text{ μs}$

Figure 7 FWD
Turn-off Switching Waveforms & definition of t_{rr}

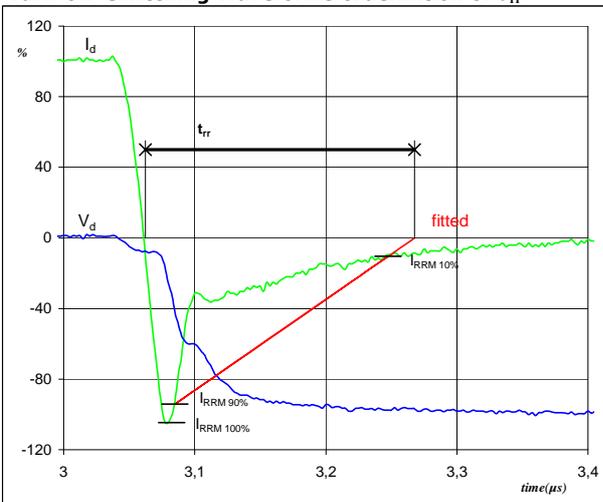


$V_d (100\%) = 300 \text{ V}$
 $I_d (100\%) = 20 \text{ A}$
 $I_{RRM} (100\%) = 21 \text{ A}$
 $t_{rr} = 0,19 \text{ μs}$



Switching Definitions Inverter

Figure 8 FWD


Turn-on Switching Waveforms & definition of t_{Qrr}
 (t_{Qrr} = integrating time for Q_{rr})

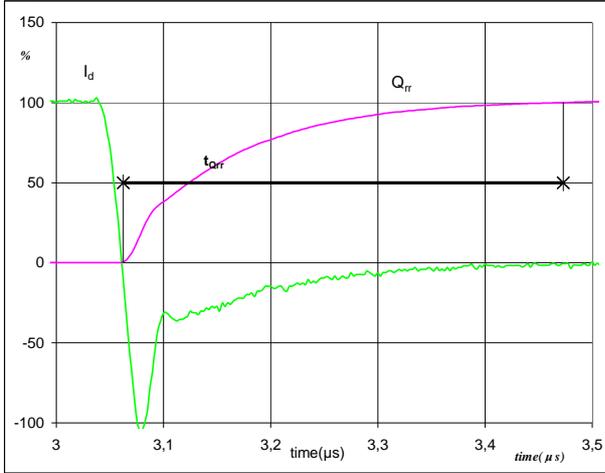

I_d (100%) =	20	A
Q_{rr} (100%) =	1,35	μC
t_{Qrr} =	0,41	μs

Figure 10 FWD

Turn-on Switching Waveforms & definition of t_{Erec}
 (t_{Erec} = integrating time for E_{rec})

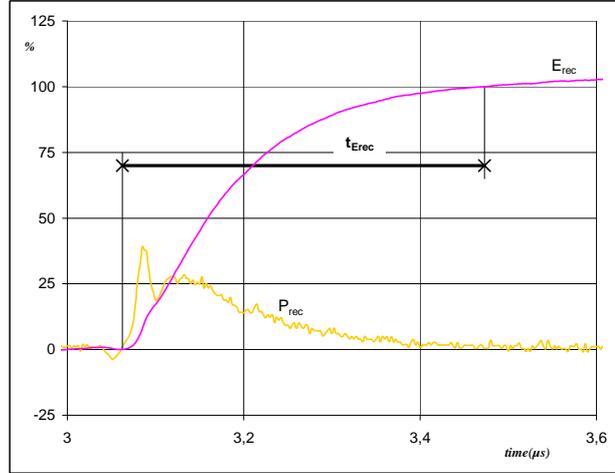

P_{rec} (100%) =	5,99	kW
E_{rec} (100%) =	0,27	mJ
t_{Erec} =	0,41	μs



Ordering Code and Marking - Outline - Pinout


Ordering Code & Marking																									
Version	Ordering Code																								
without thermal paste 12mm housing with solder pins	V23990-P545-A28-PM																								
with thermal paste 12mm housing with solder pins	V23990-P545-A28-/3/-PM																								
without thermal paste 17mm housing with solder pins	V23990-P545-A29-PM																								
without thermal paste 12mm housing 1 phase rectifier with solder pins	V23990-P545-B28-PM																								
with thermal paste 12mm housing 1 phase rectifier with solder pins	V23990-P545-B28-/3/-PM																								
with thermal paste 12mm housing 1 phase rectifier with solder pins	V23990-P545-B128-/3/-PM																								
without thermal paste 17mm housing 1 phase rectifier with solder pins	V23990-P545-B129-PM																								
with thermal paste 17mm housing 1 phase rectifier with solder pins	V23990-P545-B129-/3/-PM																								
without thermal paste 17mm housing without brake with solder pins	V23990-P545-C29-PM																								
without thermal paste 12mm housing 1 phase rectifier without brake with solder pins	V23990-P545-D28-PM																								
with thermal paste 12mm housing 1 phase rectifier without brake with solder pins	V23990-P545-D28-/3/-PM																								
	<table border="1"> <thead> <tr> <th>Text</th> <th>VIN</th> <th>Name&Ver</th> <th>UL</th> <th>Lot</th> <th>Serial</th> </tr> </thead> <tbody> <tr> <td></td> <td>VIN</td> <td>NNNNNNVV</td> <td>UL</td> <td>LLLL</td> <td>SSSS</td> </tr> <tr> <th>Datamatrix</th> <td>Name&Ver</td> <td>Serial</td> <td>Date Code</td> <td></td> <td></td> </tr> <tr> <td></td> <td>NNNNNNVV</td> <td>SSSS</td> <td>WWYY</td> <td></td> <td></td> </tr> </tbody> </table>	Text	VIN	Name&Ver	UL	Lot	Serial		VIN	NNNNNNVV	UL	LLLL	SSSS	Datamatrix	Name&Ver	Serial	Date Code				NNNNNNVV	SSSS	WWYY		
	Text	VIN	Name&Ver	UL	Lot	Serial																			
	VIN	NNNNNNVV	UL	LLLL	SSSS																				
Datamatrix	Name&Ver	Serial	Date Code																						
	NNNNNNVV	SSSS	WWYY																						

Pin table				Outline	
Pin	X	Y	Function		
1	25,5	2,7	NTC1		17 mm housing
2	25,5	0	NTC2		
3	22,8	0	-DC		
4	20,1	0	BRCG		
5	16,2	0	BRCE		
6	13,5	0	G6		
7	10,8	0	E6		
8	8,1	0	G5		
9	5,4	0	E5		
10	2,7	0	G4		
11	0	0	E4		12 mm housing
12	0	19,8	G1		
13	0	22,5	U		
14	7,5	19,8	G2		
15	7,5	22,5	V		
16	15	19,8	G3		
17	15	22,5	W		
18	22,8	22,5	+INV		
19	25,5	22,5	+DC		
20	33,5	22,5	BRC+		
21	33,5	15	L1		
22	33,5	7,5	L2		
23	33,5	0	L3		

Pinout variation	
Module subtype	Not assembled pins
V23990-P545-A28-PM	-
V23990-P545-A29-PM	-
V23990-P545-B28-PM	21
V23990-P545-B128-PM	23
V23990-P545-B129-PM	23
V23990-P545-C29-PM	4, 5, 20
V23990-P545-D28-PM	4, 5, 20, 21



Ordering Code and Marking - Outline - Pinout

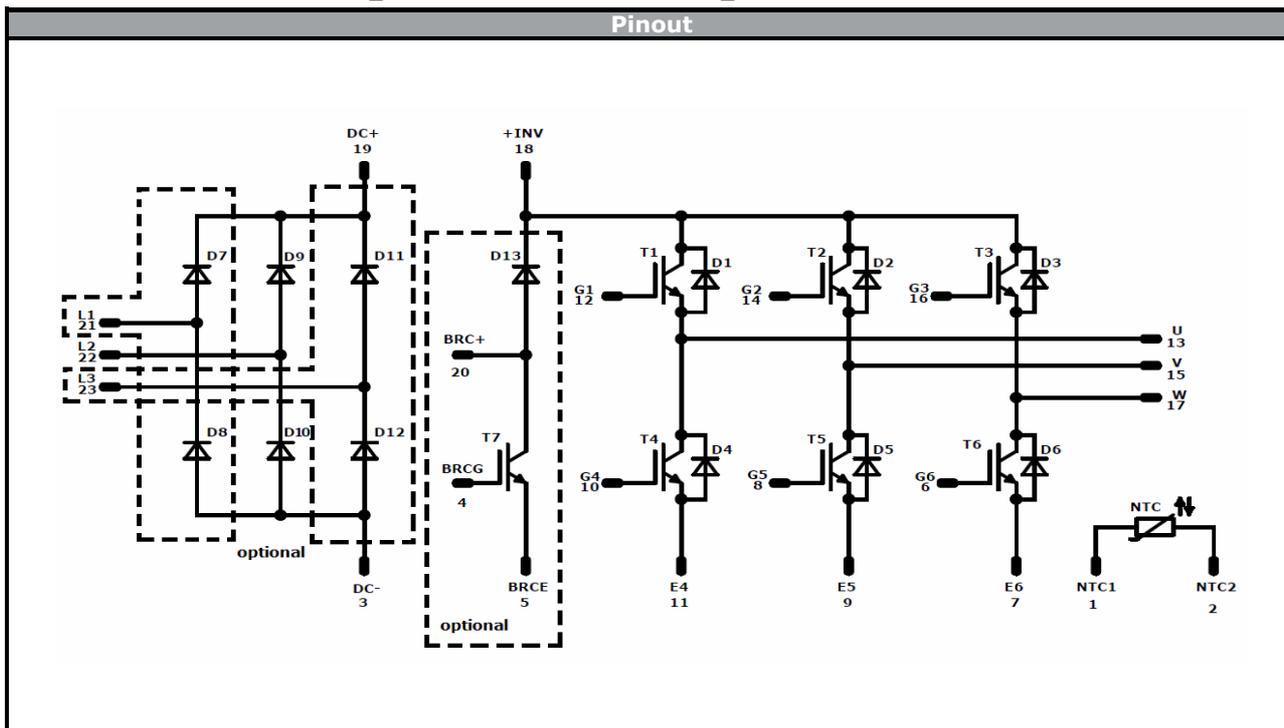

Identification					
ID	Component	Voltage	Current	Function	Comment
T1,T2,T3,T4,T5,T6	IGBT	600V	20A	Inverter Switch	
D1,D2,D3,D4,D5,D6	FWD	600V	20A	Inverter Diode	
T7	IGBT	600V	15A	Brake Switch	
D13	FWD	600V	15A	Brake Diode	
D7,D8,D9,D10,D11,D12	Diode	1600V	25A	Rectifier Diode	
NTC	NTC			Thermistor	



Packaging instruction			
Standard packaging quantity (SPQ)	135	>SPQ Standard	<SPQ Sample

Handling instruction
Handling instructions for <i>flow</i> 0 packages see vincotech.com website.

Package data
Package data for <i>flow</i> 0 packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
V23990-P545-x2x-D8-14	14 Jun. 2019	P545-D28 version added	1,19

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.