
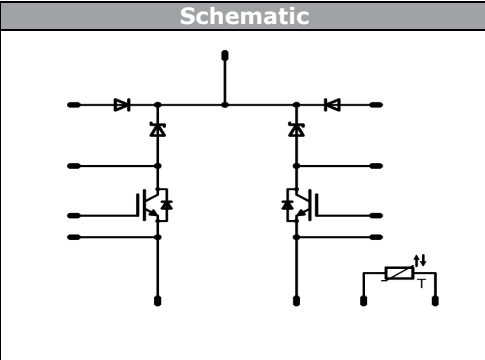




| <i>flow BOOST 0</i>  | 1200 V / 40 A   |
|--|---|
| <div style="background-color: #eee; padding: 2px; margin-bottom: 5px;"><b>Features</b></div> <ul style="list-style-type: none"> <li>High efficiency dual boost</li> <li>Ultra fast switching frequency</li> <li>Low Inductance Layout</li> <li>1200V IGBT and 1200V SiC diode</li> </ul> | <div style="background-color: #eee; padding: 2px; margin-bottom: 5px;"><b>flow 0 housing</b></div>  |
| <div style="background-color: #eee; padding: 2px; margin-bottom: 5px;"><b>Target Applications</b></div> <ul style="list-style-type: none"> <li>solar inverter</li> </ul>   | <div style="background-color: #eee; padding: 2px; margin-bottom: 5px;"><b>Schematic</b></div>       |
| <div style="background-color: #eee; padding: 2px; margin-bottom: 5px;"><b>Types</b></div> <ul style="list-style-type: none"> <li>V23990-P629-L48-PM</li> <li>V23990-P629-L48Y-PM</li> <li>V23990-P629-L49-PM</li> <li>V23990-P629-L49Y-PM</li> </ul>                                     |   |

## Maximum Ratings

$T_j=25^{\circ}\text{C}$ , unless otherwise specified

| Parameter                              | Symbol               | Condition   | Value     | Unit                 |
|--|----------------------|---|-----------|----------------------|
| <b>Bypass Diode (D7,D8)</b>            |                      |   |           |                      |
| Repetitive peak reverse voltage        | $V_{RRM}$            |   | 1600      | V                    |
| Mean forward current                   | $I_{FAV}$            | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$                 | 34        | A                    |
| Surge (non-repetitive) forward current | $I_{FSM}$            | $t_p=10\text{ms}$ $T_j=150^{\circ}\text{C}$             | 200       | A                    |
| $I^2t$ -value                          | $I^2t$               |   | 200       | $\text{A}^2\text{s}$ |
| Power dissipation                      | $P_{tot}$            | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$                 | 42        | W                    |
| Maximum Junction Temperature           | $T_{jmax}$           |   | 150       | $^{\circ}\text{C}$   |
| <b>Input Boost IGBT (T1,T2)</b>        |                      |   |           |                      |
| Collector-emitter break down voltage   | $V_{CES}$            |   | 1200      | V                    |
| DC collector current                   | $I_C$                | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$                 | 41        | A                    |
| Pulsed collector current               | $I_{CRM}$            | $t_p$ limited by $T_{jmax}$                             | 120       | A                    |
| Turn off safe operating area           |                      | $T_j \leq 150^{\circ}\text{C}$<br>$V_{CE} \leq V_{CES}$ | 80        | A                    |
| Power dissipation                      | $P_{tot}$            | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$                 | 113       | W                    |
| Gate-emitter peak voltage              | $V_{GE}$             |   | $\pm 20$  | V                    |
| Short circuit ratings                  | $t_{SC}$<br>$V_{CC}$ | $T_j \leq 150^{\circ}\text{C}$<br>$V_{GE} = 15\text{V}$ | 10<br>800 | $\mu\text{s}$<br>V   |
| Maximum Junction Temperature           | $T_{jmax}$           |   | 175       | $^{\circ}\text{C}$   |



## Maximum Ratings

$T_j=25^{\circ}\text{C}$ , unless otherwise specified

| Parameter                              | Symbol     | Condition                                  | Value | Unit               |
|--|------------|--|-------|--------------------|
| <b>Input Boost FWD (D1,D2,D4,D5)</b>   |            |  |       |                    |
| Peak Repetitive Reverse Voltage        | $V_{RRM}$  |  | 1200  | V                  |
| Mean forward current                   | $I_{FAV}$  | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$    | 18    | A                  |
| Surge (non-repetitive) forward current | $I_{FSM}$  | $t_p=10\text{ms}$ $T_j=25^{\circ}\text{C}$ | 92    | A                  |
| Repetitive peak forward current        | $I_{FRM}$  | Half Sine Wave $T_j=25^{\circ}\text{C}$    | 52    | A                  |
| Power dissipation                      | $P_{tot}$  | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$    | 50    | W                  |
| Maximum Junction Temperature           | $T_{jmax}$ |  | 175   | $^{\circ}\text{C}$ |

### Input Boost Inv. Diode (D9,D10)

|                                 |            |   |      |                    |
|---------------------------------|------------|---|------|--------------------|
| Peak Repetitive Reverse Voltage | $V_{RRM}$  |   | 1200 | V                  |
| Mean forward current            | $I_{FAV}$  | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$ | 6    | A                  |
| Repetitive peak forward current | $I_{FRM}$  | $t_p$ limited by $T_{jmax}$             | 6    | A                  |
| Power dissipation               | $P_{tot}$  | $T_j=T_{jmax}$ $T_s=80^{\circ}\text{C}$ | 26   | W                  |
| Maximum Junction Temperature    | $T_{jmax}$ |   | 150  | $^{\circ}\text{C}$ |

### Thermal Properties

|   |           |  |                            |                    |
|---|-----------|--|----------------------------|--------------------|
| Storage temperature                             | $T_{stg}$ |  | -40...+125                 | $^{\circ}\text{C}$ |
| Operation temperature under switching condition | $T_{op}$  |  | -40...+( $T_{jmax} - 25$ ) | $^{\circ}\text{C}$ |

### Insulation Properties

|                    |  |                                 |          |    |
|--------------------|--|---------------------------------|----------|----|
| Insulation voltage |  | $t=2\text{s}$ DC voltage        | 4000     | V  |
| Creepage distance  |  |                                 | min 12,7 | mm |
| Clearance          |  | 12mm housing with solder pins   | min 9,55 | mm |
| Clearance          |  | 12mm housing with pressfit pins | min 9,57 | mm |
| Clearance          |  | 17mm housing                    | min 12,7 | mm |



Characteristic Values

| Parameter | Symbol | Conditions                         |   |   |            |     | Value |     |  | Unit |
|-----------|--------|------------------------------------|---|---|------------|-----|-------|-----|--|------|
|           |        | $V_{GE}$ [V]<br>or<br>$V_{GS}$ [V] | $V_r$ [V]<br>or<br>$V_{CE}$ [V]<br>or<br>$V_{DS}$ [V] | $I_C$ [A]<br>or<br>$I_F$ [A]<br>or<br>$I_D$ [A] | $T_j$ [°C] | Min | Typ   | Max |  |      |

**Bypass Diode (D7,D8)**

|   |               |  |  |      |    |           |     |                |      |          |
|---|---------------|--|--|------|----|-----------|-----|----------------|------|----------|
| Forward voltage                               | $V_F$         |  |  |      | 25 | 25<br>125 | 0,7 | 1,15<br>1,11   | 1,4  | V        |
| Threshold voltage (for power loss calc. only) | $V_{th}$      |  |  |      | 25 | 25<br>125 |     | 0,92<br>0,82   |      | V        |
| Slope resistance (for power loss calc. only)  | $r_t$         |  |  |      | 25 | 25<br>125 |     | 0,009<br>0,012 |      | $\Omega$ |
| Reverse current                               | $I_r$         |  |  | 1500 |    | 25<br>125 |     |                | 0,05 | mA       |
| Thermal resistance junction to sink           | $R_{th(j-s)}$ | phase-change material<br>$\lambda=3,4W/mK$ |  |      |    |           |     | 1,67           |      | K/W      |

**Input Boost IGBT (T1,T2)**

|                                      |               |   |                 |       |        |               |     |             |      |          |
|--------------------------------------|---------------|---|-----------------|-------|--------|---------------|-----|-------------|------|----------|
| Gate emitter threshold voltage       | $V_{GE(th)}$  |   | $V_{GE}=V_{CE}$ |       | 0,0015 | 25<br>150     | 5,2 | 5,8         | 6,4  | V        |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ |   | 15              |       | 40     | 25<br>150     | 1,7 | 2,1<br>2,48 | 2,6  | V        |
| Collector-emitter cut-off            | $I_{CES}$     |   | 0               | 1200  |        | 25<br>150     |     |             | 0,25 | mA       |
| Gate-emitter leakage current         | $I_{GES}$     |   | 20              | 0     |        | 25<br>150     |     |             | 120  | nA       |
| Integrated Gate resistor             | $R_{gint}$    |   |                 |       |        |               |     | none        |      | $\Omega$ |
| Turn-on delay time                   | $t_{d(on)}$   | $R_{goff}=16 \Omega$<br>$R_{gon}=16 \Omega$ | 15              | 700   | 40     | 25            |     | 35          |      | ns       |
| Rise time                            | $t_r$         |   |                 |       |        | 150           |     | 34,2        |      |          |
| Turn-off delay time                  | $t_{d(off)}$  |   |                 |       |        | 25            |     | 26,4        |      |          |
| Fall time                            | $t_f$         |   |                 |       |        | 150           |     | 27,2        |      |          |
| Turn-on energy loss                  | $E_{on}$      |   |                 |       |        | 25            |     | 372,2       |      |          |
| Turn-off energy loss                 | $E_{off}$     | 150   |                 | 430,8 |        | 2,061<br>2,19 |     |             |      | mWs      |
| Input capacitance                    | $C_{ies}$     |   |                 |       |        |               |     | 2360        |      | pF       |
| Output capacitance                   | $C_{oss}$     | f=1MHz                                      | 0               | 25    |        | 25            |     | 230         |      |          |
| Reverse transfer capacitance         | $C_{rss}$     |   |                 |       |        |               |     | 125         |      |          |
| Gate charge                          | $Q_G$         | f=1MHz                                      | 0               | 25    | 40     | 25            |     | 192         |      | nC       |
| Thermal resistance junction to sink  | $R_{th(j-s)}$ | phase-change material<br>$\lambda=3,4W/mK$  |                 |       |        |               |     | 0,84        |      | K/W      |

**Input Boost FWD (D1,D2,D4,D5)**

|                                       |                      |  |    |      |    |           |   |                |     |            |
|---------------------------------------|----------------------|--|----|------|----|-----------|---|----------------|-----|------------|
| Forward voltage                       | $V_F$                |  |    |      | 10 | 25<br>150 | 1 | 1,46<br>1,8    | 2   | V          |
| Reverse leakage current               | $I_{rm}$             |  |    | 1200 |    | 25<br>150 |   |                | 300 | $\mu A$    |
| Peak recovery current                 | $I_{RRM}$            | $R_{goff}=16 \Omega$                       | 15 | 700  | 40 | 25        |   | 7,78           |     | A          |
| Reverse recovery time                 | $t_{rr}$             |  |    |      |    | 150       |   | 8,1            |     |            |
| Reverse recovery charge               | $Q_{rr}$             |  |    |      |    | 25        |   | 9,5            |     |            |
| Reverse recovered energy              | $E_{rec}$            |  |    |      |    | 150       |   | 0,04<br>0,04   |     |            |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ |  |    |      |    | 25        |   | 0,002<br>0,002 |     |            |
| Thermal resistance junction to sink   | $R_{th(j-s)}$        | phase-change material<br>$\lambda=3,4W/mK$ |    |      |    |           |   | 2480<br>2790   |     | A/ $\mu s$ |
| Thermal resistance junction to sink   | $R_{th(j-s)}$        | phase-change material<br>$\lambda=3,4W/mK$ |    |      |    |           |   | 1,88           |     | K/W        |

**Input Boost Inv. Diode (D9,D10)**

|                                     |               |  |  |  |   |           |  |              |  |     |
|-------------------------------------|---------------|--|--|--|---|-----------|--|--------------|--|-----|
| Diode forward voltage               | $V_F$         |  |  |  | 3 | 25<br>125 |  | 1,65<br>1,58 |  | V   |
| Thermal resistance junction to sink | $R_{th(j-s)}$ | phase-change material<br>$\lambda=3,4W/mK$ |  |  |   |           |  | 2,72         |  | K/W |



### Characteristic Values

| Parameter                  | Symbol         | Conditions                         |   |   |            |      | Value |      |   | Unit |
|----------------------------|----------------|------------------------------------|---|---|------------|------|-------|------|---|------|
|                            |                | $V_{GE}$ [V]<br>or<br>$V_{GS}$ [V] | $V_r$ [V]<br>or<br>$V_{CE}$ [V]<br>or<br>$V_{DS}$ [V] | $I_C$ [A]<br>or<br>$I_F$ [A]<br>or<br>$I_D$ [A] | $T_j$ [°C] | Min  | Typ   | Max  |   |      |
| <b>Thermistor</b>          |                |                                    |   |   |            |      |       |      |   |      |
| Rated resistance           | $R$            |                                    |   |   | 25         |      | 21,5  |      |   | kΩ   |
| Deviation of R100          | $\Delta_{R/R}$ | $R_{100}=1486 \Omega$              |   |   | 25         | -4,5 |       | +4,5 |   | %    |
| Power dissipation          | $P$            |                                    |   |   | 25         |      | 210   |      |   | mW   |
| Power dissipation constant |                |                                    |   |   | 25         |      | 3,5   |      |   | mW/K |
| B-value                    | B(25/50)       |                                    |   |   | 25         |      | 3884  |      |   | K    |
| B-value                    | B(25/100)      |                                    |   |   | 25         |      | 3964  |      |   | K    |
| Vincotech NTC Reference    |                |                                    |   |   |            |      |       |      | F |      |




### INPUT BOOST

**Figure 1** BOOST IGBT

**Typical output characteristics**

$I_C = f(V_{CE})$

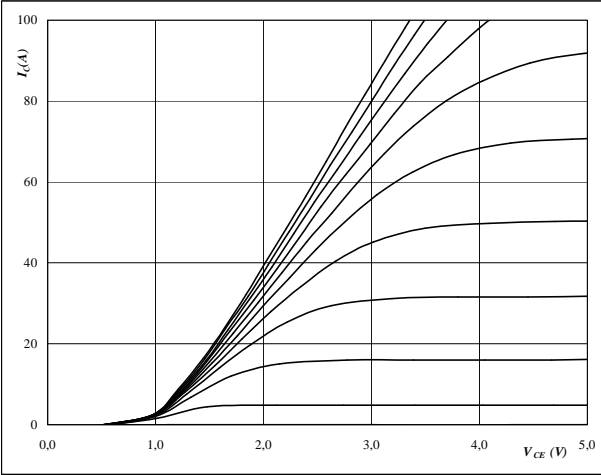


**At**

$t_p = 250 \mu s$   
 $T_j = 25 \text{ } ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

**Figure 2** BOOST IGBT

**Typical output characteristics**

$I_C = f(V_{CE})$

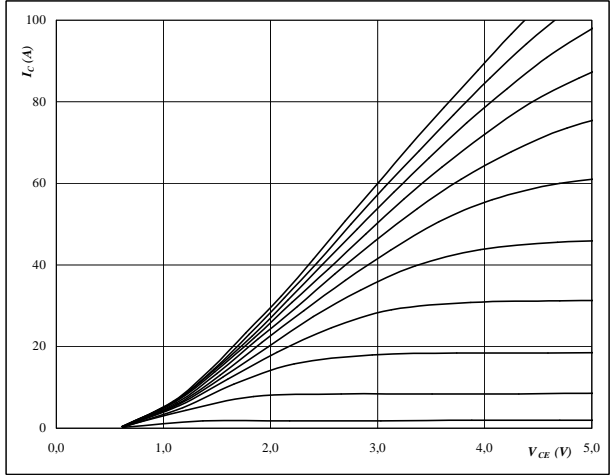


**At**

$t_p = 250 \mu s$   
 $T_j = 125 \text{ } ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

**Figure 3** BOOST IGBT

**Typical transfer characteristics**

$I_C = f(V_{GS})$

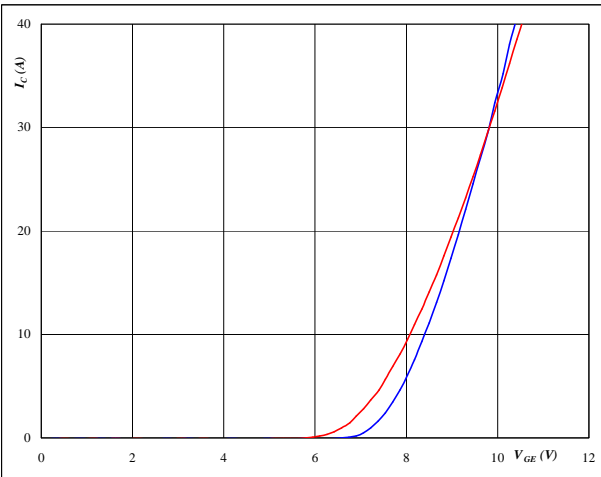


**At**

$t_p = 250 \mu s$   
 $V_{CE} = 10 V$   
 $T_j = 25/125 \text{ } ^\circ C$

**Figure 4** BOOST FWD

**Typical diode forward current as a function of forward voltage**

$I_F = f(V_F)$

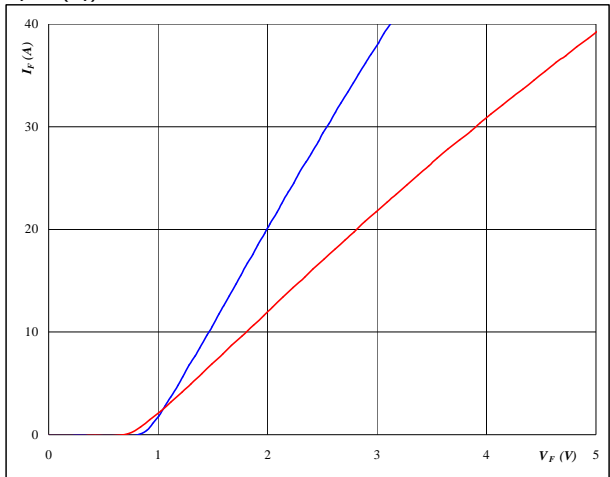

**At**

$T_j = 25/125 \text{ } ^\circ C$   
 $t_p = 250 \mu s$




### INPUT BOOST

**Figure 5** BOOST IGBT

Typical switching energy losses  
as a function of collector current

$E = f(I_C)$

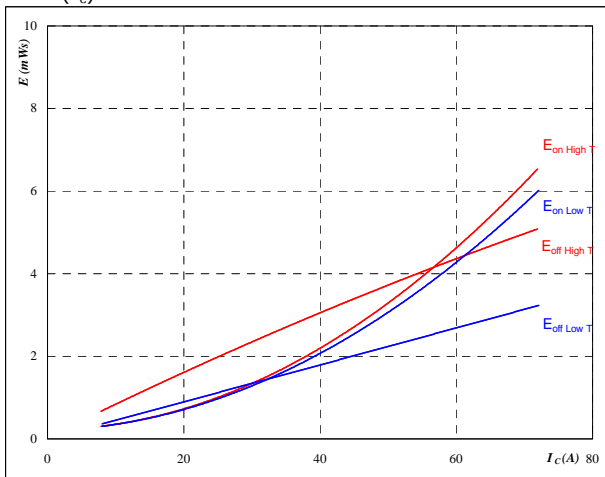


With an inductive load at

- $T_j = 25/125 \text{ } ^\circ\text{C}$
- $V_{CE} = 700 \text{ V}$
- $V_{GE} = \pm 15 \text{ V}$
- $R_{gon} = 16 \text{ } \Omega$
- $R_{goff} = 16 \text{ } \Omega$

**Figure 6** BOOST IGBT

Typical switching energy losses  
as a function of gate resistor

$E = f(R_G)$

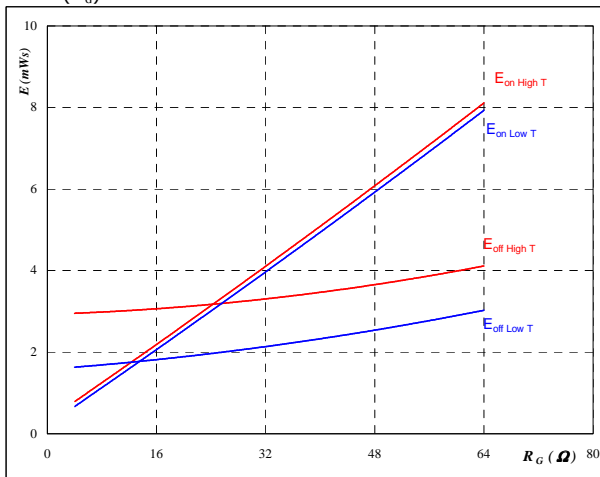


With an inductive load at

- $T_j = 25/125 \text{ } ^\circ\text{C}$
- $V_{CE} = 700 \text{ V}$
- $V_{GE} = \pm 15 \text{ V}$
- $I_D = 40 \text{ A}$

**Figure 7** BOOST FWD

Typical reverse recovery energy loss  
as a function of collector current

$E_{rec} = f(I_C)$

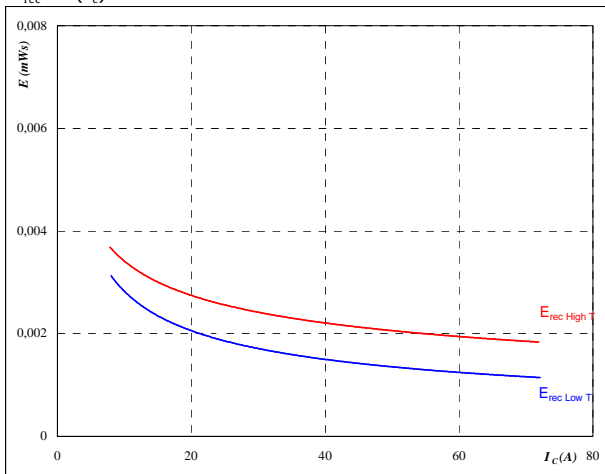


With an inductive load at

- $T_j = 25/125 \text{ } ^\circ\text{C}$
- $V_{CE} = 700 \text{ V}$
- $V_{GE} = \pm 15 \text{ V}$
- $R_{gon} = 16 \text{ } \Omega$
- $R_{goff} = 16 \text{ } \Omega$

**Figure 8** BOOST FWD

Typical reverse recovery energy loss  
as a function of gate resistor

$E_{rec} = f(R_G)$

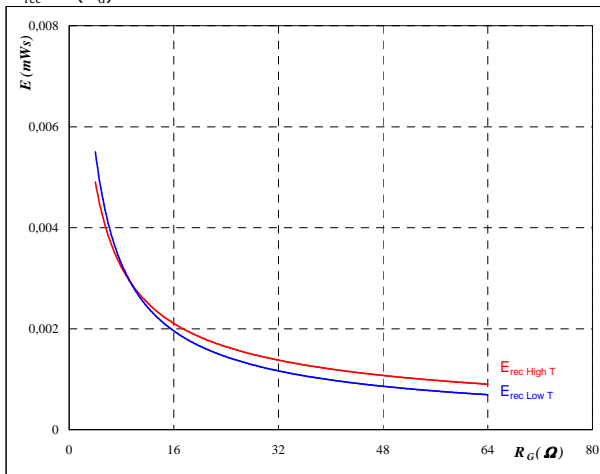

With an inductive load at

- $T_j = 25/125 \text{ } ^\circ\text{C}$
- $V_{CE} = 700 \text{ V}$
- $V_{GE} = \pm 15 \text{ V}$
- $I_C = 40 \text{ A}$




## INPUT BOOST

**Figure 9** BOOST IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

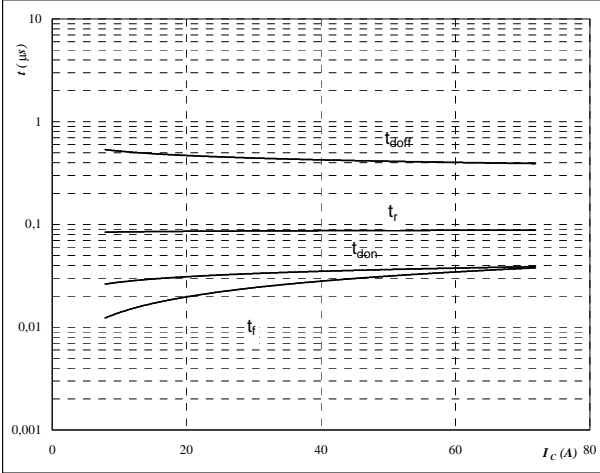


With an inductive load at

|              |     |    |
|--------------|-----|----|
| $T_j =$      | 125 | °C |
| $V_{CE} =$   | 700 | V  |
| $V_{GE} =$   | ±15 | V  |
| $R_{gon} =$  | 16  | Ω  |
| $R_{goff} =$ | 16  | Ω  |

**Figure 10** BOOST IGBT

Typical switching times as a function of gate resistor

$$t = f(R_G)$$

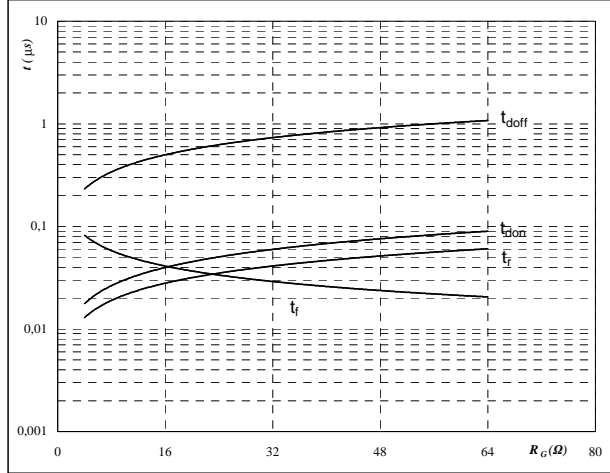


With an inductive load at

|            |     |    |
|------------|-----|----|
| $T_j =$    | 125 | °C |
| $V_{CE} =$ | 700 | V  |
| $V_{GE} =$ | ±15 | V  |
| $I_C =$    | 40  | A  |

**Figure 11** BOOST FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

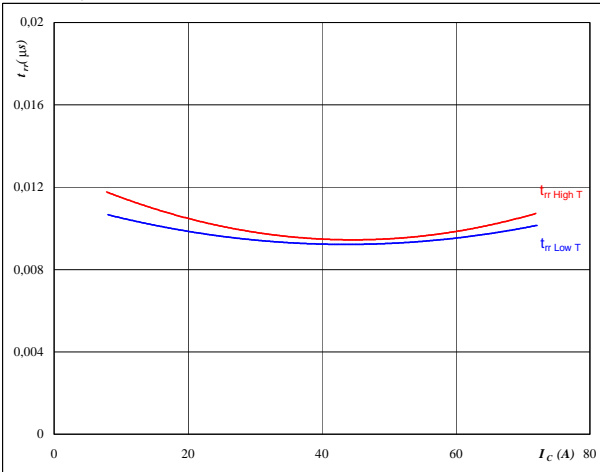


**At**

|             |        |    |
|-------------|--------|----|
| $T_j =$     | 25/125 | °C |
| $V_{CE} =$  | 700    | V  |
| $V_{GE} =$  | ±15    | V  |
| $R_{gon} =$ | 16     | Ω  |

**Figure 12** BOOST FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

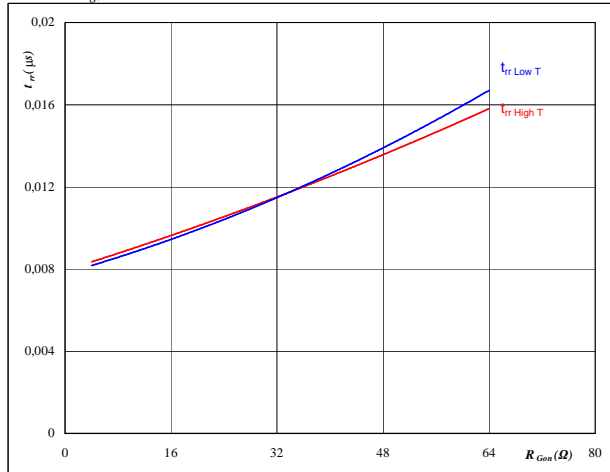

**At**

|            |        |    |
|------------|--------|----|
| $T_j =$    | 25/125 | °C |
| $V_R =$    | 700    | V  |
| $I_F =$    | 40     | A  |
| $V_{GE} =$ | ±15    | V  |




## INPUT BOOST

**Figure 13** BOOST FWD

Typical reverse recovery charge as a function of collector current

$$Q_{rr} = f(I_C)$$

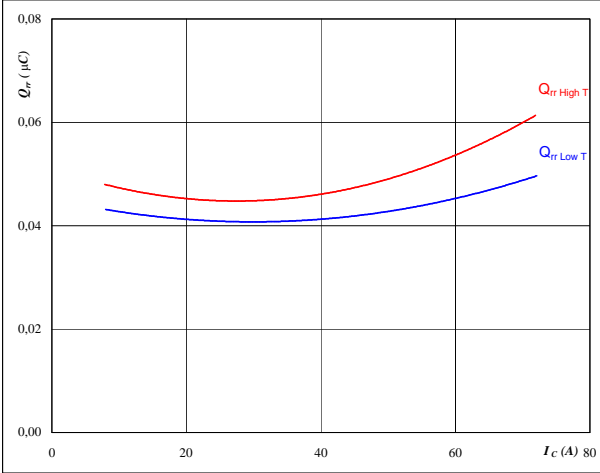


**At**

$T_j = 25/125$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$  Ω

**Figure 14** BOOST FWD

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$$Q_{rr} = f(R_{gon})$$

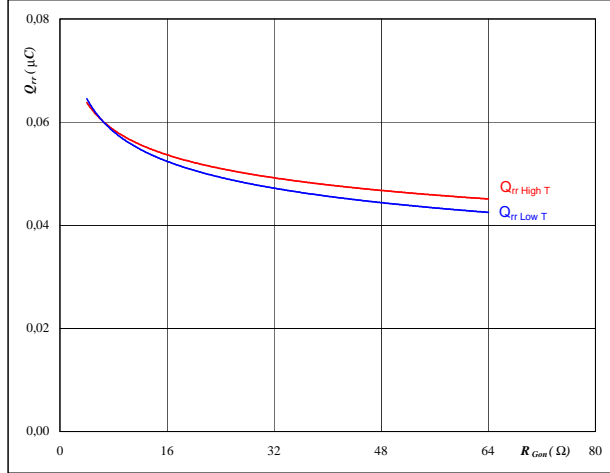


**At**

$T_j = 25/125$  °C  
 $V_R = 700$  V  
 $I_T = 40$  A  
 $V_{GE} = \pm 15$  V

**Figure 15** BOOST FWD

Typical reverse recovery current as a function of collector current

$$I_{RRM} = f(I_C)$$

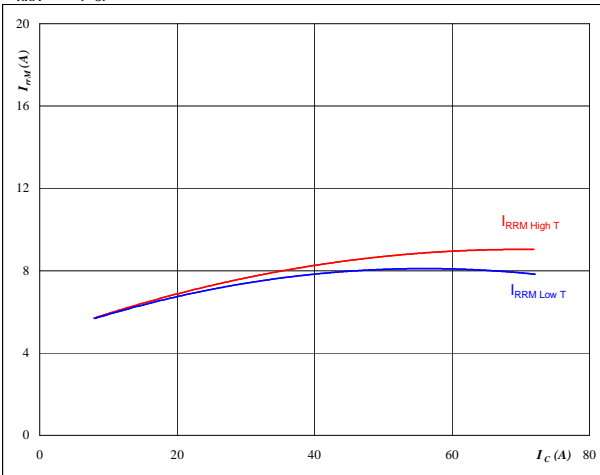


**At**

$T_j = 25/125$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$  Ω

**Figure 16** BOOST FWD

Typical reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RRM} = f(R_{gon})$$

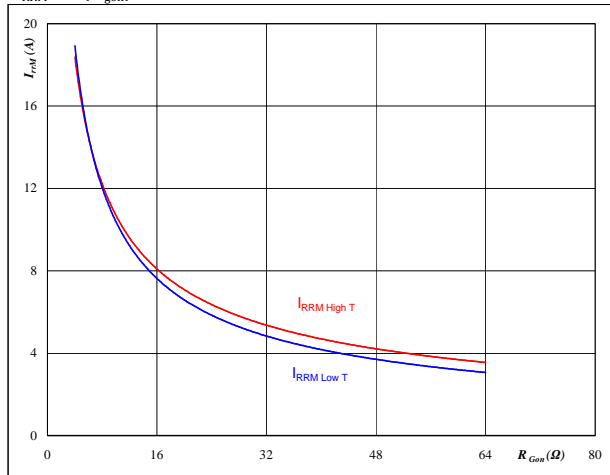

**At**

$T_j = 25/125$  °C  
 $V_R = 700$  V  
 $I_F = 40$  A  
 $V_{GE} = \pm 15$  V






### INPUT BOOST

**Figure 17** BOOST FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current

$$dI_0/dt, dI_{rec}/dt = f(I_c)$$

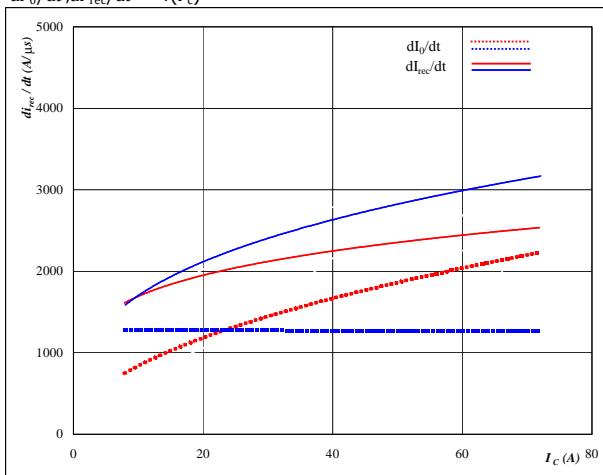


**At**  
 $T_j = 25/125$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$  Ω

**Figure 18** BOOST FWD

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$$dI_0/dt, dI_{rec}/dt = f(R_{gon})$$

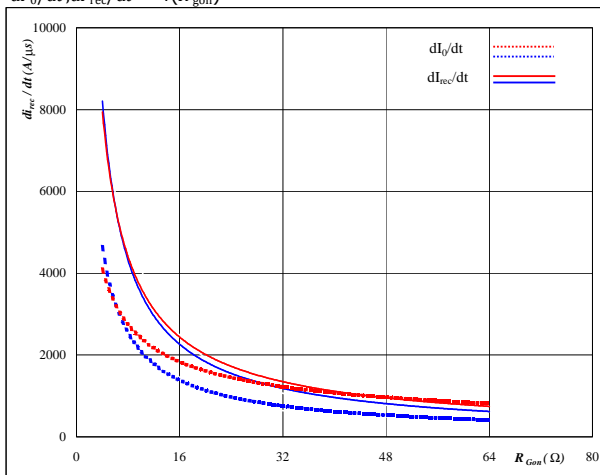


**At**  
 $T_j = 25/125$  °C  
 $V_R = 700$  V  
 $I_F = 40$  A  
 $V_{GE} = \pm 15$  V

**Figure 19** BOOST IGBT

IGBT transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

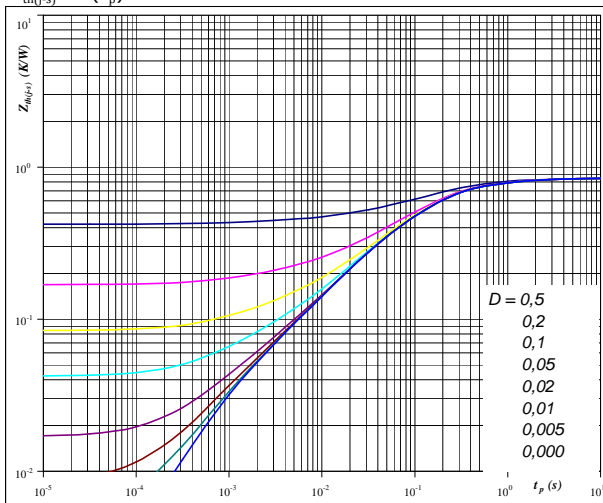

**At**  
 $D = t_p / T$   
 $R_{th(j-s)} = 0,84$  K/W


IGBT thermal model values

| R (K/W)  | τ (s)    |
|----------|----------|
| 1,07E-01 | 1,41E+00 |
| 3,91E-01 | 1,88E-01 |
| 2,23E-01 | 5,60E-02 |
| 9,23E-02 | 1,12E-02 |
| 2,99E-02 | 1,11E-03 |

**Figure 20** BOOST FWD

FWD transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

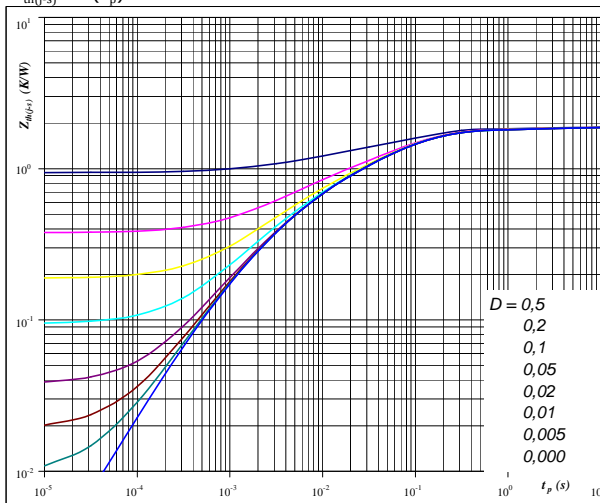

**At**  
 $D = t_p / T$   
 $R_{th(j-s)} = 1,88$  K/W

FWD thermal model values

| R (K/W)  | τ (s)    |
|----------|----------|
| 5,58E-02 | 6,96E+00 |
| 1,47E-01 | 5,43E-01 |
| 8,94E-01 | 7,92E-02 |
| 4,33E-01 | 1,33E-02 |
| 2,94E-01 | 3,03E-03 |
| 5,99E-02 | 6,32E-04 |




### INPUT BOOST

**Figure 21** BOOST IGBT

**Power dissipation as a function of heatsink temperature**

$$P_{tot} = f(T_s)$$

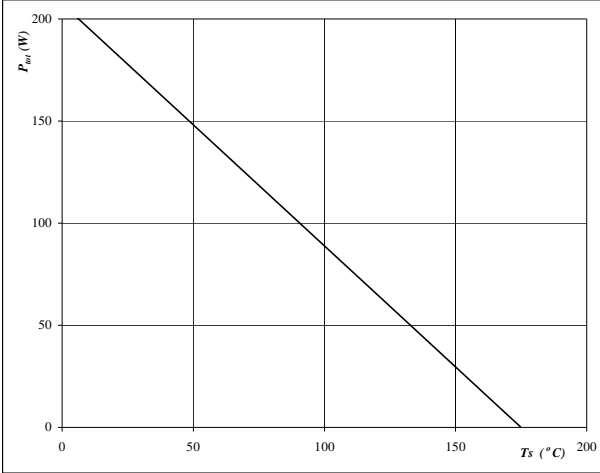


**At**  
 $T_j = 175$  °C

**Figure 22** BOOST IGBT

**Collector current as a function of heatsink temperature**

$$I_c = f(T_s)$$

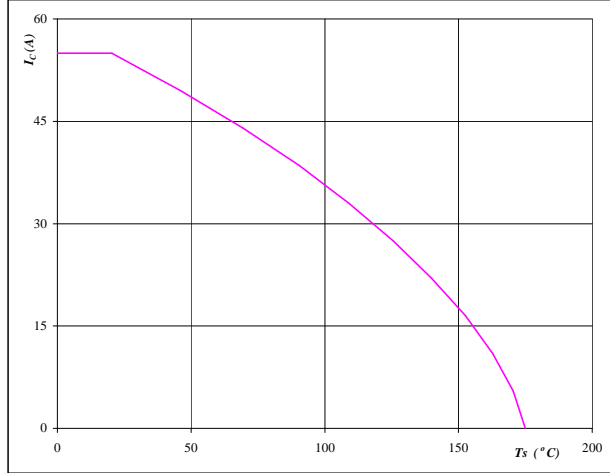


**At**  
 $T_j = 175$  °C  
 $V_{GE} = 15$  V

**Figure 23** BOOST FWD

**Power dissipation as a function of heatsink temperature**

$$P_{tot} = f(T_s)$$

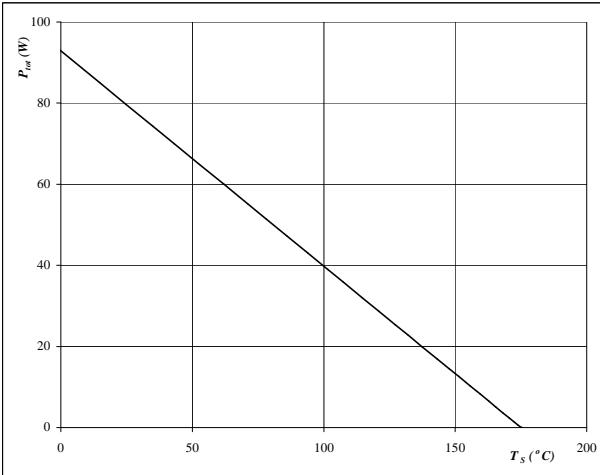


**At**  
 $T_j = 175$  °C

**Figure 24** BOOST FWD

**Forward current as a function of heatsink temperature**

$$I_F = f(T_s)$$

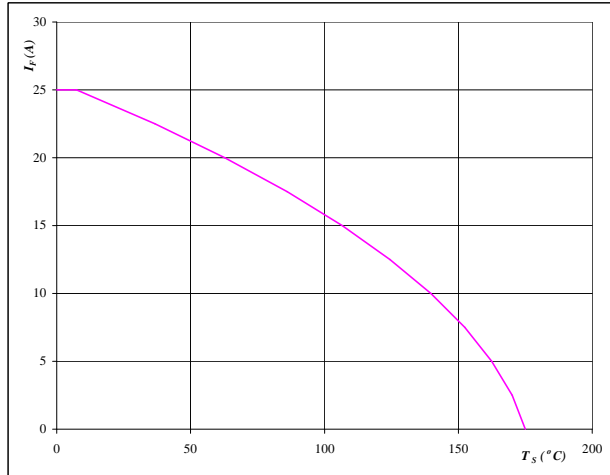

**At**  
 $T_j = 175$  °C




## INPUT BOOST

**Figure 25** BOOST IGBT

Safe operating area as a function of collector-emitter voltage

$$I_C = f(V_{CE})$$

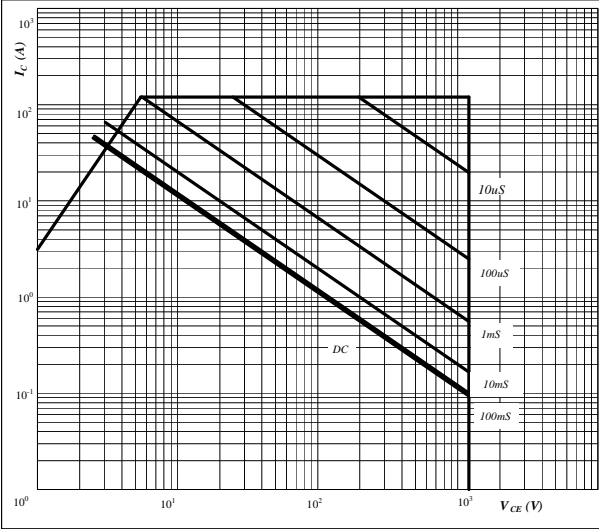


**At**

- $D =$  single pulse
- $T_S =$  80 °C
- $V_{GE} =$  ±15 V
- $T_j = T_{jmax}$  °C

**Figure 26** BOOST IGBT

Gate voltage vs Gate charge

$$V_{GE} = f(Q_g)$$

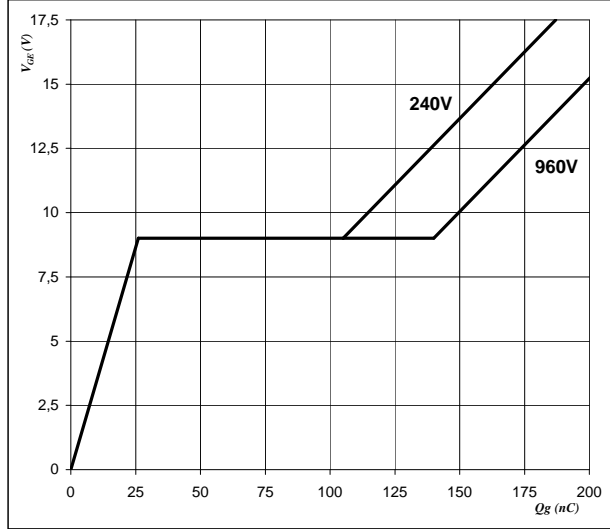


**At**

- $I_C =$  40 A

**Figure 27** Output inverter IGBT

Short circuit withstand time as a function of gate-emitter voltage

$$t_{sc} = f(V_{GE})$$

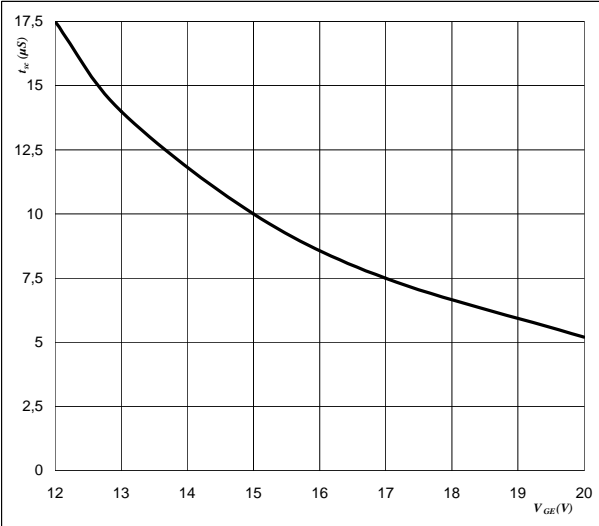


**At**

- $V_{CE} =$  1200 V
- $T_j \leq$  150 °C

**Figure 28** Output inverter IGBT

Typical short circuit collector current as a function of gate-emitter voltage

$$V_{GE} = f(Q_{GE})$$

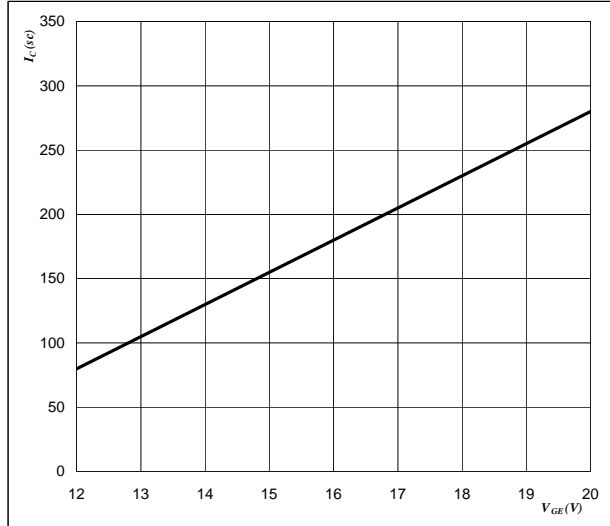


**At**

- $V_{CE} \leq$  1200 V
- $T_j =$  150 °C



### INPUT BOOST

**Figure 29** IGBT  
**Reverse bias safe operating area**

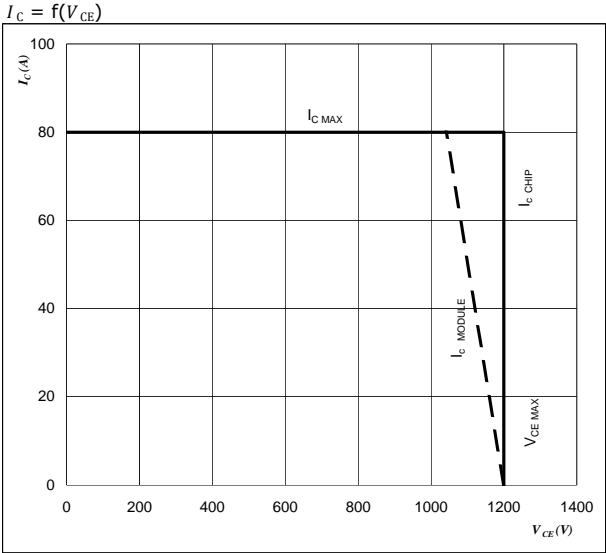

**At**

$$T_j = T_{jmax} - 25 \text{ } ^\circ\text{C} \quad R_{gon} = 16 \text{ } \Omega$$

$$R_{goff} = 16 \text{ } \Omega$$




### INPUT BOOST INV. Diode

**Figure 1** INPUT BOOST INV. Diode

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

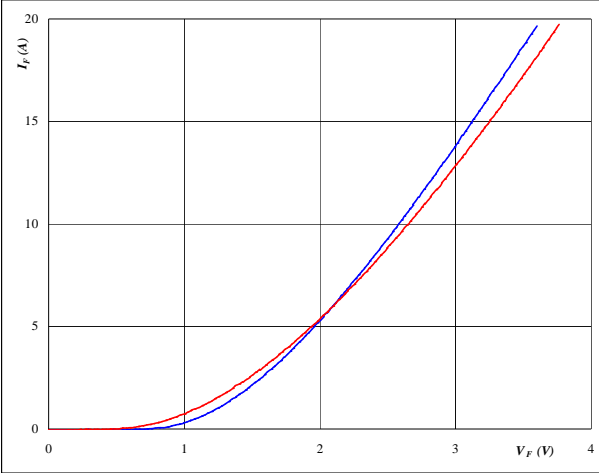


**At**  
 $T_j = 25/125 \text{ } ^\circ\text{C}$   
 $t_p = 250 \text{ } \mu\text{s}$

**Figure 2** INPUT BOOST INV. Diode

Diode transient thermal impedance as a function of pulse width

$Z_{th(j-s)} = f(t_p)$

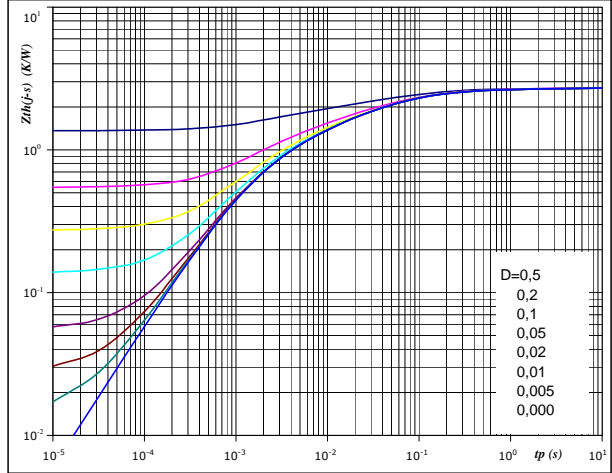


**At**  
 $D = t_p / T$   
 $R_{th(j-s)} = 2,72 \text{ K/W}$

**Figure 3** INPUT BOOST INV. Diode

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_s)$

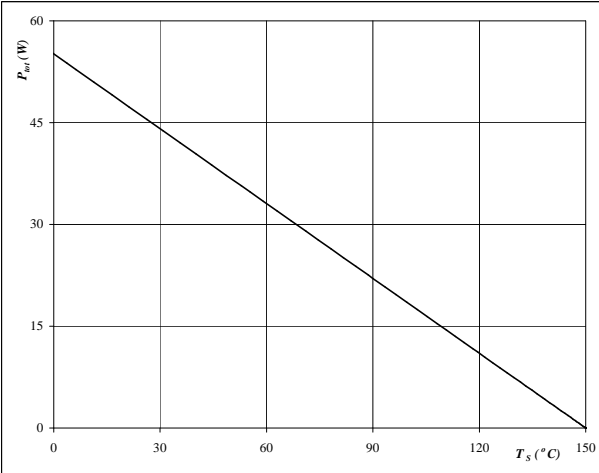


**At**  
 $T_j = 150 \text{ } ^\circ\text{C}$

**Figure 4** INPUT BOOST INV. Diode

Forward current as a function of heatsink temperature

$I_F = f(T_s)$

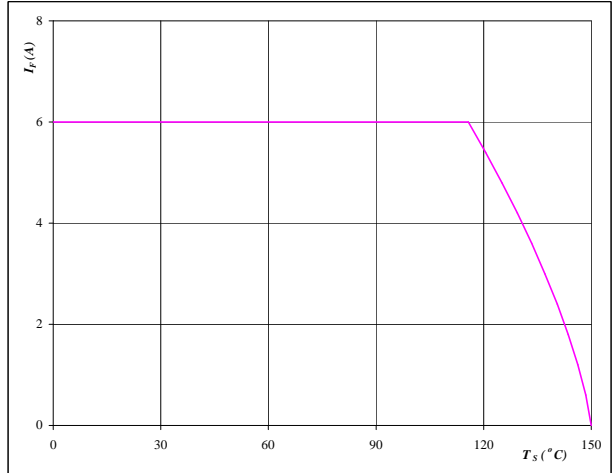

**At**  
 $T_j = 150 \text{ } ^\circ\text{C}$




### Bypass Diode

**Figure 1** Bypass diode

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

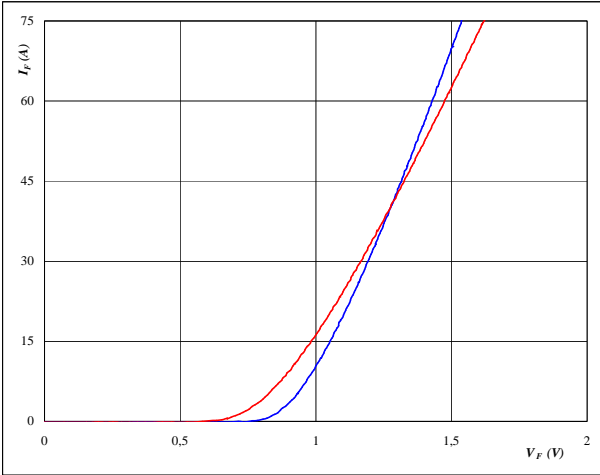


**At**  
 $T_j = 25/125 \text{ } ^\circ\text{C}$   
 $t_p = 250 \text{ } \mu\text{s}$

**Figure 2** Bypass diode

Diode transient thermal impedance as a function of pulse width

$Z_{th(j-s)} = f(t_p)$

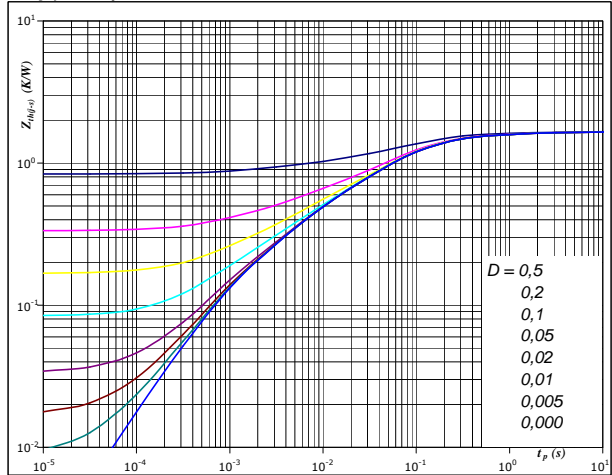


**At**  
 $D = t_p / T$   
 $R_{th(j-s)} = 1,67 \text{ K/W}$

**Figure 3** Bypass diode

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_s)$

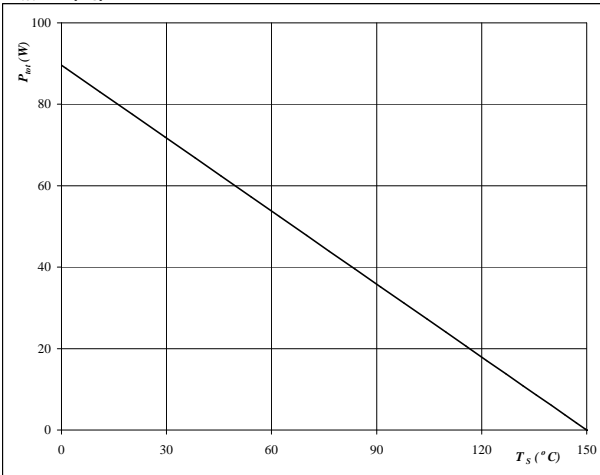


**At**  
 $T_j = 150 \text{ } ^\circ\text{C}$

**Figure 4** Bypass diode

Forward current as a function of heatsink temperature

$I_F = f(T_s)$

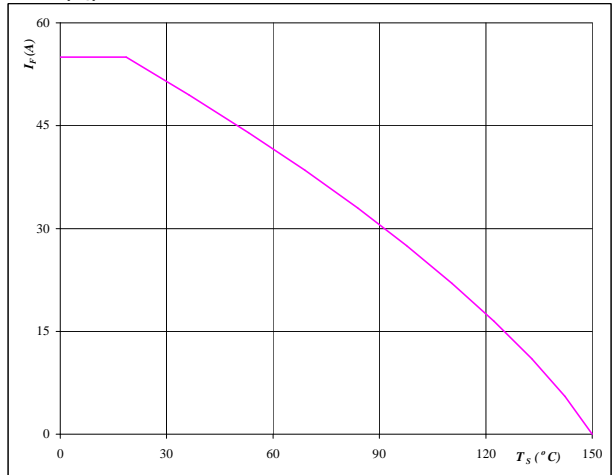

**At**  
 $T_j = 150 \text{ } ^\circ\text{C}$




# Thermistor

**Figure 1** Thermistor

**Typical NTC characteristic  
as a function of temperature**

$$R_T = f(T)$$

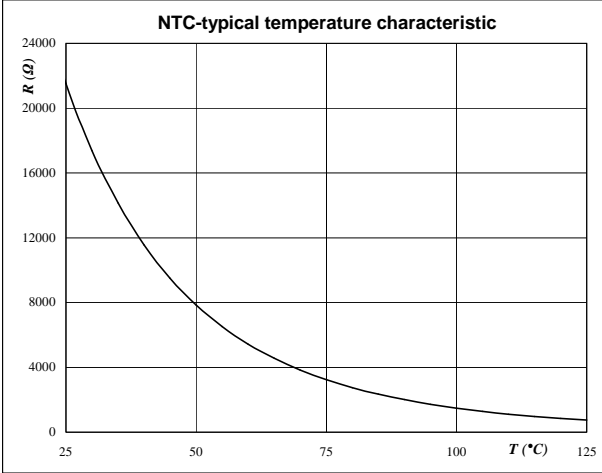




## Switching Definitions

### General conditions

|            |   |             |
|------------|---|-------------|
| $T_j$      | = | 125 °C      |
| $R_{gon}$  | = | 16 $\Omega$ |
| $R_{goff}$ | = | 16 $\Omega$ |

**Figure 1** BOOST IGBT


Turn-off Switching Waveforms & definition of  $t_{doff}$   $t_{Eoff}$   
( $t_{Eoff}$  = integrating time for  $E_{off}$ )

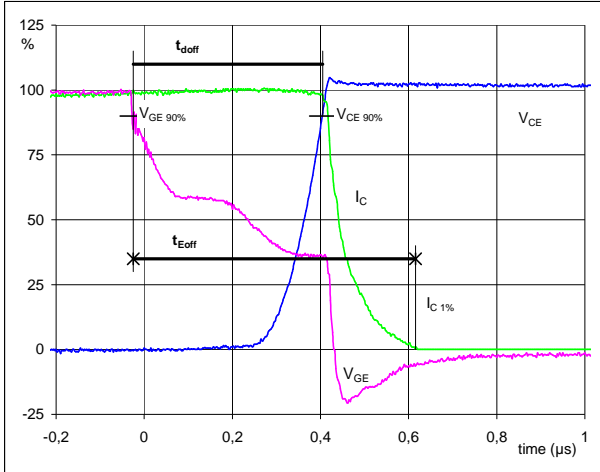

|                   |      |         |
|-------------------|------|---------|
| $V_{GE}$ (0%) =   | 0    | V       |
| $V_{GE}$ (100%) = | 15   | V       |
| $V_C$ (100%) =    | 700  | V       |
| $I_C$ (100%) =    | 40   | A       |
| $t_{doff}$ =      | 0,43 | $\mu$ s |
| $t_{Eoff}$ =      | 0,64 | $\mu$ s |

**Figure 2** BOOST IGBT


Turn-on Switching Waveforms & definition of  $t_{donr}$   $t_{Eon}$   
( $t_{Eon}$  = integrating time for  $E_{on}$ )

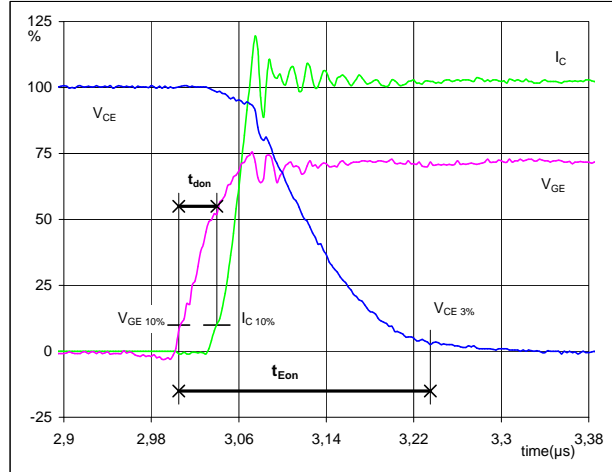

|                   |       |         |
|-------------------|-------|---------|
| $V_{GE}$ (0%) =   | 0     | V       |
| $V_{GE}$ (100%) = | 15    | V       |
| $V_C$ (100%) =    | 700   | V       |
| $I_C$ (100%) =    | 40    | A       |
| $t_{donr}$ =      | 0,034 | $\mu$ s |
| $t_{Eon}$ =       | 0,230 | $\mu$ s |

**Figure 3** BOOST IGBT


Turn-off Switching Waveforms & definition of  $t_f$

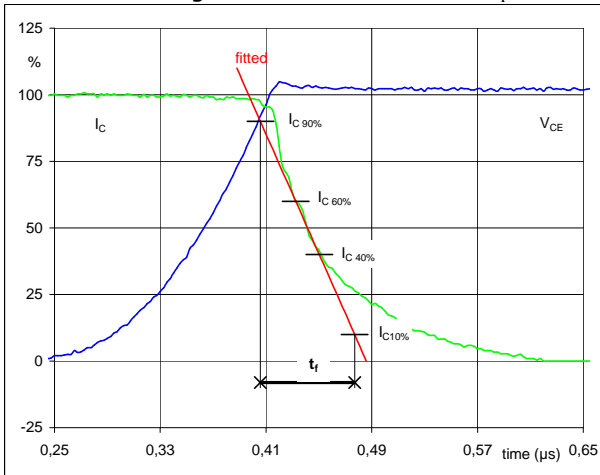

|                |      |         |
|----------------|------|---------|
| $V_C$ (100%) = | 700  | V       |
| $I_C$ (100%) = | 40   | A       |
| $t_f$ =        | 0,07 | $\mu$ s |

**Figure 4** BOOST IGBT

Turn-on Switching Waveforms & definition of  $t_r$

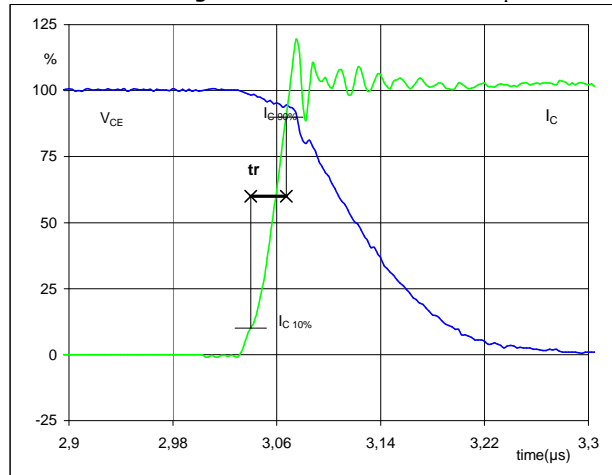


|                |       |         |
|----------------|-------|---------|
| $V_C$ (100%) = | 700   | V       |
| $I_C$ (100%) = | 40    | A       |
| $t_r$ =        | 0,027 | $\mu$ s |






### Switching Definitions

**Figure 5** BOOST IGBT  
**Turn-off Switching Waveforms & definition of  $t_{Eoff}$**

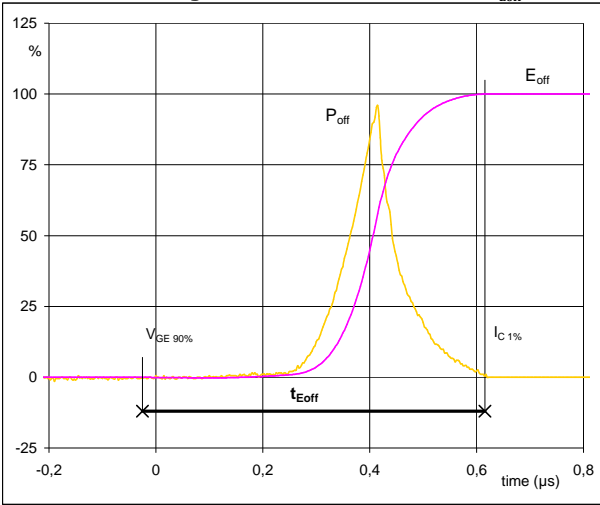


$P_{off} (100\%) = 28,10 \text{ kW}$   
 $E_{off} (100\%) = 3,04 \text{ mJ}$   
 $t_{Eoff} = 0,64 \text{ μs}$

**Figure 6** BOOST IGBT  
**Turn-on Switching Waveforms & definition of  $t_{Eon}$**

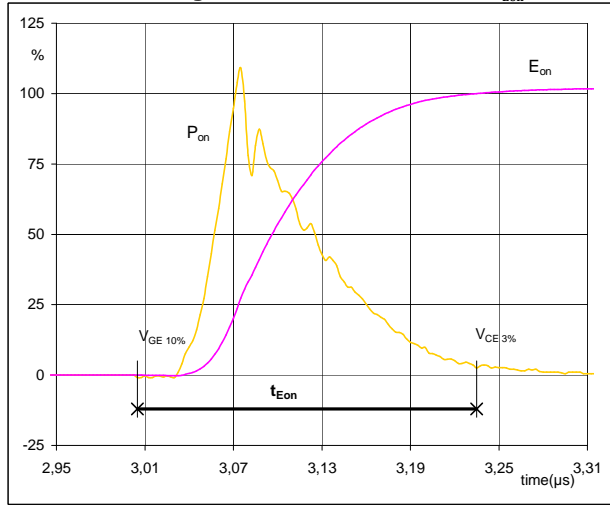

$P_{on} (100\%) = 28,10 \text{ kW}$   
 $E_{on} (100\%) = 2,19 \text{ mJ}$   
 $t_{Eon} = 0,23 \text{ μs}$

**Figure 7** BOOST FWD  
**Turn-off Switching Waveforms & definition of  $t_{tr}$**

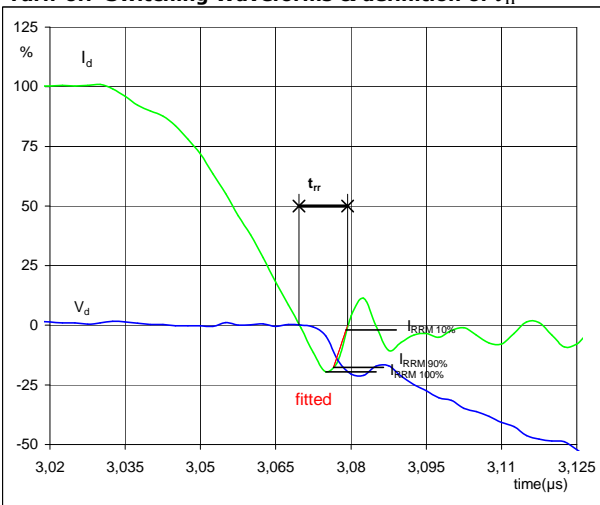


$V_d (100\%) = 700 \text{ V}$   
 $I_d (100\%) = 40 \text{ A}$   
 $I_{RRM} (100\%) = -8 \text{ A}$   
 $t_{tr} = 0,01 \text{ μs}$



### Switching Definitions

**Figure 8** BOOST FWD


Turn-on Switching Waveforms & definition of  $t_{Q_{rr}}$   
( $t_{Q_{rr}}$  = integrating time for  $Q_{rr}$ )

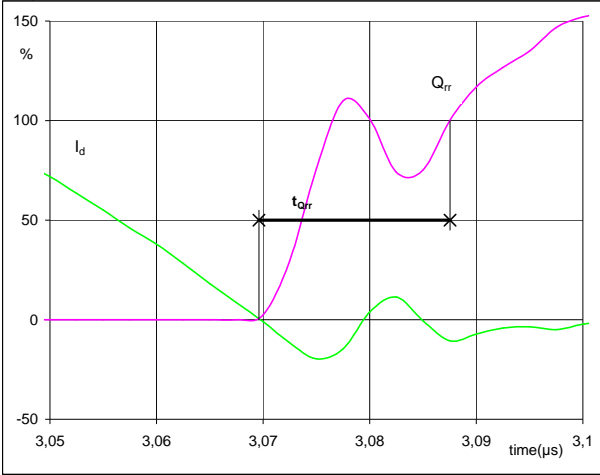

|                   |       |               |
|-------------------|-------|---------------|
| $I_d$ (100%) =    | 40    | A             |
| $Q_{rr}$ (100%) = | 0,04  | $\mu\text{C}$ |
| $t_{Q_{rr}}$ =    | 0,018 | $\mu\text{s}$ |

**Figure 9** BOOST FWD

Turn-on Switching Waveforms & definition of  $t_{E_{rec}}$   
( $t_{E_{rec}}$  = integrating time for  $E_{rec}$ )


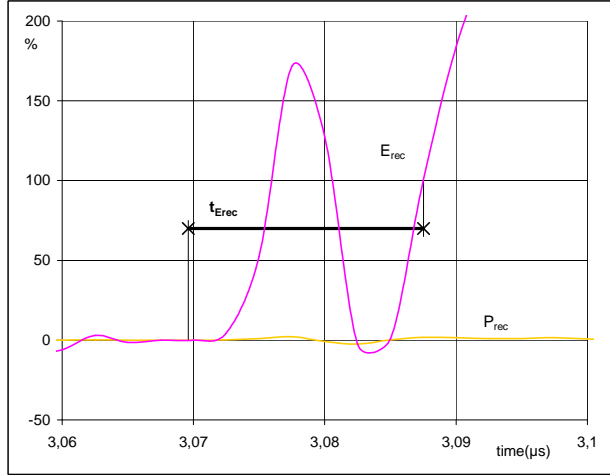


|                    |       |               |
|--------------------|-------|---------------|
| $P_{rec}$ (100%) = | 28,10 | kW            |
| $E_{rec}$ (100%) = | 0,002 | mJ            |
| $t_{E_{rec}}$ =    | 0,018 | $\mu\text{s}$ |



## Ordering Code and Marking - Outline - Pinout

| Ordering Code & Marking         |                     |                  |                         |
|---------------------------------|---------------------|------------------|-------------------------|
| Version                         | Ordering Code       | in DataMatrix as | in packaging barcode as |
| 12mm housing with solder pins   | V23990-P629-L48-PM  | P629L48          | P629L48                 |
| 12mm housing with pressfit pins | V23990-P629-L48Y-PM | P629L48Y         | P629L48Y                |
| 17mm housing with solder pins   | V23990-P629-L49-PM  | P629L49          | P629L49                 |
| 17mm housing with pressfit pins | V23990-P629-L49Y-PM | P629L49Y         | P629L49Y                |

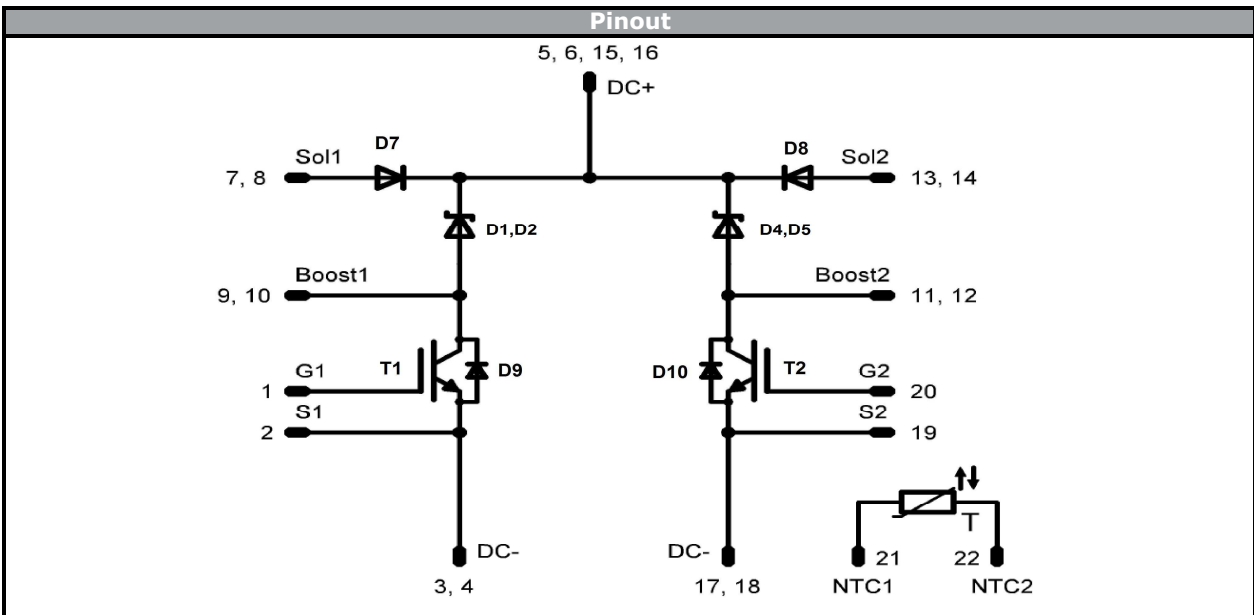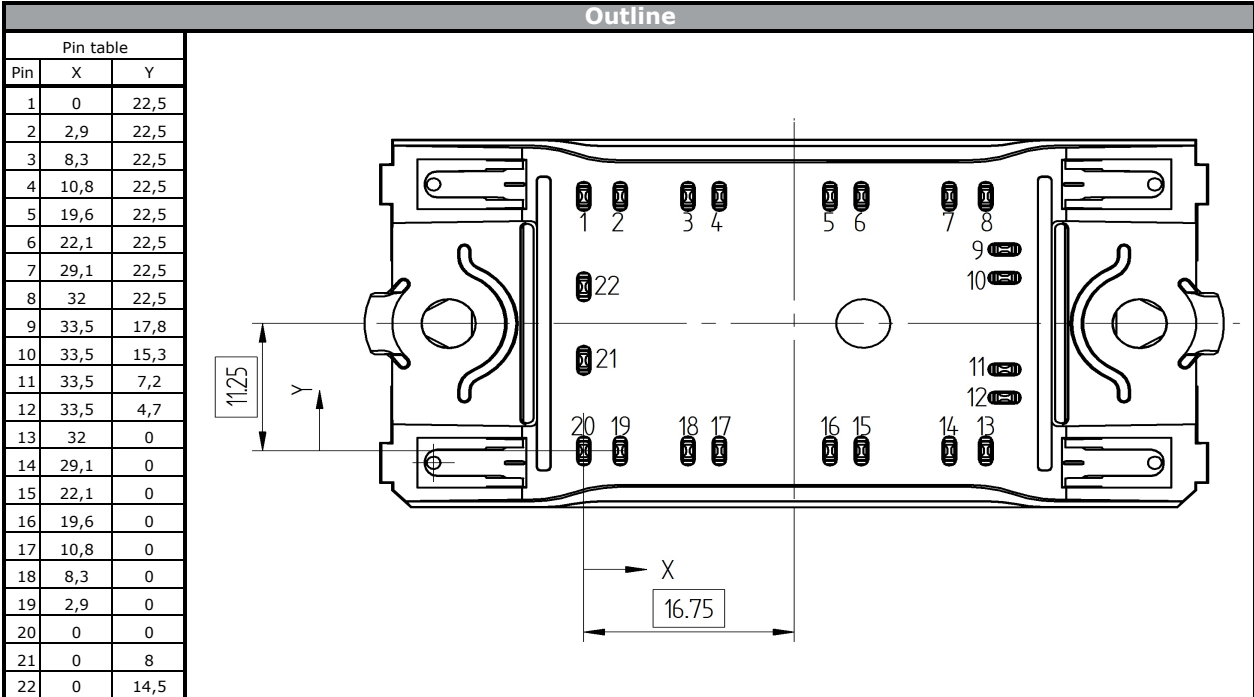

**Packaging instruction**

|                                   |            |      |          |      |        |
|-----------------------------------|------------|------|----------|------|--------|
| Standard packaging quantity (SPQ) | <b>135</b> | >SPQ | Standard | <SPQ | Sample |
|-----------------------------------|------------|------|----------|------|--------|

**Handling instruction**

Handling instructions for *flow* 0 packages see vincotech.com website.

**Package data**

Package data for *flow* 0 packages see vincotech.com website.

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.