



Vincotech

30-F212PMA075M7-L889A79

datasheet

flowPIM 2

1200 V / 75 A

Features

- IGBT Mitsubishi gen 7 technology with low VCEsat and improved EMC behavior
- Open emitter configuration
- Compact and low inductive design
- Built-in NTC


Target applications

- Industrial Drives


Types

- 30-F212PMA075M7-L889A79

flow 2 17 mm housing



Schematic

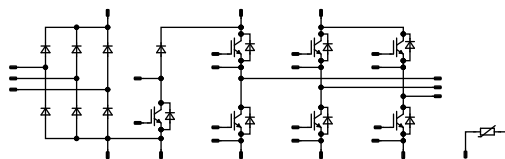



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Inverter Switch

Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	94	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	190	W
Gate-emitter voltage	V_{GES}		± 20	V
Maximum junction temperature	T_{jmax}		175	°C

Inverter Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	87	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	200	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	165	W
Maximum junction temperature	T_{jmax}		175	°C

Brake Switch

Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	71	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	100	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	162	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	9,5	μs
Maximum junction temperature	T_{jmax}		175	°C



Vincotech

30-F212PMA075M7-L889A79
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Brake Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	36	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	50	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	70	W
Maximum junction temperature	T_{jmax}		175	°C

Brake Sw. Protection Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	13	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	10	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	34	W
Maximum junction temperature	T_{jmax}		175	°C

Rectifier Diode

Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	126	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	890	A
Surge current capability	I^2t		3960	A ² s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	156	W
Maximum junction temperature	T_{jmax}		150	°C



Vincotech

30-F212PMA075M7-L889A79
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+(T_{jmax} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	V_{isol}	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			12,01	mm
Comparative Tracking Index	CTI		≥ 200	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,0075	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		75	25 125 150		1,55 1,7 1,75	1,9 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			100	µA
Gate-emitter leakage current	I_{GES}		20	0		25			500	nA
Internal gate resistance	r_g							4		Ω
Input capacitance	C_{ies}	0	10		25			16000		pF
Output capacitance	C_{oes}							480		pF
Reverse transfer capacitance	C_{res}							190		pF
Gate charge	Q_g	$V_{CC} = 600$ V	15		75	25		570		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,5		K/W
--	---------------	---------------------------------------	--	--	--	--	--	-----	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 2$ Ω $R_{goff} = 2$ Ω	±15	600	75	25 125 150		197,2 208,2 211,8		ns
Rise time	t_r					25 125 150		28,6 37,6 38,6		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		203,4 233 241,8		ns
Fall time	t_f					25 125 150		86,36 112,58 111,22		ns
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD}=8,54$ µC $Q_{tFWD}=13,39$ µC $Q_{tFWD}=15,31$ µC				25 125 150		5,56 7,82 8,5		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		5,08 6,8 7,28		mWs



Vincotech

30-F212PMA075M7-L889A79
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Diode

Static

Forward voltage	V_F				100	25 125 150		1,82 1,96 1,97	2,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1200$ V				25			40	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,58		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RRM}	$di/dt=2268$ A/µs $di/dt=1969$ A/µs $di/dt=1970$ A/µs	± 15	600	75	25 125 150		74,72 76,64 78,09		A
Reverse recovery time	t_{rr}					25 125 150		277,69 432,14 458,54		ns
Recovered charge	Q_r					25 125 150		8,54 13,39 15,31		µC
Reverse recovered energy	E_{rec}					25 125 150		3,2 5,19 6		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		801,95 613,64 544,2		A/µs



Vincotech

30-F212PMA075M7-L889A79
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,005	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		50	25 125 150		1,55 1,77 1,83	1,9 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			0,09	mA
Gate-emitter leakage current	I_{GES}		20	0		25			0,5	µA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	0	10	25				10000		pF
Output capacitance	C_{oes}							350		pF
Reverse transfer capacitance	C_{res}							130		pF
Gate charge	Q_g	$V_{CC} = 600$ V	15		50	25		380		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,59		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8$ Ω $R_{goff} = 8$ Ω	0/15	700	50	25 125 150		116,2 105,4 105		ns
Rise time	t_r					25 125 150		57,8 64,2 65,8		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		329,6 368,8 373,6		ns
Fall time	t_f					25 125 150		84,82 116,95 123,56		ns
Turn-on energy (per pulse)	E_{on}					25 125 150		4,49 5,5 5,8		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		3,94 5,48 5,76		mWs



Vincotech

30-F212PMA075M7-L889A79
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Diode

Static

Forward voltage	V_F				25	25 125 150		1,63 1,7 1,69	2,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1200$ V				25			35	μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,36		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RRM}	$di/dt=1050$ A/μs $di/dt=710$ A/μs $di/dt=806$ A/μs	0/15	700	50	25 125 150		29,64 32,15 33,13		A
Reverse recovery time	t_{rr}					25 125 150		263,44 375,47 410,88		ns
Recovered charge	Q_r					25 125 150		3,82 5,59 6,19		μC
Reverse recovered energy	E_{rec}					25 125 150		1,7 2,62 2,94		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		272,45 192,34 183,05		A/μs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]		Min	Typ	Max	

Brake Sw. Protection Diode

Static

Forward voltage	V_F				5	25 125 150		1,57 1,66 1,65	2,1 ⁽¹⁾		V
Reverse leakage current	I_R	$V_r = 1200$ V				25			20		μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						2,76			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----

Rectifier Diode

Static

Forward voltage	V_F				45	25 125 150		1,01 0,929 0,92	1,21 ⁽¹⁾ 1,1 ⁽¹⁾		V
Reverse leakage current	I_R	$V_r = 1600$ V				25			50		μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,45			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	P							5		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$						4000		K
Vincotech Thermistor Reference									I	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Vincotech


30-F212PMA075M7-L889A79
datasheet

Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

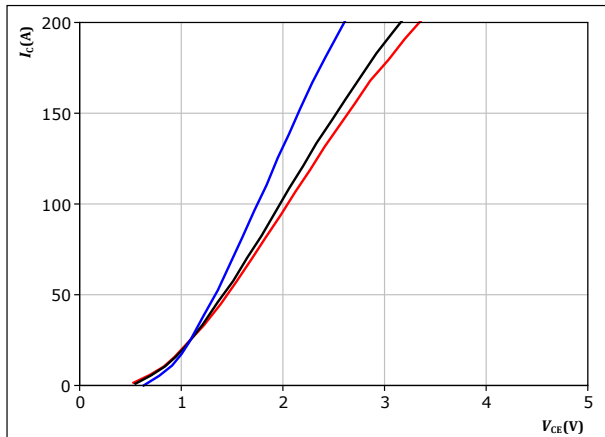


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j: 25 \text{ } ^\circ\text{C}$
 $125 \text{ } ^\circ\text{C}$
 $150 \text{ } ^\circ\text{C}$

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

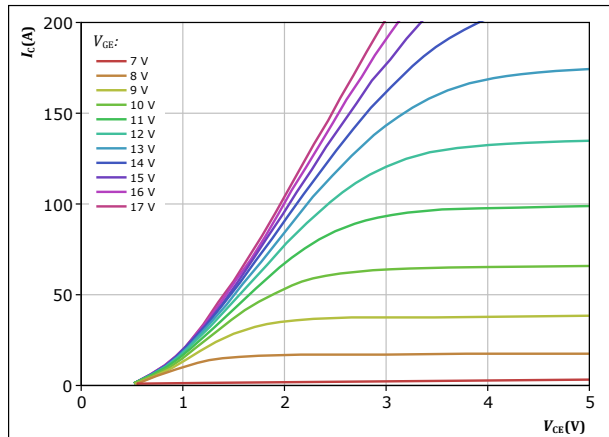


$t_p = 250 \mu s$
 $T_j = 150 \text{ } ^\circ\text{C}$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

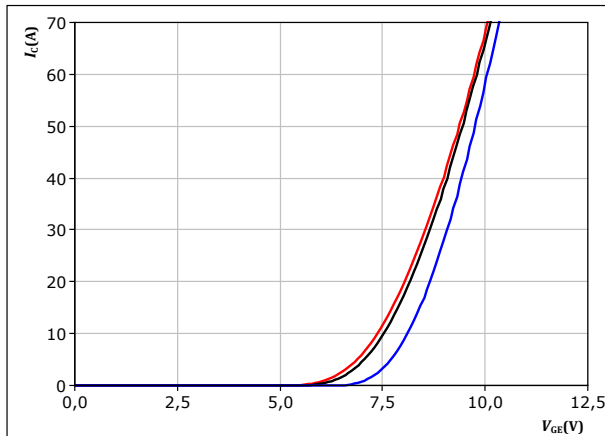


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_j: 25 \text{ } ^\circ\text{C}$
 $125 \text{ } ^\circ\text{C}$
 $150 \text{ } ^\circ\text{C}$

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

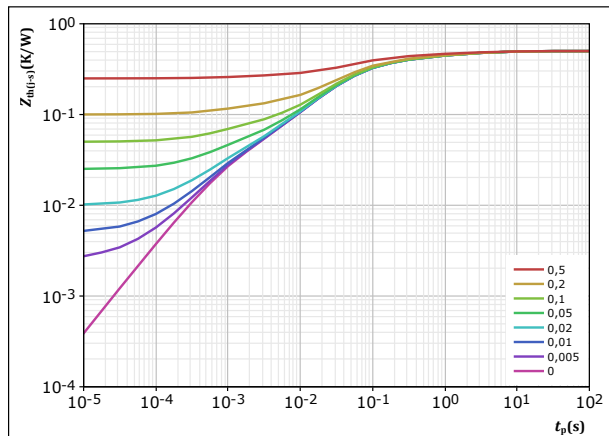

$D = t_p / T$
 $R_{th(j-s)} = 0,5 \text{ K/W}$
IGBT thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
3,92E-02	4,73E+00
6,01E-02	9,48E-01
1,18E-01	1,70E-01
2,25E-01	3,80E-02
3,32E-02	9,18E-03
2,48E-02	8,63E-04



Vincotech

30-F212PMA075M7-L889A79
datasheet


Inverter Switch Characteristics

figure 5.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

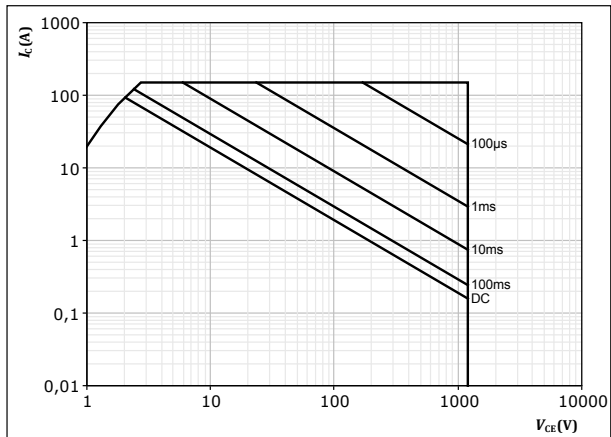

$D =$ single pulse

$T_s = 80$ °C

$V_{GE} = 15$ V

$T_j = T_{jmax}$



Vincotech

30-F212PMA075M7-L889A79
datasheet


Inverter Diode Characteristics

figure 6.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$

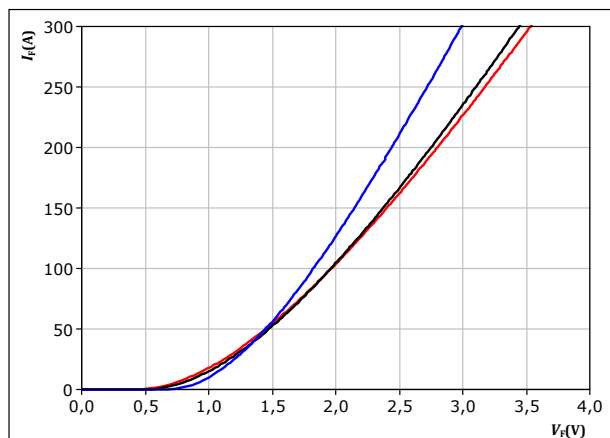

$t_p = 250 \mu s$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 7.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

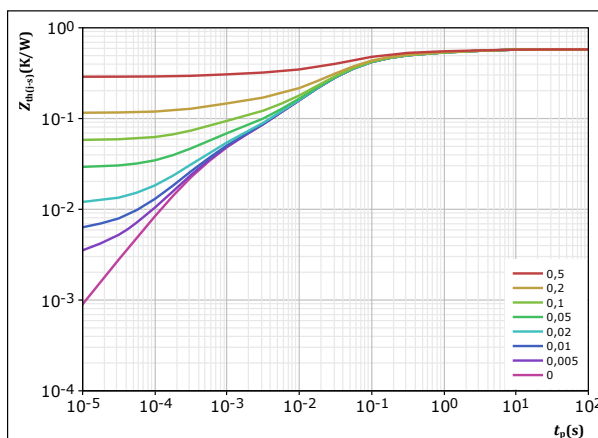

$D =$	t_p / T	
$R_{th(j-s)} =$	0,578	K/W
FWD thermal model values		
R (K/W)	τ (s)	
4,89E-02	3,41E+00	
7,07E-02	4,06E-01	
2,02E-01	7,46E-02	
1,90E-01	2,27E-02	
3,24E-02	3,47E-03	
3,35E-02	4,78E-04	



Vincotech

30-F212PMA075M7-L889A79
datasheet


Brake Switch Characteristics

figure 8.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

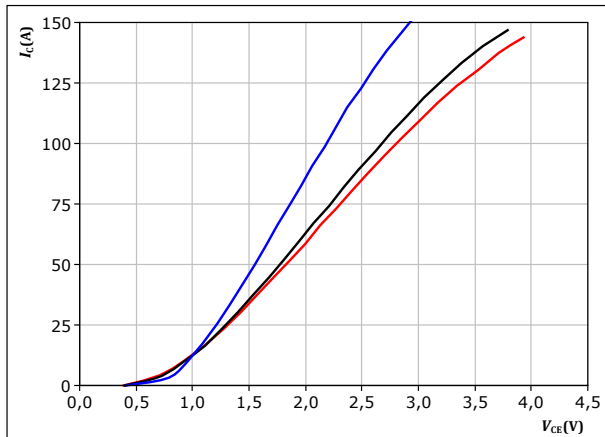


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j: 25 ^\circ C$
 $125 ^\circ C$
 $150 ^\circ C$

figure 9.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

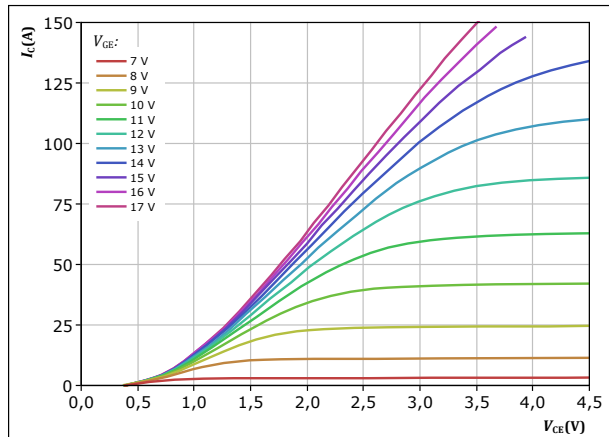


$t_p = 250 \mu s$
 $T_j = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 10.

IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

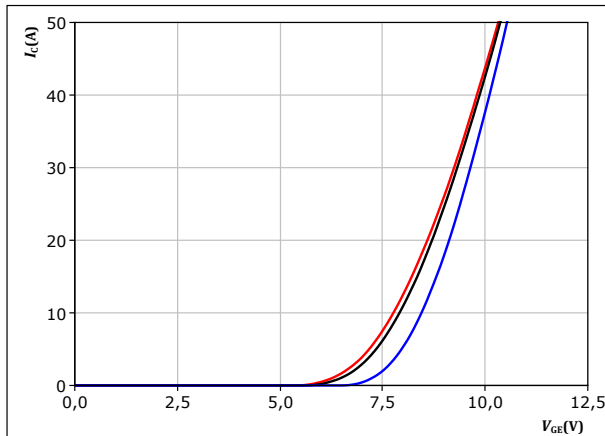


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_j: 25 ^\circ C$
 $125 ^\circ C$
 $150 ^\circ C$

figure 11.

IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

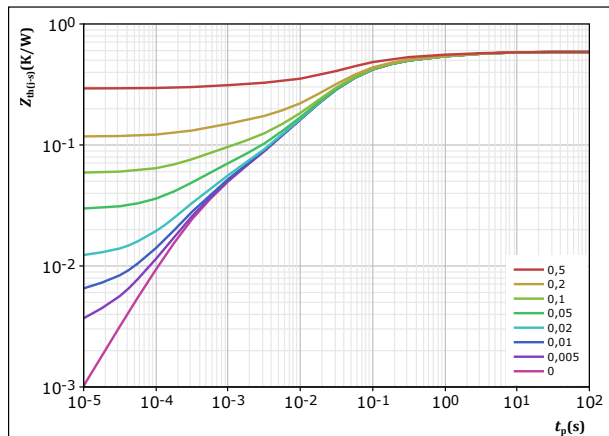

$D = t_p / T$
 $R_{th(j-s)} = 0,586 K/W$
IGBT thermal model values

$R (K/W)$	$\tau (s)$
3,16E-02	4,80E+00
5,30E-02	1,05E+00
1,21E-01	1,71E-01
2,39E-01	4,01E-02
9,09E-02	1,21E-02
2,38E-02	1,71E-03
2,73E-02	3,65E-04



Vincotech

30-F212PMA075M7-L889A79
datasheet


Brake Switch Characteristics

figure 12.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

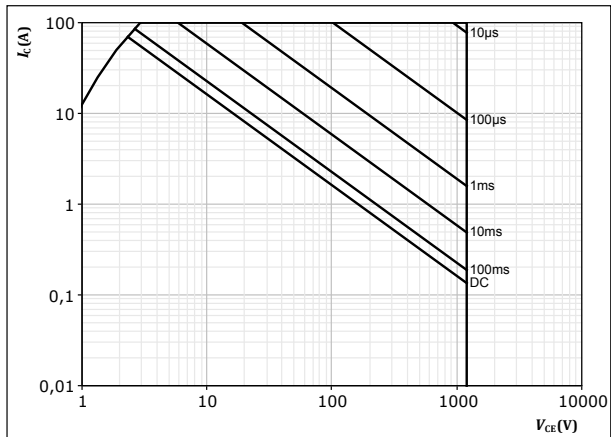

D = single pulse

T_s = 80 °C

V_{GE} = 15 V

T_j = T_{jmax}



Vincotech


Brake Diode Characteristics

figure 13.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$

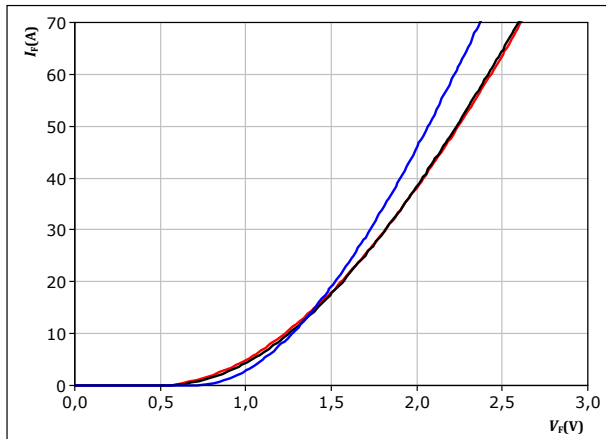

$t_p = 250 \mu s$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 14.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

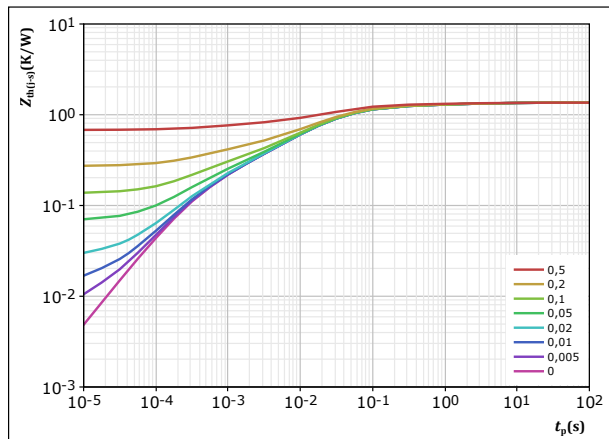

$D = t_p / T$
 $R_{th(j-s)} = 1,359 \text{ K/W}$

FWD thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
4,30E-02	6,93E+00
7,33E-02	1,01E+00
1,84E-01	1,33E-01
5,52E-01	2,95E-02
2,85E-01	7,43E-03
1,16E-01	1,34E-03
1,06E-01	3,07E-04



Vincotech


Brake Sw. Protection Diode Characteristics

figure 15.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$

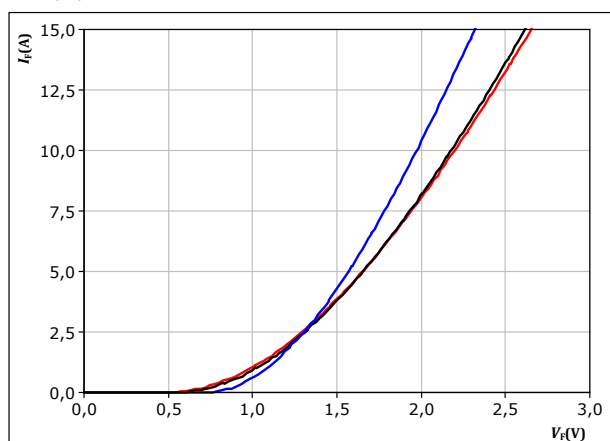

$t_p = 250 \mu s$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 16.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

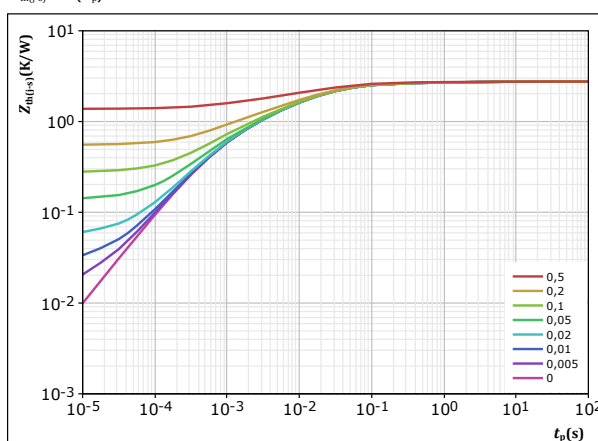

$D = t_p / T$
 $R_{th(j-s)} = 2,759 \text{ K/W}$

FWD thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
6,58E-02	4,81E+00
1,43E-01	3,47E-01
6,08E-01	4,61E-02
8,65E-01	1,40E-02
7,08E-01	2,91E-03
3,69E-01	5,42E-04



Vincotech


Rectifier Diode Characteristics

figure 17.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$

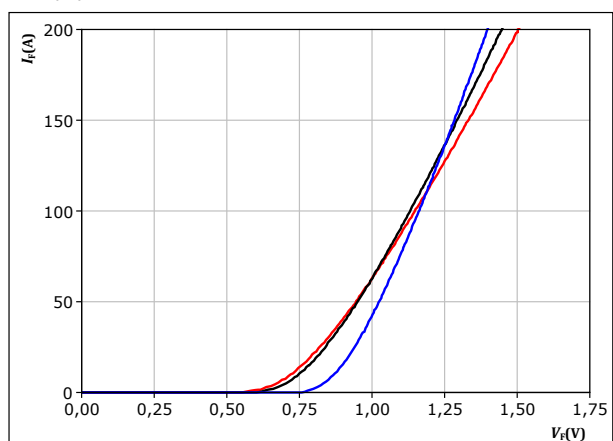

$t_p = 250 \mu s$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 18.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

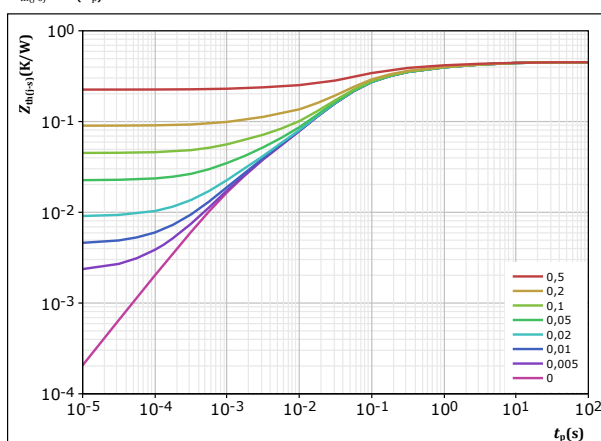

$D = t_p / T$
 $R_{th(j-s)} = 0,45 \text{ K/W}$

Rectifier thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
3,06E-02	7,38E+00
5,87E-02	1,30E+00
1,21E-01	1,90E-01
2,00E-01	4,49E-02
2,12E-02	9,83E-03
1,85E-02	1,38E-03



Vincotech

30-F212PMA075M7-L889A79
datasheet


Thermistor Characteristics

figure 19.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

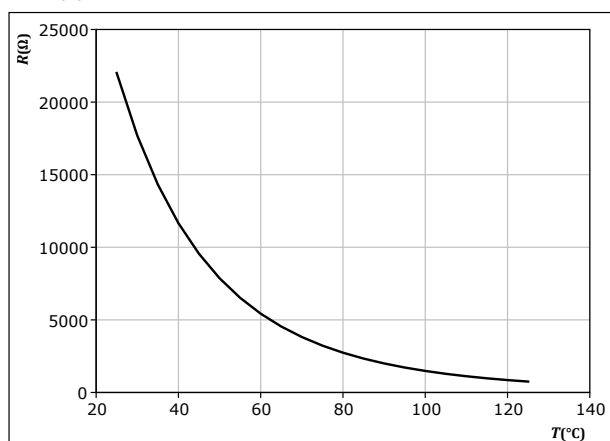



Vincotech

30-F212PMA075M7-L889A79
datasheet


Inverter Switching Characteristics

figure 20.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

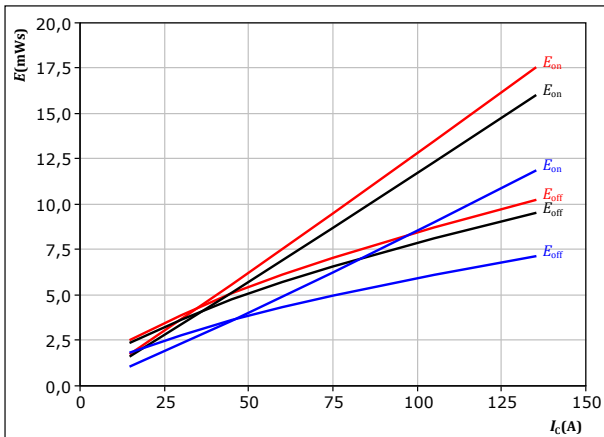

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 22.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

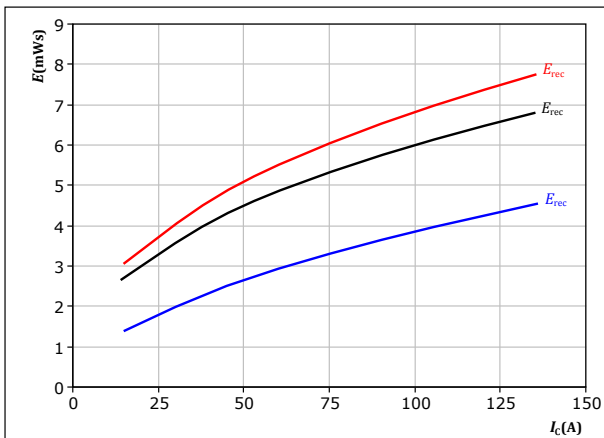

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 21.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

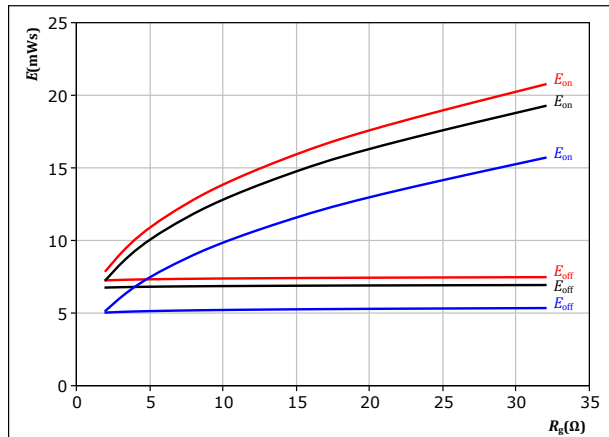

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 75 \text{ A}$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 23.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

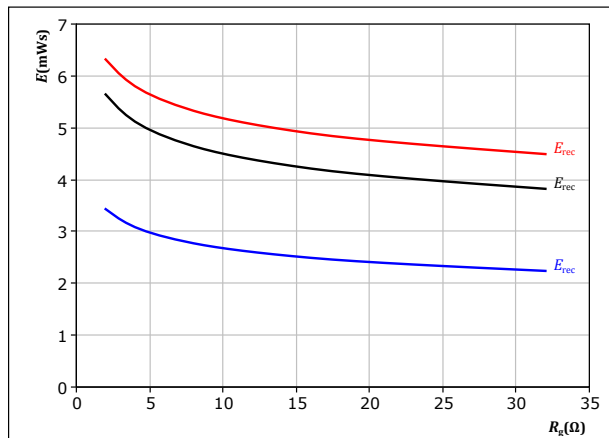

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 75 \text{ A}$

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

30-F212PMA075M7-L889A79
datasheet


Inverter Switching Characteristics

figure 24.

IGBT

Typical switching times as a function of collector current

$$t = f(I_c)$$

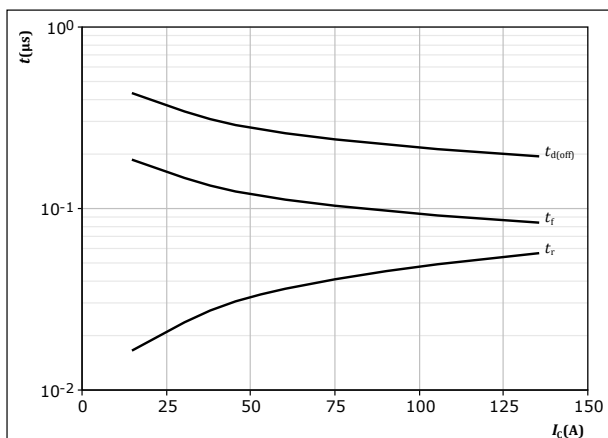

With an inductive load at


$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$R_{gon} =$	2	Ω
$R_{goff} =$	2	Ω

figure 25.

IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

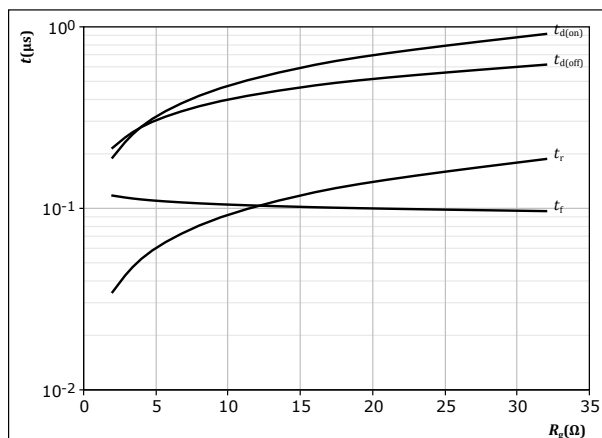

With an inductive load at


$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$I_c =$	75	A

figure 26.

FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_c)$$

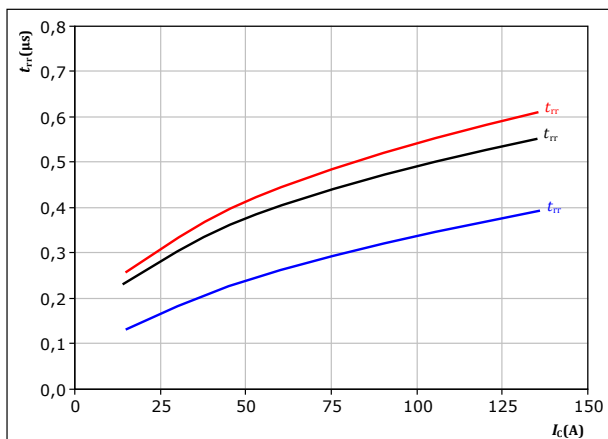

With an inductive load at

$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$R_{gon} =$	2	Ω


$T_j:$	25 °C
	125 °C
	150 °C

figure 27.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor

$$t_{rr} = f(R_{goff})$$

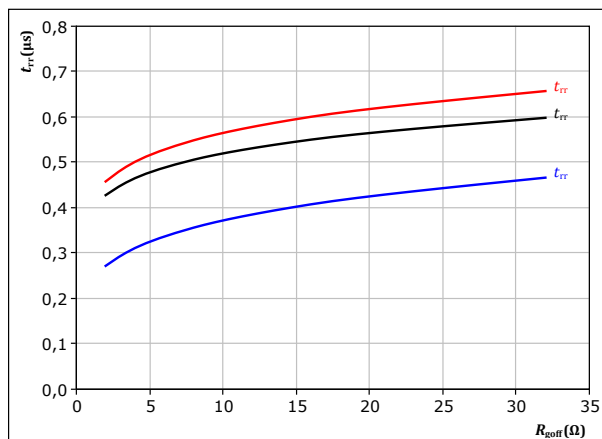

With an inductive load at

$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$I_c =$	75	A

$T_j:$	25 °C
	125 °C
	150 °C



Vincotech

30-F212PMA075M7-L889A79
datasheet


Inverter Switching Characteristics

figure 28.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

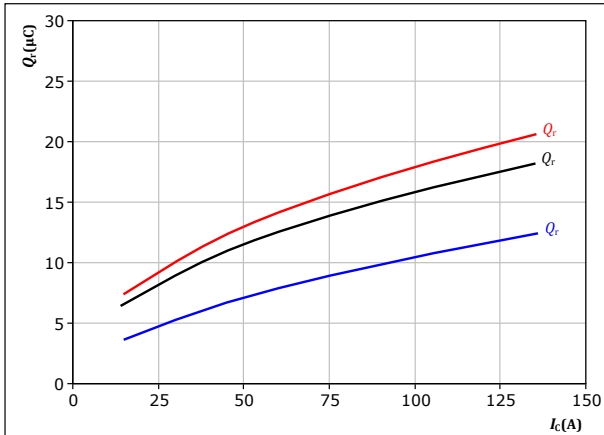

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 30.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

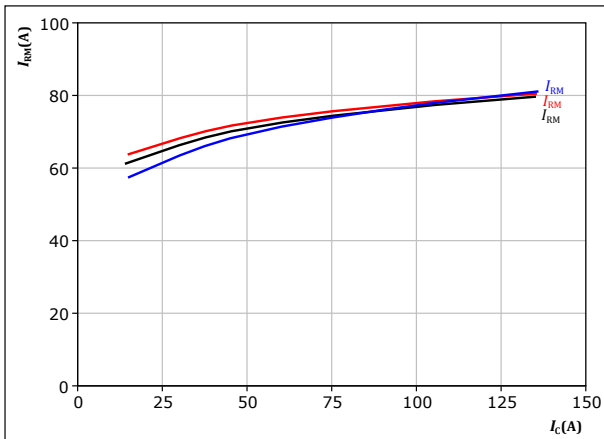

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 29.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

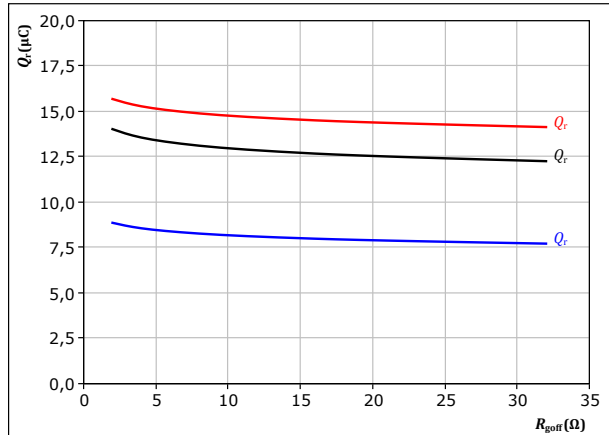

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 75$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 31.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

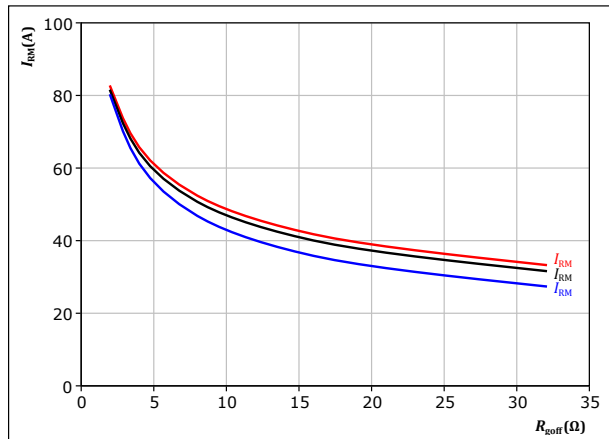

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 75$ A

T_j :
— 25 °C
— 125 °C
— 150 °C




Vincotech

30-F212PMA075M7-L889A79
datasheet

Inverter Switching Characteristics

figure 32. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

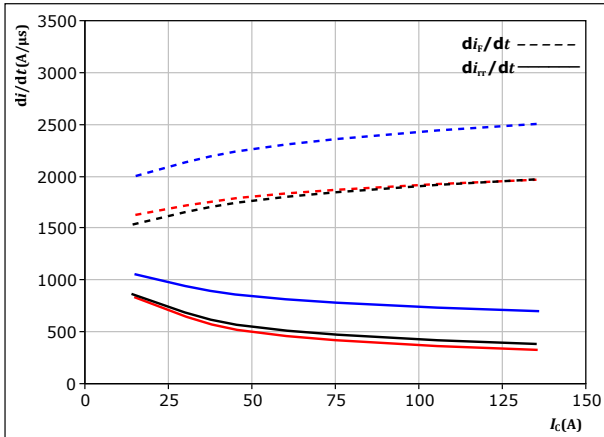


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{goff} = 2$ Ω

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 33. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_r/dt = f(R_{goff})$

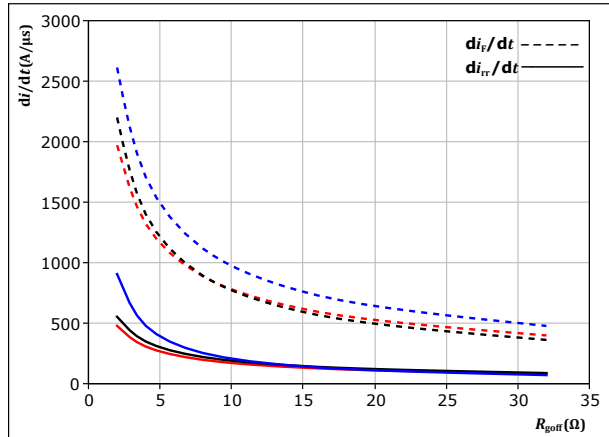

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 75$ A

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 34. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

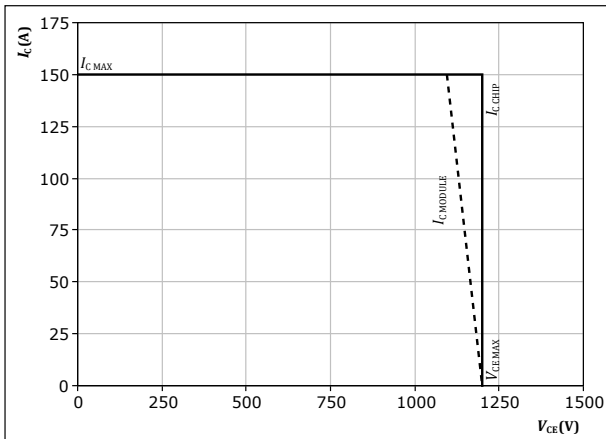

At $T_j = 150$ °C
 $R_{goff} = 2$ Ω
 $R_{goff} = 2$ Ω



Vincotech

30-F212PMA075M7-L889A79
datasheet


Brake Switching Characteristics

figure 35.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

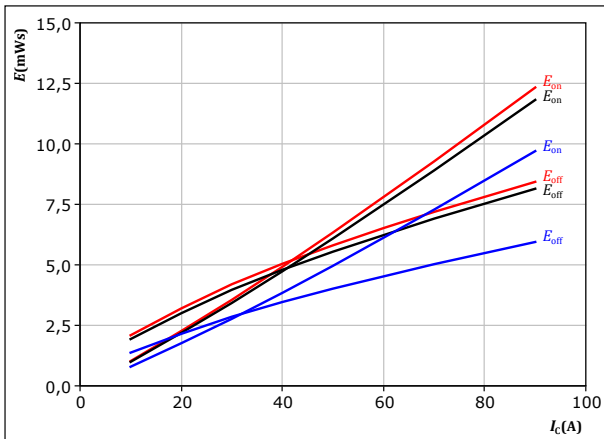

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 37.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

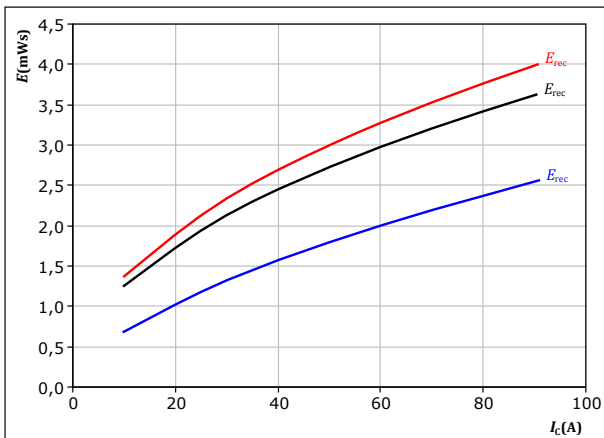

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 36.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

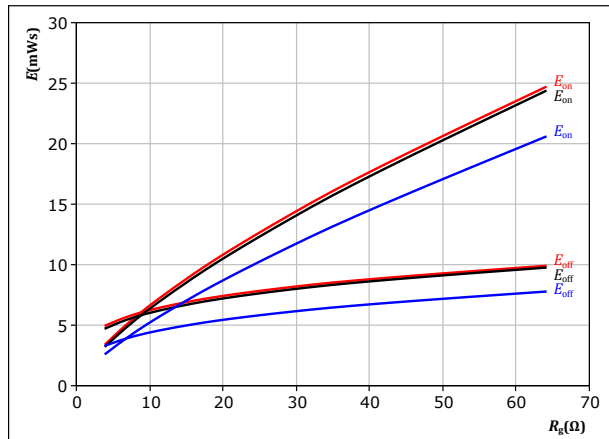

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 50$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 38.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

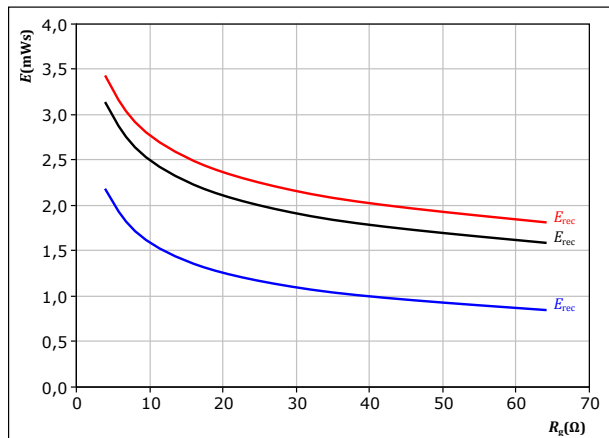

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 50$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

30-F212PMA075M7-L889A79
datasheet


Brake Switching Characteristics

figure 39.

IGBT

Typical switching times as a function of collector current

$$t = f(I_c)$$

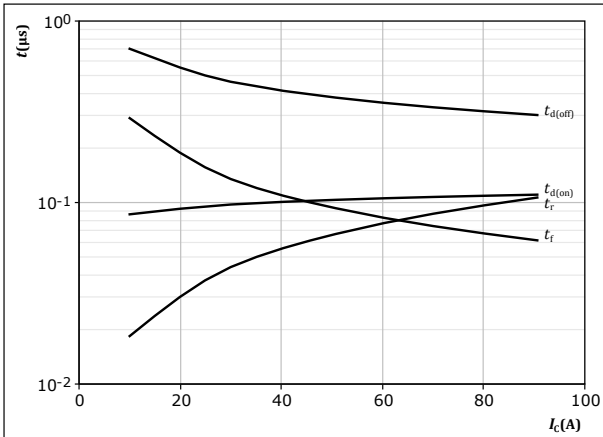

With an inductive load at


$T_j = 150$ °C
 $V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

figure 40.

IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

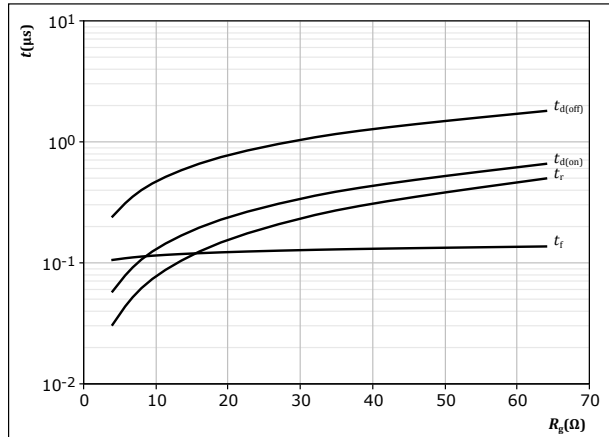

With an inductive load at


$T_j = 150$ °C
 $V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 50$ A

figure 41.

FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_c)$$

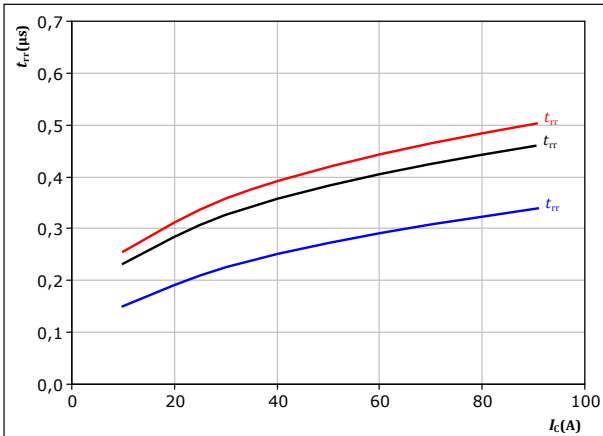

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j : 25 °C
125 °C
150 °C

figure 42.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor

$$t_{rr} = f(R_{goff})$$

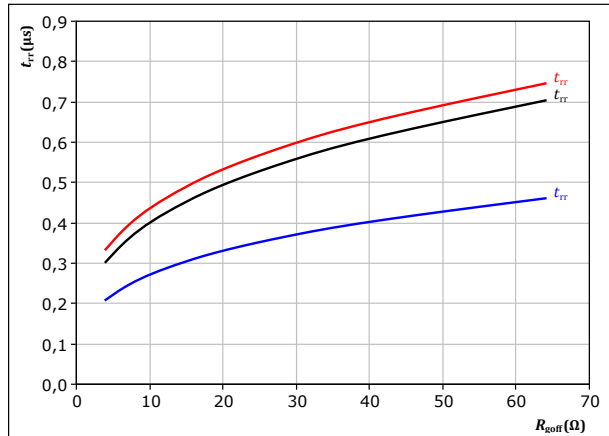

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 50$ A

T_j : 25 °C
125 °C
150 °C



Vincotech

30-F212PMA075M7-L889A79
datasheet


Brake Switching Characteristics

figure 43.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

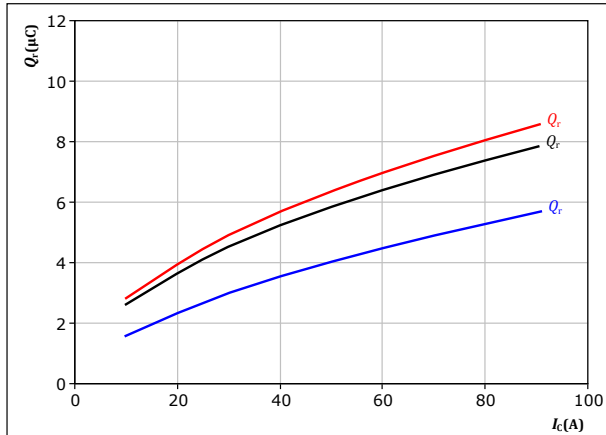

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 45.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

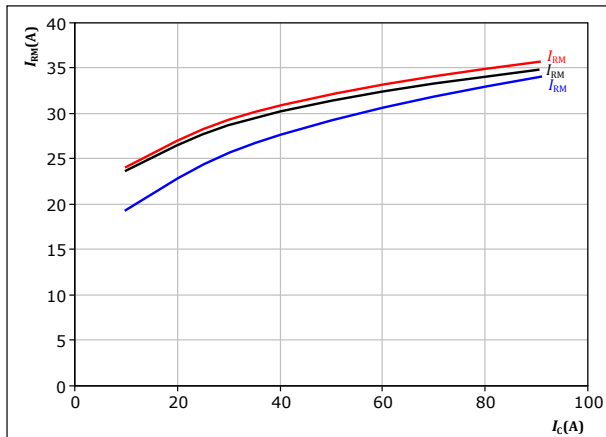

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 44.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

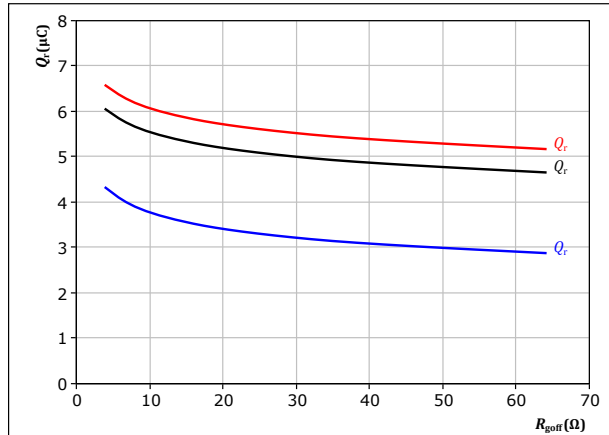

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 50$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 46.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

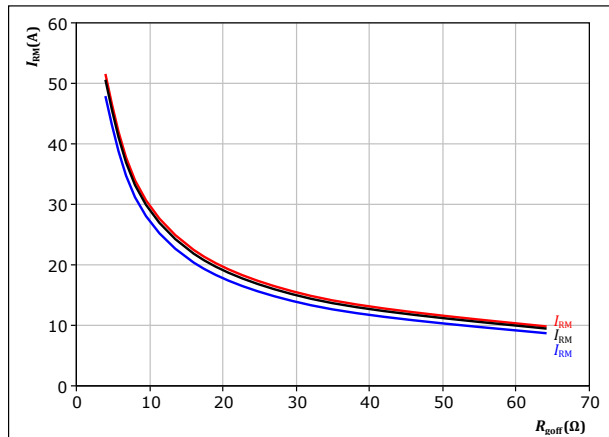

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_c = 50$ A

T_j :
— 25 °C
— 125 °C
— 150 °C




Vincotech

30-F212PMA075M7-L889A79
datasheet

Brake Switching Characteristics

figure 47. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

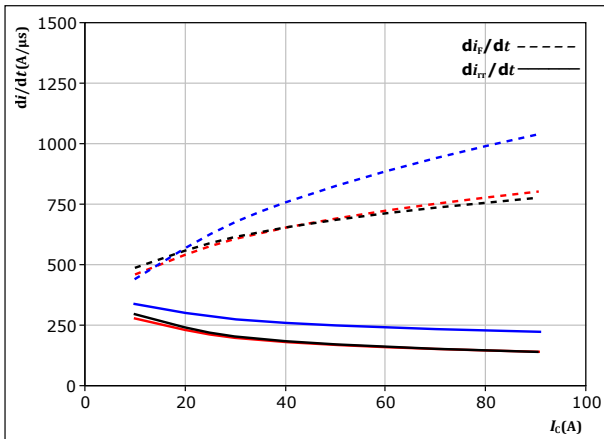

With an inductive load at


$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 49. IGBT

Reverse bias safe operating area


$I_C = f(V_{CE})$

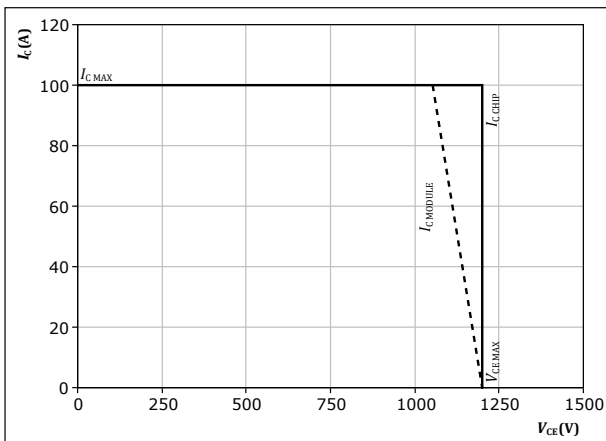

At $T_j = 150$ °C
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

figure 48. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_r/dt = f(R_{goff})$

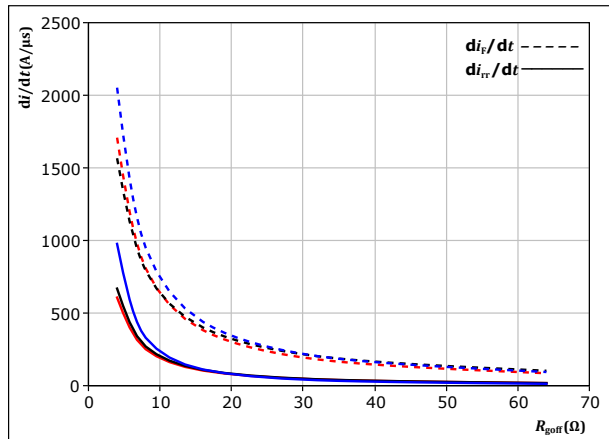

With an inductive load at

$V_{CE} = 700$ V
 $V_{GE} = 0/15$ V
 $I_C = 50$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

30-F212PMA075M7-L889A79
datasheet

Switching Definitions

figure 50. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

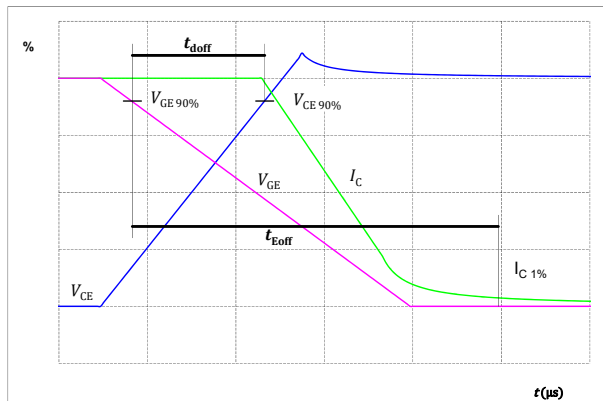


figure 51. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

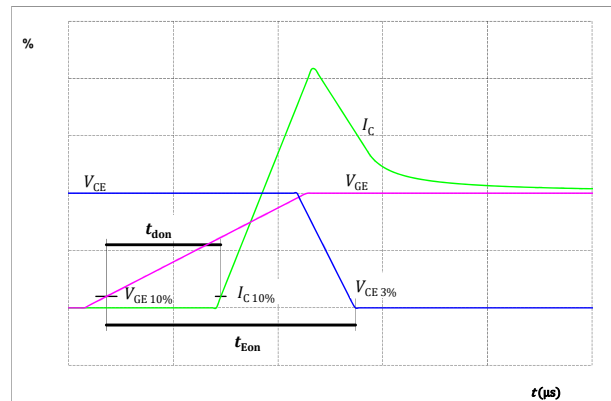


figure 52. IGBT

Turn-off Switching Waveforms & definition of t_f


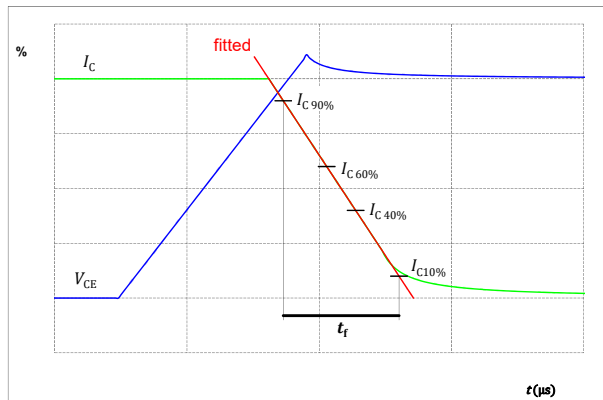


figure 53. IGBT

Turn-on Switching Waveforms & definition of t_r



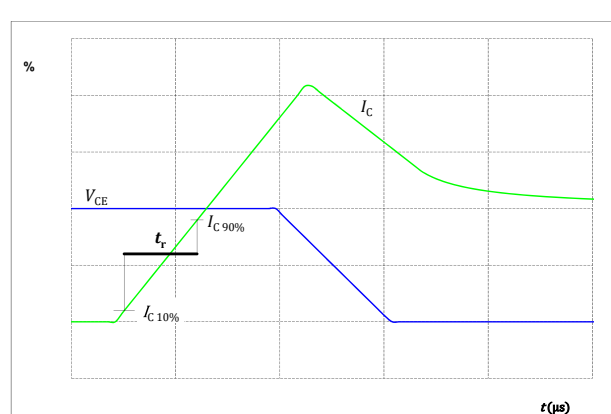

Vincotech

30-F212PMA075M7-L889A79
datasheet

Switching Definitions

figure 54.

FWD

Turn-off Switching Waveforms & definition of t_{rr}


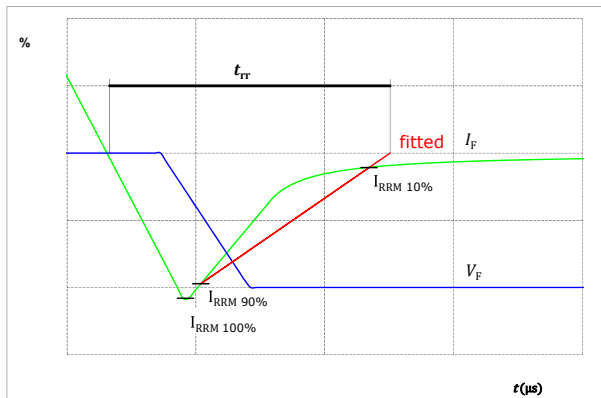


figure 55.

FWD



Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)

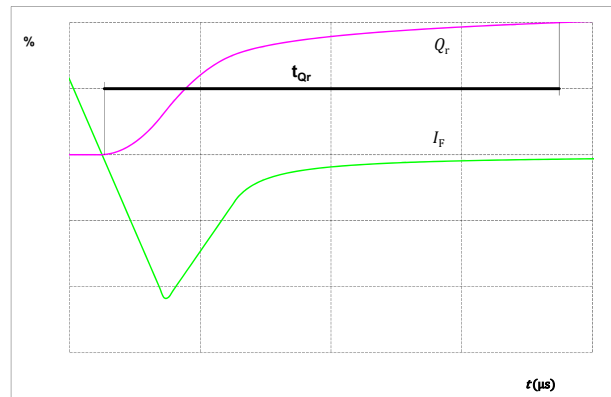



datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	30-F212PMA075M7-L889A79
With thermal paste (3,4 W/mK, PSX-P7)	30-F212PMA075M7-L889A79-/3/

Marking							
<div><div>NN-NNNNNNNNNNNNNNNNNNNN TTTTTTVVVWYY UL VIN LLLLL SSSS</div><div></div><div></div></div>	Text	Name		Date code	UL & VIN	Lot	Serial
		NN-NNNNNNNNNNNNNNNNNNNN- TTTTTTV		WWYY	UL VIN	LLLLL	SSSS
	Datamatrix	Type&Ver	Lot number	Serial	Date code		
		TTTTTTTV	LLLLL	SSSS	WWYY		

Outline							
Pin table [mm]							
Pin	X	Y	Function	29	0	37,2	Ph3
1	71,2	0	DC-Rect	30	2,5	37,2	Ph3
2	68,7	0	DC-Rect	31	5	37,2	Ph3
3	66,2	0	DC-Rect	32	7,8	37,2	S16
4	63,7	0	DC-Rect	33	10,6	37,2	G16
5	55,95	0	DC+Rect	34	18,45	37,2	G14
6	53,45	0	DC+Rect	35	21,25	37,2	S14
7	55,95	2,8	DC+Rect	36	24,05	37,2	Ph2
8	53,45	2,8	DC+Rect	37	26,55	37,2	Ph2
9	48,4	0	DC+Inv1	38	29,05	37,2	Ph2
10	45,9	0	DC+Inv1	39	36,1	37,2	Ph1
11	38,9	0	S11	40	38,6	37,2	Ph1
12	36,1	0	DC-1	41	41,1	37,2	Ph1
13	38,9	2,8	G11	42	43,9	37,2	S12
14	36,1	2,8	DC-1	43	46,7	37,2	G12
15	31,3	0	DC-2	44	53,7	37,2	ACIn1
16	28,5	0	S13	45	56,2	37,2	ACIn1
17	31,3	2,8	DC-2	46	58,7	37,2	ACIn1
18	28,5	2,8	G13	47	71,2	37,2	ACIn2
19	19,3	0	Therm2	48	71,2	34,7	ACIn2
20	19,3	2,8	Therm1	49	71,2	32,2	ACIn2
21	12,3	0	DC+Inv2	50	71,2	25,2	ACIn3
22	9,8	0	DC+Inv2	51	71,2	22,7	ACIn3
23	12,3	2,8	DC+Inv2	52	71,2	20,2	ACIn3
24	9,8	2,8	DC+Inv2	53	68,7	12,8	Br
25	2,8	0	S15	54	71,2	12,8	Br
26	0	0	DC-3	55	71,2	5,6	G27
27	2,8	2,8	G15	56	71,2	2,8	DC-Br
28	0	2,8	DC-3				




Vincotech

30-F212PMA075M7-L889A79

datasheet

Pinout

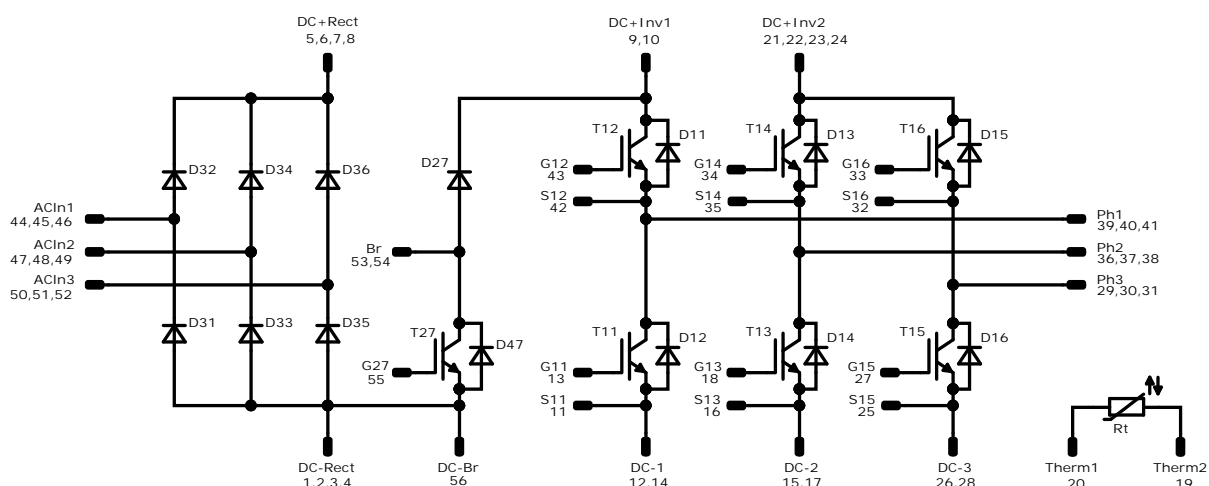


Identification

ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	1200 V	75 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1200 V	100 A	Inverter Diode	
T27	IGBT	1200 V	50 A	Brake Switch	
D27	FWD	1200 V	25 A	Brake Diode	
D47	FWD	1200 V	5 A	Brake Sw. Protection Diode	
D31, D32, D33, D34, D35, D36	Rectifier	1600 V	75 A	Rectifier Diode	
Rt	NTC			Thermistor	



Vincotech

30-F212PMA075M7-L889A79
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 36	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow 2</i> packages see vincotech.com website.				
Package data				
Package data for <i>flow 2</i> packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
30-F212PMA075M7-L889A79-D5-14	25 Sep. 2021	Inverter Switch and Diode dynamic characteristics are updated Rectifier forward voltage conditions is updated Updated Brake Switch gate charge Separated datasheet for solder pin version New datasheet format, module is unchanged	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.