
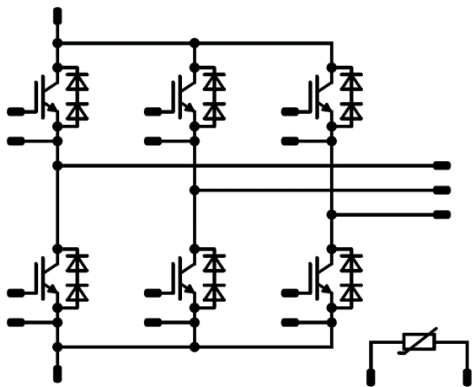




Vincotech

10-PY126TA025SH-L826F68Y

datasheet

flowPACK 1		1200 V / 25 A
Features	flow 1 12 mm housing	
<ul style="list-style-type: none">• High speed IGBT4• Tandem diodes for improved thermal performance• Integrated thermal sensor		
Target applications	Schematic	
<ul style="list-style-type: none">• Embedded Drives• Industrial Drives		
Types		
<ul style="list-style-type: none">• 10-PY126TA025SH-L826F68Y		

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	31	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	75	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	94	W
Gate-emitter voltage	V_{GES}		±20	V
Short circuit ratings	t_{SC}	$T_j \leq 150\text{ °C}$	10	µs
	V_{CC}	$V_{GE} = 15\text{ V}$	800	V
Maximum Junction Temperature	T_{jmax}		175	°C



Vincotech

10-PY126TA025SH-L826F68Y
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Diode				
Peak repetitive reverse voltage	V_{RRM}		1300	V
Continuous (direct) forward current	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	29	A
Repetitive peak forward current	I_{FRM}		60	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	85	W
Maximum junction temperature	T_{jmax}		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...(T _{jmax} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
		AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			min. 12,7	mm
Clearance			7,9	mm
Comparative Tracking Index	CTI		> 200	

*100 % tested in production



Vincotech

10-PY126TA025SH-L826F68Y

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{GE} = V_{CE}$			0,00085	25	5,3	5,8	6,3	V
Collector-emitter saturation voltage	V_{CEsat}		15		25	25 125 150	1,78	1,98 2,38 2,49	2,42	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			2,4	µA
Gate-emitter leakage current	I_{GES}		20	0		25			120	nA
Internal gate resistance	r_g							none		Ω
Input capacitance	C_{ies}	$f = 1 \text{ MHz}$	0	25	25			1430		pF
Output capacitance	C_{oes}							115		
Reverse transfer capacitance	C_{res}							75		
Gate charge	Q_g		15	960	25	25		115		nC

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						1,01		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$	± 15	600	15	25 125 150		38 38 38		ns
Rise time	t_r					25 125 150		4 5 6		
Turn-off delay time	$t_{d(off)}$					25 125 150		180 254 273		
Fall time	t_f					25 125 150		35 76 98		
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD} = 0,5 \mu\text{C}$ $Q_{tFWD} = 1,5 \mu\text{C}$ $Q_{tFWD} = 1,9 \mu\text{C}$				25 125 150		0,311 0,509 0,559		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		0,619 1,106 1,214		



Vincotech

10-PY126TA025SH-L826F68Y

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Diode

Static

Forward voltage	V_F				30	25 125 150	2,46	3,40 3,18 3,10	3,74	V
Reverse leakage current	I_R			1300		25			0,36	μA

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						1,12		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RRM}	$di/dt = 2341 \text{ A/}\mu\text{s}$ $di/dt = 1563 \text{ A/}\mu\text{s}$ $di/dt = 1664 \text{ A/}\mu\text{s}$	± 15	600	15	25 125 150		37 37 39		A
Reverse recovery time	t_{rr}					25 125 150		26 127 146		ns
Recovered charge	Q_r					25 125 150		0,484 1,541 1,904		μC
Reverse recovered energy	E_{rec}					25 125 150		0,134 0,651 0,830		mWs
Peak rate of fall of recovery current	$(di_{rf}/dt)_{max}$					25 125 150		8397 2812 2731		A/μs

Thermistor

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	P					25		5		mW
Power dissipation constant						25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$				25		3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$				25		4000		K
Vincotech NTC Reference									I	



Vincotech

10-PY126TA025SH-L826F68Y datasheet

Inverter Switch Characteristics

figure 1. IGBT
Typical output characteristics

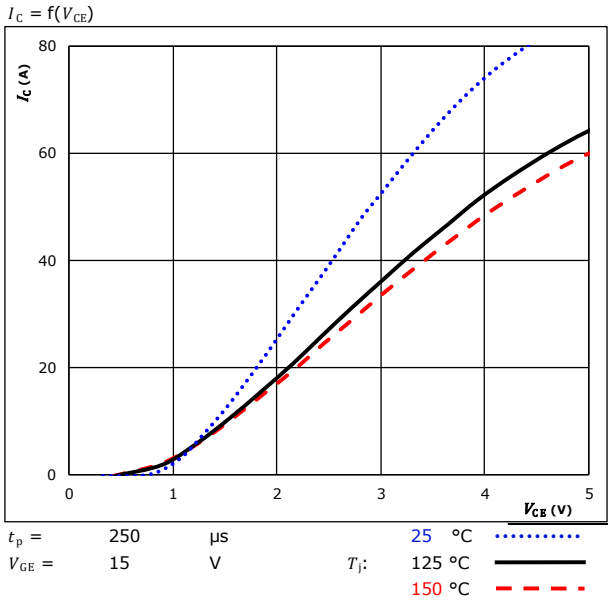


figure 2. IGBT
Typical output characteristics

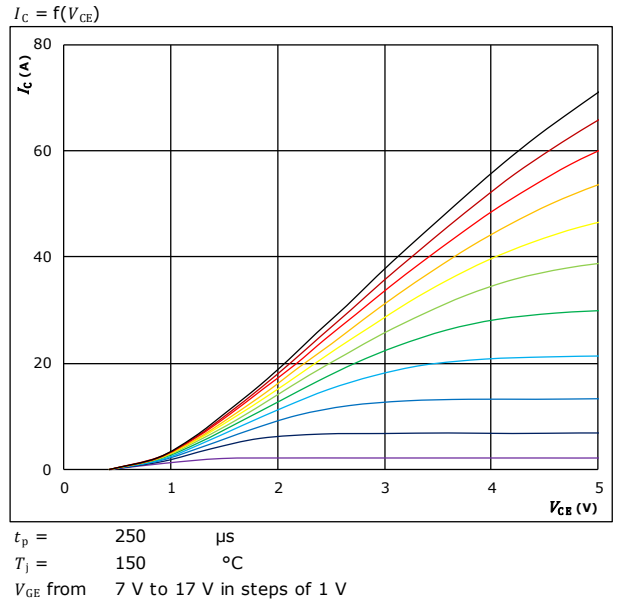


figure 3. IGBT
Typical transfer characteristics


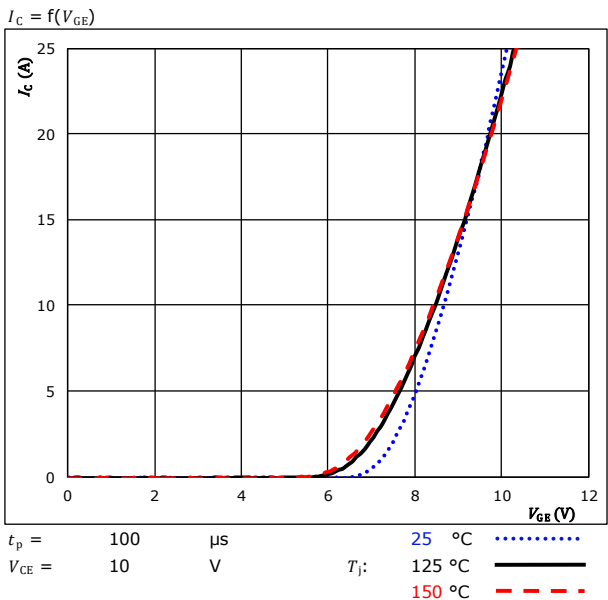


figure 4. IGBT
Transient Thermal Impedance as function of Pulse duration




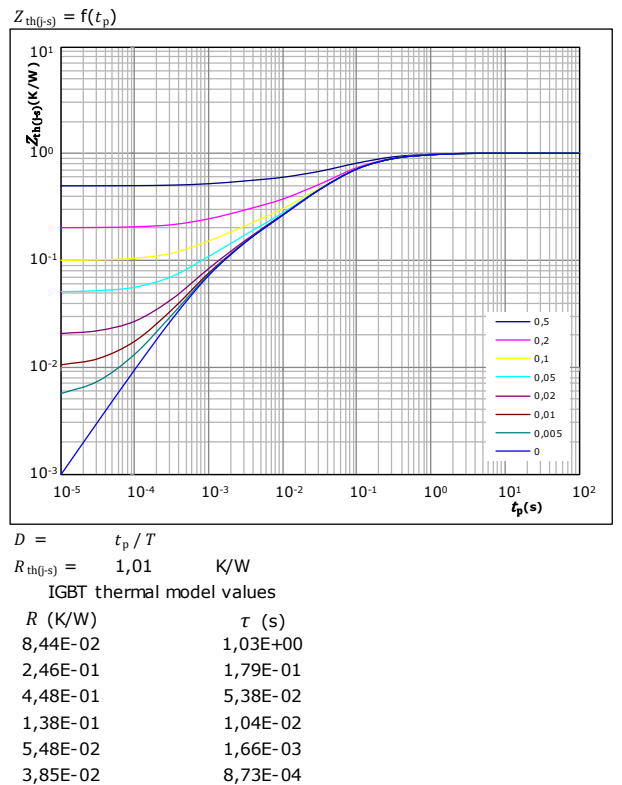

Vincotech


Inverter Switch Characteristics

figure 5. IGBT
Gate voltage vs Gate charge

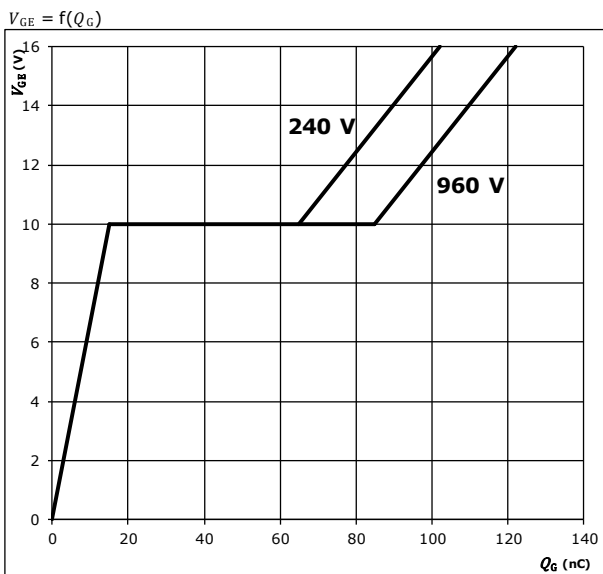

At
 $I_C = 25$ A

figure 6. IGBT
Safe operating area

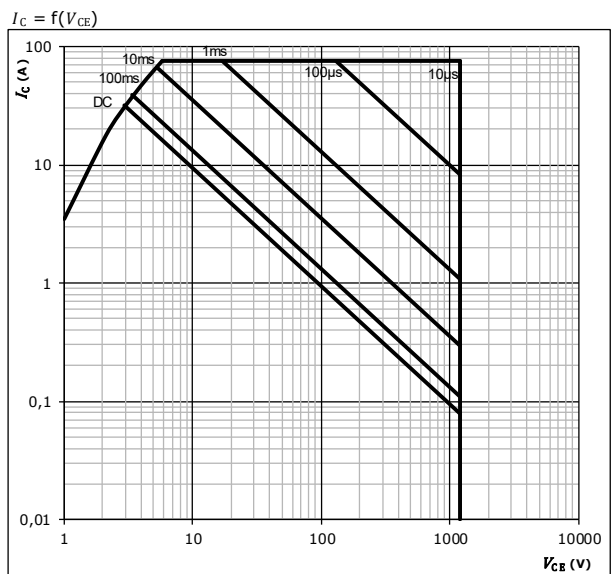

At
 $D =$ single pulse
 $T_s = 80$ °C
 $V_{GE} = \pm 15$ V
 $T_j = T_{jmax}$

figure 7. IGBT
Short circuit duration as a function of V_{GE}


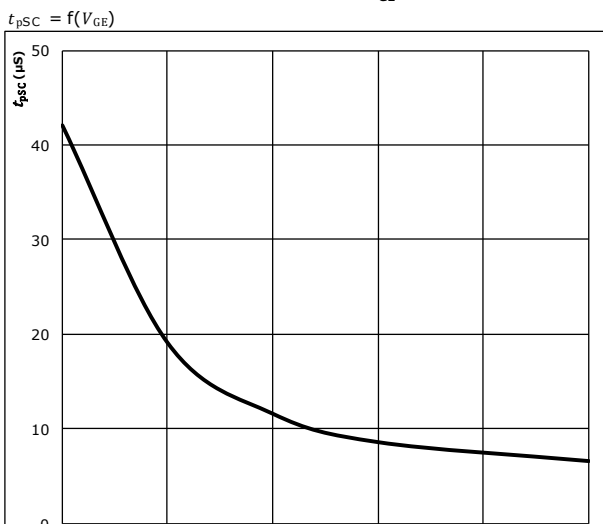


figure 8. IGBT
Typical short circuit current as a function of V_{GE}



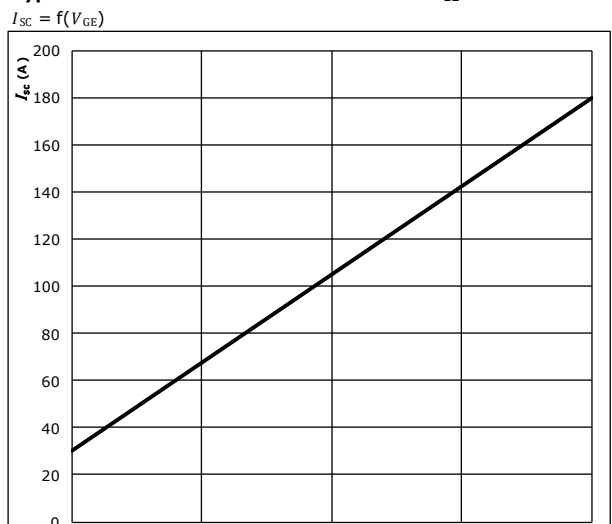

Vincotech

Inverter Diode Characteristics

figure 1. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


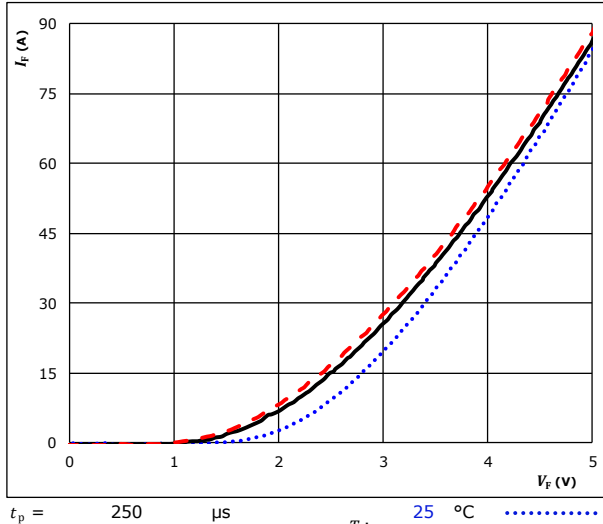


figure 2. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

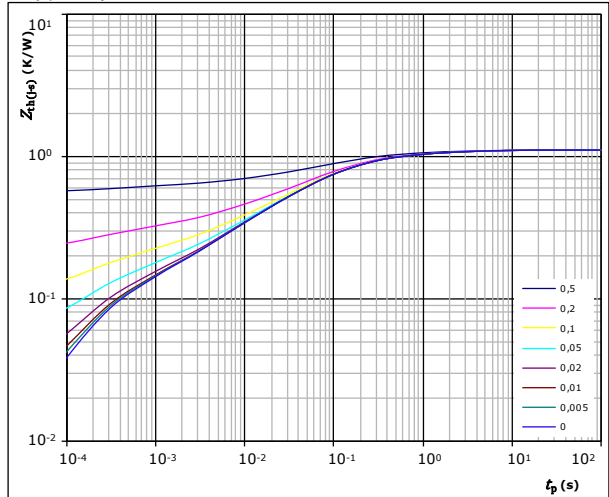

$$D = t_p / T$$

$$R_{th(j-s)} = 1,12 \text{ K/W}$$

FWD thermal model values


R (K/W)	τ (s)
4,97E-02	4,40E+00
1,25E-01	7,14E-01
3,42E-01	1,43E-01
3,04E-01	3,84E-02
1,52E-01	7,25E-03
5,32E-02	1,45E-03
9,07E-02	2,17E-04

Thermistor Characteristics

figure 1. Thermistor

Typical NTC characteristic as a function of temperature

$$R = f(T)$$

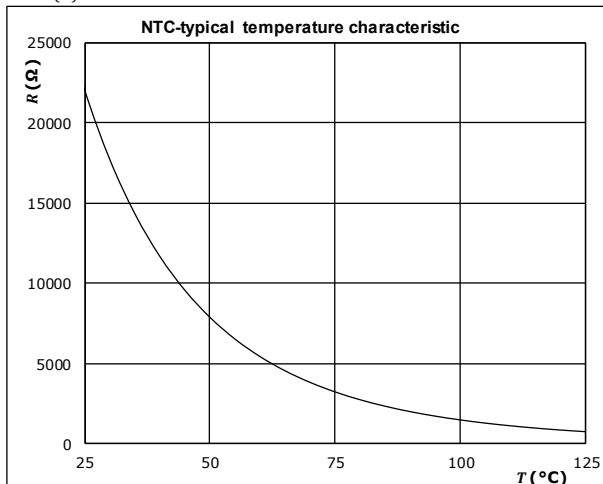



Vincotech

10-PY126TA025SH-L826F68Y


datasheet

Inverter Switching Characteristics

figure 1. IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

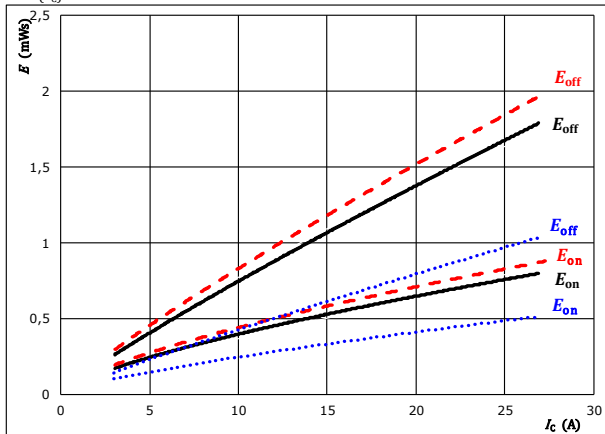

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω


T_j :

25 °C
125 °C
150 °C

figure 2. IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

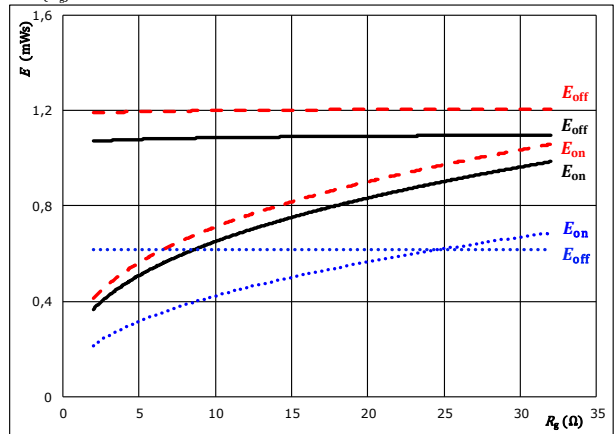

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

T_j : 25 °C
125 °C
150 °C

figure 3. FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

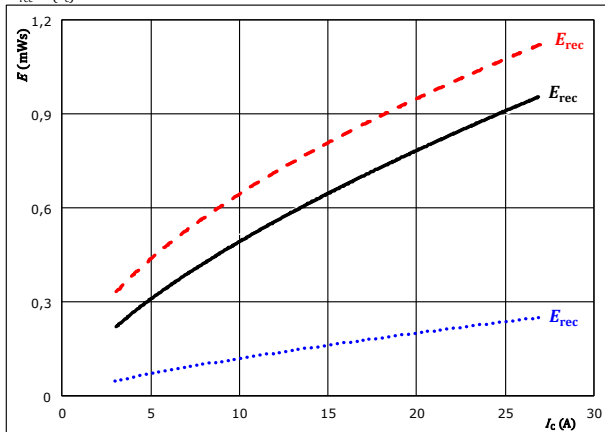

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω


T_j :

25 °C
125 °C
150 °C

figure 4. FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

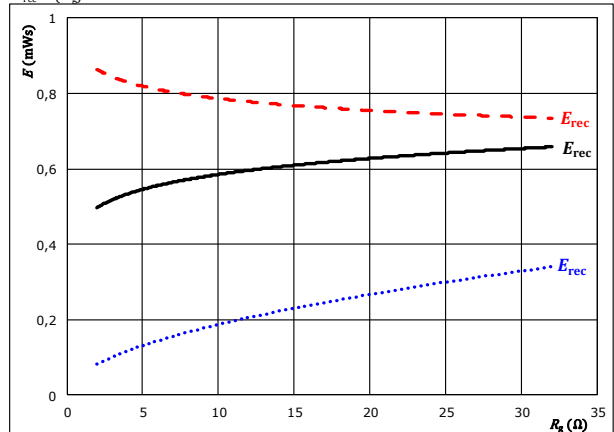

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

T_j : 25 °C
125 °C
150 °C




Vincotech

Inverter Switching Characteristics

figure 5. IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

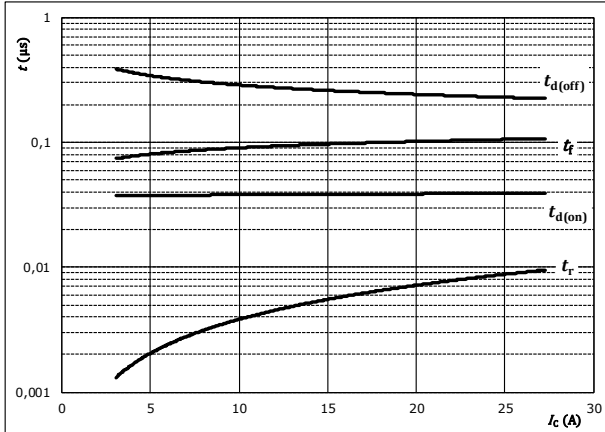


With an inductive load at

$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$R_{gon} =$	8	Ω
$R_{goff} =$	8	Ω

figure 6. IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

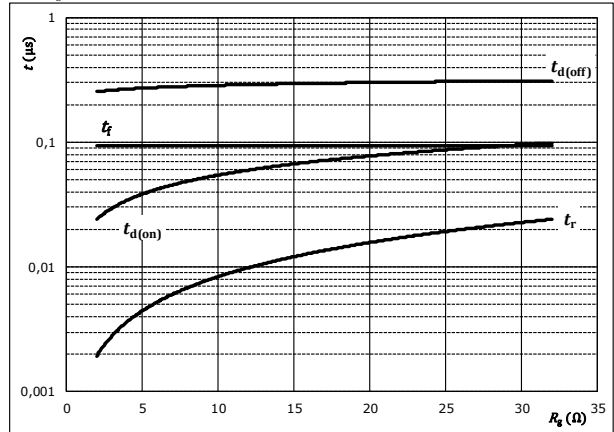


With an inductive load at

$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$I_C =$	15	A

figure 7. FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

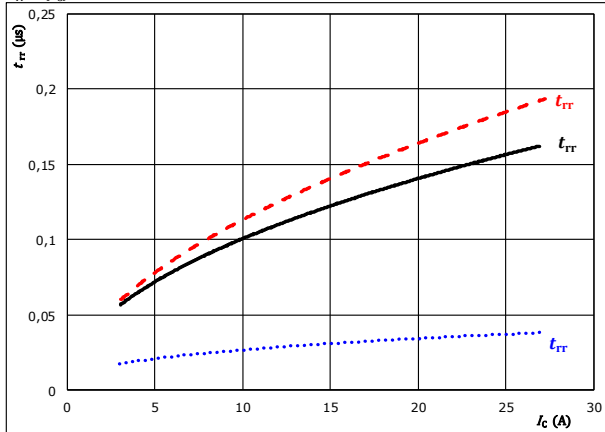


With an inductive load at

$V_{CE} =$	600	V	$T_j:$	25 °C
$V_{GE} =$	±15	V		125 °C	————
$R_{gon} =$	8	Ω		150 °C	-----

figure 8. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

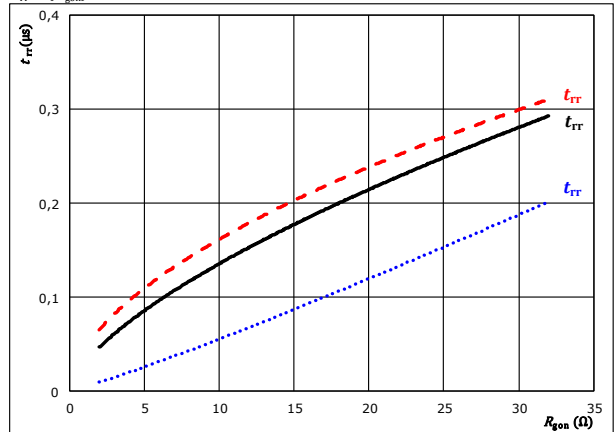

With an inductive load at

$V_{CE} =$	600	V	$T_j:$	25 °C
$V_{GE} =$	±15	V		125 °C	————
$I_C =$	15	A		150 °C	-----




Vincotech

Inverter Switching Characteristics

figure 9. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_C)$$

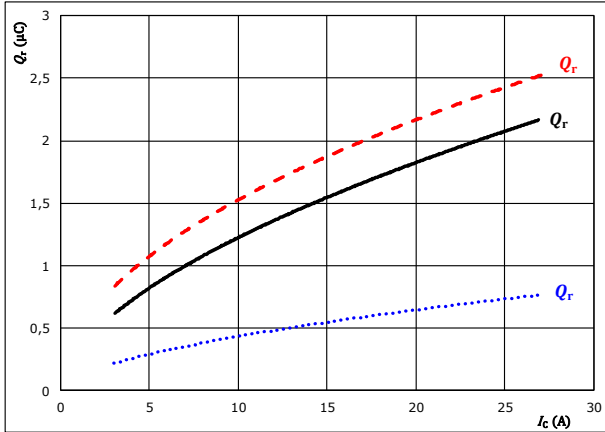

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

T_j : 25 °C (blue dotted)
125 °C (black solid)
150 °C (red dashed)

figure 10. FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

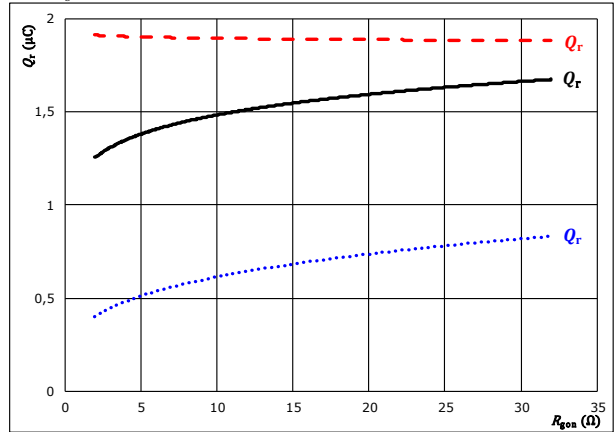

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

T_j : 25 °C (blue dotted)
125 °C (black solid)
150 °C (red dashed)

figure 11. FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_C)$$

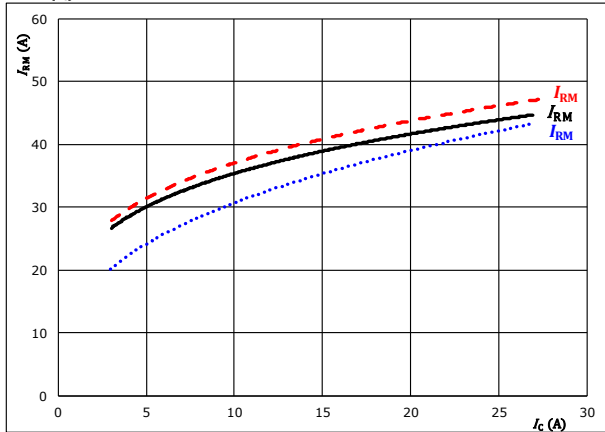

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

T_j : 25 °C (blue dotted)
125 °C (black solid)
150 °C (red dashed)

figure 12. FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

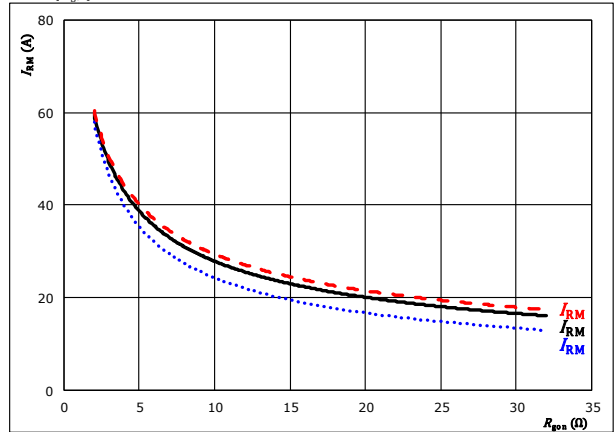

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

T_j : 25 °C (blue dotted)
125 °C (black solid)
150 °C (red dashed)




Vincotech

Inverter Switching Characteristics

figure 13. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_F/dt, di_{rr}/dt = f(I_C)$

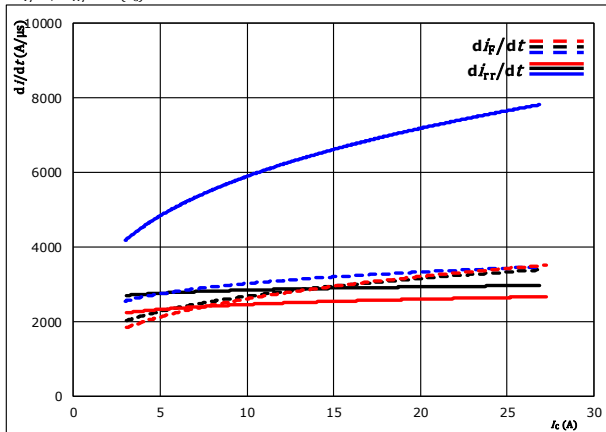


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω
 $T_j: 25$ °C
 125 °C
 150 °C

figure 14. FWD

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor
 $di_F/dt, di_{rr}/dt = f(R_{gon})$

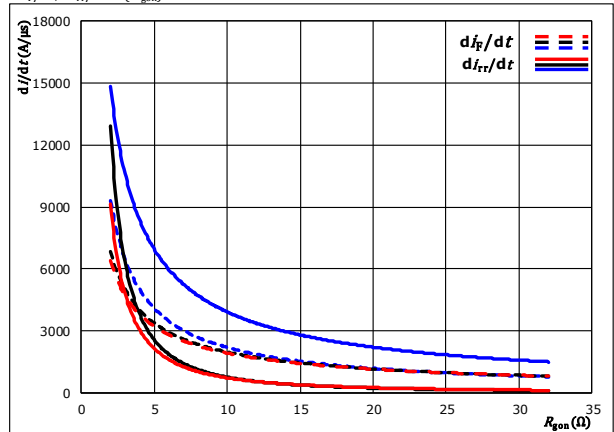


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A
 $T_j: 25$ °C
 125 °C
 150 °C

figure 15. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

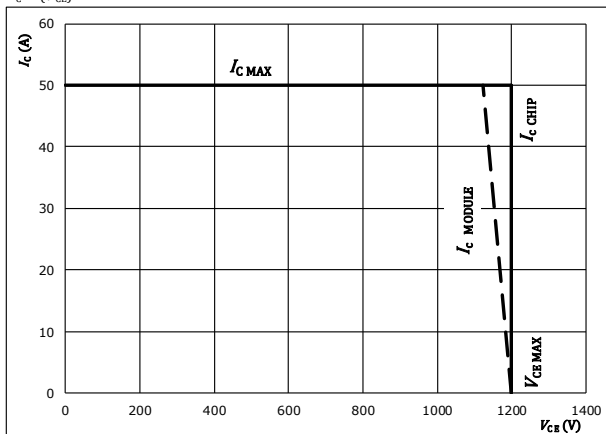

At

$T_j = 125$ °C
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω



Vincotech


Inverter Switching Definitions

General conditions

T_j	=	125 °C
R_{gon}	=	8 Ω
R_{goff}	=	8 Ω

figure 1. IGBT


Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

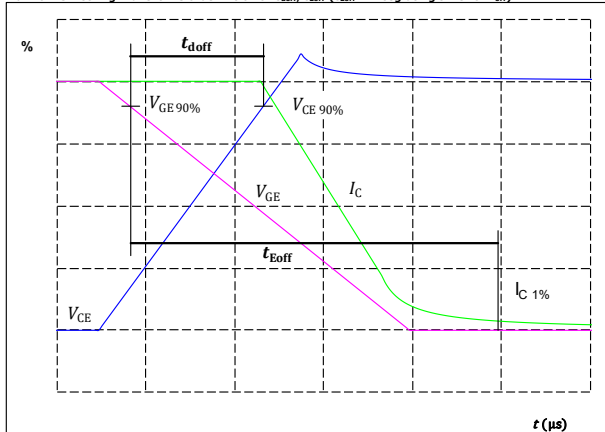

$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	15	A
$t_{doff} =$	254	ns

figure 2. IGBT


Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

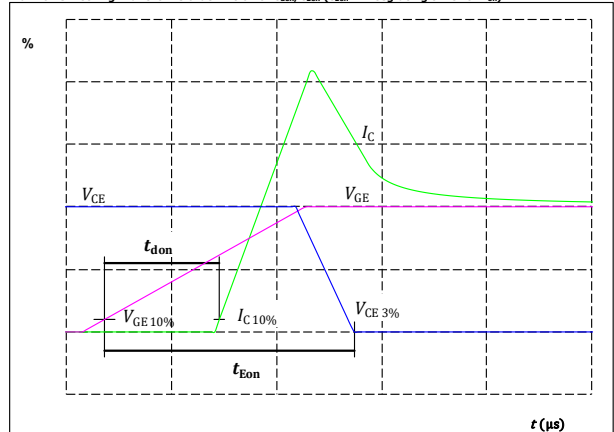

$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	15	A
$t_{don} =$	38	ns

figure 3. IGBT


Turn-off Switching Waveforms & definition of t_f

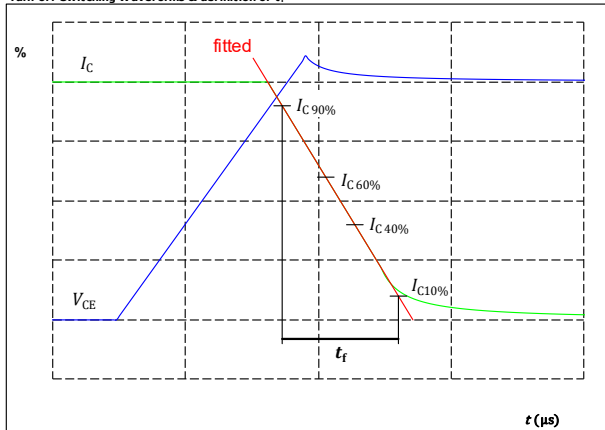

$V_C(100\%) =$	600	V
$I_C(100\%) =$	15	A
$t_f =$	76	ns

figure 4. IGBT

Turn-on Switching Waveforms & definition of t_r

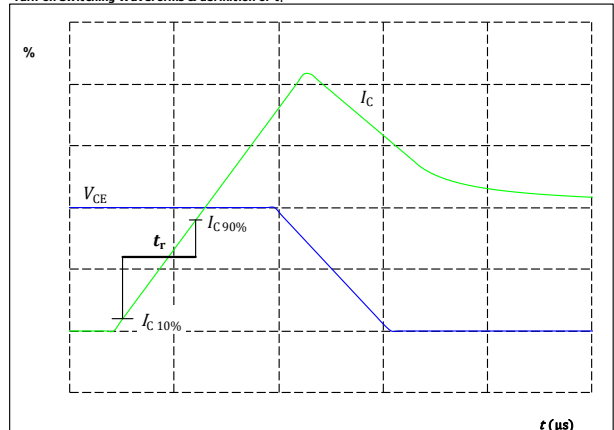

$V_C(100\%) =$	600	V
$I_C(100\%) =$	15	A
$t_r =$	5	ns




Vincotech

Inverter Switching Characteristics

figure 5. FWD


Turn-off Switching Waveforms & definition of t_{rr}

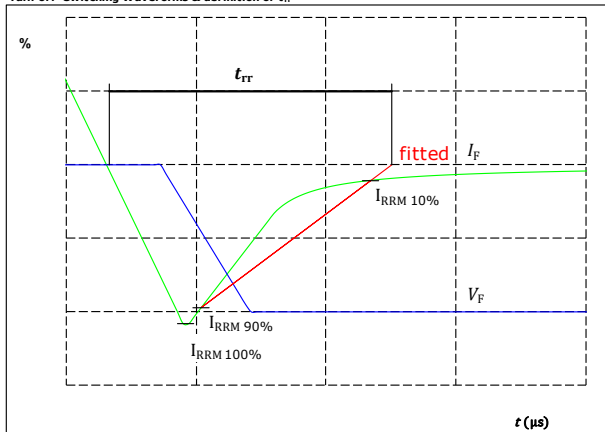

$V_F(100\%) =$	600	V
$I_F(100\%) =$	15	A
$I_{RRM}(100\%) =$	37	A
$t_{rr} =$	127	ns

figure 6. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)

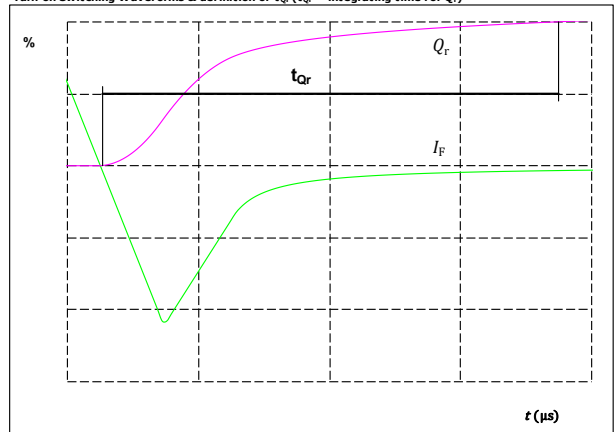



$I_F(100\%) =$	15	A
$Q_r(100\%) =$	1,54	μC





Vincotech

10-PY126TA025SH-L826F68Y


datasheet

Ordering Code & Marking								
Version				Ordering Code				
without thermal paste 12mm housing with Press-fit pins				10-PY126TA025SH-L826F68Y				
with thermal paste 12mm housing with Press-fit pins				10-PY126TA025SH-L826F68Y-/3/				
<div><div>NN-NNNNNNNNNNNNNN TTTTTIV WWYY UL VIN LLLLL SSSS</div><div></div><div></div></div>		Text	Name		Date code	UL & VIN	Lot	Serial
			NN-NNNNNNNNNNNNNN-TTTTTIV		WWYY	UL VIN	LLLLL	SSSS
		Datamatrix	Type&Ver	Lot number	Serial	Date code		
			TTTTTIV	LLLLL	SSSS	WWYY		

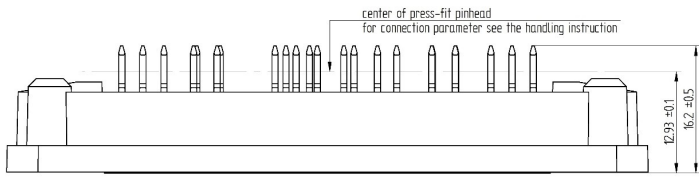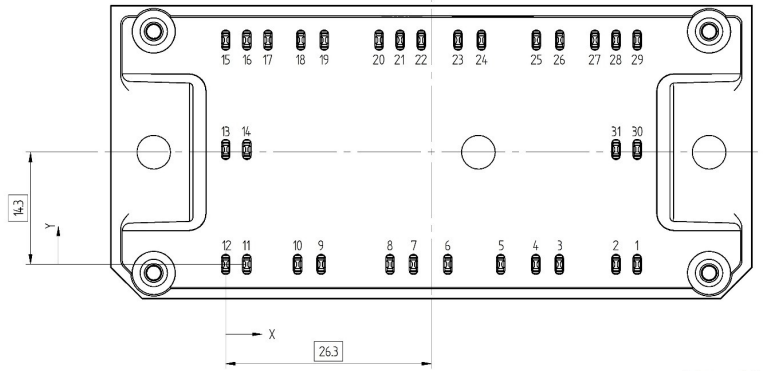Outline																																																																																																																																			
<p>Pin table</p> <table><thead><tr><th>Pin</th><th>X</th><th>Y</th><th>Functions</th></tr></thead><tbody><tr><td>1</td><td>52,6</td><td>0</td><td>DC-123</td></tr><tr><td>2</td><td>49,9</td><td>0</td><td>DC-123</td></tr><tr><td>3</td><td>42,65</td><td>0</td><td>G15</td></tr><tr><td>4</td><td>39,65</td><td>0</td><td>S15</td></tr><tr><td>5</td><td>35,15</td><td>0</td><td>Therm1</td></tr><tr><td>6</td><td>28,4</td><td>0</td><td>Therm2</td></tr><tr><td>7</td><td>24</td><td>0</td><td>G13</td></tr><tr><td>8</td><td>21</td><td>0</td><td>S13</td></tr><tr><td>9</td><td>12,2</td><td>0</td><td>G11</td></tr><tr><td>10</td><td>9,2</td><td>0</td><td>S11</td></tr><tr><td>11</td><td>2,7</td><td>0</td><td>DC-123</td></tr><tr><td>12</td><td>0</td><td>0</td><td>DC-123</td></tr><tr><td>13</td><td>0</td><td>14,65</td><td>DC+123</td></tr><tr><td>14</td><td>2,7</td><td>14,65</td><td>DC+123</td></tr><tr><td>15</td><td>0</td><td>28,6</td><td>Ph1</td></tr><tr><td>16</td><td>2,7</td><td>28,6</td><td>Ph1</td></tr><tr><td>17</td><td>5,4</td><td>28,6</td><td>Ph1</td></tr><tr><td>18</td><td>9,6</td><td>28,6</td><td>S12</td></tr><tr><td>19</td><td>12,6</td><td>28,6</td><td>G12</td></tr><tr><td>20</td><td>19,6</td><td>28,6</td><td>Ph2</td></tr><tr><td>21</td><td>22,3</td><td>28,6</td><td>Ph2</td></tr><tr><td>22</td><td>25</td><td>28,6</td><td>Ph2</td></tr><tr><td>23</td><td>29,7</td><td>28,6</td><td>S14</td></tr><tr><td>24</td><td>32,7</td><td>28,6</td><td>G14</td></tr><tr><td>25</td><td>39,7</td><td>28,6</td><td>S16</td></tr><tr><td>26</td><td>42,7</td><td>28,6</td><td>G16</td></tr><tr><td>27</td><td>47,2</td><td>28,6</td><td>Ph3</td></tr><tr><td>28</td><td>49,9</td><td>28,6</td><td>Ph3</td></tr><tr><td>29</td><td>52,6</td><td>28,6</td><td>Ph3</td></tr><tr><td>30</td><td>52,6</td><td>14,65</td><td>DC+123</td></tr><tr><td>31</td><td>49,9</td><td>14,65</td><td>DC+123</td></tr></tbody></table>				Pin	X	Y	Functions	1	52,6	0	DC-123	2	49,9	0	DC-123	3	42,65	0	G15	4	39,65	0	S15	5	35,15	0	Therm1	6	28,4	0	Therm2	7	24	0	G13	8	21	0	S13	9	12,2	0	G11	10	9,2	0	S11	11	2,7	0	DC-123	12	0	0	DC-123	13	0	14,65	DC+123	14	2,7	14,65	DC+123	15	0	28,6	Ph1	16	2,7	28,6	Ph1	17	5,4	28,6	Ph1	18	9,6	28,6	S12	19	12,6	28,6	G12	20	19,6	28,6	Ph2	21	22,3	28,6	Ph2	22	25	28,6	Ph2	23	29,7	28,6	S14	24	32,7	28,6	G14	25	39,7	28,6	S16	26	42,7	28,6	G16	27	47,2	28,6	Ph3	28	49,9	28,6	Ph3	29	52,6	28,6	Ph3	30	52,6	14,65	DC+123	31	49,9	14,65	DC+123
Pin	X	Y	Functions																																																																																																																																
1	52,6	0	DC-123																																																																																																																																
2	49,9	0	DC-123																																																																																																																																
3	42,65	0	G15																																																																																																																																
4	39,65	0	S15																																																																																																																																
5	35,15	0	Therm1																																																																																																																																
6	28,4	0	Therm2																																																																																																																																
7	24	0	G13																																																																																																																																
8	21	0	S13																																																																																																																																
9	12,2	0	G11																																																																																																																																
10	9,2	0	S11																																																																																																																																
11	2,7	0	DC-123																																																																																																																																
12	0	0	DC-123																																																																																																																																
13	0	14,65	DC+123																																																																																																																																
14	2,7	14,65	DC+123																																																																																																																																
15	0	28,6	Ph1																																																																																																																																
16	2,7	28,6	Ph1																																																																																																																																
17	5,4	28,6	Ph1																																																																																																																																
18	9,6	28,6	S12																																																																																																																																
19	12,6	28,6	G12																																																																																																																																
20	19,6	28,6	Ph2																																																																																																																																
21	22,3	28,6	Ph2																																																																																																																																
22	25	28,6	Ph2																																																																																																																																
23	29,7	28,6	S14																																																																																																																																
24	32,7	28,6	G14																																																																																																																																
25	39,7	28,6	S16																																																																																																																																
26	42,7	28,6	G16																																																																																																																																
27	47,2	28,6	Ph3																																																																																																																																
28	49,9	28,6	Ph3																																																																																																																																
29	52,6	28,6	Ph3																																																																																																																																
30	52,6	14,65	DC+123																																																																																																																																
31	49,9	14,65	DC+123																																																																																																																																
																																																																																																																																			
																																																																																																																																			
<p>Tolerance of pinpositions: ±0,5mm at the end of pins Dimension of coordinate axis is only offset without tolerance</p>																																																																																																																																			



Vincotech

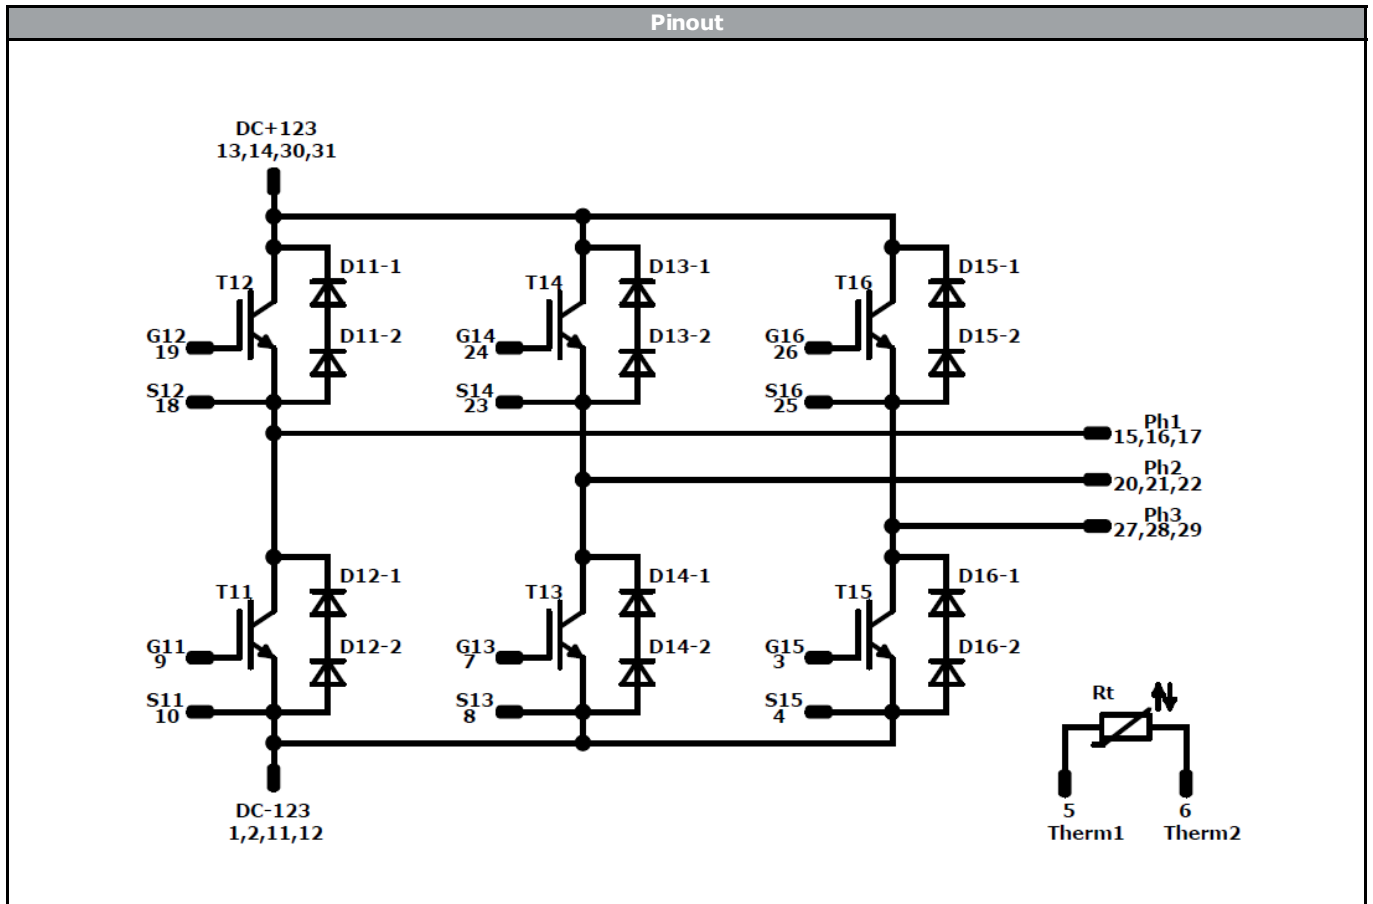

Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	1200 V	25 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1300 V	30 A	Inverter Diode	
Rt	NTC			Thermistor	




Vincotech

10-PY126TA025SH-L826F68Y
datasheet

Packaging instruction			
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ Sample

Handling instruction
Handling instructions for <i>flow</i> 1 packages see vincotech.com website.

Package data
Package data for <i>flow</i> 1 packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-PY126TA025SH-L826F68Y-D1-14	08 Nov. 2018		

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.