

flowmNPC0
mixed voltage NPC Application
650V/100A
General conditions
Half Bridge IGBT


V_{GEon}	=	15 V
V_{GOff}	=	-15 V
R_{gon}	=	4 Ω
R_{goff}	=	4 Ω

Vout= 115 VAC
Neutral Point IGBT

V_{GEon}	=	15 V
V_{GOff}	=	-15 V
R_{gon}	=	4 Ω
R_{goff}	=	4 Ω

Figure 1.
Half Bridge IGBT
Typical average static loss as a function of output current I_{oRMS}


$P_{loss}=f(I_{out})$

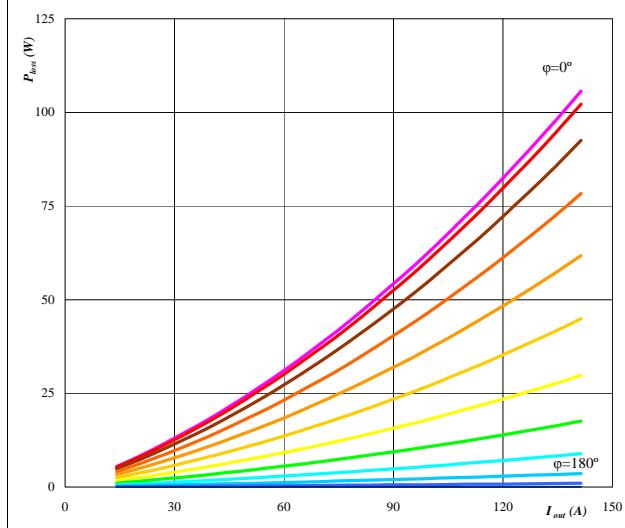

Conditions: $T_j = 125^\circ C$
 parameter: ϕ from 0° to 180°
 in 12 steps

Figure 3.
Half Bridge IGBT
Typical average static loss as a function of phase displacement ϕ


$P_{loss}=f(\phi)$

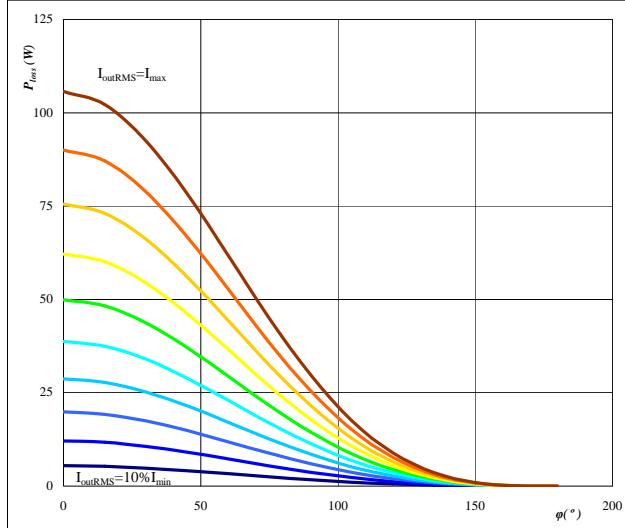

Conditions: $T_j = 125^\circ C$
 parameter: I_{oRMS} from 14,14 A to 141 A
 in steps of 14 A

Figure 2.
Neutral Point FWD
Typical average static loss as a function of output current I_{oRMS}


$P_{loss}=f(I_{out})$

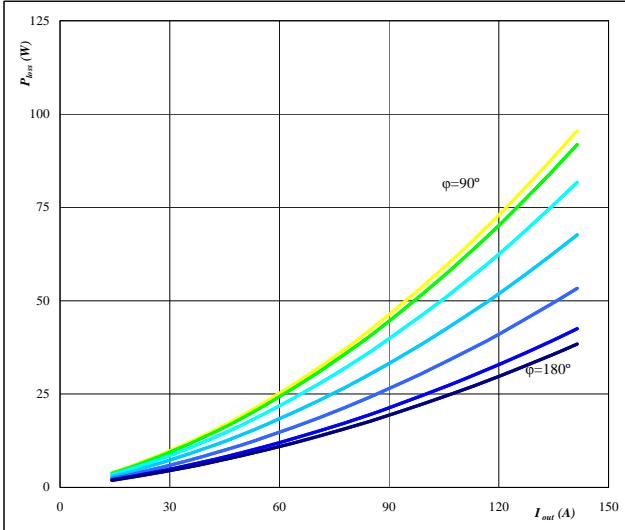

Conditions: $T_j = 125^\circ C$
 parameter: ϕ from 0° to 180°
 in 12 steps

Figure 4.
Neutral Point FWD
Typical average static loss as a function of phase displacement ϕ


$P_{loss}=f(\phi)$

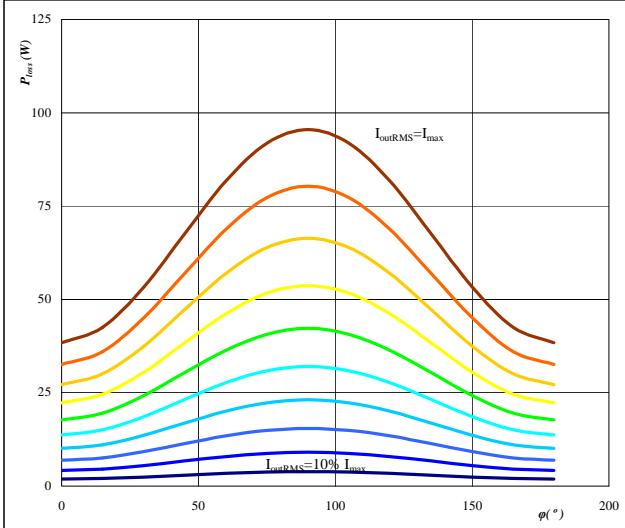

Conditions: $T_j = 125^\circ C$
 parameter: I_{oRMS} from 14,14 A to 141 A
 in steps of 14 A

flowmNPC0
mixed voltage NPC Application
650V/100A
Figure 5.
Half Bridge IGBT
Typical average switching loss as a function of phase displacement ϕ


$P_{loss}=f(\phi)$

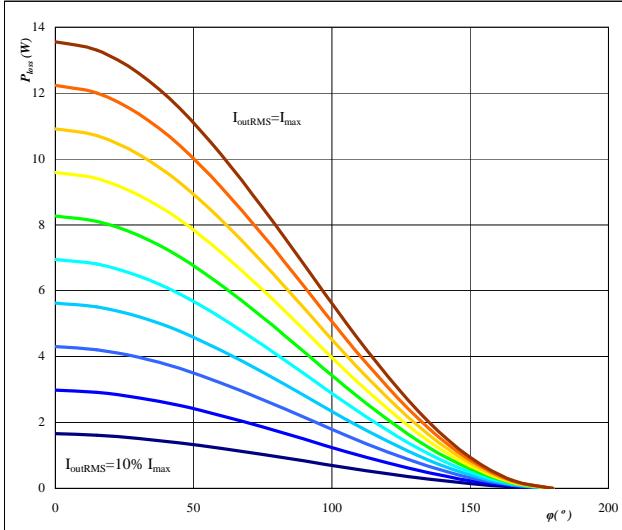

Conditions: $T_j= 125^\circ C$
 $f_{sw}= 16 \text{ kHz}$
DC link= 350 V
parameter: I_{oRMS} from 14,14 A to 141 A
in steps of 14 A

Figure 6.
Neutral Point FWD
Typical average switching loss as a function of phase displacement ϕ


$P_{loss}=f(\phi)$

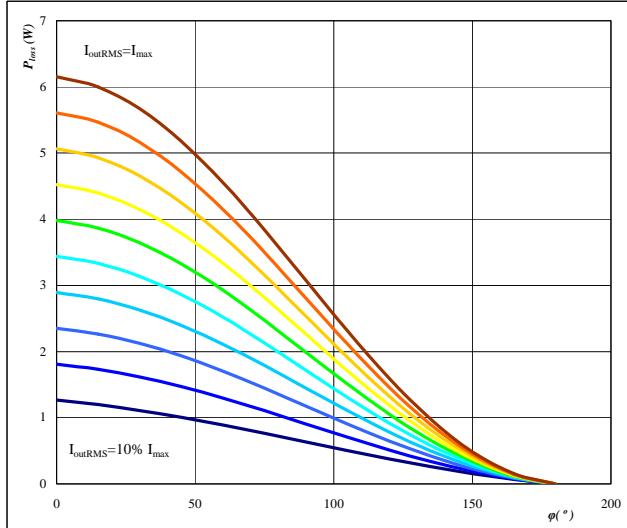

Conditions: $T_j= 125^\circ C$
 $f_{sw}= 16 \text{ kHz}$
DC link= 350 V
parameter: I_{oRMS} from 14,14 A to 141 A
in steps of 14 A

Figure 7.
Half Bridge IGBT
Typical total loss as a function of phase displacement ϕ and output current I_{oRMS}


$P_{loss}=f(I_{oRMS};\phi)$

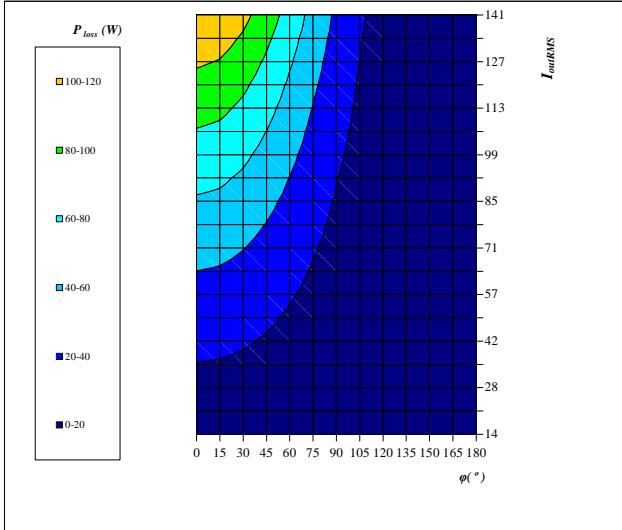

Conditions: $T_j= 125^\circ C$
DC link= 350 V
 $f_{sw}= 16 \text{ kHz}$

Figure 8.
Neutral Point FWD
Typical total loss as a function of phase displacement ϕ and output current I_{oRMS}


$P_{loss}=f(I_{oRMS};\phi)$

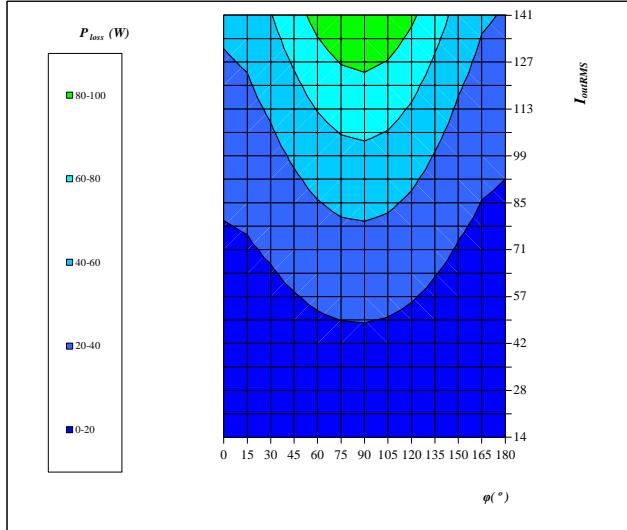

Conditions: $T_j= 125^\circ C$
DC link= 350 V
 $f_{sw}= 16 \text{ kHz}$


flowmNPC0
mixed voltage NPC Application
650V/100A

Figure 9. for Half Bridge IGBT+ Neutral Point FWD
Typical available output current as a function of phase displacement φ

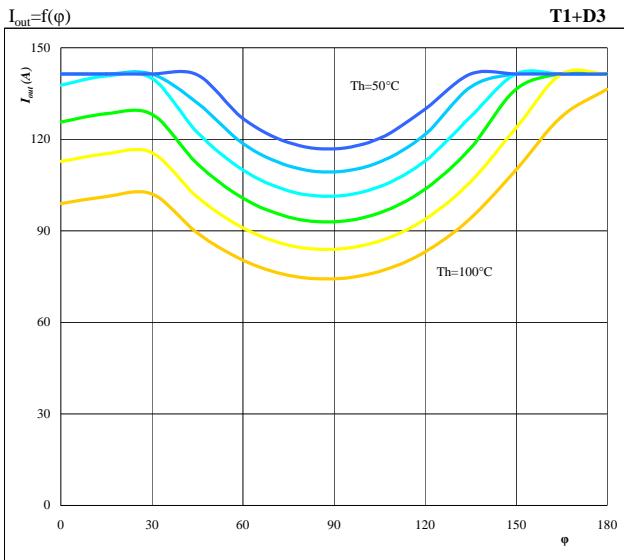


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
 DC link = 350 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 10. for Half Bridge IGBT+ Neutral Point FWD
Typical available output current as a function of switching frequency f_{sw}

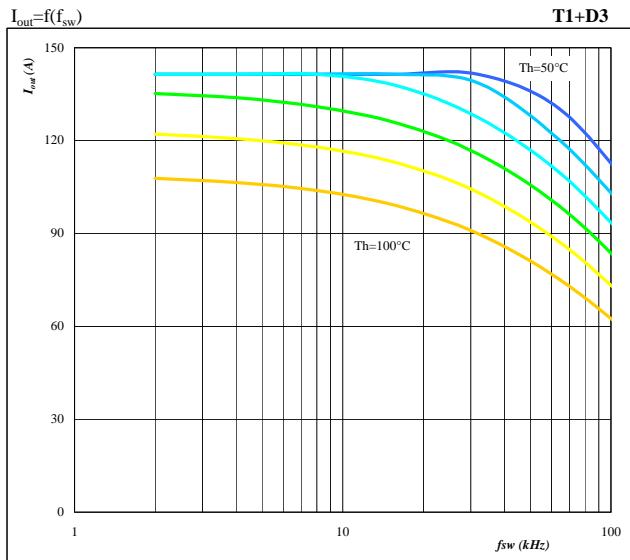


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $\varphi = 0 \text{ } ^\circ$
 DC link = 350 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps


Figure 11. for Half Bridge IGBT+ Neutral Point FWD
Typical available 50Hz output current as a function of f_{sw} and phase displacement φ

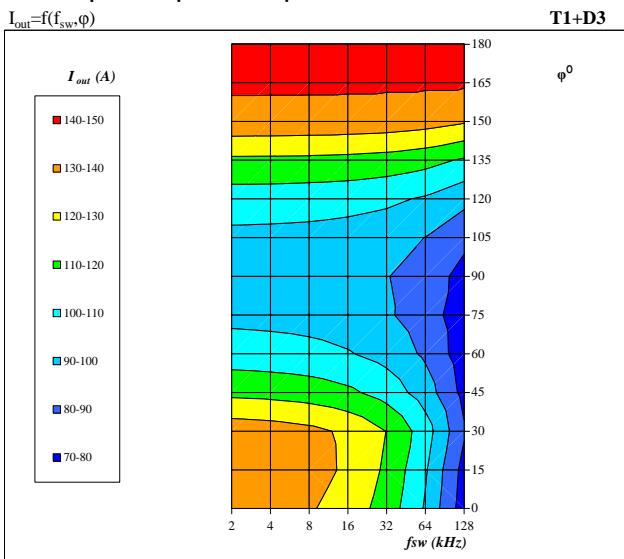


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
 DC link = 350 V
 $T_h = 80 \text{ } ^\circ\text{C}$

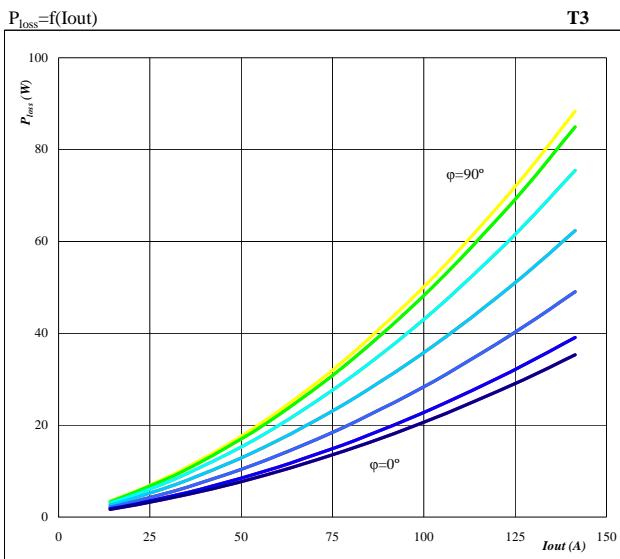flowmNPC0
mixed voltage NPC Application
650V/100A
Figure 12.
neutral point IGBT
Typical average static loss as a function of output current


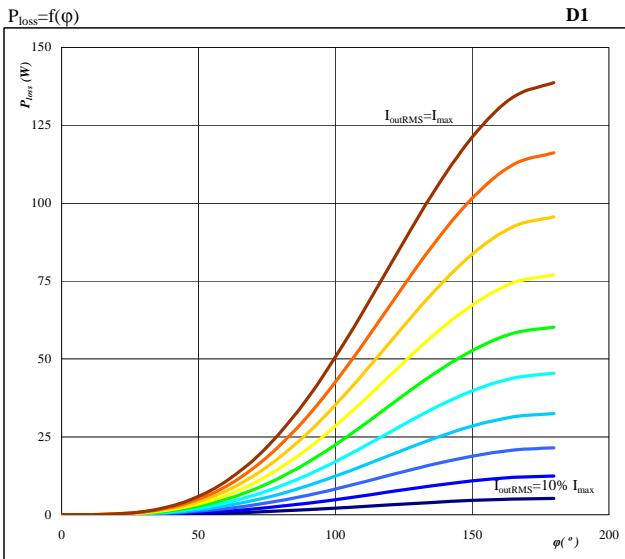
Conditions: $T_j = 125^\circ C$
 parameter: ϕ from 0° to 180°
 in 12 steps

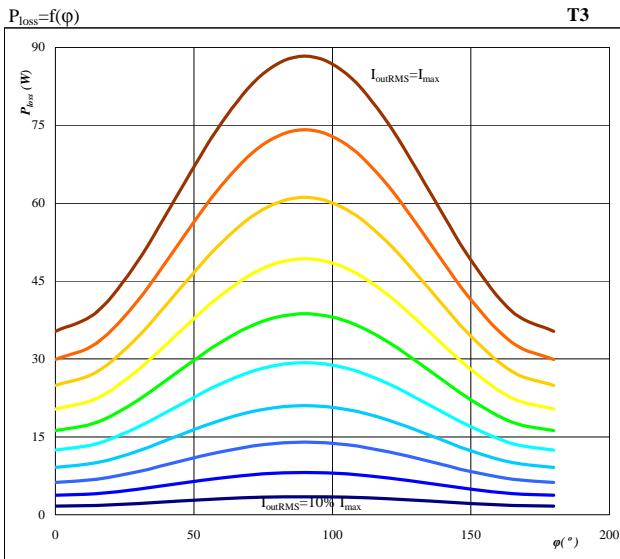Figure 14.
neutral point IGBT
Typical average static loss as a function of phase displacement


Conditions: $T_j = 125^\circ C$
 parameter: I_{outRMS} from 14 A to 141 A
 in steps of 14 A

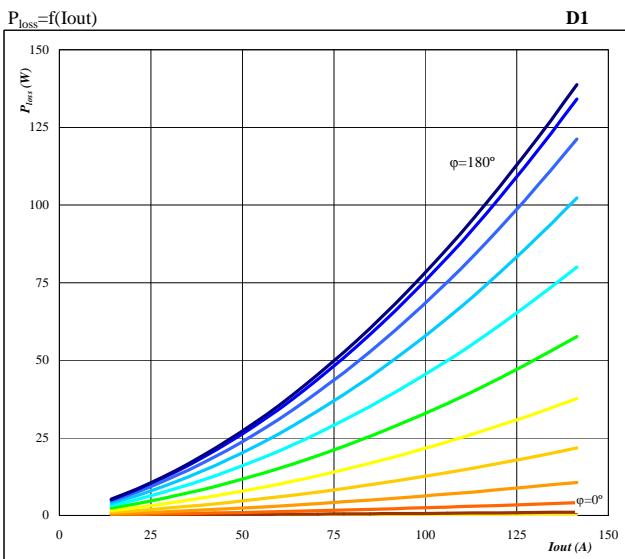Figure 13.
half bridge FRED
Typical average static loss as a function of output current


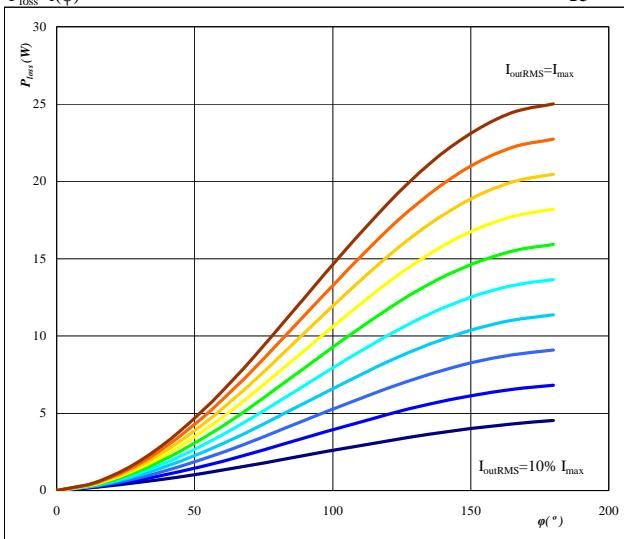
Conditions: $T_j = 125^\circ C$
 parameter: ϕ from 0° to 180°
 in 12 steps

Figure 15.
half bridge FRED
Typical average static loss as a function of phase displacement


Conditions: $T_j = 125^\circ C$
 parameter: I_{outRMS} from 14 A to 141 A
 in steps of 14 A

flowmNPC0
mixed voltage NPC Application
650V/100A
Figure 16.
neutral point IGBT
Typical average switching loss as a function of phase displacement


$P_{loss}=f(\phi)$



Conditions: $T_j=125^\circ\text{C}$ $f_{sw}=16\text{ kHz}$
 DC link= 350 V
 parameter: I_{oRMS} from 14 A to 141 A
 in steps of 14 A A

Figure 18.
neutral point IGBT
Typical total loss as a function of phase displacement and I_{outRMS}


$P_{loss}=f(I_{oRMS};\phi)$

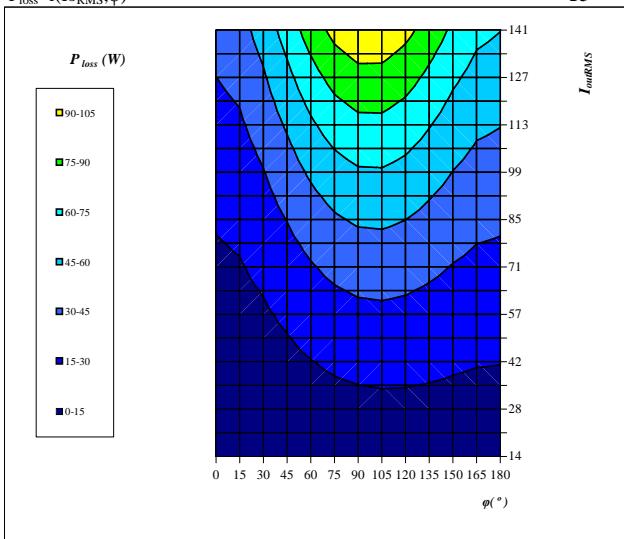

Conditions: $T_j=125^\circ\text{C}$
 DC link= 350 V
 $f_{sw}=16\text{ kHz}$

Figure 17.
half bridge FRED
Typical average switching loss as a function of phase displacement


$P_{loss}=f(\phi)$

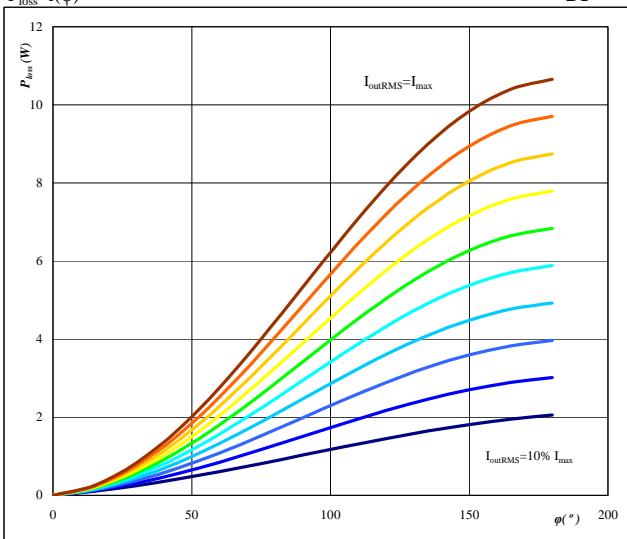

Conditions: $T_j=125^\circ\text{C}$ $f_{sw}=16\text{ kHz}$
 DC link= 350 V
 parameter: I_{oRMS} from 14 A to 141 A
 in steps of 14 A A

Figure 19.
half bridge FRED
Typical total loss as a function of phase displacement and I_{outRMS}


$P_{loss}=f(I_{oRMS};\phi)$

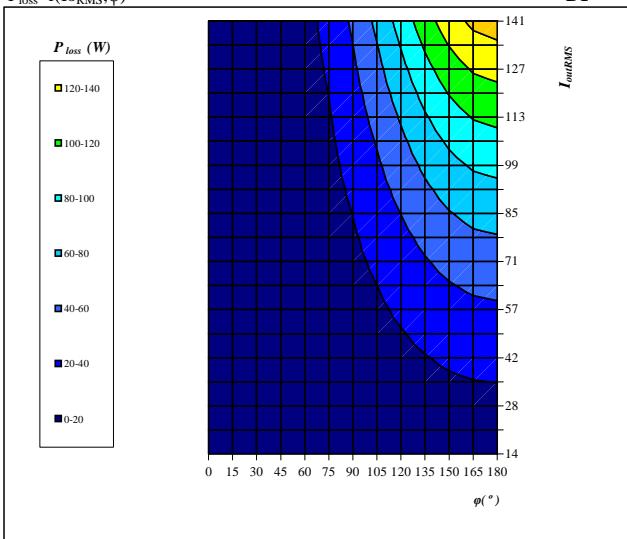

Conditions: $T_j=125^\circ\text{C}$
 DC link= 350 V
 $f_{sw}=16\text{ kHz}$


flowmNPC0
mixed voltage NPC Application
650V/100A

Figure 20. for Neutral Point IGBT+ half bridge FRED
Typical available output current as a function of phase displacement

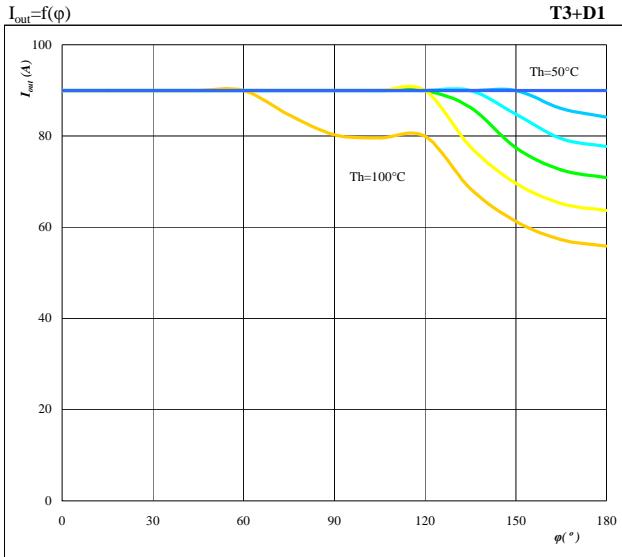


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
 DC link = 350 V
 parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 21. for Neutral Point IGBT+ half bridge FRED
Typical available output current as a function of switching frequency

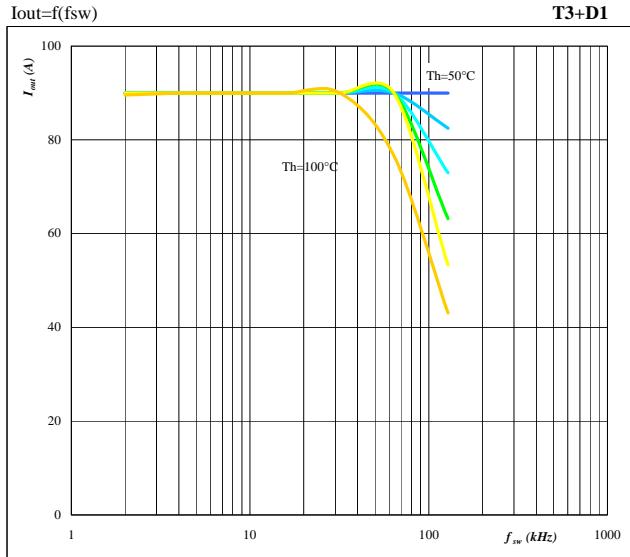


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$ $\varphi = 90^\circ$
 DC link = 350 V
 parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 22. for Neutral Point IGBT+ half bridge FRED
Typical available 50Hz output current as a function of fsw and phase displacement

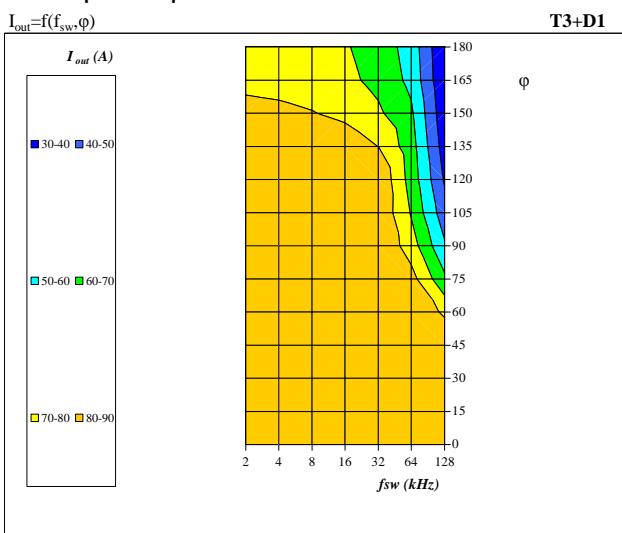


Conditions: $T_j = T_{jmax}-25 \text{ } ^\circ\text{C}$
 DC link = 350 V
 $T_h = 80 \text{ } ^\circ\text{C}$

flowmNPC0
mixed voltage NPC Application
650V/100A
Figure 23. per MODULE

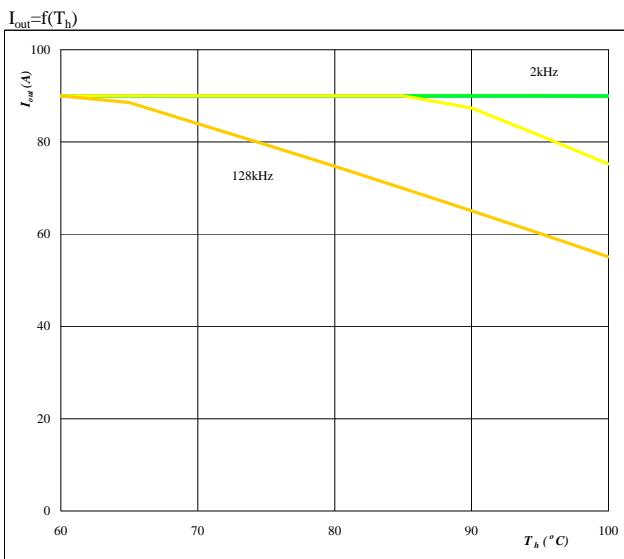Typical available output current as a function of heat sink temperature

Conditions: $T_j = T_{jmax}-25$ °C
DC link= 350 V


 $\phi = 0$ °
parameter: **Switching freq.**
fsw from 2 kHz to 128 kHz
in steps of factor 2

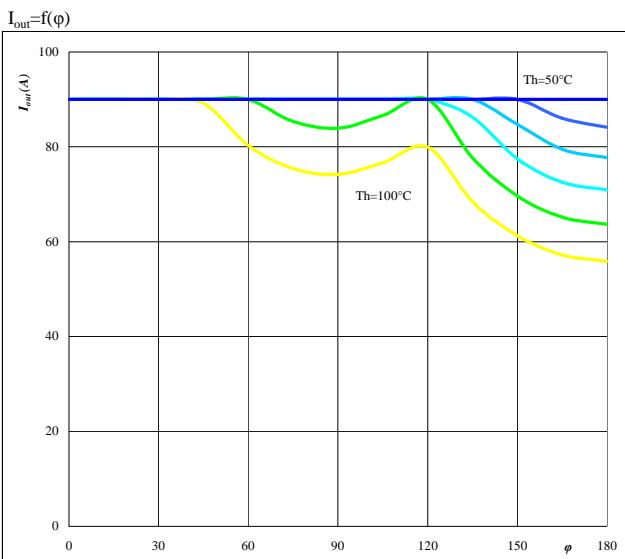Figure 24. per MODULE

Typical available output current as a function of phase displacement

Conditions: $T_j = T_{jmax}-25$ °C
DC link= 350 V


 $f_{sw} = 16$ kHz
parameter: **Heatsink temp.**
Th from 50 °C to 100 °C
in 10 °C steps

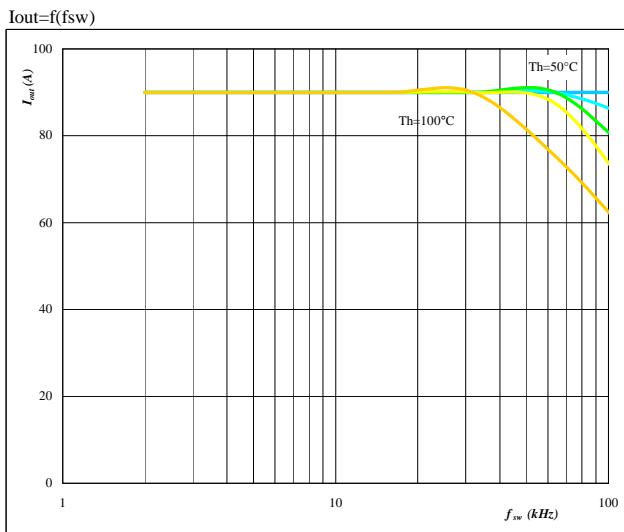Figure 25. per MODULE

Typical available output current as a function of switching frequency

Conditions: $T_j = T_{jmax}-25$ °C
DC link= 350 V

 $\phi = 0$ °
parameter: **Heatsink temp.**
Th from 50 °C to 100 °C
in 10 °C steps

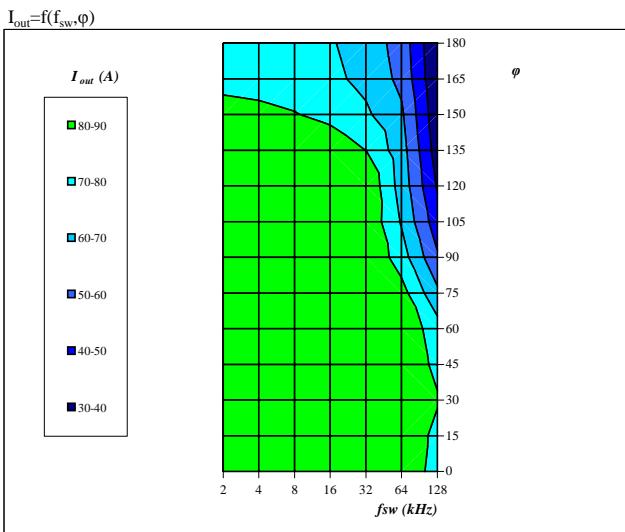Figure 26. per MODULE


Typical available 50Hz output current as a function of fsw and phase displacement

Conditions: $T_j = T_{jmax}-25$ °C
DC link= 350 V

 $T_h = 80$ °C

flowmNPC0
mixed voltage NPC Application
650V/100A
Figure 27. per MODULE

Typical efficiency as a function of output power
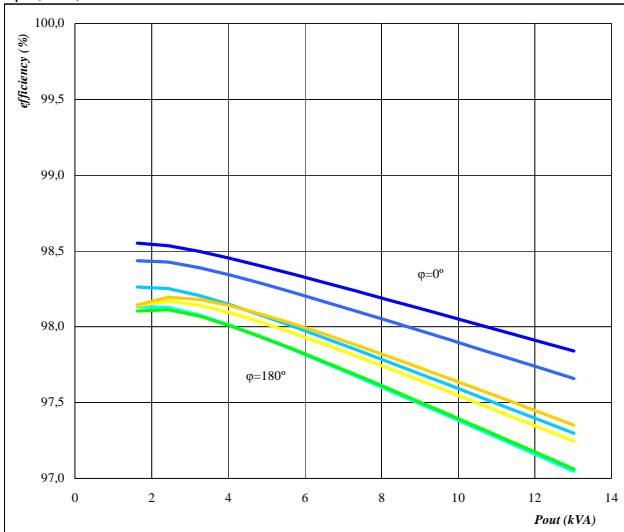
$$\eta=f(P_{out})$$




Conditions: $T_j = 125^\circ C$
 $f_{sw} = 16 \text{ kHz}$
DC link = 350 V
parameter: phase displacement
 ϕ from 0° to 180°
in steps of 30°

Figure 29. per MODULE

Typical available output power as a function of heat sink temperature

$$P_{out}=f(T_h)$$

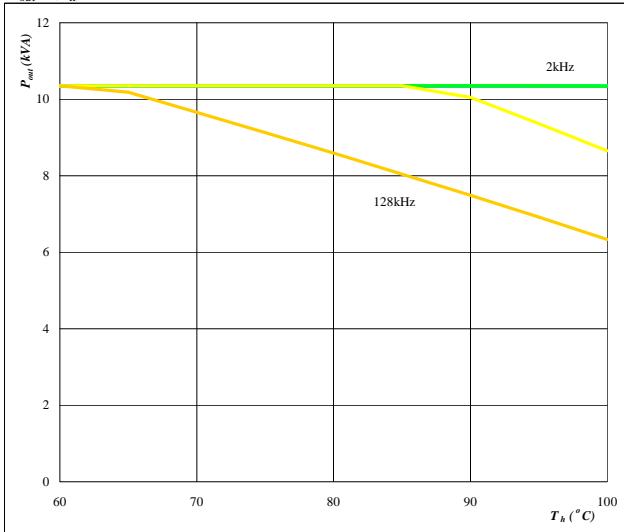


Conditions: $T_j = T_{jmax}-25^\circ C$
DC link = 350 V
 $\phi = 0^\circ$
parameter: Switching freq.
 f_{sw} from 2 kHz to 128 kHz
in steps of factor 2

Figure 28. per MODULE

Typical efficiency as a function of output power

$$\eta=f(P_{out})$$

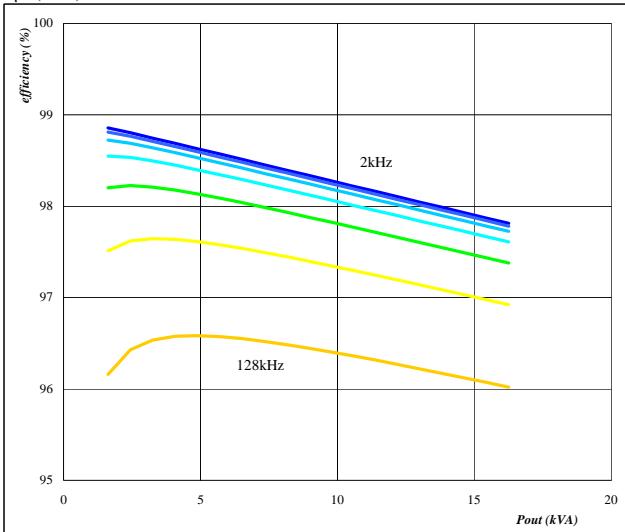


Conditions: $T_j = 125^\circ C$
DC link = 350 V
 $\phi = 0^\circ$
parameter: Switching freq.
 f_{sw} from 2 kHz to 128 kHz
in steps of factor 2

Figure 30. per MODULE

Typical loss distribution as a function of output current



$$P_{out}=f(T_h)$$

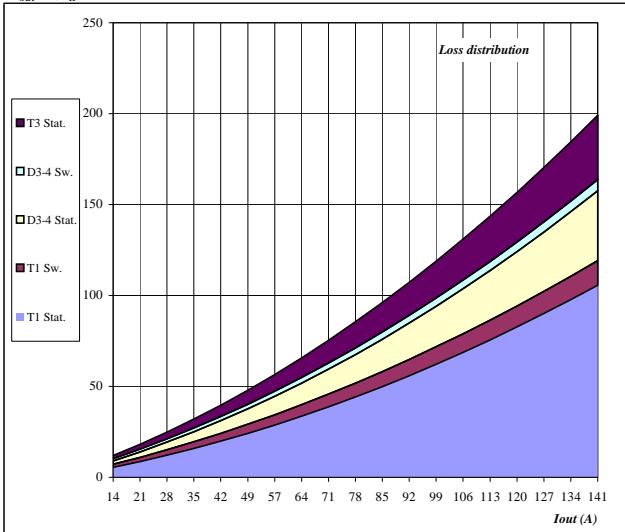

Conditions: $T_j = 125^\circ C$
 $f_{sw} = 16 \text{ kHz}$
DC link = 350 V
 $\phi = 0^\circ$

flowmNPC0
mixed voltage NPC Application
650V/100A

Figure 31.
Typical relativ loss distribution as a function of
output current

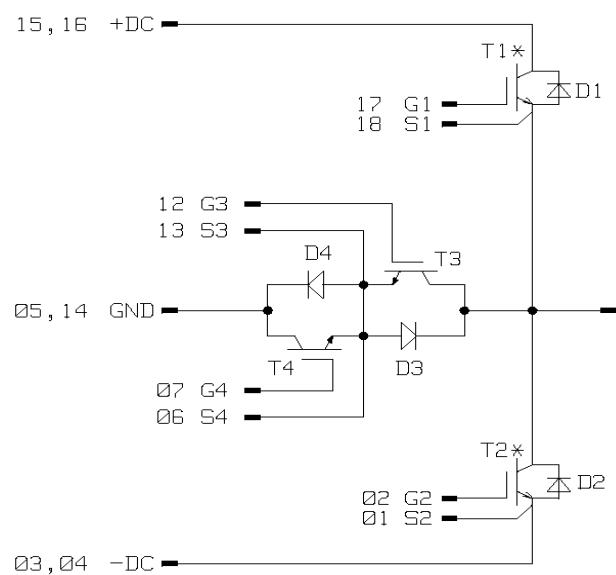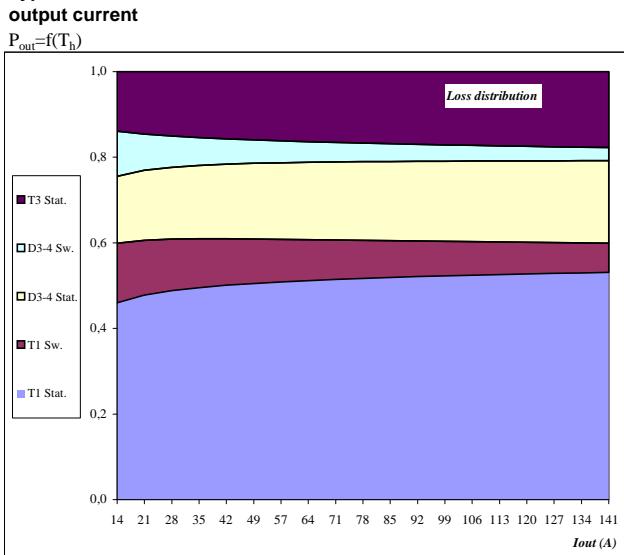

Conditions:

$T_j =$	125	$^{\circ}\text{C}$
$f_{sw} =$	16	kHz
DC link =	350	V
$\varphi =$	0	$^{\circ}$