



Vincotech

## V23990-P848-C49-PM

datasheet

flowPIM 0

1200 V / 4 A

### Features

- 2 Clips housing in 17 mm height
- Trench Fieldstop Technology IGBT4


### Target applications

- Industrial Drives


### Types

- V23990-P848-C49-PM

### flow 0 17 mm housing



### Schematic

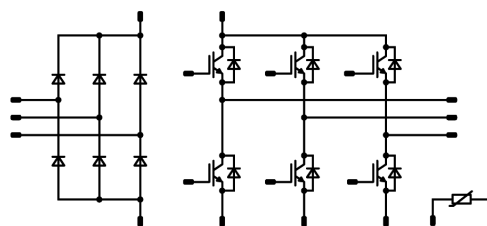



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Inverter Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	9	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	12	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	37	W
Gate-emitter voltage	$V_{GES}$		$\pm 20$	V
Short circuit ratings	$t_{SC}$	$V_{GE} = 15\text{ V}$ , $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	10	$\mu\text{s}$
Maximum junction temperature	$T_{jmax}$		175	$^{\circ}\text{C}$

## Inverter Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	19	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	20	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	46	W
Maximum junction temperature	$T_{jmax}$		175	$^{\circ}\text{C}$

## Rectifier Diode

Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	35	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	200	A
Surge current capability	$I^2_t$		200	$\text{A}^2\text{s}$
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	W
Maximum junction temperature	$T_{jmax}$		150	$^{\circ}\text{C}$



Vincotech

**V23990-P848-C49-PM**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

## Module Properties

### Thermal Properties

Storage temperature	$T_{\text{stg}}$		-40...+125	°C
Operation temperature under switching condition	$T_{\text{jop}}$		-40...+( $T_{\text{jmax}}$ - 25)	°C

### Isolation Properties

Isolation voltage	$V_{\text{isol}}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	$V_{\text{isol}}$	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			>12,7	mm
Comparative Tracking Index	CTI		≥ 200	

\*100 % tested in production



Vincotech

## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]		Min	Typ	Max	

### Inverter Switch

#### Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,00015	25		5,3	5,8	6,3	V
Collector-emitter saturation voltage	$V_{CEsat}$		15		4	25 150		1,58	1,95 2,28	2,02 <sup>(1)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25				0,5	µA
Gate-emitter leakage current	$I_{GES}$		20	0		25				120	nA
Internal gate resistance	$r_g$								None		Ω
Input capacitance	$C_{ies}$	$f = 1 \text{ Mhz}$	0	25		25			250		pF
Reverse transfer capacitance	$C_{res}$								15		pF

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)							2,58		K/W
--	---------------	---	--	--	--	--	--	--	------	--	-----

#### Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 64 \Omega$ $R_{goff} = 64 \Omega$	$\pm 15$	600	4	25 150		76,8 74,8		ns
Rise time	$t_r$					25 150		18,4 23,4		ns
Turn-off delay time	$t_{d(off)}$					25 150		176,4 226,4		ns
Fall time	$t_f$					25 150		82,49 109,54		ns
Turn-on energy (per pulse)	$E_{on}$					25 150		0,324 0,563		mWs
Turn-off energy (per pulse)	$E_{off}$					25 150		0,208 0,315		mWs



## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]		Min	Typ	Max	

### Inverter Diode

#### Static

Forward voltage	$V_F$				10	25 125 150		1,35	1,79 1,77 1,73	2,05 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_i = 1200$ V				25				2,7	μA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)							2,07		K/W
--	---------------	---------------------------------------	--	--	--	--	--	--	------	--	-----

#### Dynamic

Peak recovery current	$I_{RRM}$	$di/dt=200$ A/μs $di/dt=167$ A/μs	±15	600	4	25 150		5,24 6,35		A
Reverse recovery time	$t_{rr}$					25 150		248,36 431,13		ns
Recovered charge	$Q_r$					25 150		0,579 1,24		μC
Reverse recovered energy	$E_{rec}$					25 150		0,209 0,47		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 150		95,21 48,92		A/μs



## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]		Min	Typ	Max	

### Rectifier Diode

#### Static

Forward voltage	$V_F$				8	25 125 150		0,976 0,879 0,85	1,21 <sup>(1)</sup> 1,1 <sup>(1)</sup>		V
Reverse leakage current	$I_R$	$V_i = 1600$ V				25				50	μA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,59			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----

### Thermistor

#### Static

Rated resistance	$R$					25		22			kΩ
Deviation of $R_{100}$	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5		%
Power dissipation	$P$							5			mW
Power dissipation constant	$d$					25		1,5			mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1$ %						3962			K
B-value	$B_{(25/100)}$	Tol. $\pm 1$ %						4000			K
Vincotech Thermistor Reference									I		

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.



Vincotech


V23990-P848-C49-PM  
datasheet

## Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

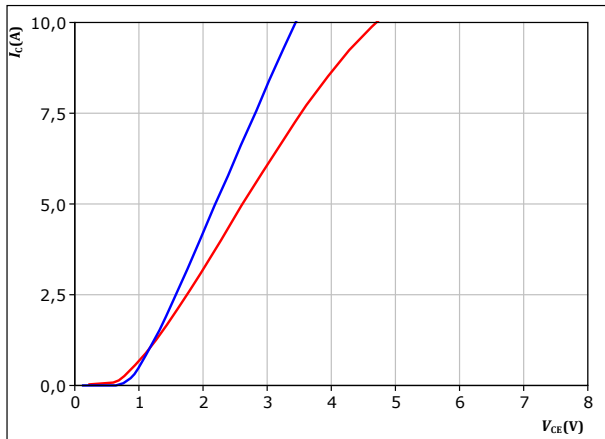


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$   
 $T_j: 25 ^\circ C$  (blue line)  
 $150 ^\circ C$  (red line)

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

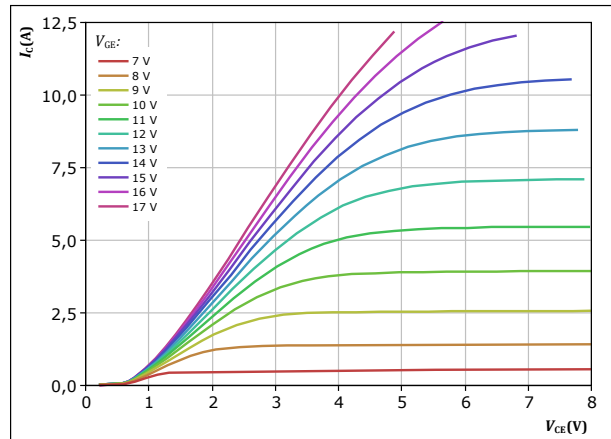


$t_p = 250 \mu s$   
 $T_j = 150 ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

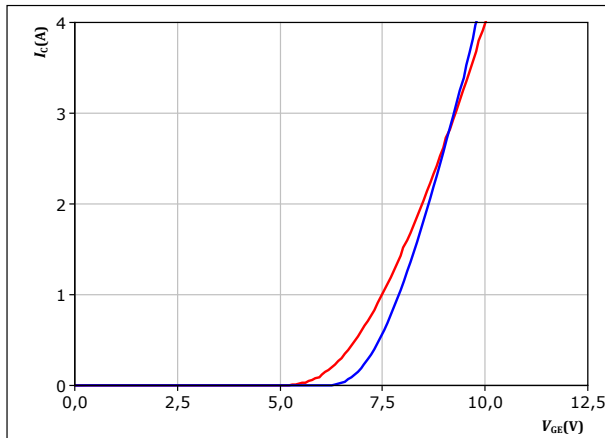


$t_p = 250 \mu s$   
 $V_{CE} = 10 V$   
 $T_j: 25 ^\circ C$  (blue line)  
 $150 ^\circ C$  (red line)

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

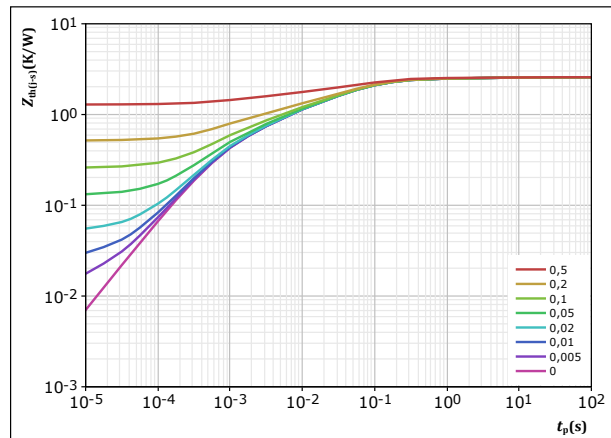

$D = t_p / T$   
 $R_{th(j-s)} = 2.577 K/W$   
IGBT thermal model values

$R (K/W)$	$\tau (s)$
8.49E-02	6.59E+00
1.97E-01	3.69E-01
1.01E+00	6.94E-02
4.64E-01	1.61E-02
4.43E-01	4.16E-03
3.82E-01	6.88E-04



Vincotech


**V23990-P848-C49-PM**  
datasheet

## Inverter Switch Characteristics

**figure 5.** IGBT

Safe operating area

$$I_C = f(V_{CE})$$

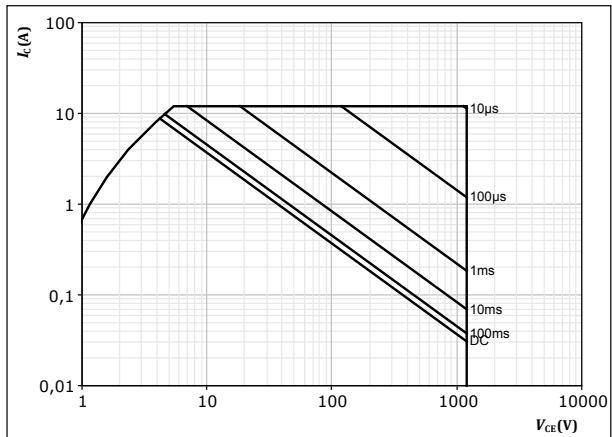

$D =$  single pulse

$T_s = 80$  °C

$V_{GE} = 15$  V

$T_j = T_{jmax}$





Vincotech


V23990-P848-C49-PM  
datasheet

## Inverter Diode Characteristics

figure 6. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

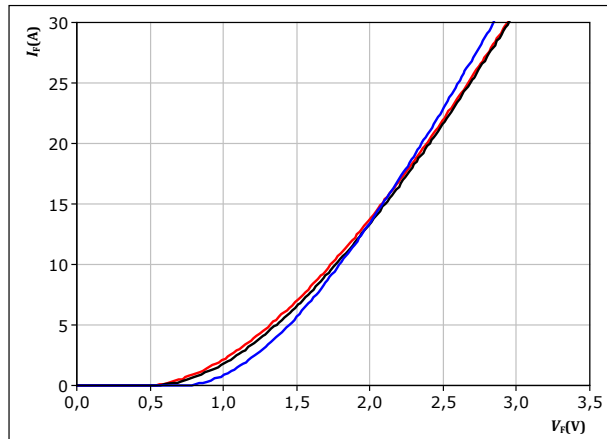

$t_p = 250 \mu s$


$T_j:$

- 25 °C
- 125 °C
- 150 °C

figure 7. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

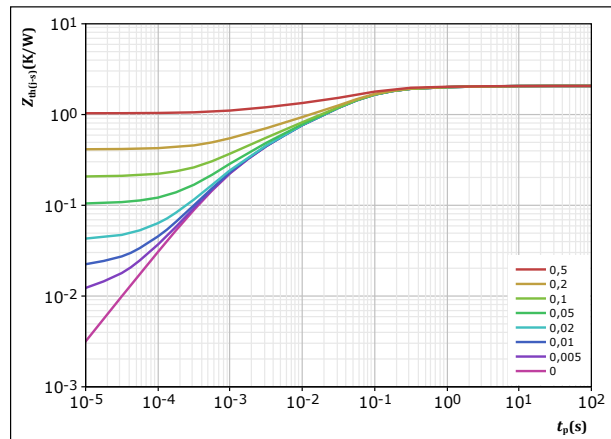

$D = t_p / T$

$R_{th(j-s)} = 2,066 \text{ K/W}$

FWD thermal model values

$R$ (K/W)	$\tau$ (s)
5,09E-02	4,26E+00
1,55E-01	5,03E-01
7,75E-01	7,89E-02
5,33E-01	2,68E-02
3,54E-01	5,03E-03
1,97E-01	9,09E-04



Vincotech


## Rectifier Diode Characteristics

figure 8.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$

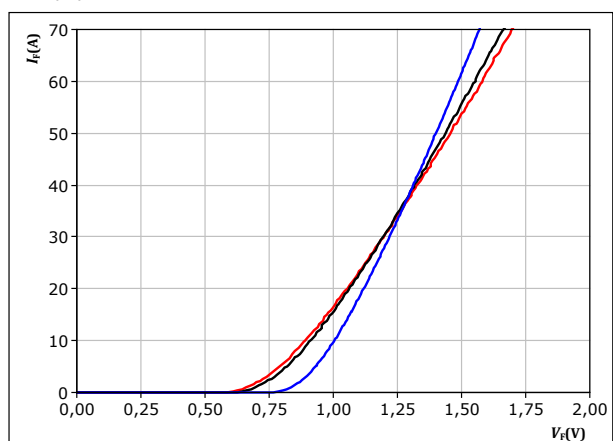

$t_p = 250 \mu s$


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 9.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

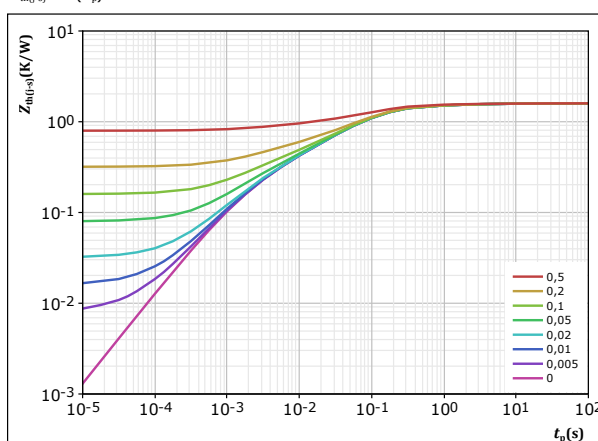

$D = t_p / T$   
 $R_{th(j-s)} = 1,594 \text{ K/W}$

Rectifier thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
3,44E-02	9,66E+00
1,12E-01	1,22E+00
5,81E-01	1,45E-01
4,89E-01	5,05E-02
2,38E-01	9,26E-03
1,22E-01	1,79E-03
1,81E-02	7,88E-04



Vincotech

**V23990-P848-C49-PM**  
datasheet


## Thermistor Characteristics

figure 10.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

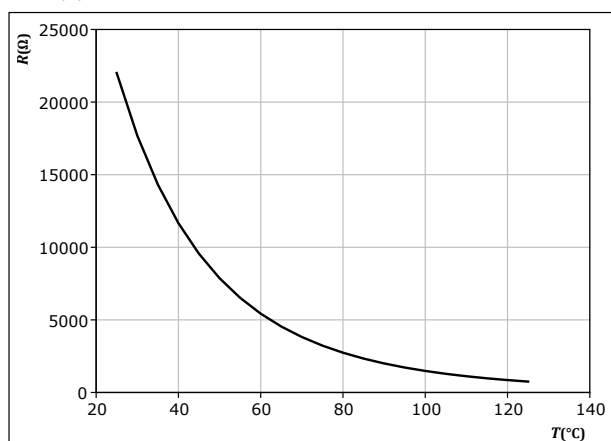



Vincotech

V23990-P848-C49-PM  
datasheet


## Inverter Switching Characteristics

figure 11.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

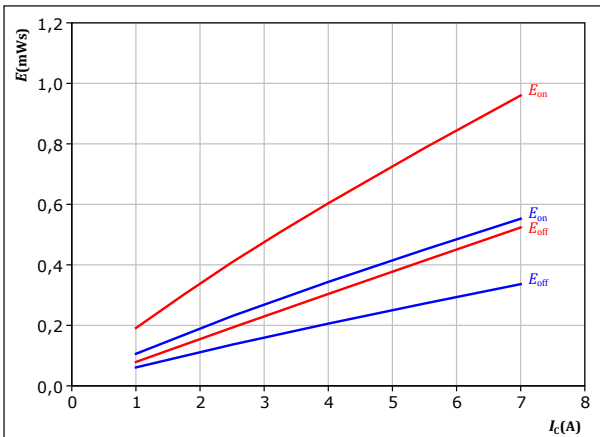

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$   $\Omega$   
 $R_{goff} = 64$   $\Omega$


$T_j$ : — 25 °C  
— 150 °C

figure 12.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

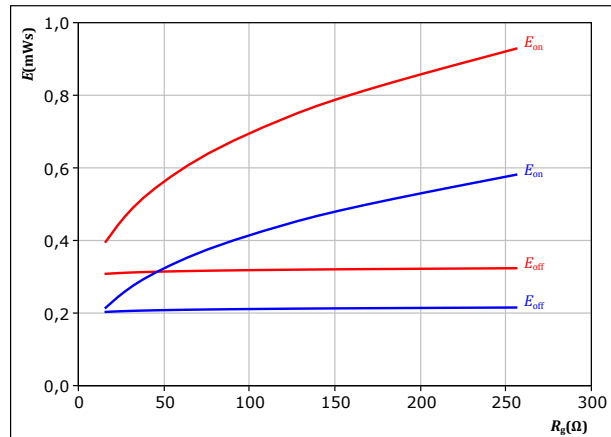

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 4$  A


$T_j$ : — 25 °C  
— 150 °C

figure 13.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

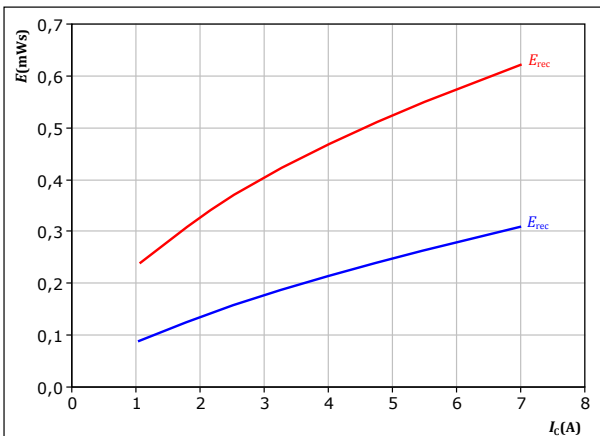

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$   $\Omega$


$T_j$ : — 25 °C  
— 150 °C

figure 14.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

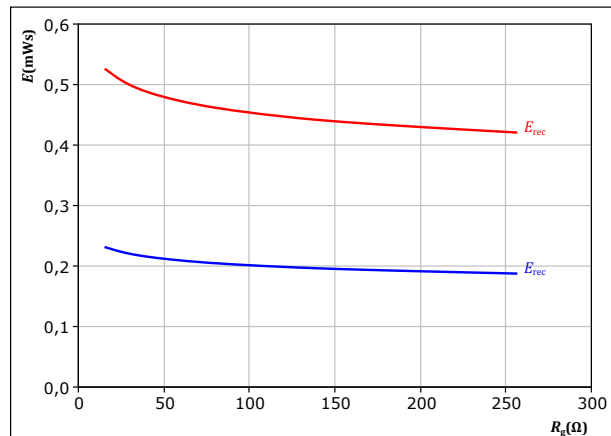

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 4$  A

$T_j$ : — 25 °C  
— 150 °C



Vincotech


**V23990-P848-C49-PM**  
datasheet

## Inverter Switching Characteristics

figure 15.

IGBT

Typical switching times as a function of collector current  
 $t = f(I_C)$

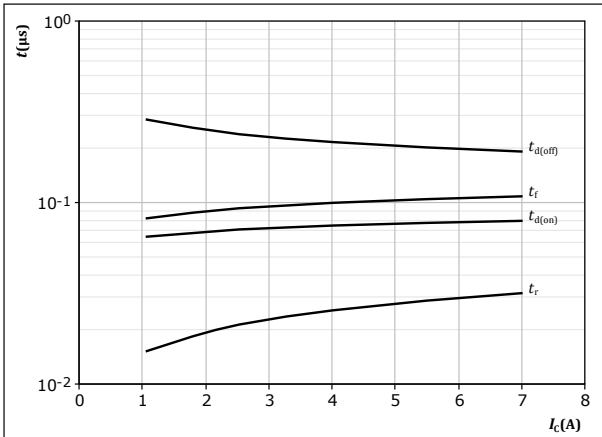


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$  Ω  
 $R_{goff} = 64$  Ω

figure 16.

IGBT

Typical switching times as a function of gate resistor  
 $t = f(R_g)$

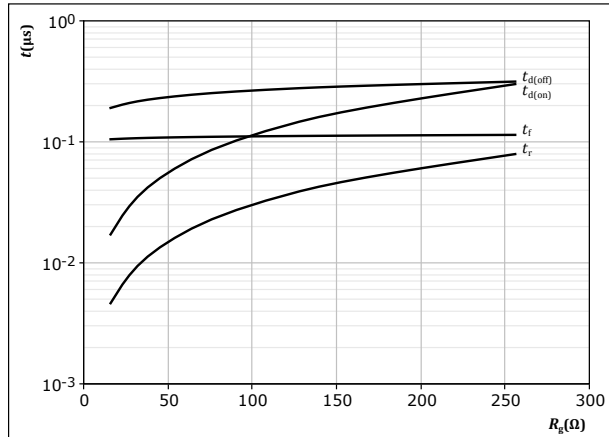


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 4$  A

figure 17.

FWD

Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_C)$

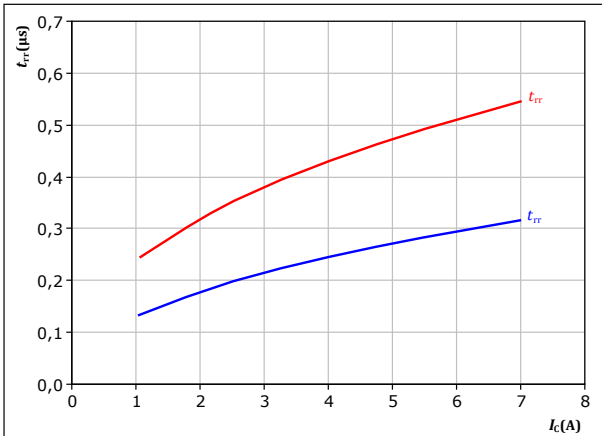

With an inductive load at


$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$  Ω

$T_j$ : — 25 °C  
— 150 °C

figure 18.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor  
 $t_{rr} = f(R_{goff})$

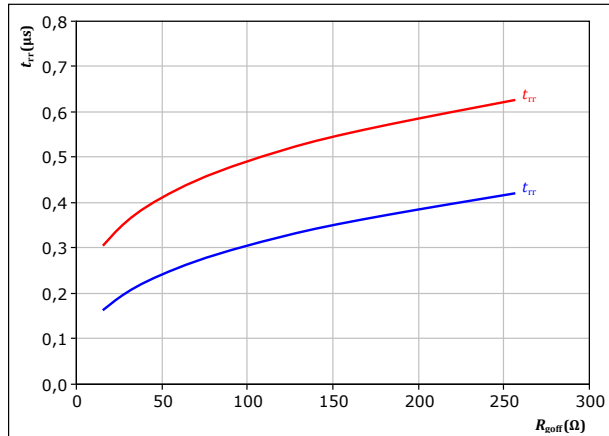

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 4$  A

$T_j$ : — 25 °C  
— 150 °C



Vincotech

**V23990-P848-C49-PM**  
datasheet


## Inverter Switching Characteristics

figure 19.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

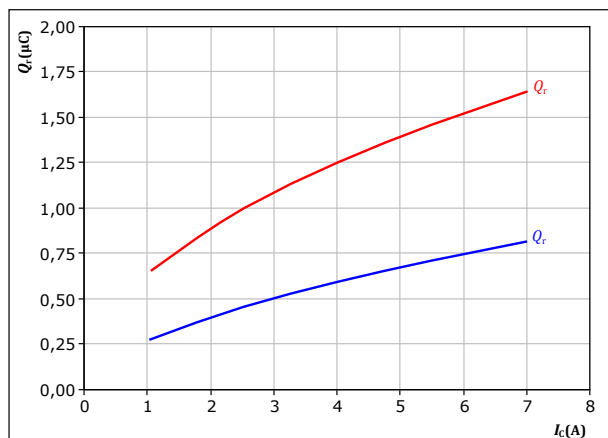

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$  Ω


$T_j$ : — 25 °C  
— 150 °C

figure 21.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

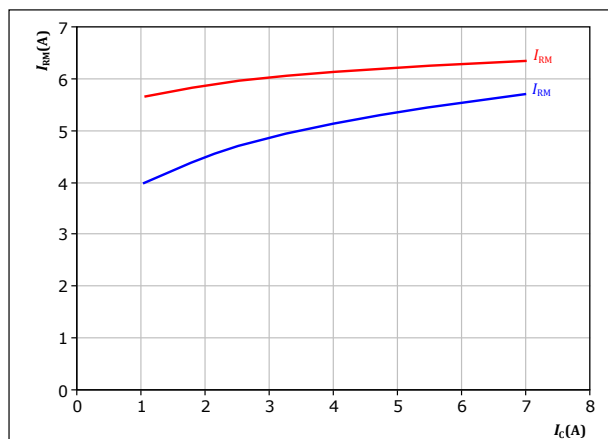

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$  Ω


$T_j$ : — 25 °C  
— 150 °C

figure 20.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

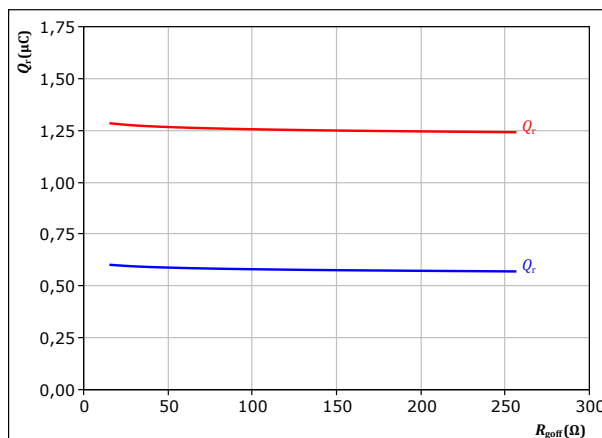

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 4$  A


$T_j$ : — 25 °C  
— 150 °C

figure 22.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

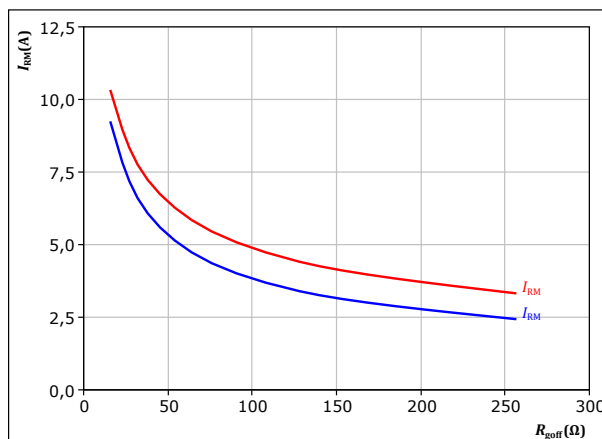

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 4$  A

$T_j$ : — 25 °C  
— 150 °C



Vincotech


V23990-P848-C49-PM  
datasheet

## Inverter Switching Characteristics

figure 23.

FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

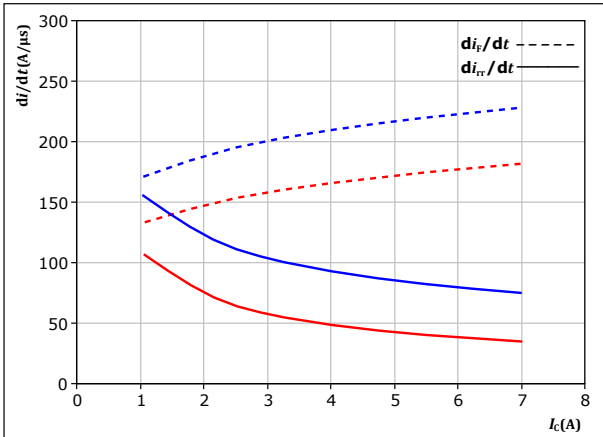

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 64$  Ω


$T_j$ : — 25 °C  
— 150 °C

figure 25.

IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

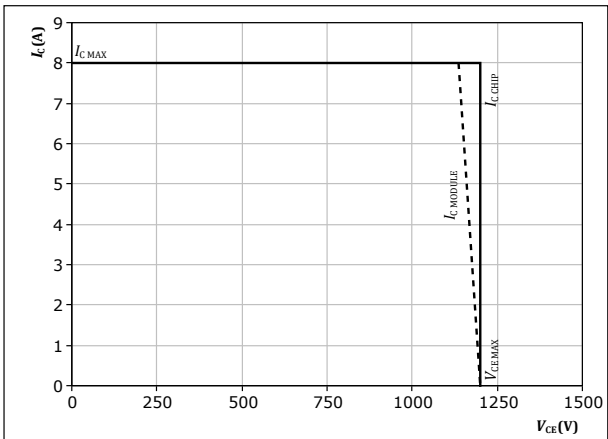


At  $T_j = 150$  °C  
 $R_{gon} = 64$  Ω  
 $R_{goff} = 64$  Ω

figure 24.

FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor  
 $di_f/dt, di_r/dt = f(R_{goff})$

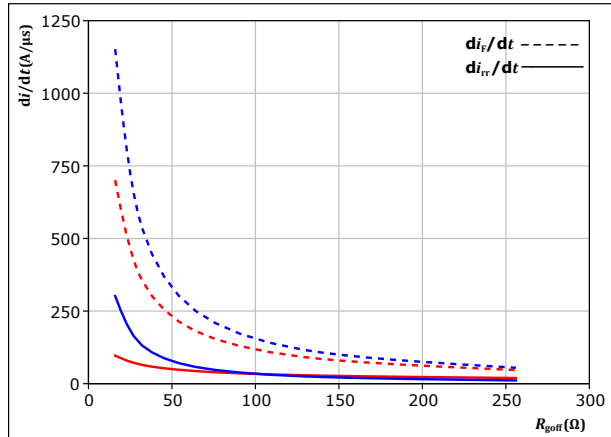

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 4$  A

$T_j$ : — 25 °C  
— 150 °C



## Inverter Switching Definitions

figure 26. IGBT

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

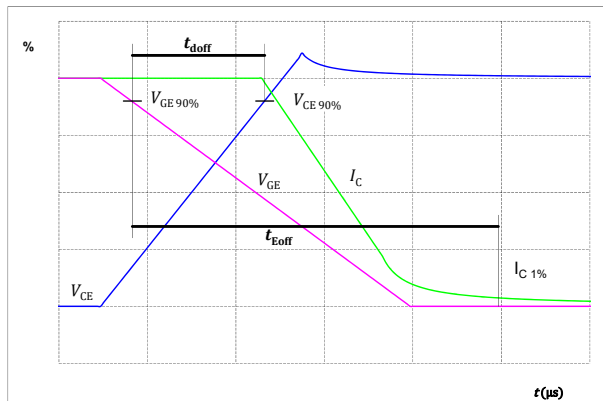


figure 27. IGBT

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

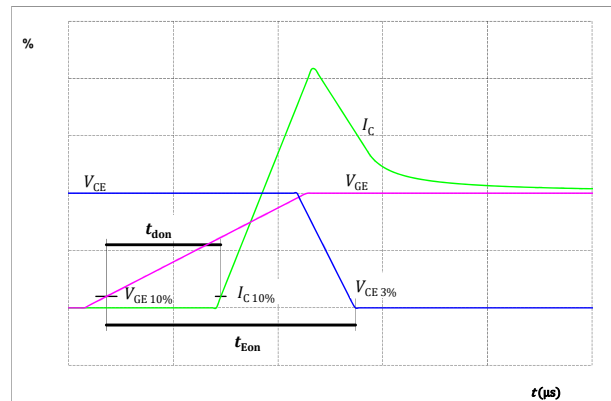


figure 28. IGBT

Turn-off Switching Waveforms & definition of  $t_f$


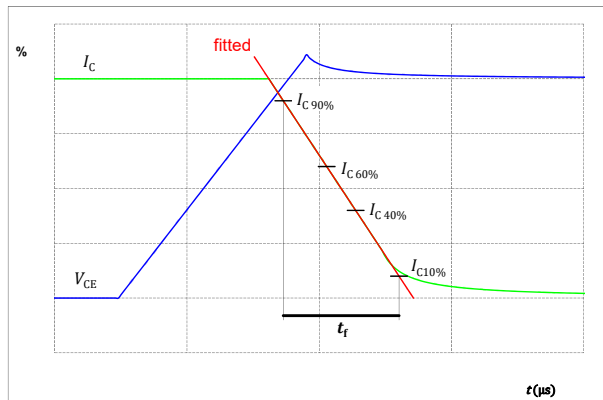


figure 29. IGBT

Turn-on Switching Waveforms & definition of  $t_r$





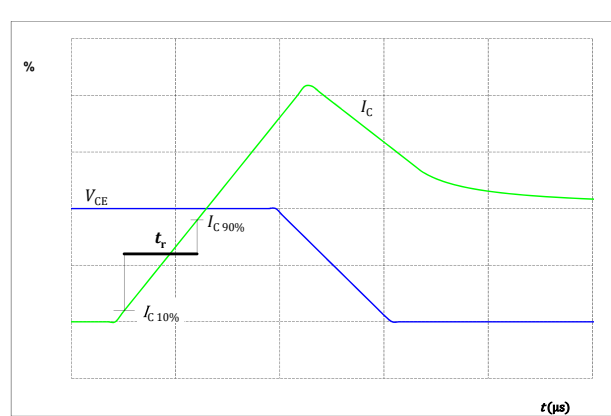

Vincotech

## Inverter Switching Definitions

figure 30.

FWD

Turn-off Switching Waveforms & definition of  $t_{rr}$


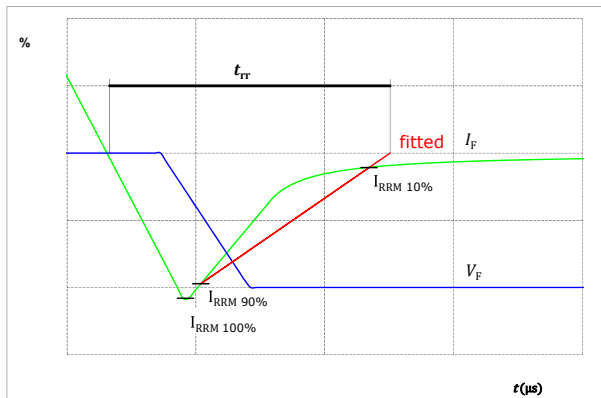


figure 31.

FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )



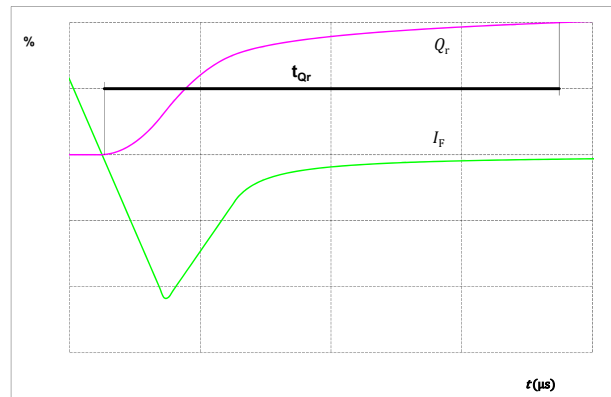

Vincotech

# V23990-P848-C49-PM

datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	V23990-P848-C49-PM
With thermal paste (5,2 W/mK, PTM6000HV)	V23990-P848-C49-/7/-PM
With thermal paste (3,4 W/mK, PSX-P7)	V23990-P848-C49-/3/-PM

Marking							
	Text	VIN	Date code	Type&Ver	UL	Lot	Serial
		VIN	WWYY	TTTTTTVV	UL	LLLL	SSSS
	Datamatrix	Type&Ver	Lot number	Serial	Date code		
		TTTTTTVV	LLLL	SSSS	WWYY		

# Outline


Pin table [mm]

Pin	X	Y	Function
1	25,5	2,7	NTC1
2	25,5	0	NTC2
3	22,8	0	-DC
4	not assembled		
5	not assembled		
6	13,5	0	G6
7	10,8	0	E6
8	8,1	0	G5
9	5,4	0	E5
10	2,7	0	G4
11	0	0	E4
12	0	19,8	G1
13	0	22,5	U
14	7,5	19,8	G2
15	7,5	22,5	V
16	15	19,8	G3
17	15	22,5	W
18	22,8	22,5	+INV
19	25,5	22,5	+DC
20	not assembled		
21	33,5	15	L1
22	33,5	7,5	L2
23	33,5	0	L3

Tolerance of pinpositions: ±0.5mm at the end of pins  
Dimension of coordinate axis is only offset without tolerance



Pinout

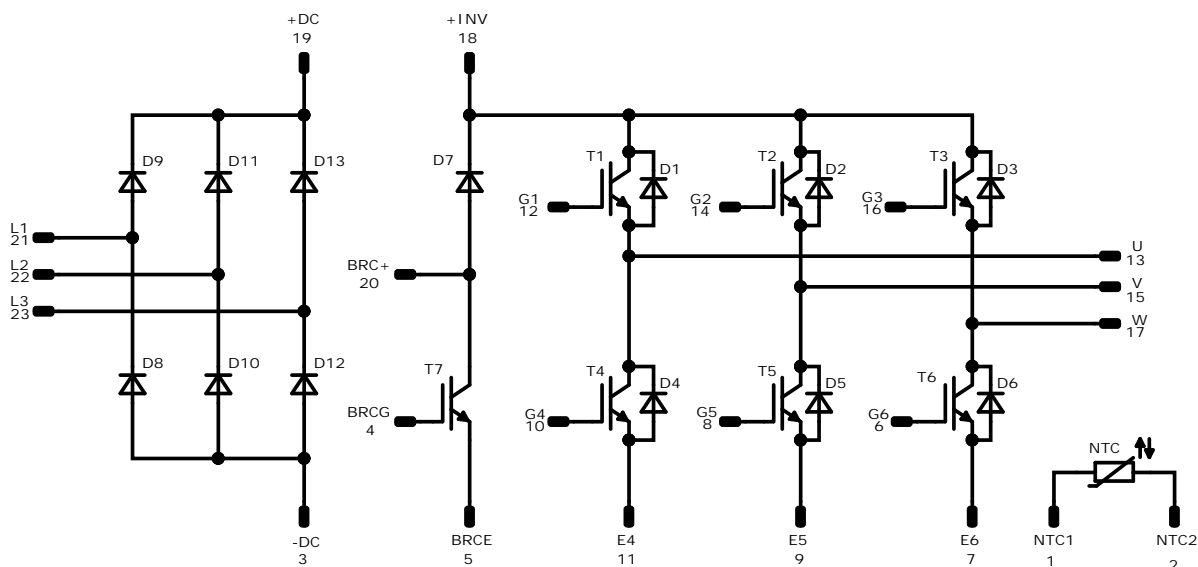


Identification

ID	Component	Voltage	Current	Function	Comment
T4, T1, T5, T2, T6, T3	IGBT	1200 V	4 A	Inverter Switch	
D1, D4, D2, D5, D3, D6	FWD	1200 V	10 A	Inverter Diode	
D8, D9, D10, D11, D12, D13	Rectifier	1600 V	25 A	Rectifier Diode	
NTC	NTC			Thermistor	



Vincotech

**V23990-P848-C49-PM**  
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 135	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow 0</i> packages see vincotech.com website.				
Package data				
Package data for <i>flow 0</i> packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
V23990-P848-C49-PM-D8-14	30 Sep. 2021	New Datasheet format, module is unchanged Correct Thermal values of Inverter Switch Correct Static values of Rectifier Diode, Inverter Diode Separate datasheet	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.