

flow2 MNPC

mixed voltage NPC Application

1200V/200A

half bridge IGBT	
V_{GEon}	= 15 V
V_{GOff}	= -15 V
R_{gon}	= 2 Ω
R_{goff}	= 2 Ω


General conditions

Vout= 230 VAC

neutral point IGBT	
V_{GEon}	= 15 V
V_{GOff}	= -15 V
R_{gon}	= 2 Ω
R_{goff}	= 2 Ω

Figure 1.
half bridge IGBT
Typical average static loss as a function of output current I_{oRMS}


$P_{loss}=f(I_{out})$

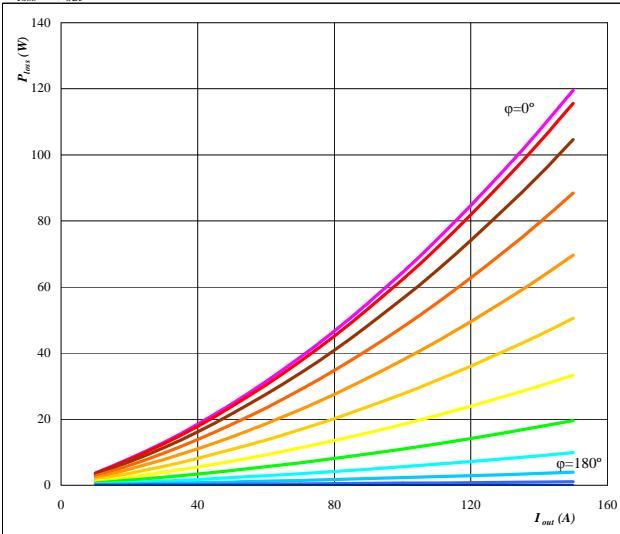

Conditions: $T_j = 150^\circ C$
 parameter: φ from 0° to 180°
 in 12 steps

Figure 3.
half bridge IGBT
Typical average static loss as a function of phase displacement φ


$P_{loss}=f(\varphi)$

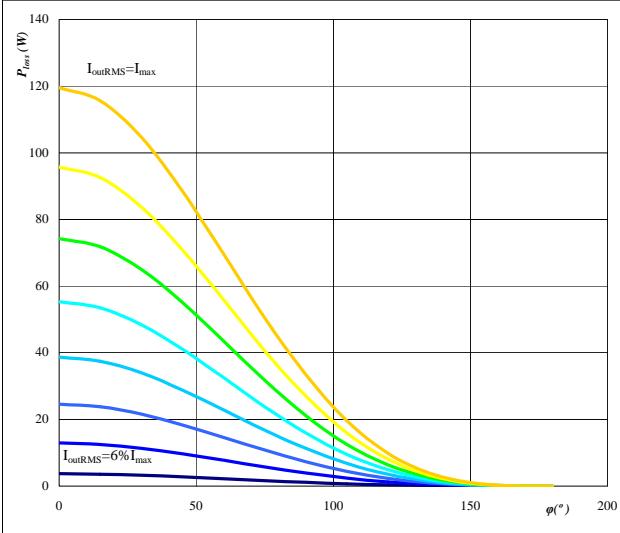

Conditions: $T_j = 150^\circ C$
 parameter: I_{oRMS} from 10 A to 150 A
 in steps of 20 A

Figure 2.
neutral point FWD
Typical average static loss as a function of output current I_{oRMS}


$P_{loss}=f(I_{out})$

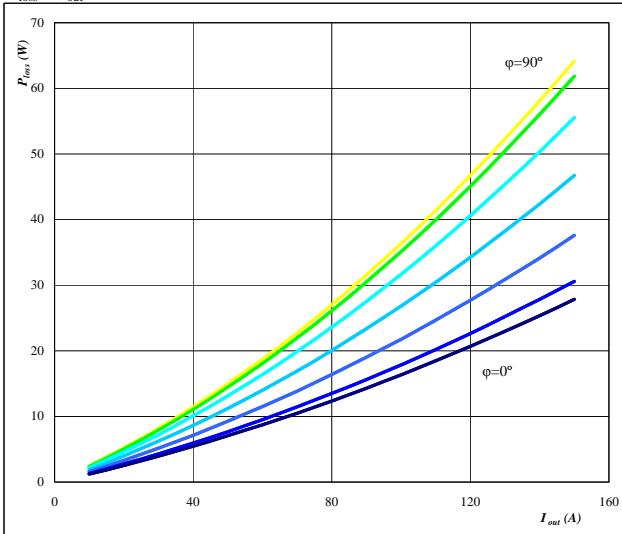

Conditions: $T_j = 125^\circ C$
 parameter: φ from 0° to 180°
 in 12 steps

Figure 4.
neutral point FWD
Typical average static loss as a function of phase displacement φ


$P_{loss}=f(\varphi)$

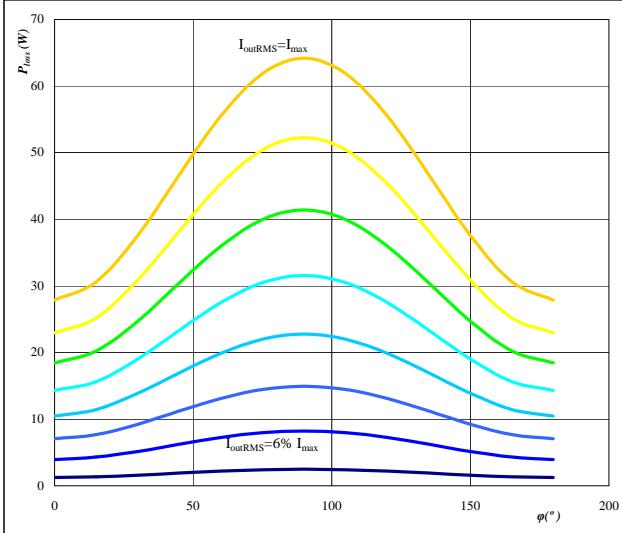

Conditions: $T_j = 125^\circ C$
 parameter: I_{oRMS} from 10 A to 150 A
 in steps of 20 A

flow2 MNPC
mixed voltage NPC Application
1200V/200A
Figure 5.
Typical average switching loss as a function of phase displacement φ


$P_{loss}=f(\varphi)$

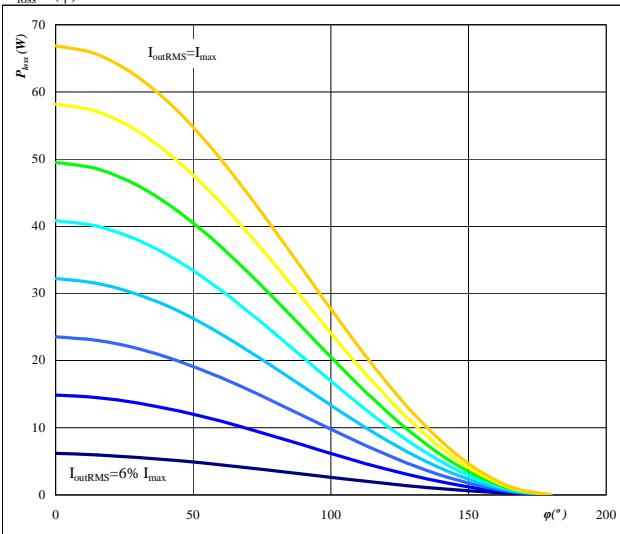

Conditions: $T_j=150^\circ\text{C}$
 $f_{sw}=16\text{ kHz}$
 DC link= 700 V
 parameter: I_{oRMS} from 10 A to 150 A
 in steps of 20 A

half bridge IGBT
Figure 6.
Typical average switching loss as a function of phase displacement φ


$P_{loss}=f(\varphi)$

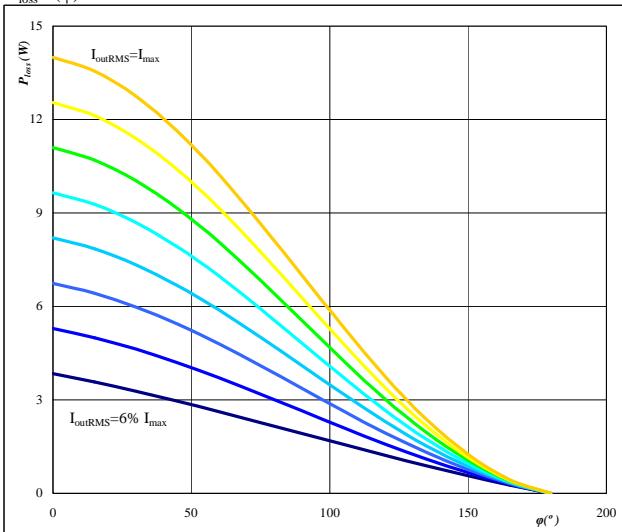

Conditions: $T_j=125^\circ\text{C}$
 $f_{sw}=16\text{ kHz}$
 DC link= 700 V
 parameter: I_{oRMS} from 10 A to 150 A
 in steps of 20 A

Figure 7.
Typical total loss as a function of phase displacement φ and output current I_{oRMS}


$P_{loss}=f(I_{oRMS}; \varphi)$

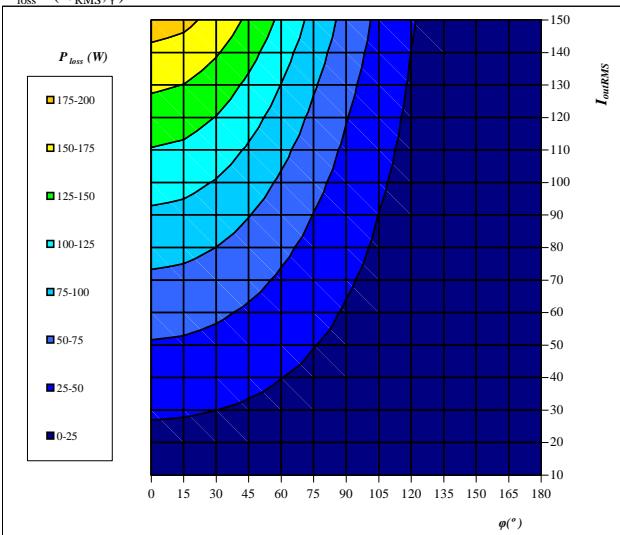

Conditions: $T_j=150^\circ\text{C}$
 DC link= 700 V
 $f_{sw}=16\text{ kHz}$

half bridge IGBT
Figure 8.
Typical total loss as a function of phase displacement φ and output current I_{oRMS}


$P_{loss}=f(I_{oRMS}; \varphi)$

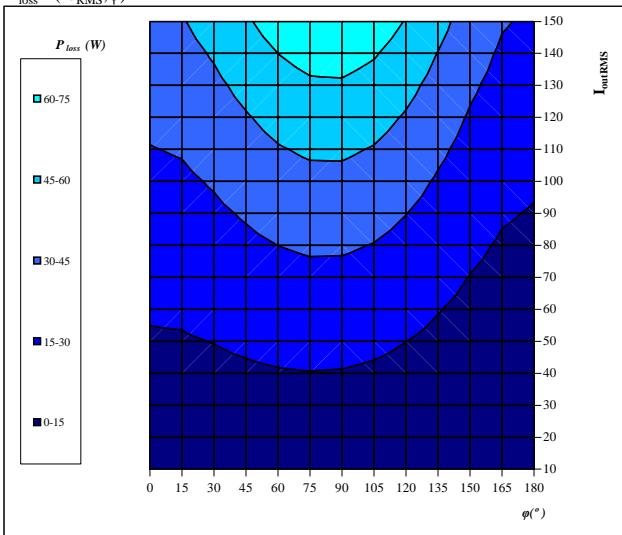

Conditions: $T_j=125^\circ\text{C}$
 DC link= 700 V
 $f_{sw}=16\text{ kHz}$


flow2 MNPC
mixed voltage NPC Application
1200V/200A

Figure 9. for half bridge IGBT + neutral point FWD
Typical available output current as a function of phase displacement ϕ

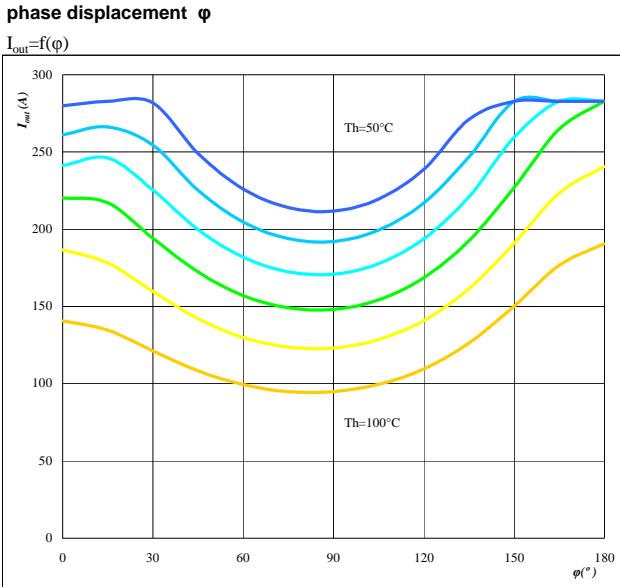


Conditions: $T_j = 150/125 \text{ } ^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
 DC link = 700 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 10. for half bridge IGBT + neutral point FWD
Typical available output current as a function of switching frequency f_{sw}

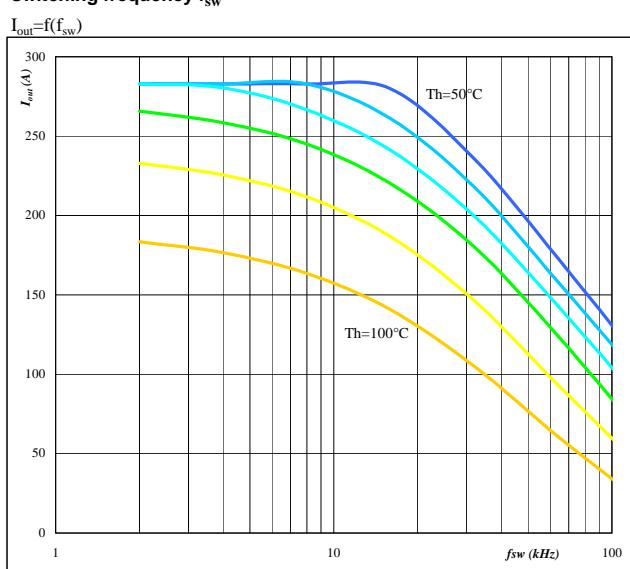

Conditions: $T_j = 150/125 \text{ } ^\circ\text{C}$ $\phi = 0 \text{ } ^\circ$
 DC link = 700 V
 parameter: Heatsink temp.
 T_h from 50 $^\circ\text{C}$ to 100 $^\circ\text{C}$
 in 10 $^\circ\text{C}$ steps

Figure 11. for half bridge IGBT + neutral point FWD
Typical available 50Hz output current as a function of f_{sw} and phase displacement ϕ

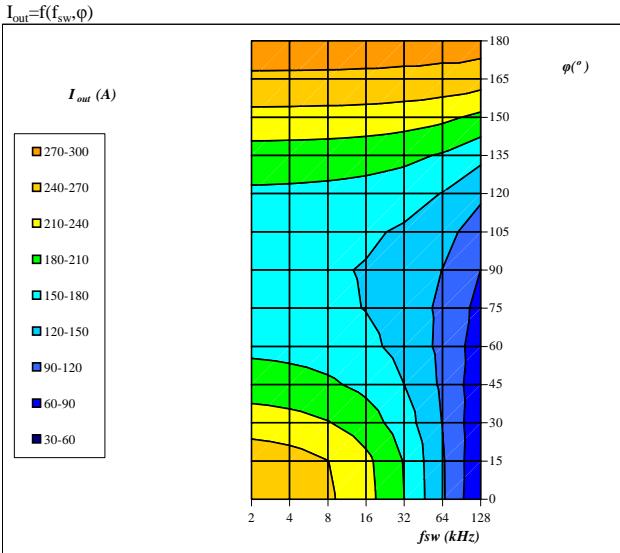

Conditions: $T_j = 150/125 \text{ } ^\circ\text{C}$
 DC link = 700 V
 $T_h = 80 \text{ } ^\circ\text{C}$

flow2 MNPC

mixed voltage NPC Application


1200V/200A

Figure 12.

neutral point IGBT

Typical average static loss as a function of output current

$$P_{loss}=f(I_{out})$$

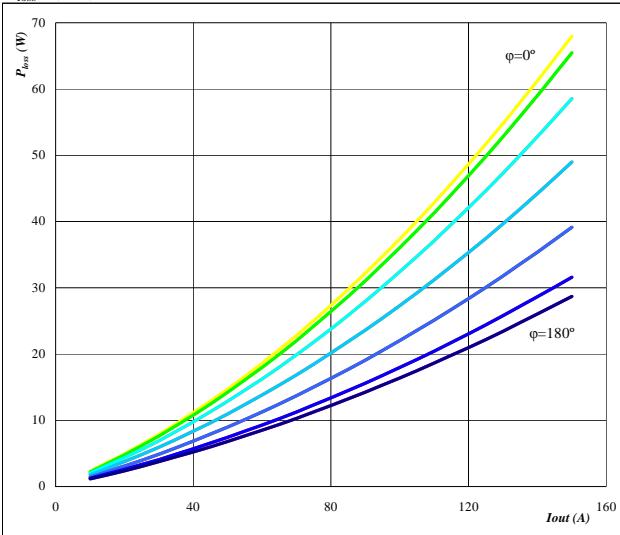


Conditions: $T_j = 150^\circ C$
 parameter: φ from 0° to 180°
 in 12 steps

Figure 14.

neutral point IGBT

Typical average static loss as a function of phase displacement

$$P_{loss}=f(\varphi)$$

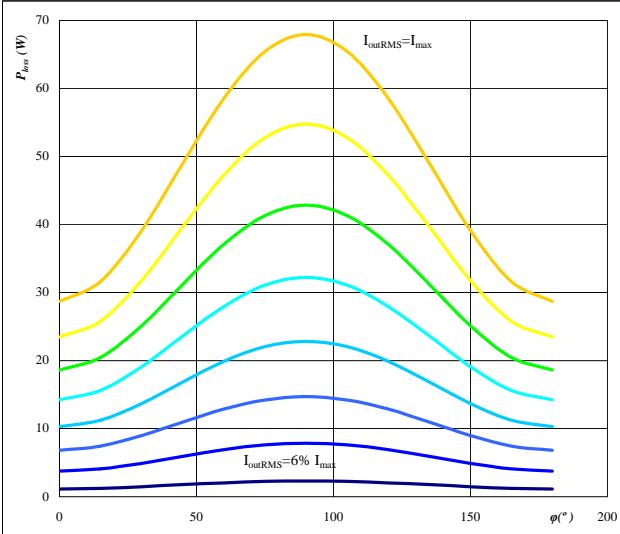


Conditions: $T_j = 150^\circ C$
 parameter: I_{outRMS} from 10 A to 150 A
 in steps of 20 A

Figure 13.

half bridge FWD

Typical average static loss as a function of output current

$$P_{loss}=f(I_{out})$$

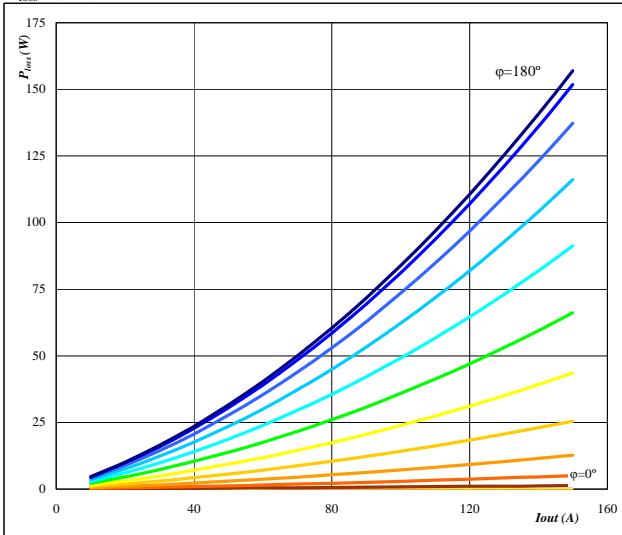


Conditions: $T_j = 150^\circ C$
 parameter: φ from 0° to 180°
 in 12 steps

Figure 15.

half bridge FWD

Typical average static loss as a function of phase displacement


$$P_{loss}=f(\varphi)$$

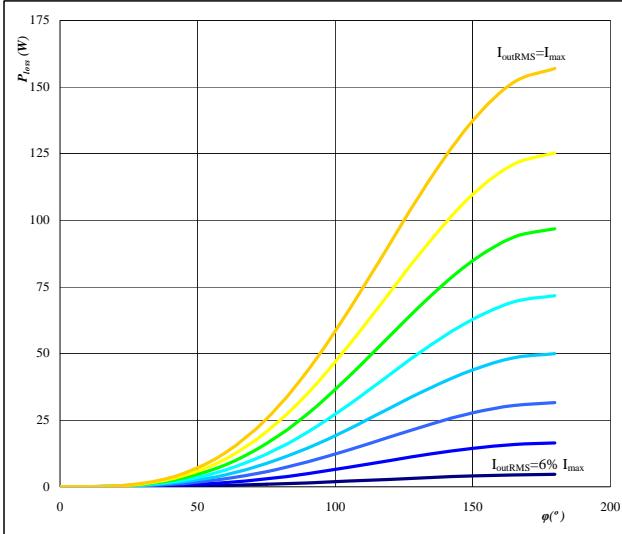

Conditions: $T_j = 125^\circ C$
 parameter: I_{outRMS} from 10 A to 150 A
 in steps of 20 A

flow2 MNPC
mixed voltage NPC Application
1200V/200A
Figure 16.
neutral point IGBT
Typical average switching loss as a function of phase displacement


$$P_{loss} = f(\phi)$$

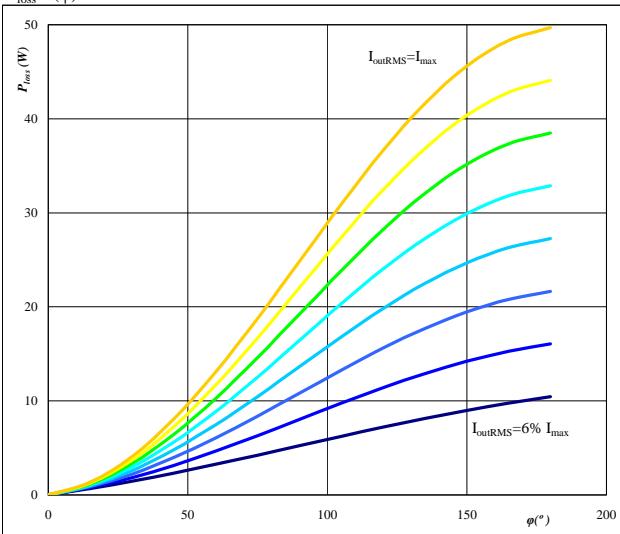

Conditions: $T_j = 150^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
DC link = 700 V
parameter: I_{oRMS} from 10 A to 150 A
in steps of 20 A A

Figure 17.
half bridge FWD
Typical average switching loss as a function of phase displacement


$$P_{loss} = f(\phi)$$

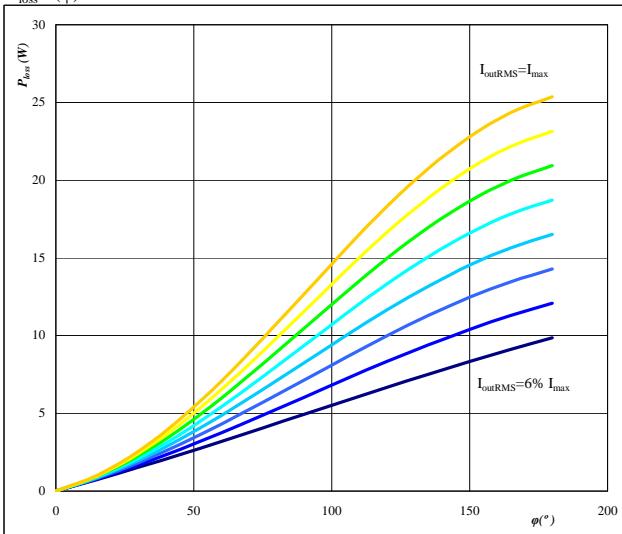

Conditions: $T_j = 125^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
DC link = 700 V
parameter: I_{oRMS} from 10 A to 150 A
in steps of 20 A A

Figure 18.
neutral point IGBT
Typical total loss as a function of phase displacement and I_{outRMS}


$$P_{loss} = f(I_{oRMS}; \phi)$$

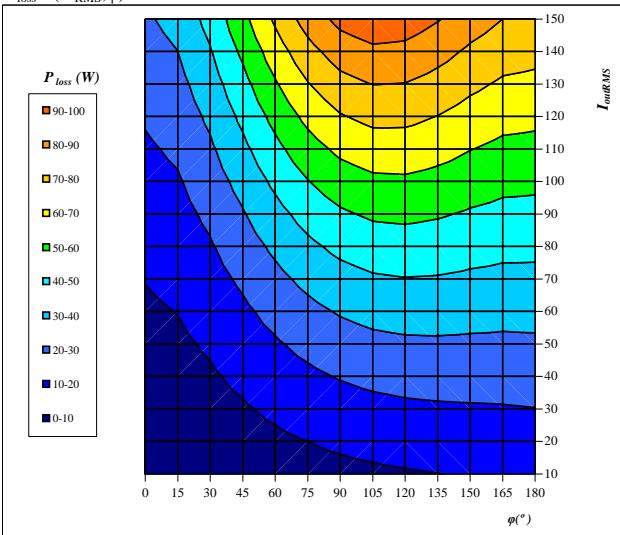

Conditions: $T_j = 150^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
DC link = 700 V
 $I_{oRMS} = 16 \text{ A}$

Figure 19.
half bridge FWD
Typical total loss as a function of phase displacement and I_{outRMS}

$$P_{loss} = f(I_{oRMS}; \phi)$$

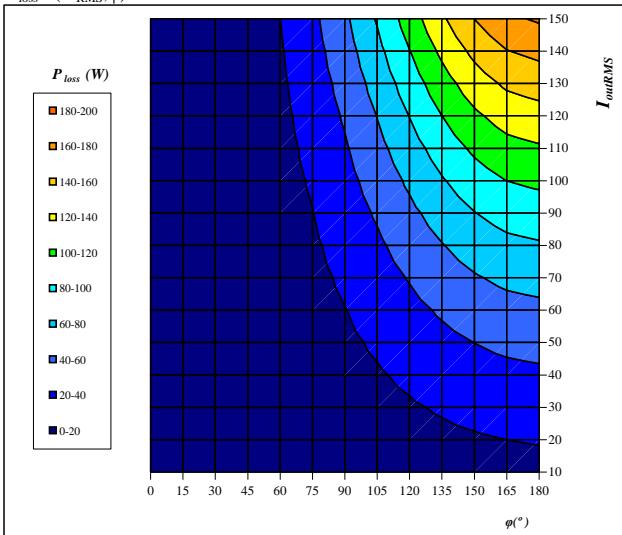


Conditions: $T_j = 125^\circ\text{C}$ $f_{sw} = 16 \text{ kHz}$
DC link = 700 V
 $I_{oRMS} = 16 \text{ A}$

flow2 MNPC
mixed voltage NPC Application
1200V/200A
Figure 20. for neutral point IGBT + half bridge FWD

Typical available output current as a function of phase displacement

$$I_{out} = f(\phi)$$

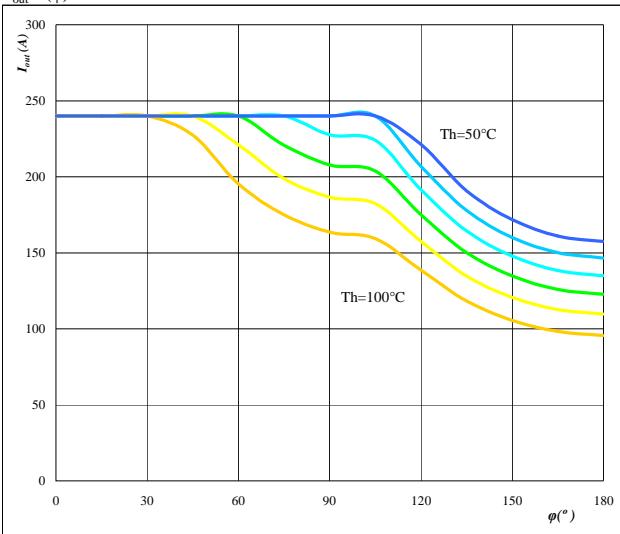

 Conditions: $T_j = 150/125^\circ C$, $f_{sw} = 16\text{ kHz}$
 DC link = 700 V

 parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 21. for neutral point IGBT + half bridge FWD

Typical available output current as a function of switching frequency

$$I_{out} = f(f_{sw})$$

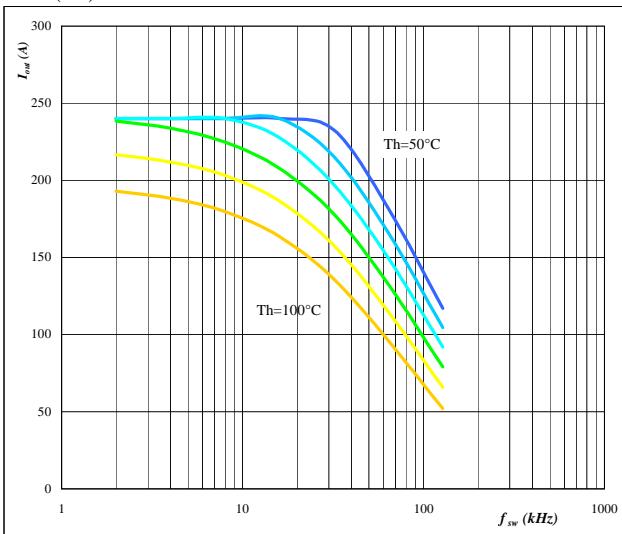

 Conditions: $T_j = 150/125^\circ C$, $\varphi = 90^\circ$, $f_{sw} = 16\text{ kHz}$
 DC link = 700 V

 parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 22. for neutral point IGBT + half bridge FWD


Typical available 50Hz output current as a function of fsw and phase displacement

$$I_{out} = f(f_{sw}, \phi)$$

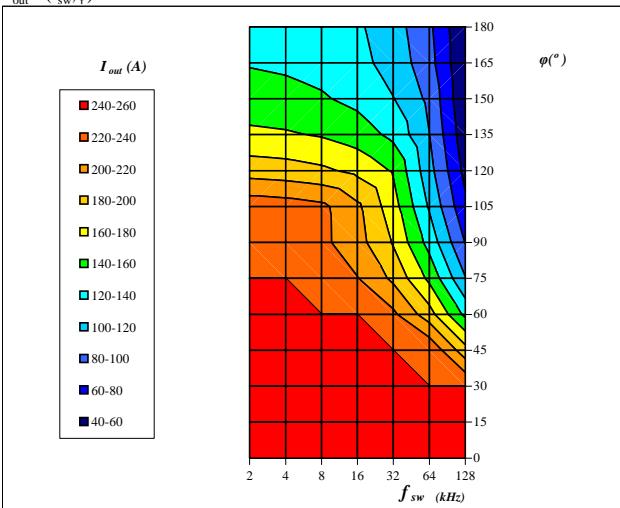
 Conditions: $T_j = 150/125^\circ C$,
 DC link = 700 V,
 $T_h = 80^\circ C$

flow2 MNPC
mixed voltage NPC Application
1200V/200A
Figure 23.
per PHASE
Typical available output current as a function of heat sink temperature


$I_{out}=f(T_h)$

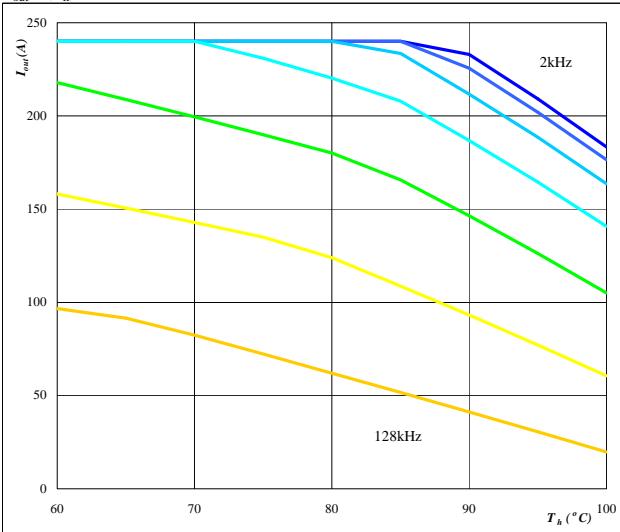
Conditions: $T_j= 150/125 \text{ } ^\circ\text{C}$
DC link= 700 V
 $\phi=$ 0 °

parameter: Switching freq.
 fsw from 2 kHz to 128 kHz
 in steps of factor 2

Figure 24.
per PHASE
Typical available output current as a function of phase displacement


$I_{out}=f(\phi)$

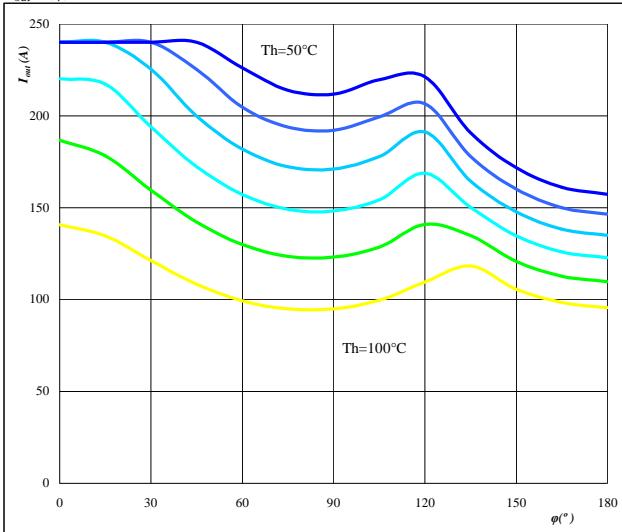
Conditions: $T_j= 150/125 \text{ } ^\circ\text{C}$
DC link= 700 V
f_{sw}= 16 kHz

parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 25.
per PHASE
Typical available output current as a function of switching frequency


$I_{out}=f(f_{sw})$

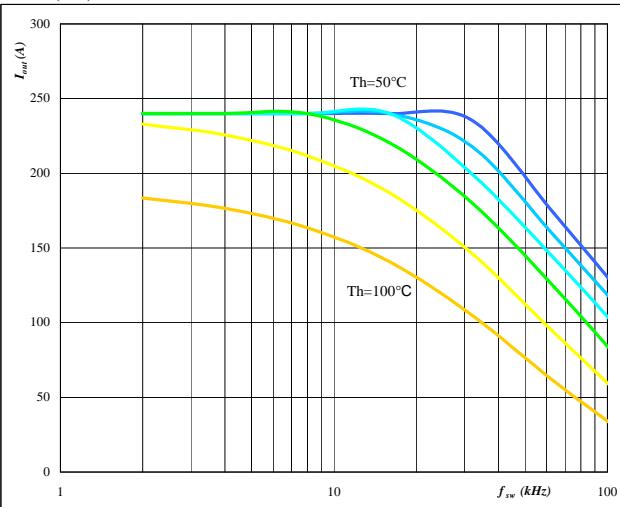
Conditions: $T_j= 150/125 \text{ } ^\circ\text{C}$
DC link= 700 V
 $\phi=$ 0 °

parameter: Heatsink temp.
 Th from 50 °C to 100 °C
 in 10 °C steps

Figure 26.
per PHASE
Typical available 50Hz output current as a function of fsw and phase displacement


$I_{out}=f(f_{sw}, \phi)$

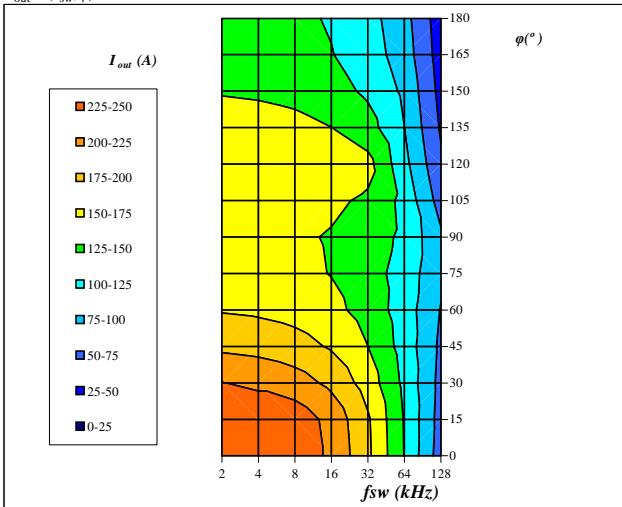
Conditions: $T_j= 150/125 \text{ } ^\circ\text{C}$
DC link= 700 V
 $T_h=$ 80 °C

flow2 MNPC
mixed voltage NPC Application
1200V/200A
Figure 27. per PHASE

Typical efficiency as a function of output power

$\eta=f(P_{out})$

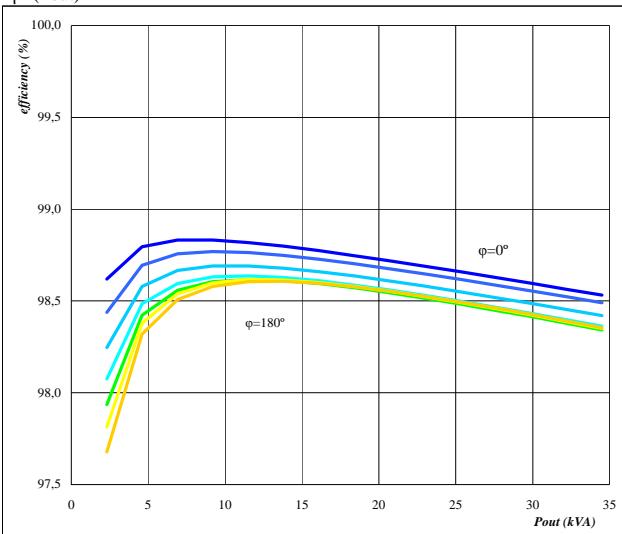

Conditions: $T_j=150/125\text{ }^\circ\text{C}$
 $f_{sw}=16\text{ kHz}$
DC link= 700 V

parameter: phase displacement
 ϕ from 0° to 180°
in steps of 30°

Figure 29. per PHASE

Typical available output power as a function of heat sink temperature

$P_{out}=f(T_h)$

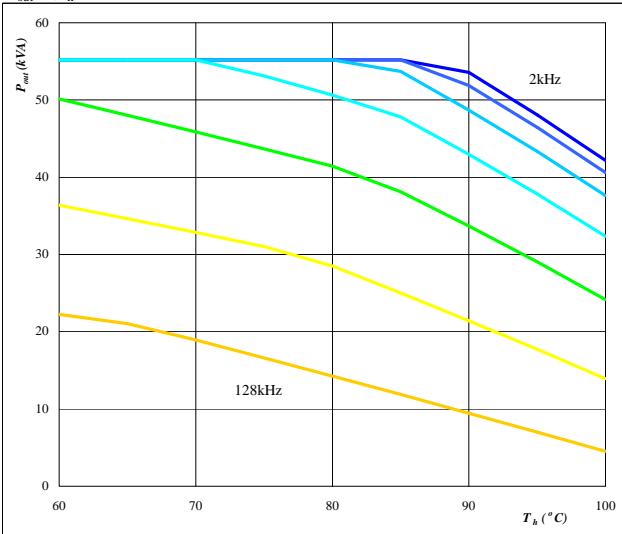

Conditions: $T_j=150/125\text{ }^\circ\text{C}$
DC link= 700 V

parameter: Switching freq.
 f_{sw} from 2 kHz to 128 kHz
in steps of factor 2

Figure 28. per PHASE

Typical efficiency as a function of output power

$\eta=f(P_{out})$

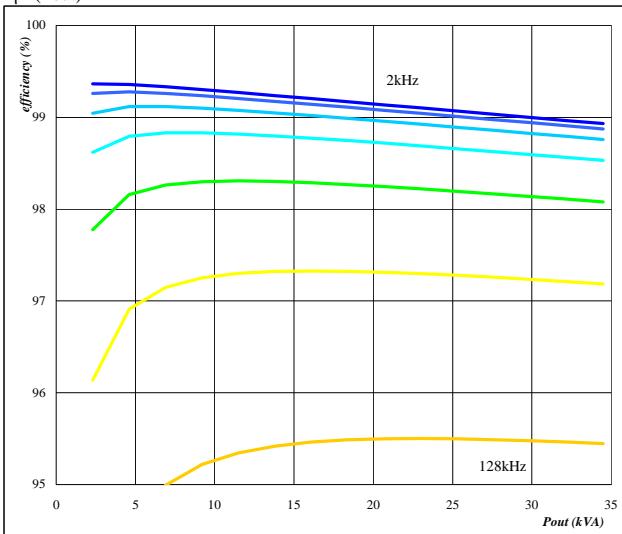

Conditions: $T_j=150/125\text{ }^\circ\text{C}$
DC link= 700 V
parameter: Switching freq.

 f_{sw} from 2 kHz to 128 kHz
in steps of factor 2

Figure 30. per PHASE

Typical loss distribution as a function of output current

$P_{out}=f(I_{out})$

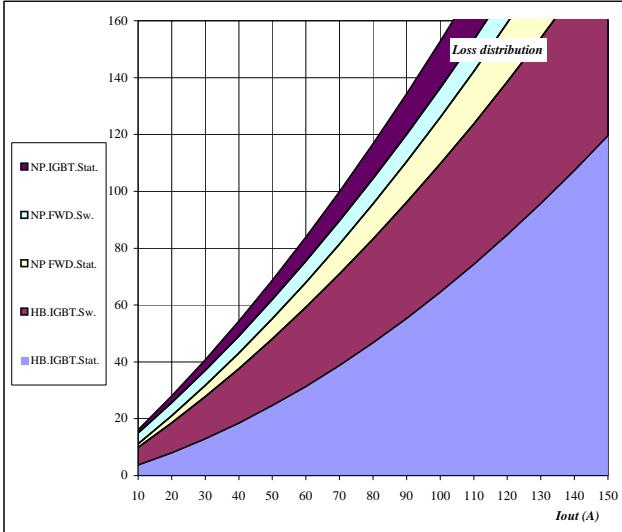
Conditions: $T_j=150/125\text{ }^\circ\text{C}$
 $f_{sw}=16\text{ kHz}$
DC link= 700 V

parameter: $\varphi=0^\circ$

flow2 MNPC
mixed voltage NPC Application
1200V/200A

Figure 31.
Typical relativ loss distribution as a function of output current

$$P_{out} = f(T_h)$$


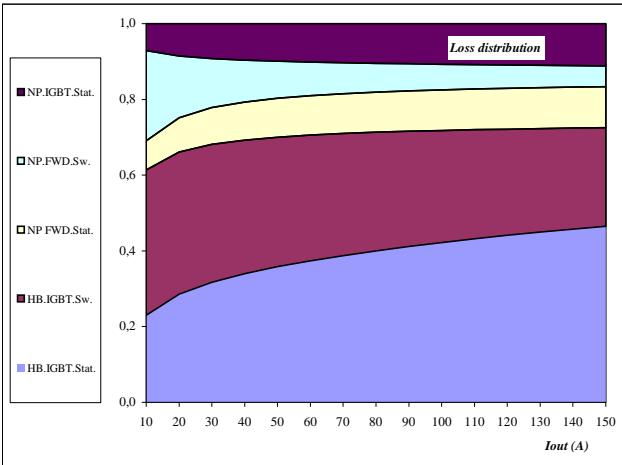


Figure 32.
Schematic

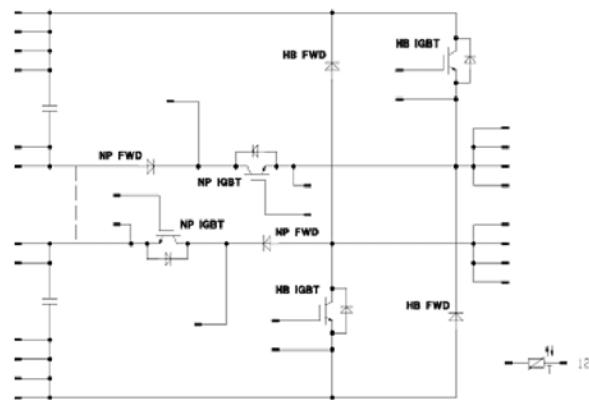

Conditions:

T _j =	150/125	°C
f _{sw} =	16	kHz
DC link=	700	V
Φ=	0 °	