



General conditions

3phase SPWM

V_{GEon} = 15 V

V_{GEoff} = -15 V

R_{gon} = 2 Ω


R_{goff} = 2 Ω

Figure 1

IGBT

Typical average static loss as a function of output current

P_{loss} = f(I_{out})

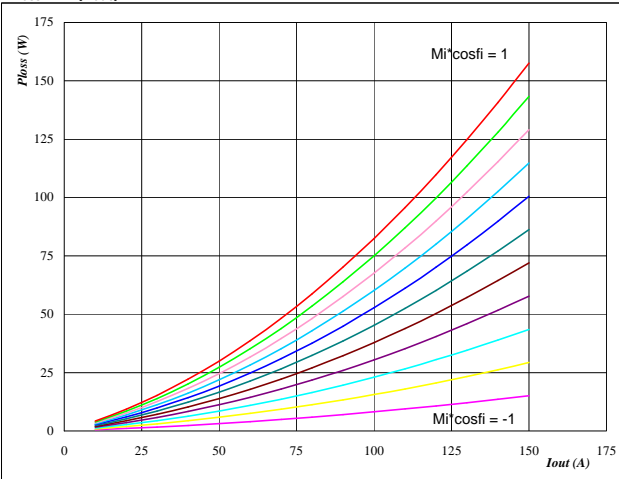

At

T_j = 150 °C


Mi*cosφ from -1 to 1 in steps of 0,2

Figure 2

FWD

Typical average static loss as a function of output current

P_{loss} = f(I_{out})

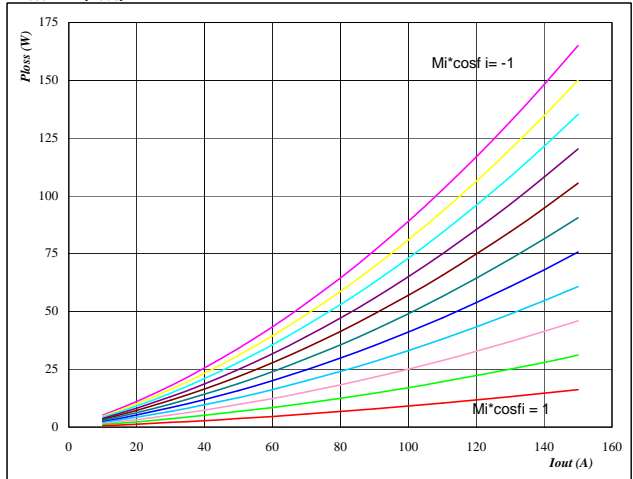

At

T_j = 150 °C


Mi*cosφ from -1 to 1 in steps of 0,2

Figure 3

IGBT

Typical average switching loss as a function of output current

P_{loss} = f(I_{out})

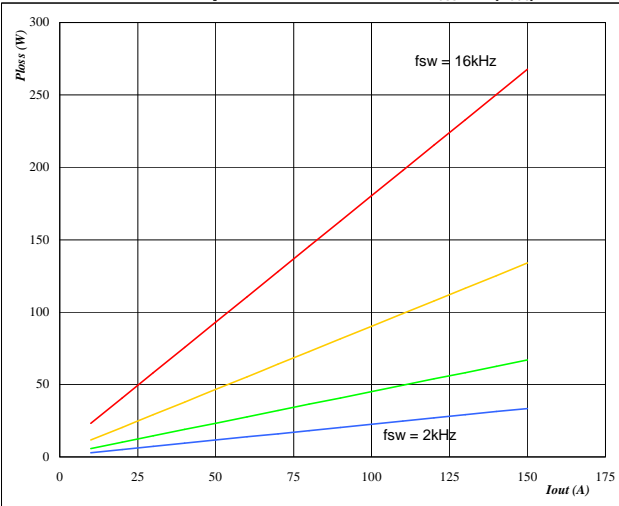

At

T_j = 150 °C

DC link = 600 V


f_{sw} from 2 kHz to 16 kHz in steps of factor 2

Figure 4

FWD

Typical average switching loss as a function of output current

P_{loss} = f(I_{out})

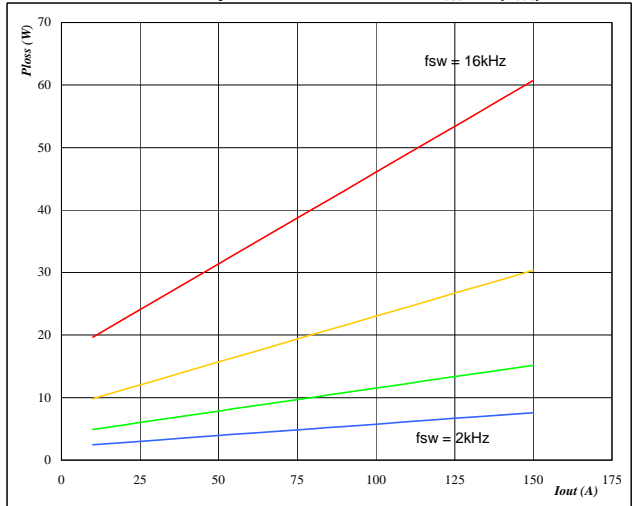

At

T_j = 150 °C


DC link = 600 V

f_{sw} from 2 kHz to 16 kHz in steps of factor 2



Figure 5 Phase


Typical available 50Hz output current as a function $Mi \cdot \cos \phi$ $I_{out} = f(Mi \cdot \cos \phi)$

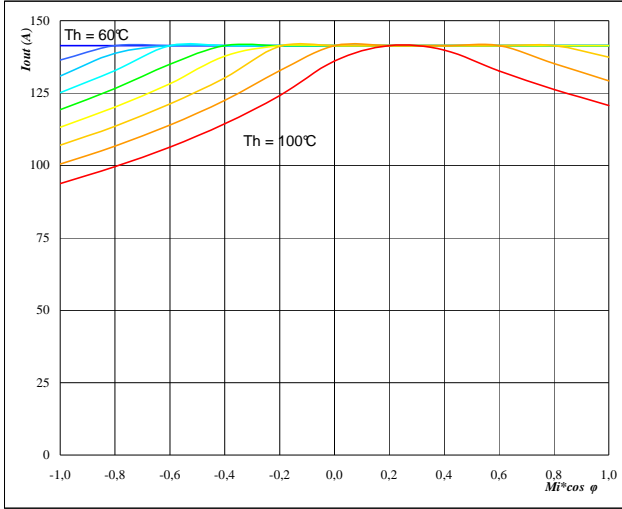

At
 $T_j = 150$ °C
 DC link = 600 V
 $f_{sw} = 4$ kHz
 T_h from 60 °C to 100 °C in steps of 5 °C

Figure 6 Phase


Typical available 50Hz output current as a function of switching frequency $I_{out} = f(f_{sw})$

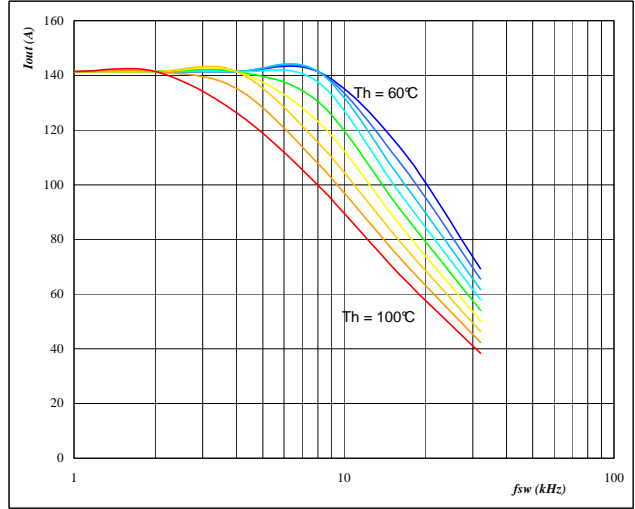

At
 $T_j = 150$ °C
 DC link = 600 V
 $Mi \cdot \cos \phi = 0,8$
 T_h from 60 °C to 100 °C in steps of 5 °C

Figure 7 Phase


Typical available 50Hz output current as a function of $Mi \cdot \cos \phi$ and switching frequency $I_{out} = f(f_{sw}, Mi \cdot \cos \phi)$

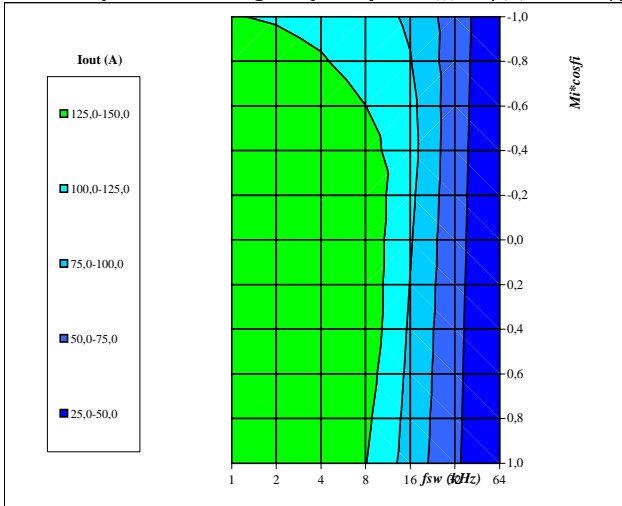

At
 $T_j = 150$ °C
 DC link = 600 V
 $T_h = 80$ °C

Figure 8 Phase


Typical available 0Hz output current as a function of switching frequency $I_{outpeak} = f(f_{sw})$

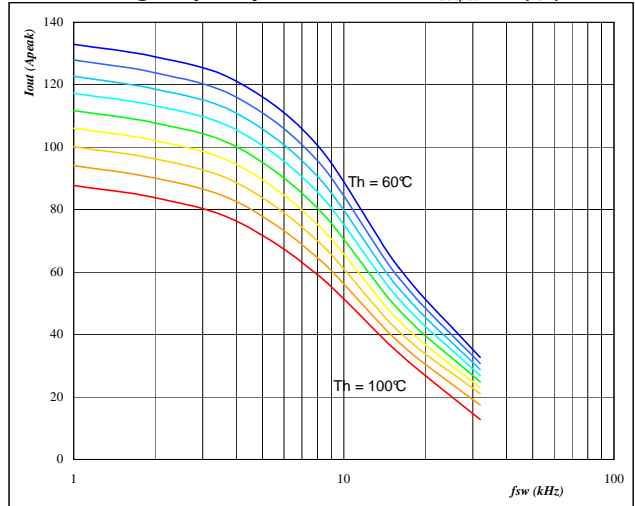

At
 $T_j = 150$ °C
 DC link = 600 V
 T_h from 60 °C to 100 °C in steps of 5 °C
 $Mi = 0$




Figure 9 Inverter
Typical available peak output power as a function of heatsink temperature
 $P_{out} = f(T_{th})$

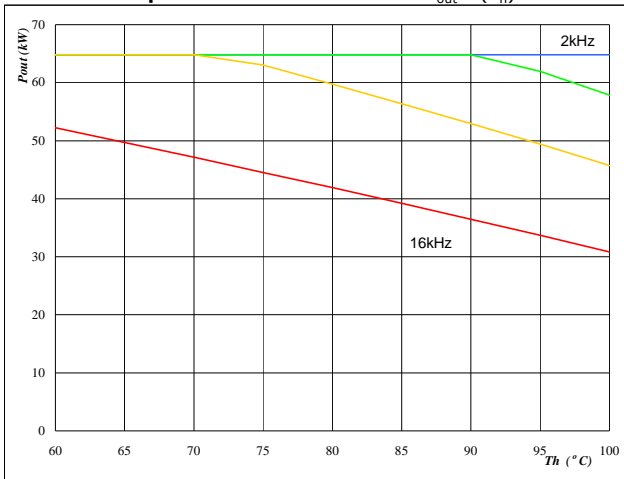


At
 $T_j = 150 \text{ } ^\circ\text{C}$
 DC link = 600 V
 $M_i = 1$
 $\cos \varphi = 0,80$
 f_{sw} from 2 kHz to 16 kHz in steps of factor 2

Figure 10 Inverter
Typical efficiency as a function of output power
 efficiency = $f(P_{out})$

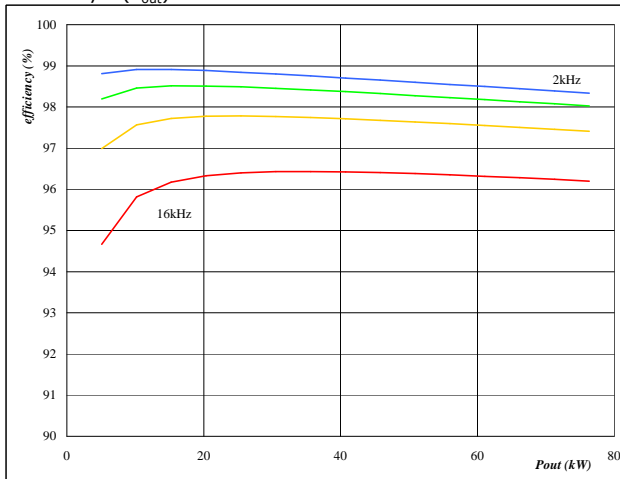

At
 $T_j = 150 \text{ } ^\circ\text{C}$
 DC link = 600 V
 $M_i = 1$
 $\cos \varphi = 0,80$
 f_{sw} from 2 kHz to 16 kHz in steps of factor 2

Figure 11 Inverter
Typical available overload factor as a function of motor power and switching frequency
 $P_{peak} / P_{nom} = f(P_{nom}, f_{sw})$

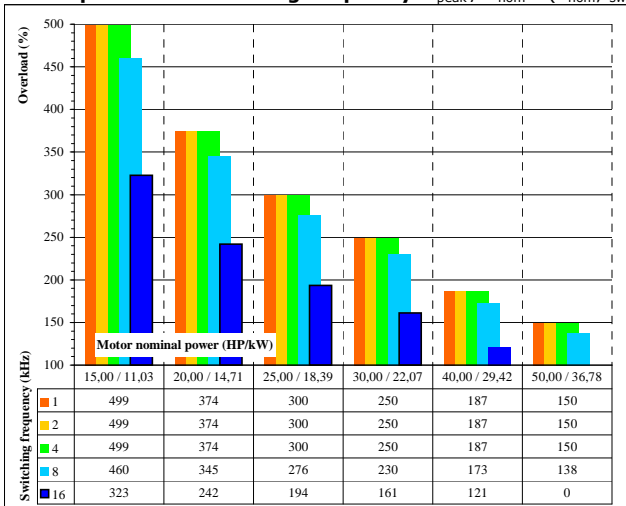

At
 $T_j = 150 \text{ } ^\circ\text{C}$
 DC link = 600 V
 $M_i = 1$
 $\cos \varphi = 0,8$
 f_{sw} from 1 kHz to 16kHz in steps of factor 2
 $T_{th} = 80 \text{ } ^\circ\text{C}$
 Motor eff = 0,85