



MiniSKiiP® PIM 3

1200 V / 100 A

Topology features

- Converter+Brake+Inverter
- Kelvin Emitter for improved switching performance
- Temperature sensor

Component features

- Easy paralleling
- Low turn-off losses
- Low collector emitter saturation voltage
- Positive temperature coefficient
- Short tail current
- Switching optimized for EMC

Housing features

- Base isolation: Si_3N_4
- Easy assembly in one mounting step
- Flexible PCB design w/o pin holes
- Rugged solderless spring contacts


Target applications

- Embedded Drives
- Industrial Drives


Types

- 80-M312PMA100M701-K420A72

MiniSKiiP® 3 16 mm housing

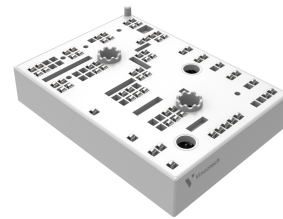

Schematic

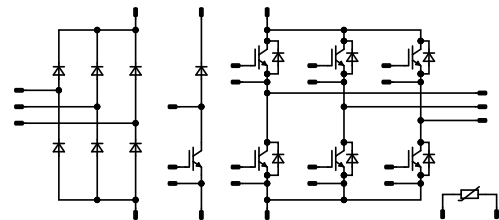



Vincotech

80-M312PMA100M701-K420A72
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	139	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	200	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	297	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	9,5	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Inverter Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	88	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	200	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	168	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Brake Switch

Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	139	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	200	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	297	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	9,5	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$



Vincotech

80-M312PMA100M701-K420A72
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Brake Diode				
Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	88	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	200	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	168	W
Maximum junction temperature	T_{jmax}		175	°C

Rectifier Diode

Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	119	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	890	A
Surge current capability	I^2t		3960	A ² s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	143	W
Maximum junction temperature	T_{jmax}		150	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	5500	V
Isolation voltage	V_{isol}	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance		With std lid For more informations see handling instructions	6,3	mm
Clearance		With std lid For more informations see handling instructions	6,3	mm
Comparative Tracking Index	CTI		≥ 600	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,01	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		100	25 125 150		1,53 1,71 1,75	1,85 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			100	µA
Gate-emitter leakage current	I_{GES}		20	0		25			200	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	0	10	25				21000		pF
Output capacitance	C_{oes}							700		pF
Reverse transfer capacitance	C_{res}							280		pF
Gate charge	Q_g	$V_{CC} = 600$ V	0/15		100	25		700		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,32		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 2$ Ω $R_{goff} = 2$ Ω	±15	600	100	25 125 150		118,2 118,2 117,6		ns
Rise time	t_r					25 125 150		10,2 12,4 13,4		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		173,6 200,4 205,6		ns
Fall time	t_f					25 125 150		82,85 96,38 106,77		ns
Turn-on energy (per pulse)	E_{on}					25 125 150		3,26 4,87 5,37		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		6,6 8,77 9,49		mWs



Vincotech

80-M312PMA100M701-K420A72

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Diode

Static

Forward voltage	V_F				100	25 125 150		1,82 1,96 1,97	2,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1200$ V				25			40	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,57		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RM}	$di/dt=9387$ A/µs $di/dt=7872$ A/µs $di/dt=8350$ A/µs	± 15	600	100	25 125 150		178,25 165,9 164,61		A
Reverse recovery time	t_{rr}					25 125 150		149,24 311,54 339,17		ns
Recovered charge	Q_r					25 125 150		11,6 17,27 19,18		µC
Reverse recovered energy	E_{rec}					25 125 150		5,14 7,75 8,59		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		4044 2649 2147		A/µs



Vincotech

80-M312PMA100M701-K420A72

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,01	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		100	25 125 150		1,53 1,71 1,75	1,85 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			100	µA
Gate-emitter leakage current	I_{GES}		20	0		25			200	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	0	10	25				21000		pF
Output capacitance	C_{oes}							700		pF
Reverse transfer capacitance	C_{res}							280		pF
Gate charge	Q_g	$V_{CC} = 600$ V	0/15		100	25		700		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,32		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$	0/15	600	100	25 125 150		165 157 157		ns
Rise time	t_r					25 125 150		91 102 100		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		485 521 533		ns
Fall time	t_f					25 125 150		49,22 95,43 100,22		ns
Turn-on energy (per pulse)	E_{on}					25 125 150		13,9 17,69 18,13		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		5,99 8,31 8,78		mWs



Vincotech

80-M312PMA100M701-K420A72

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Diode

Static

Forward voltage	V_F				100	25 125 150		1,82 1,96 1,97	2,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1200$ V				25			40	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,57		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RM}	$di/dt=652$ A/µs $di/dt=808$ A/µs $di/dt=707$ A/µs	0/15	600	100	25 125 150		38,03 48,61 50,56		A
Reverse recovery time	t_{rr}					25 125 150		341,78 519,83 568,44		ns
Recovered charge	Q_r					25 125 150		7,88 13,45 15,58		µC
Reverse recovered energy	E_{rec}					25 125 150		2,31 4,42 5,24		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		274,74 169,52 155,74		A/µs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Rectifier Diode

Static

Forward voltage	V_F				45	25 125 150		1,01 0,929 0,92	1,21 ⁽¹⁾ 1,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1600$ V				25			50	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,49		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Thermistor

Static

Rated resistance	R					25		1		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1670$ Ω				100	-2		2	%
Maximum Current	I_{max}							3		mA
Power dissipation constant	d					25		0,76		mW/K
A-value	A							$7,635 \times 10^{-3}$		1/K
B-value	B							$1,73 \times 10^{-5}$		1/K ²
Vincotech Thermistor Reference									E	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Vincotech

80-M312PMA100M701-K420A72 datasheet


Inverter Switch Characteristics

figure 1.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

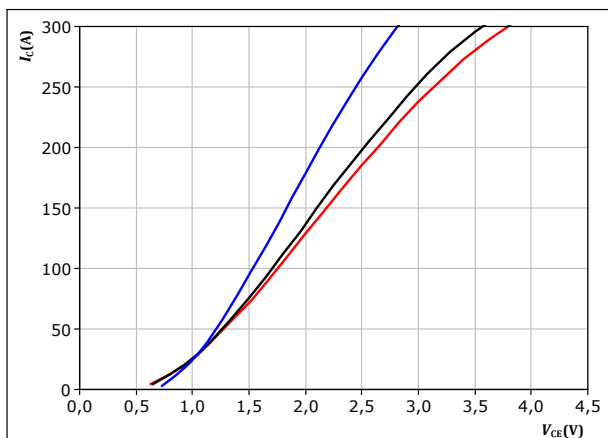

$t_p = 250 \mu s$
 $V_{GE} = 15 V$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 2.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

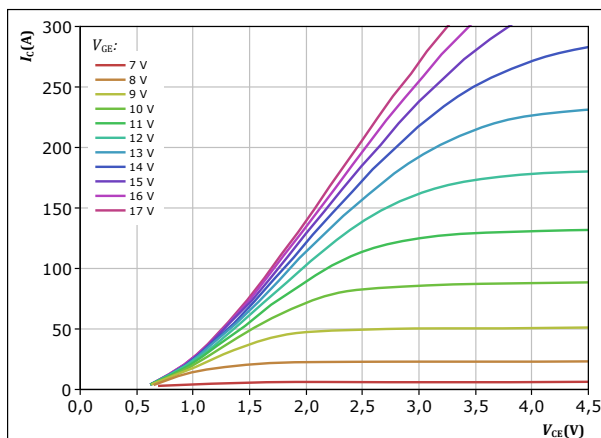


$t_p = 250 \mu s$
 $T_j = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3.

IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

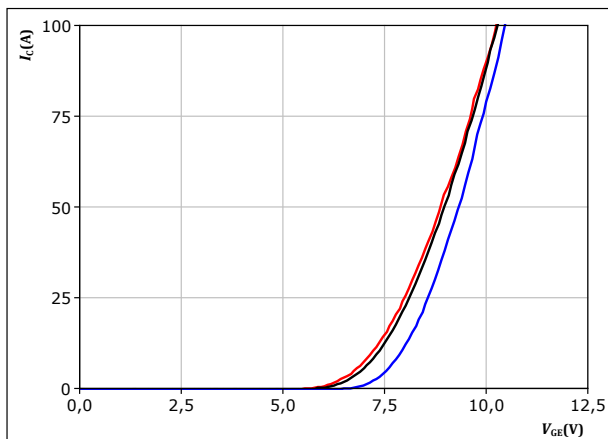

$t_p = 250 \mu s$
 $V_{CE} = 10 V$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 4.

IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

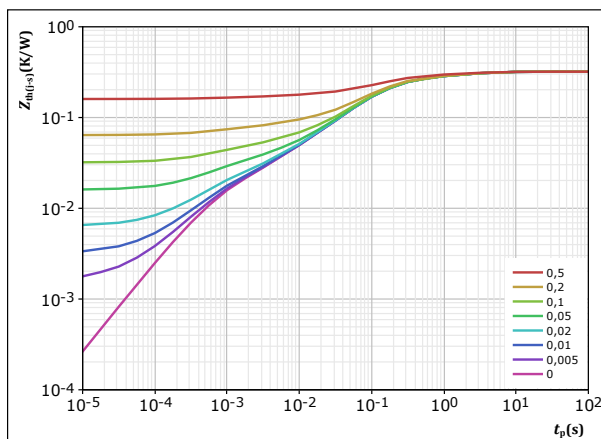

$D = t_p / T$
 $R_{th(j-s)} = 0,32 K/W$
IGBT thermal model values

$R (K/W)$	$\tau (s)$
2,95E-02	3,34E+00
4,80E-02	7,23E-01
1,38E-01	1,44E-01
7,51E-02	5,27E-02
1,54E-02	5,11E-03
1,35E-02	6,41E-04



Vincotech


80-M312PMA100M701-K420A72 datasheet

Inverter Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

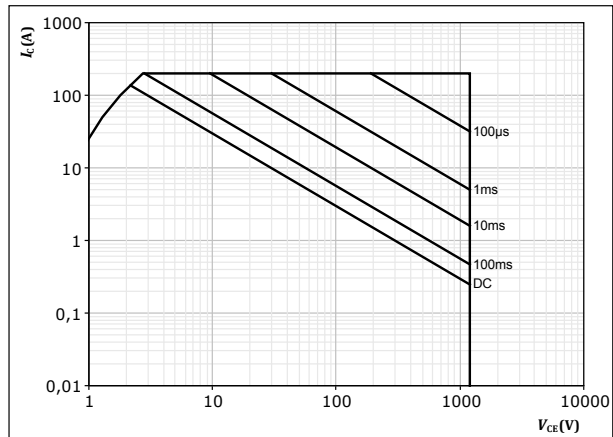


$D =$ single pulse
 $T_s = 80$ °C
 $V_{GE} = 15$ V
 $T_j = T_{jmax}$

figure 6. IGBT

Gate voltage vs gate charge

$$V_{GE} = f(Q_g)$$

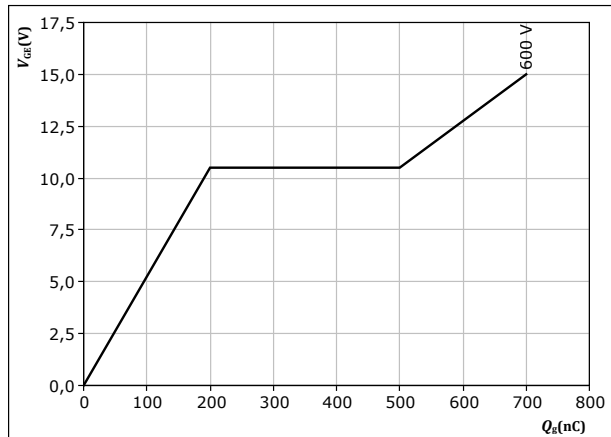

$I_C = 100$ A
 $T_j = 25$ °C



Vincotech


80-M312PMA100M701-K420A72 datasheet

Inverter Diode Characteristics

figure 7. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

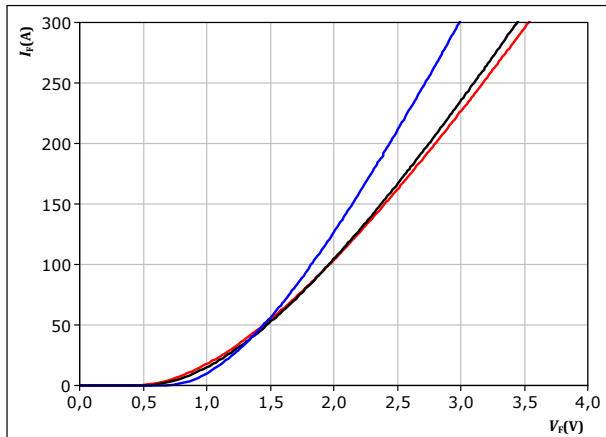

$t_p = 250 \mu s$


T_j :

- 25 °C
- 125 °C
- 150 °C

figure 8. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

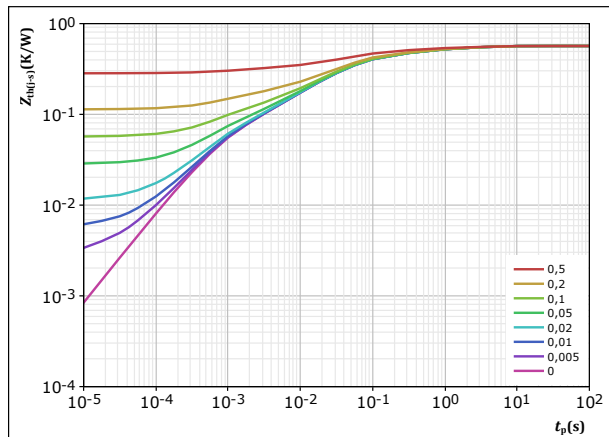

$D = t_p / T$

$R_{th(j-s)} = 0,567 \text{ K/W}$

FWD thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
5,63E-02	2,63E+00
9,93E-02	3,70E-01
2,54E-01	4,81E-02
9,97E-02	9,39E-03
5,74E-02	8,41E-04



Vincotech


80-M312PMA100M701-K420A72 datasheet

Brake Switch Characteristics

figure 9. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

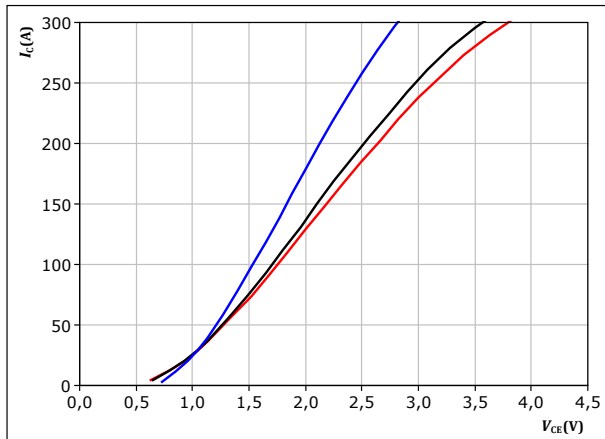


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j:$ 25 °C, 125 °C, 150 °C

figure 10. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

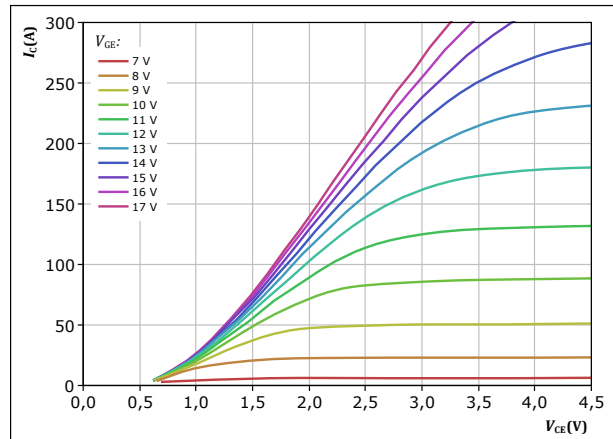


$t_p = 250 \mu s$
 $T_j = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 11. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

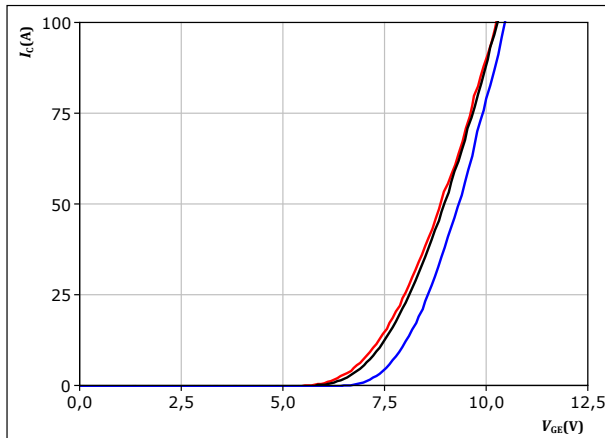


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_j:$ 25 °C, 125 °C, 150 °C

figure 12. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

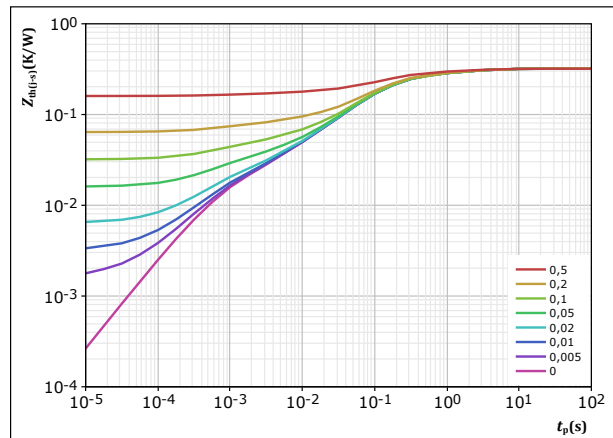

$D = t_p / T$
 $R_{th(j-s)} = 0,32 K/W$
IGBT thermal model values

$R (K/W)$	$\tau (s)$
2,95E-02	3,34E+00
4,80E-02	7,23E-01
1,38E-01	1,44E-01
7,51E-02	5,27E-02
1,54E-02	5,11E-03
1,35E-02	6,41E-04



Vincotech

80-M312PMA100M701-K420A72 datasheet


Brake Switch Characteristics

figure 13.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

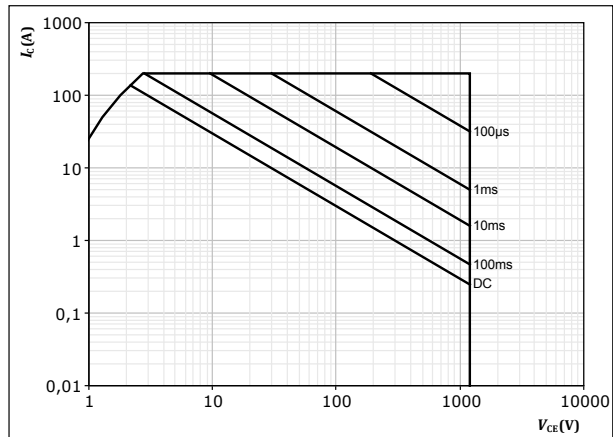


$D = \text{single pulse}$
 $T_s = 80 \text{ } ^\circ\text{C}$
 $V_{GE} = 15 \text{ V}$
 $T_j = T_{jmax}$

figure 14.

IGBT

Gate voltage vs gate charge

$$V_{GE} = f(Q_g)$$

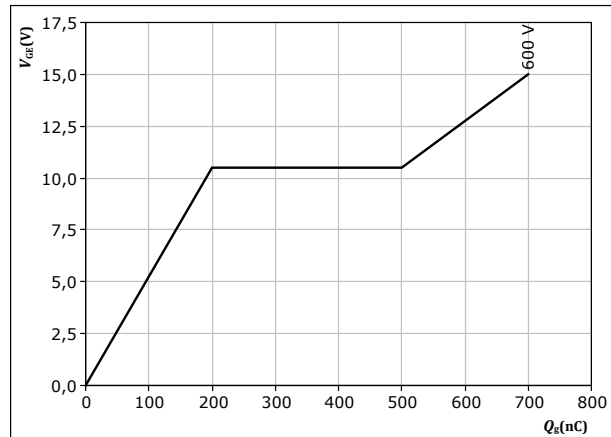

$I_C = 100 \text{ A}$
 $T_j = 25 \text{ } ^\circ\text{C}$



Vincotech


80-M312PMA100M701-K420A72 datasheet

Brake Diode Characteristics

figure 15. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

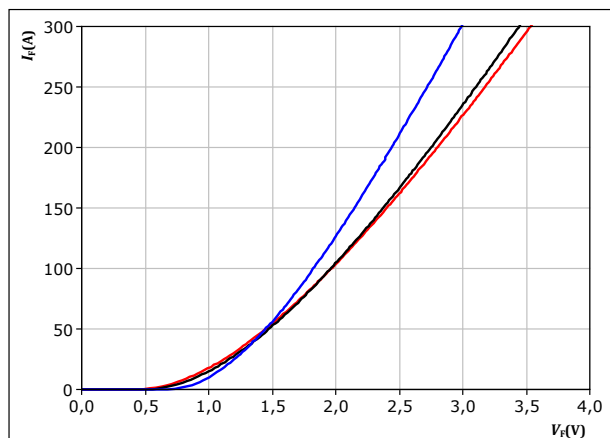


$t_p = 250 \mu s$

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 16. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

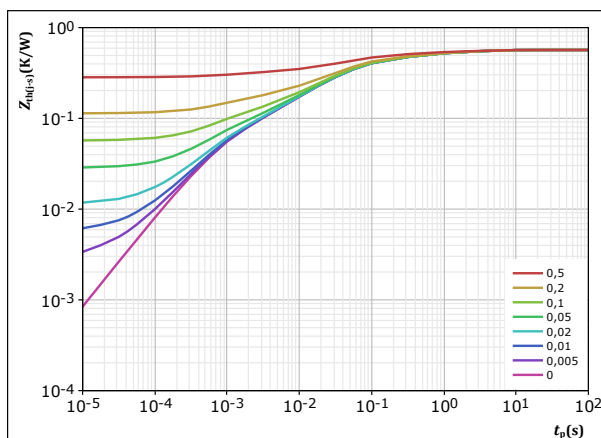

$D =$	t_p / T	
$R_{th(j-s)} =$	0,567	K/W
FWD thermal model values		
R (K/W)	τ (s)	
5,63E-02	2,63E+00	
9,93E-02	3,70E-01	
2,54E-01	4,81E-02	
9,97E-02	9,39E-03	
5,74E-02	8,41E-04	



Vincotech

80-M312PMA100M701-K420A72 datasheet


Rectifier Diode Characteristics

figure 17.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$

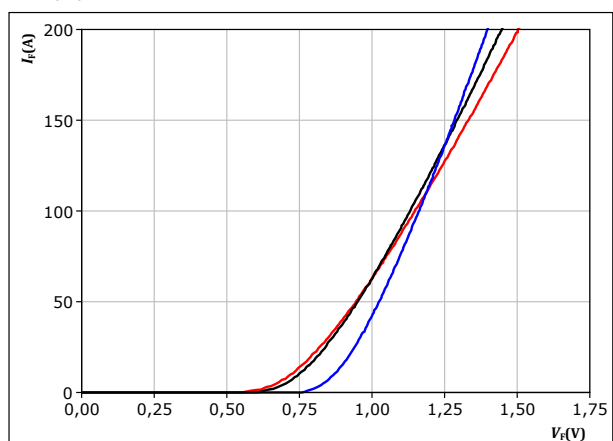

$t_p =$ 250 μ s


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 18.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

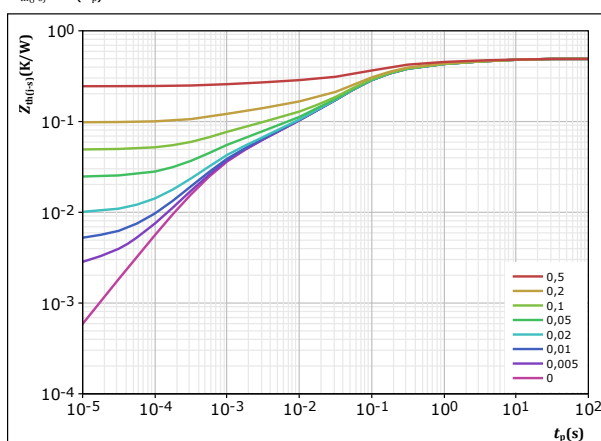

$D =$	t_p / T	
$R_{th(j-s)} =$	0,49	K/W
Rectifier thermal model values		
R (K/W)	τ (s)	
4,81E-02	6,41E+00	
6,72E-02	7,56E-01	
1,49E-01	1,48E-01	
1,58E-01	5,10E-02	
3,51E-02	4,40E-03	
3,28E-02	6,96E-04	



Vincotech

80-M312PMA100M701-K420A72
datasheet


Thermistor Characteristics

figure 19.

Thermistor

Typical PTC characteristic as function of temperature

$$R_T = f(T)$$

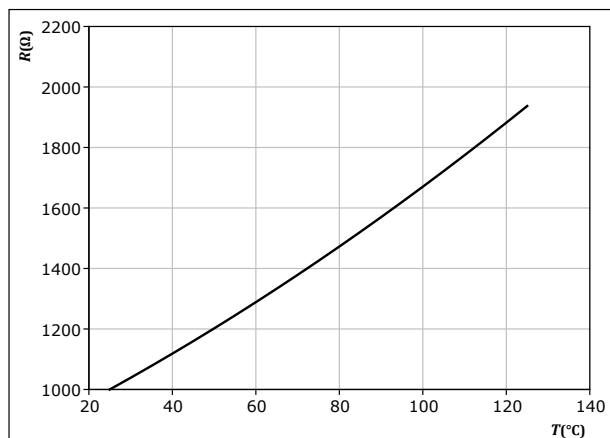



Vincotech

80-M312PMA100M701-K420A72 datasheet


Inverter Switching Characteristics

figure 20.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

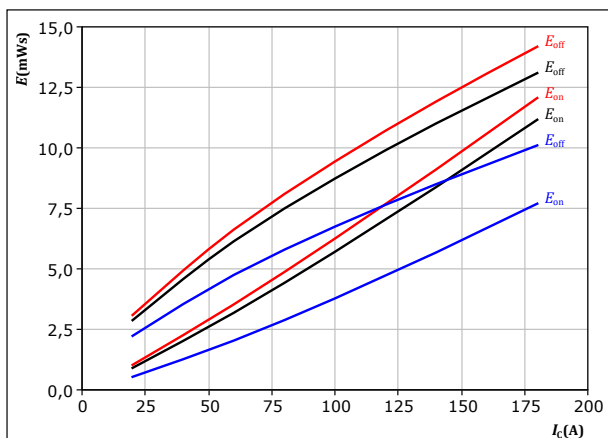

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$


T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)

figure 21.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

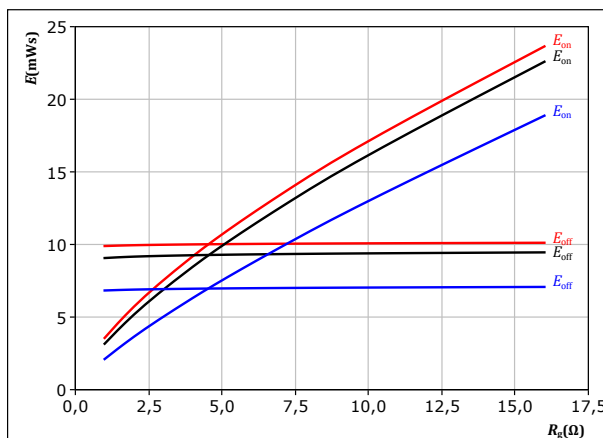

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 100 \text{ A}$


T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)

figure 22.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

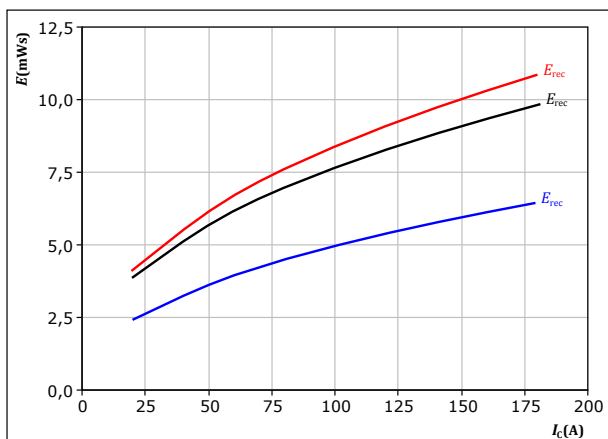

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$


T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)

figure 23.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

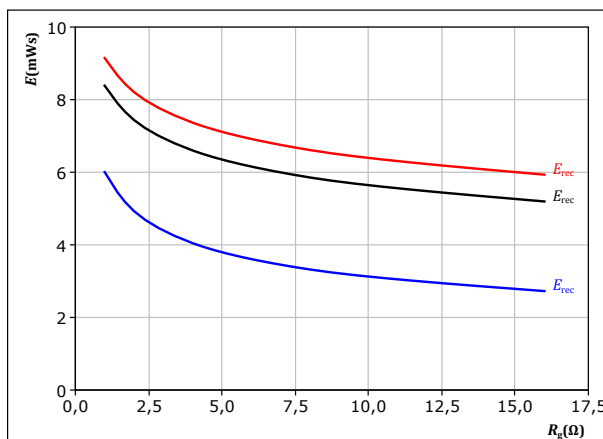

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 100 \text{ A}$

T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)




Vincotech

80-M312PMA100M701-K420A72 datasheet

Inverter Switching Characteristics

figure 24. IGBT

Typical switching times as a function of collector current
 $t = f(I_c)$

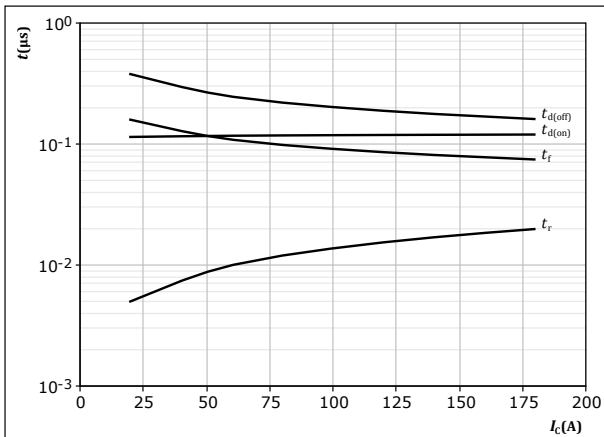


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω
 $R_{goff} = 2$ Ω

figure 25. IGBT

Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

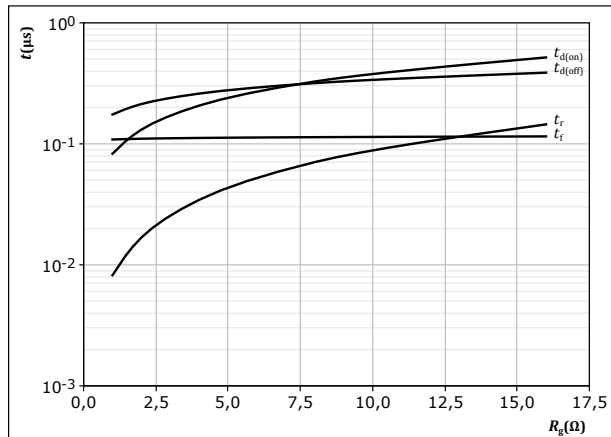


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 100$ A

figure 26. FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_c)$

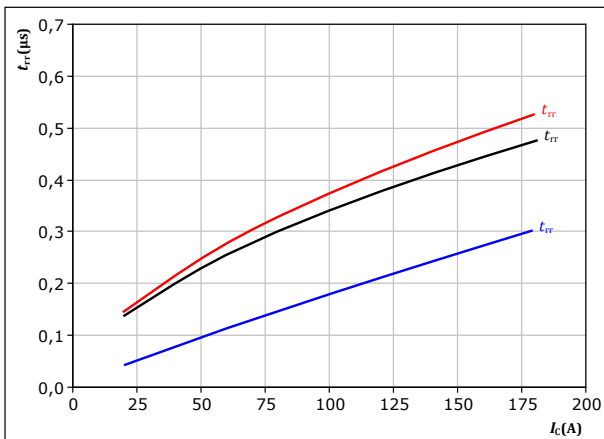


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 27. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

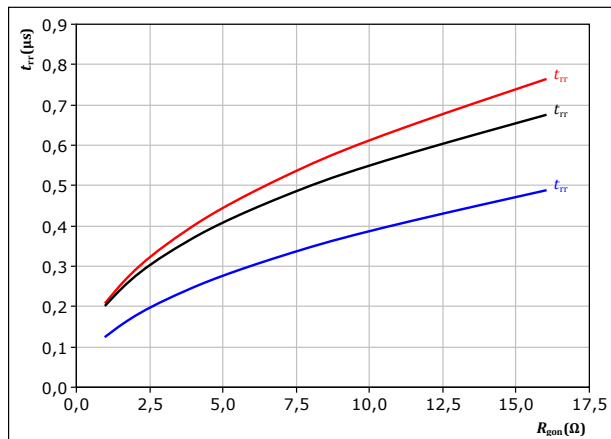

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 100$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

80-M312PMA100M701-K420A72 datasheet


Inverter Switching Characteristics

figure 28.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

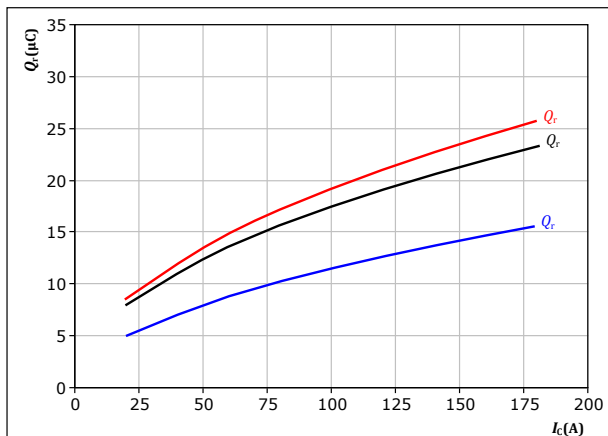

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j : 25 °C
125 °C
150 °C

figure 30.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

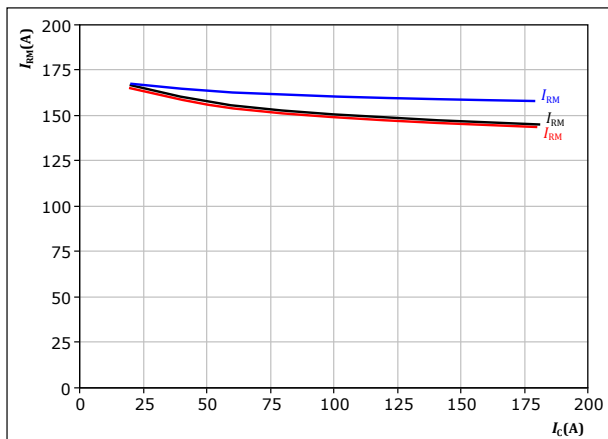

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j : 25 °C
125 °C
150 °C

figure 29.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

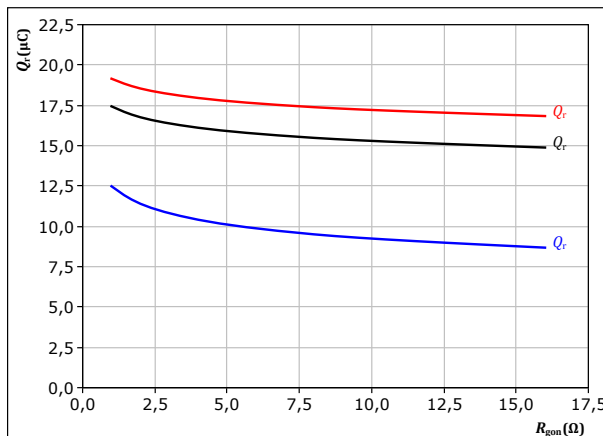

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 100$ A


T_j : 25 °C
125 °C
150 °C

figure 31.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

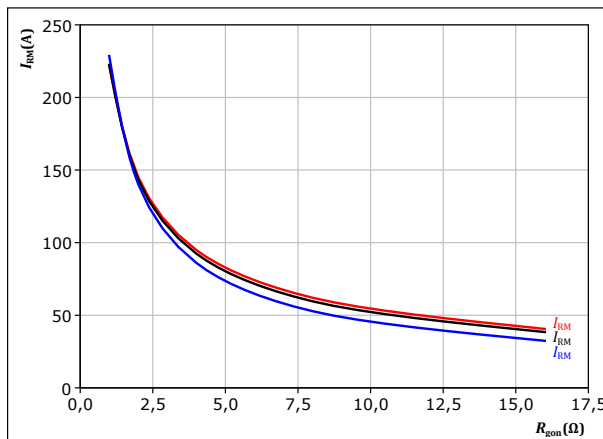

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 100$ A

T_j : 25 °C
125 °C
150 °C




Vincotech

80-M312PMA100M701-K420A72 datasheet

Inverter Switching Characteristics

figure 32. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

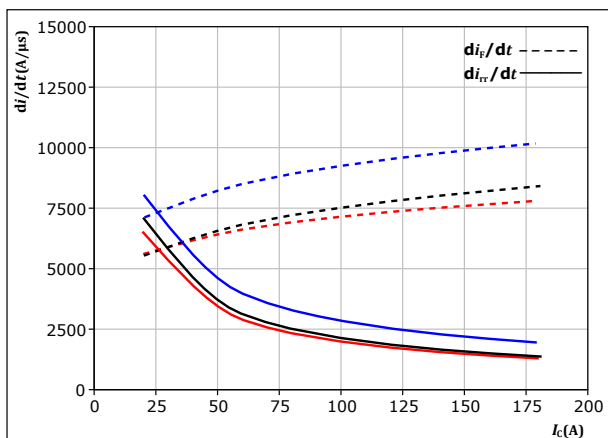


With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$
 $T_j = 25 \text{ } ^\circ\text{C}$
 $T_j = 125 \text{ } ^\circ\text{C}$
 $T_j = 150 \text{ } ^\circ\text{C}$

figure 33. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

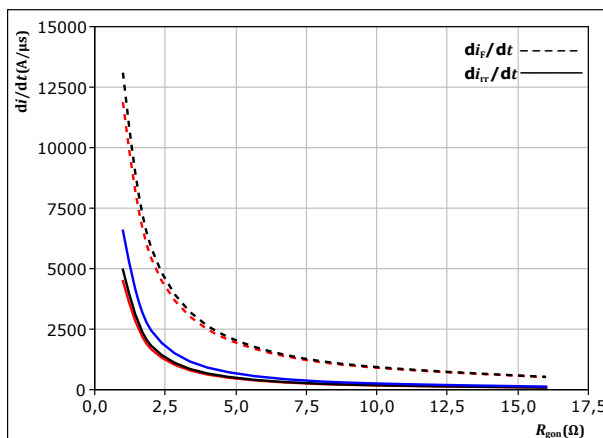


With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 100 \text{ A}$
 $T_j = 25 \text{ } ^\circ\text{C}$
 $T_j = 125 \text{ } ^\circ\text{C}$
 $T_j = 150 \text{ } ^\circ\text{C}$

figure 34. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

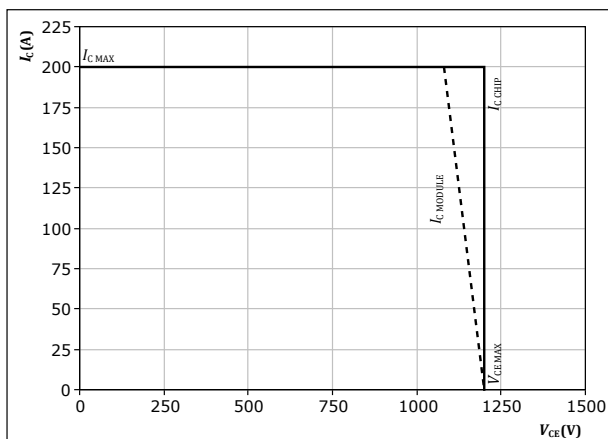

At $T_j = 150 \text{ } ^\circ\text{C}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$



Vincotech

80-M312PMA100M701-K420A72 datasheet


Brake Switching Characteristics

figure 35.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

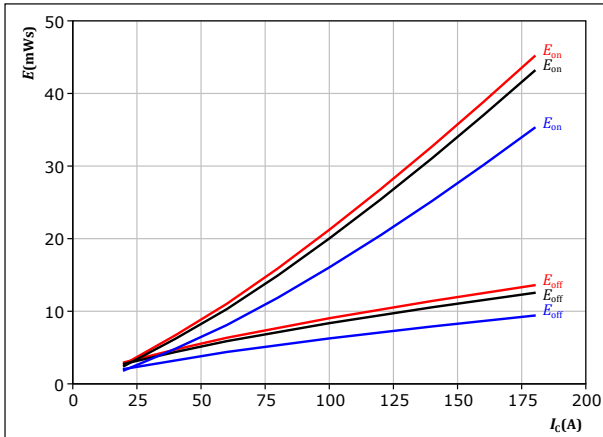

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 37.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

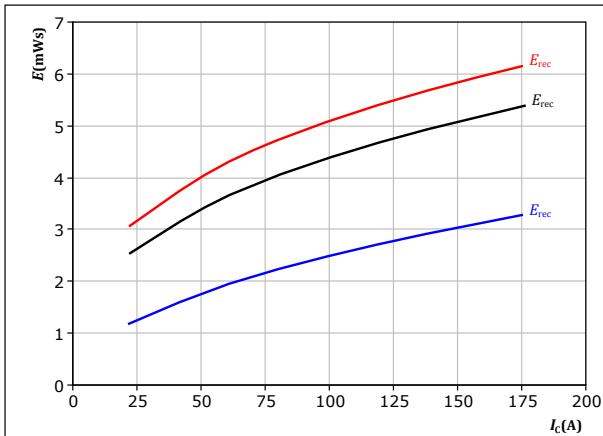

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 36.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

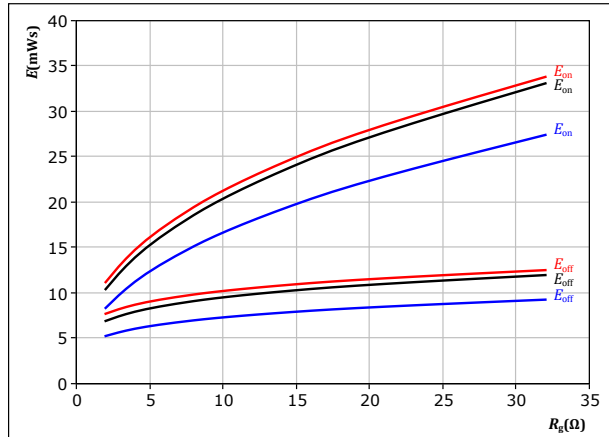

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $I_C = 100$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 38.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

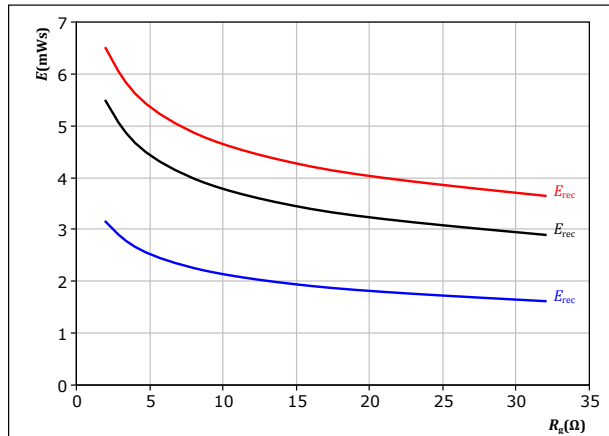

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $I_C = 100$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

80-M312PMA100M701-K420A72 datasheet


Brake Switching Characteristics

figure 39.

IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

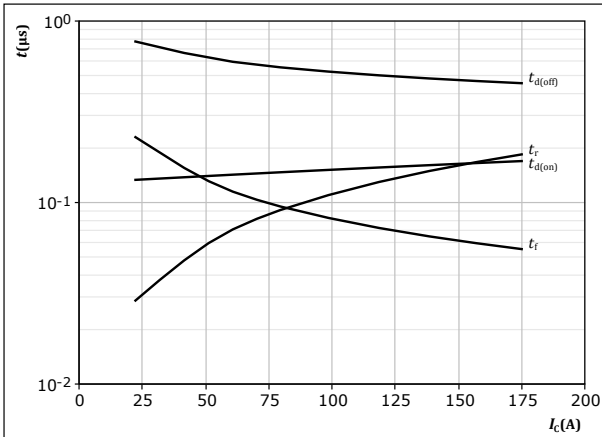

With an inductive load at


$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

figure 40.

IGBT

Typical switching times as a function of IGBT turn on gate resistor

$$t = f(R_g)$$

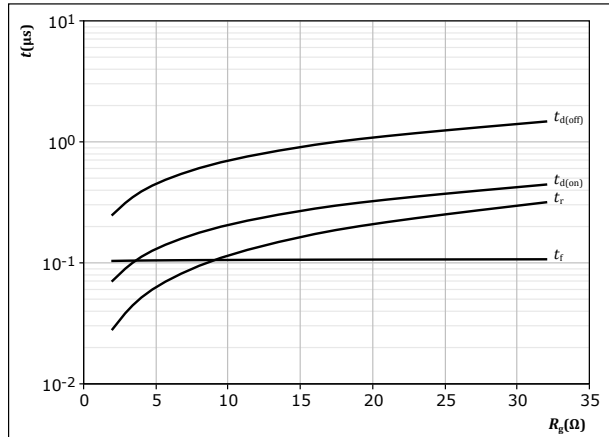

With an inductive load at


$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $I_C = 100$ A

figure 41.

FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

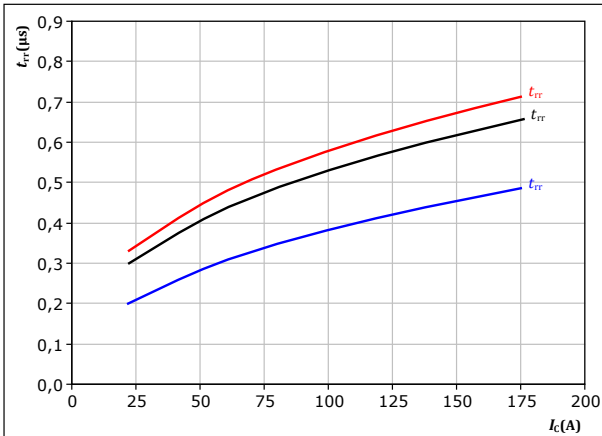

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j : — 25 °C
— 125 °C
— 150 °C

figure 42.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

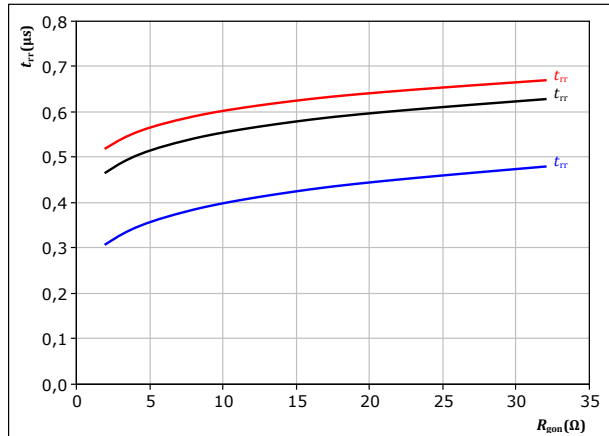

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $I_C = 100$ A

T_j : — 25 °C
— 125 °C
— 150 °C



Vincotech

80-M312PMA100M701-K420A72 datasheet


Brake Switching Characteristics

figure 43.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

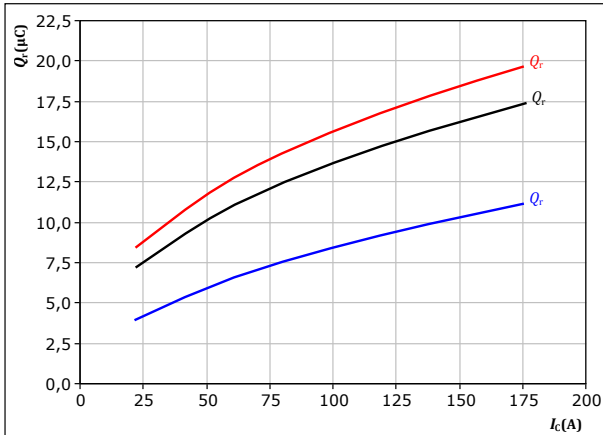

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j : 25 °C
125 °C
150 °C

figure 45.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

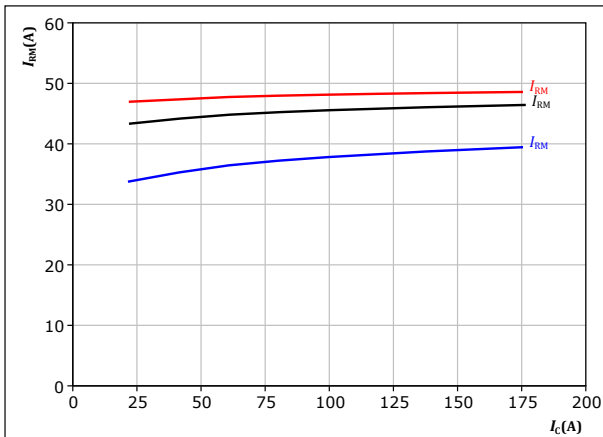

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j : 25 °C
125 °C
150 °C

figure 44.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

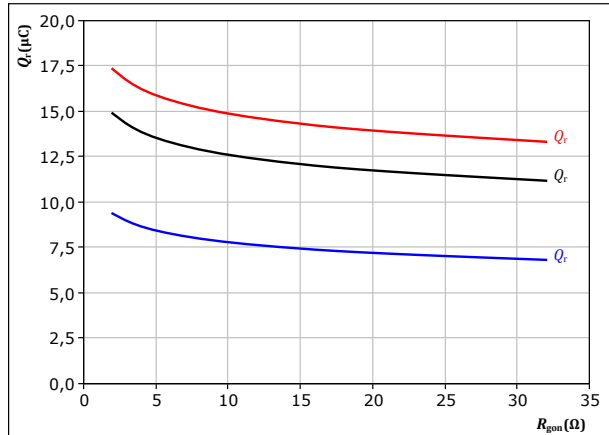

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $I_c = 100$ A


T_j : 25 °C
125 °C
150 °C

figure 46.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

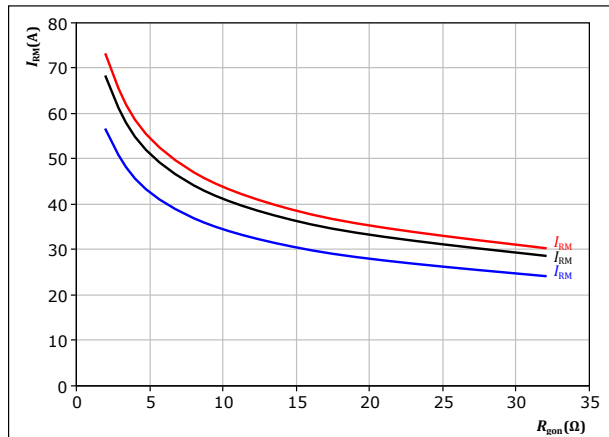

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = 0/15$ V
 $I_c = 100$ A

T_j : 25 °C
125 °C
150 °C




Vincotech

80-M312PMA100M701-K420A72
datasheet

Brake Switching Characteristics

figure 47. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

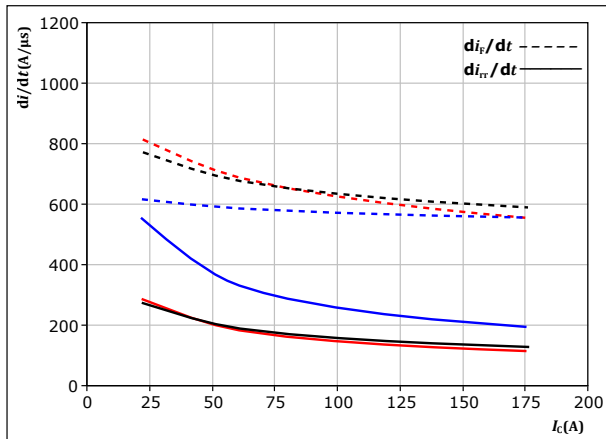


With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $R_{gon} = 8 \text{ } \Omega$

$T_j:$ — 25 °C
— 125 °C
— 150 °C

figure 48. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

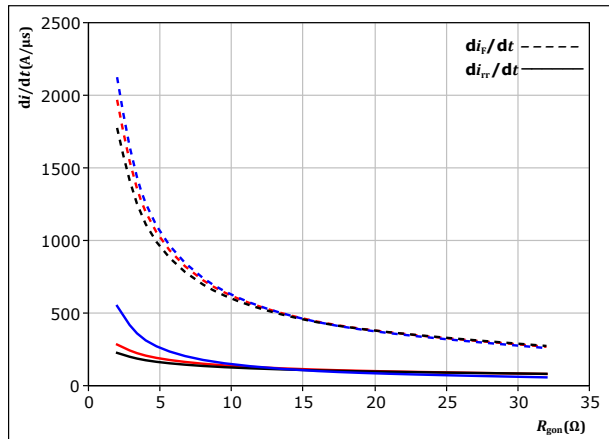

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $I_C = 100 \text{ A}$

$T_j:$ — 25 °C
— 125 °C
— 150 °C

figure 49. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

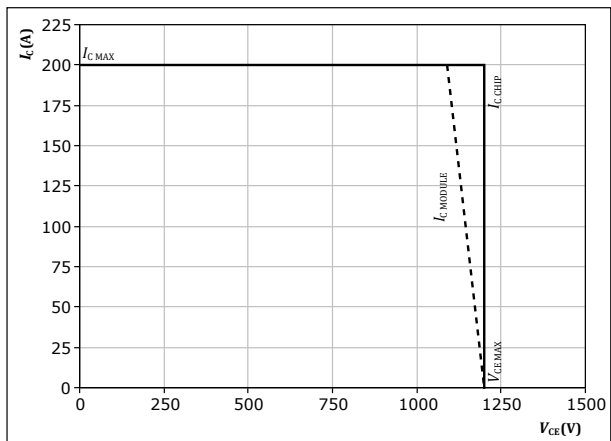

At $T_j = 150^\circ\text{C}$
 $R_{gon} = 8 \text{ } \Omega$
 $R_{goff} = 8 \text{ } \Omega$



Vincotech

80-M312PMA100M701-K420A72 datasheet

Switching Definitions

figure 50. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})



figure 51. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})




figure 52. IGBT

Turn-off Switching Waveforms & definition of t_f



figure 53. IGBT

Turn-on Switching Waveforms & definition of t_r

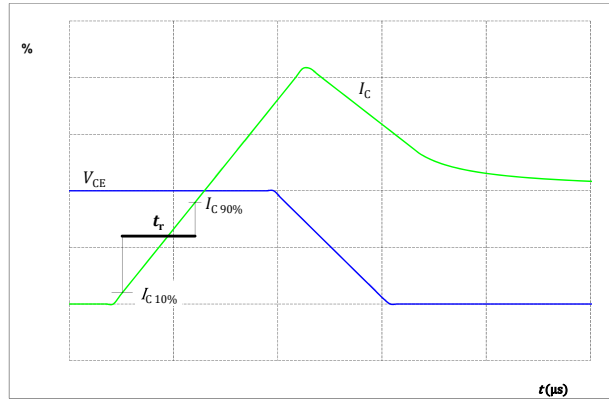



Vincotech

80-M312PMA100M701-K420A72 datasheet

Switching Definitions

figure 54. FWD

Turn-off Switching Waveforms & definition of t_{rr}


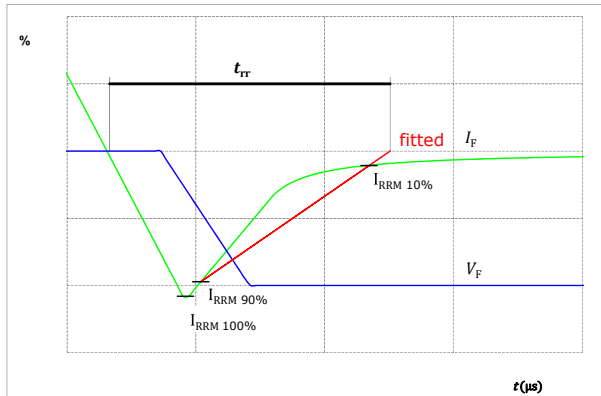


figure 55. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)



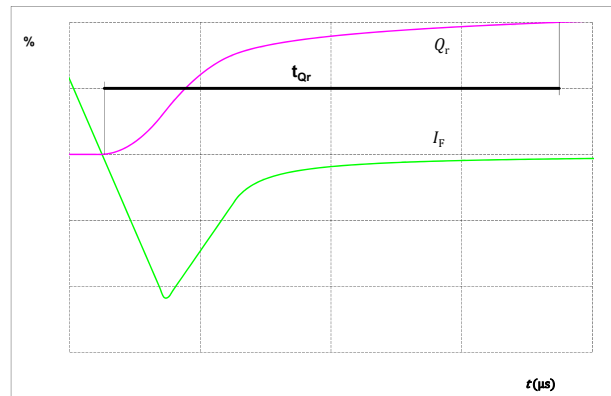

Vincotech


80-M312PMA100M701-K420A72

datasheet

Ordering Code	
Version	Ordering Code
With std lid (6.5mm height) + no thermal grease	80-M312PMA100M701-K420A72-/0A/
With thin lid (2.8mm height) + no thermal grease	80-M312PMA100M701-K420A72-/0B/
With std lid (6.5mm height) + thermal grease (0,8 W/mK, P12, silicone-based)	80-M312PMA100M701-K420A72-/1A/
With thin lid (2.8mm height) + thermal grease (0,8 W/mK, P12, silicone-based)	80-M312PMA100M701-K420A72-/1B/
With std lid (6.5mm height) + thermal grease (3,4 W/mK, PSX-P7, silicone-free)	80-M312PMA100M701-K420A72-/3A/
With thin lid (2.8mm height) + thermal grease (3,4 W/mK, PSX-P7, silicone-free)	80-M312PMA100M701-K420A72-/3B/
With std lid (6.5mm height) + thermal grease (2,5 W/mK, TG20032, silicone-free)	80-M312PMA100M701-K420A72-/4A/
With thin lid (2.8mm height) + thermal grease (2,5 W/mK, TG20032, silicone-free)	80-M312PMA100M701-K420A72-/4B/
With std lid (6.5mm height) + thermal grease (2,5 W/mK, HPTP, silicone-based)	80-M312PMA100M701-K420A72-/5A/
With thin lid (2.8mm height) + thermal grease (2,5 W/mK, HPTP, silicone-based)	80-M312PMA100M701-K420A72-/5B/

Marking						
Text	Name		Date code	UL & VIN	Lot	Serial
	NN-NNNNNNNNNNNNNN- TTTTTVV		WWYY	UL VIN	LLLLL	SSSS
Datamatrix	Type&Ver	Lot number	Serial	Date code		
	TTTTTVV	LLLLL	SSSS	WWYY		

Outline							
Pin table [mm]							
Pin	X	Y	Function	45	-25,9	2,2	DC+Br
1	15,83	-25,3	G16	46	-29,18	8,74	Br
2	15,83	-6,4	S16	47	-29,18	11,94	Br
3	15,83	-3,2	Ph3	48	-32,82	8,74	Br
4	15,83	0	Ph3	49	-32,82	11,94	Br
5	15,83	3,2	Ph3	50	-35,68	22,1	DC-Br
6	15,83	6,4	Ph3	51	-35,68	25,3	DC-Br
7	not assembled			52	-36,58	-25,3	DC+rect
8	not assembled			53	-36,58	-22,1	DC+rect
9	15,83	22,1	G15	54	not assembled		
10	15,83	25,3	S15	55	not assembled		
11	8,13	-25,3	Therm2	56	-36,58	-9,3	DC+Inv
12	8,13	-22,1	Therm1	57	-36,58	-6,1	DC+Inv
13	not assembled			58	-39,32	15,7	G27
14	8,13	25,3	DC-Inv	59	-39,32	18,9	S27
15	not assembled			60	-39,32	22,1	DC-Br
16	1,82	-12,18	S14	61	-39,32	25,3	DC-Br
17	1,82	-8,98	Ph2	62	-40,22	-25,3	DC+rect
18	1,82	-5,79	Ph2	63	-40,22	-22,1	DC+rect
19	0,43	22,1	G13	64	not assembled		
20	0,43	25,3	S13	65	not assembled		
21	-1,07	-25,3	G14	66	-40,22	-9,3	DC+Inv
22	not assembled			67	-40,22	-6,09	DC+Inv
23	not assembled			68	-50,18	-25,3	ACIn1
24	-1,82	-8,98	Ph2	69	-50,18	-22,1	ACIn1
25	-1,82	-5,79	Ph2	70	not assembled		
26	not assembled			71	not assembled		
27	not assembled			72	-50,18	-9,5	ACIn2
28	-7,27	25,3	DC-Inv	73	-50,18	-6,3	ACIn2
29	-14,97	22,1	G11	74	-50,18	6,3	DC-rect
30	-14,97	25,3	S11	75	-50,18	9,5	DC-rect
31	not assembled			76	-50,18	22,1	ACIn3
32	-16,05	-11,82	Ph1	77	-50,18	25,3	ACIn3
33	-16,05	-8,63	Ph1	78	-53,82	-25,3	ACIn1
34	-16,05	-5,42	S12	79	-53,82	-22,1	ACIn1
35	-19,22	-25,3	G12	80	not assembled		
36	not assembled			81	not assembled		
37	-19,7	-11,82	Ph1	82	-53,82	-9,5	ACIn2
38	-19,7	-8,62	Ph1	83	-53,82	-6,3	ACIn2
39	not assembled			84	not assembled		
40	-22,26	-1	DC+Br	85	-53,82	6,3	DC-rect
41	-22,26	2,2	DC+Br	86	-53,82	9,5	DC-rect
42	-22,67	22,1	DC-Inv	87	-53,82	22,1	ACIn3
43	-22,67	25,3	DC-Inv	88	-53,82	25,3	ACIn3
44	-25,9	-1	DC+Br				

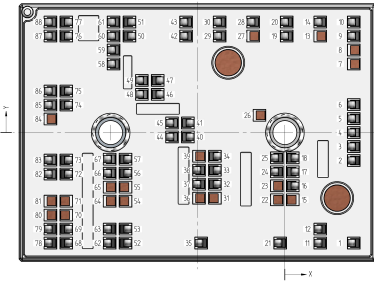


Pad positions refers to center point. For more informations on pad design please see package data



Vincotech

Pinout

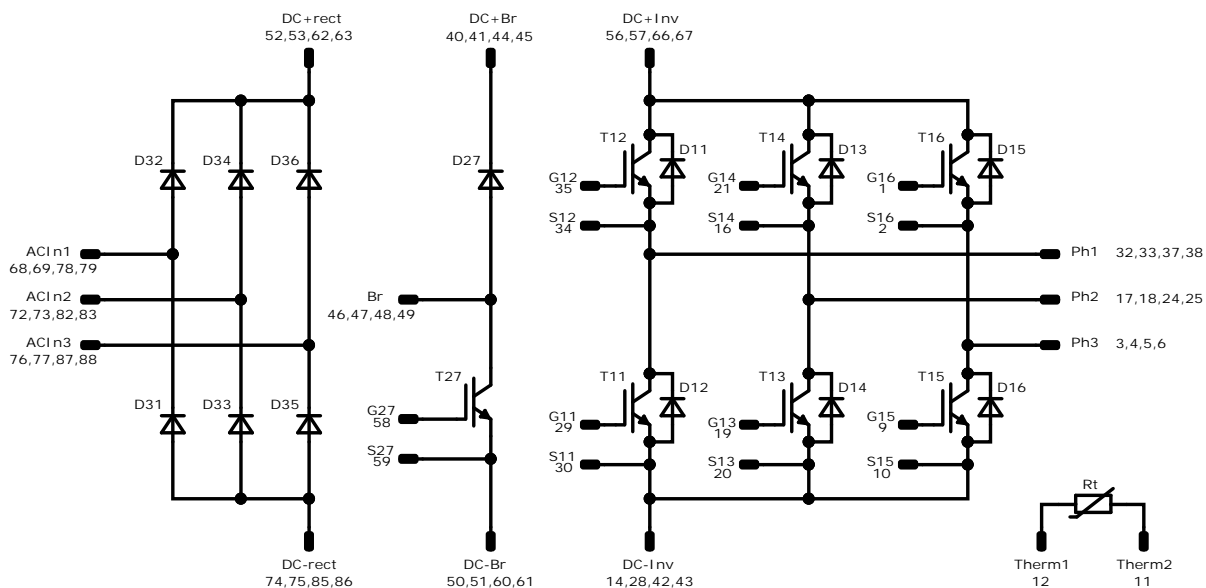


Identification

ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	1200 V	100 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1200 V	100 A	Inverter Diode	
T27	IGBT	1200 V	100 A	Brake Switch	
D27	FWD	1200 V	100 A	Brake Diode	
D31, D32, D33, D34, D35, D36	Rectifier	1600 V	75 A	Rectifier Diode	
Rt	PTC			Thermistor	



Vincotech

80-M312PMA100M701-K420A72
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 48	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for MiniSKiiP® 3 packages see vincotech.com website.				
Package data				
Package data for MiniSKiiP® 3 packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
80-M312PMA100M701-K420A72-D3-14	15 Sep. 2022	Correction of Gate charge unit and condition	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.