



Vincotech

# 10-F0166RA050SC-M920G29

datasheet

flowCON 0

1600 V / 50 A

## Topology features

- Three-phase Rectifier
- Brake Chopper
- Temperature sensor

## Component features

- High inrush current capability

## Housing features

- Base isolation:  $\text{Al}_2\text{O}_3$
- Clip-in, reliable mechanical connection, qualified for wave soldering
- Convex shaped substrate for superior thermal contact
- Thermo-mechanical push-and-pull force relief
- Solder pin


## Target applications

- Industrial Drives


## Types

- 10-F0166RA050SC-M920G29

## flow 0 17 mm housing



## Schematic

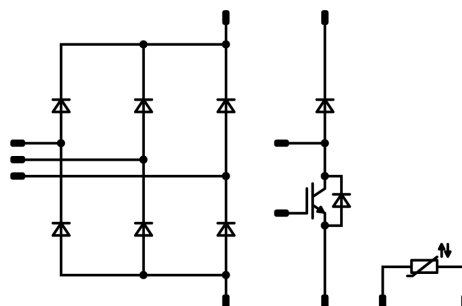



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Brake Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	51	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	150	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	122	W
Gate-emitter voltage	$V_{GES}$		$\pm 20$	V
Short circuit ratings	$t_{SC}$	$V_{GE} = 15\text{ V}$ , $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	10	$\mu\text{s}$
Maximum junction temperature	$T_{jmax}$		175	$^{\circ}\text{C}$

## Brake Diode

Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	27	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 8,3\text{ ms}$ $T_j = 25\text{ °C}$	150	A
Surge current capability	$I^2t$		112	$\text{A}^2\text{s}$
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	34	W
Maximum junction temperature	$T_{jmax}$		150	$^{\circ}\text{C}$

## Brake Sw. Protection Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s \leq 80\text{ °C}$	6 <sup>(1)</sup>	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	6	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	19	W
Maximum junction temperature	$T_{jmax}$		150	$^{\circ}\text{C}$

<sup>(1)</sup> limited by  $I_{FRM}$



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Rectifier Diode</b>				
Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_a = 80\text{ °C}$	88	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	600	A
Surge current capability	$I^2t$		1800	A <sup>2</sup> s
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_a = 80\text{ °C}$	105	W
Maximum junction temperature	$T_{jmax}$		150	°C

## Module Properties

### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	°C
Operation temperature under switching condition	$T_{jop}$		-40...+( $T_{jmax} - 25$ )	°C

### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			>12,7	mm
Comparative Tracking Index	CTI		≥ 200	

\*100 % tested in production



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Brake Switch

#### Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0017	25	5,3	5,8	6,3	V
Collector-emitter saturation voltage	$V_{CEsat}$		15		50	25 125 150	1,58	1,87 2,18 2,3	2,07 <sup>(2)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			1	µA
Gate-emitter leakage current	$I_{GES}$		20	0		25			120	nA
Internal gate resistance	$r_g$							4		Ω
Input capacitance	$C_{ies}$	$f = 1 \text{ Mhz}$	0	25		25		2800		pF
Reverse transfer capacitance	$C_{res}$							100		pF
Gate charge	$Q_g$		±15		0	25		380		nC

#### Thermal

Thermal resistance junction to sink <sup>(3)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 5,2 \text{ W/mK}$ (PTM)						0,78		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

#### Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$	0/15	700	25	25 125		27,83 27,24		ns
Rise time	$t_r$					25 125		18,87 20,55		ns
Turn-off delay time	$t_{d(off)}$					25 125		401,92 535,59		ns
Fall time	$t_f$					25 125		72,66 121,53		ns
Turn-on energy (per pulse)	$E_{on}$					25 125		13,34 14,48		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125		2,14 3,76		mWs



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]		Min	Typ	Max	

### Brake Diode

#### Static

Forward voltage	$V_F$				7	25 125 150			1,01 0,922	1,11 <sup>(2)</sup>  1,01 <sup>(2)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1600$ V				25 150				5 700	µA

#### Thermal

Thermal resistance junction to sink <sup>(3)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 5,2$ W/mK (PTM)							2,03		K/W
--	---------------	---------------------------------------	--	--	--	--	--	--	------	--	-----

#### Dynamic

Peak recovery current	$I_{RM}$	$di/dt=1687$ A/µs $di/dt=1604$ A/µs	0/15	700	25	25 125		128,33 119,56		A
Reverse recovery time	$t_{rr}$					25 125		531,86 566,34		ns
Recovered charge	$Q_r$					25 125		26,74 27,3		µC
Reverse recovered energy	$E_{rec}$					25 125		8,37 8,08		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125		581,2 480,33		A/µs



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

#### Brake Sw. Protection Diode

##### Static

Forward voltage	$V_F$				3	25 125	1,23	1,67 1,59	1,97 <sup>(2)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1200$ V				25			27	μA

##### Thermal

Thermal resistance junction to sink <sup>(3)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 5,2$ W/mK (PTM)						3,72		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

#### Rectifier Diode

##### Static

Forward voltage	$V_F$				33	25 125 150		1,02 0,927 0,906	1,21 <sup>(2)</sup> 1,1 <sup>(2)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1600$ V				25			50	μA

##### Thermal

Thermal resistance junction to sink <sup>(3)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 5,2$ W/mK (PTM)						0,67		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Thermistor

#### Static

Rated resistance	$R$					25		22		kΩ
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	$P$					25		130		mW
Power dissipation constant	$d$					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$						4000		K
Vincotech Thermistor Reference									I	

<sup>(2)</sup> Value at chip level

<sup>(3)</sup> Only valid with pre-applied Vincotech thermal interface material.



Vincotech

# 10-F0166RA050SC-M920G29

datasheet

## Brake Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

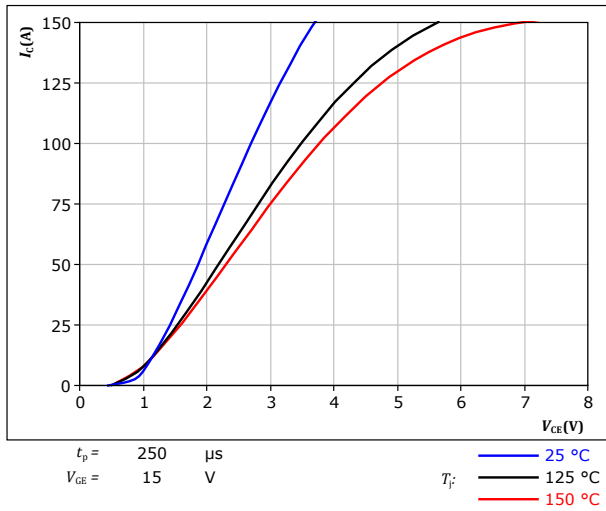


figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

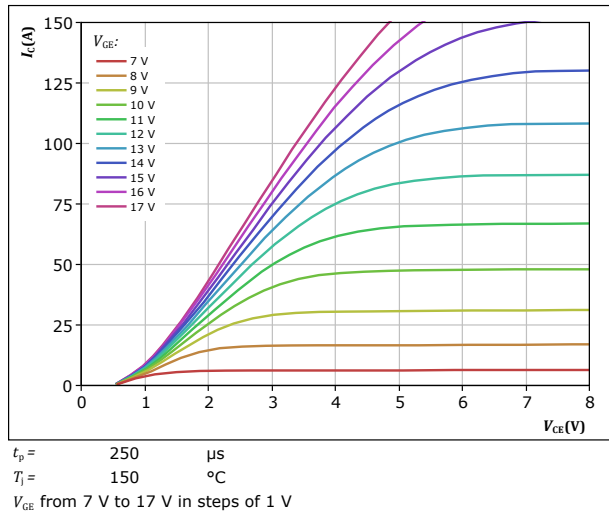


figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$


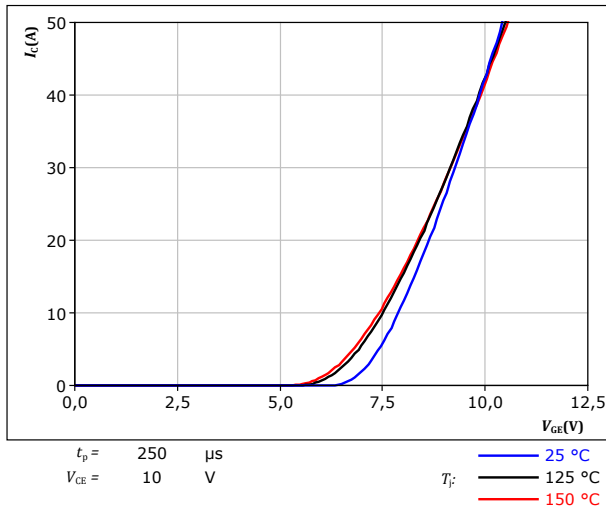


figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$



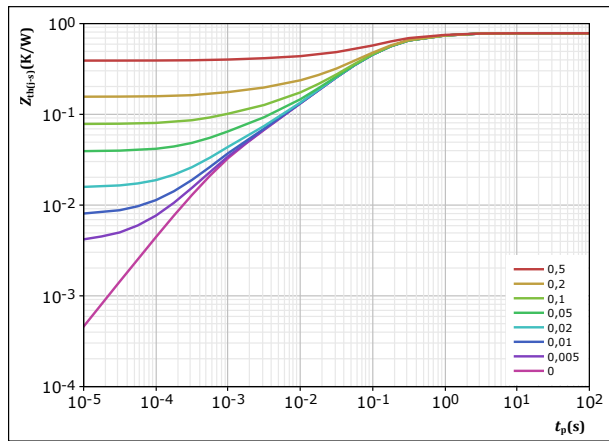



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet


## Brake Switch Characteristics

figure 5.

IGBT

Safe operating area

$I_C = f(V_{CE})$

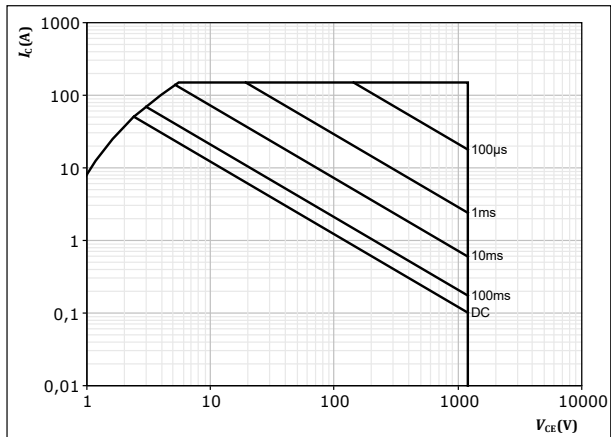

$D = \text{single pulse}$

$T_s = 80 \text{ } ^\circ\text{C}$

$V_{GE} = 15 \text{ V}$

$T_j = T_{jmax}$



Brake Diode Characteristics

figure 6. Rectifier

Typical forward characteristics

$I_F = f(V_F)$


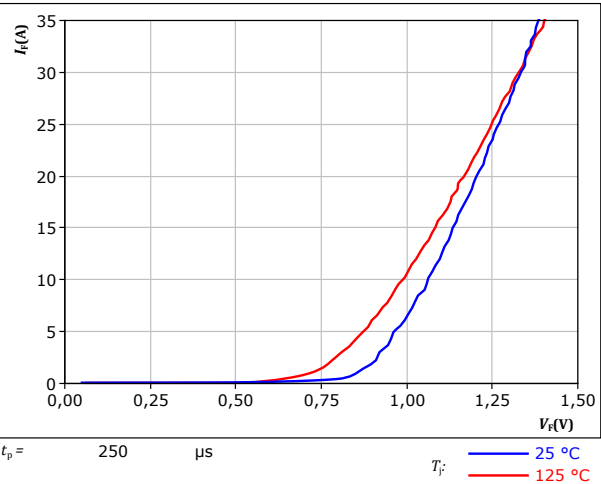


figure 7. Rectifier

Transient thermal impedance as a function of pulse width

$Z_{th(j-s)} = f(t_p)$



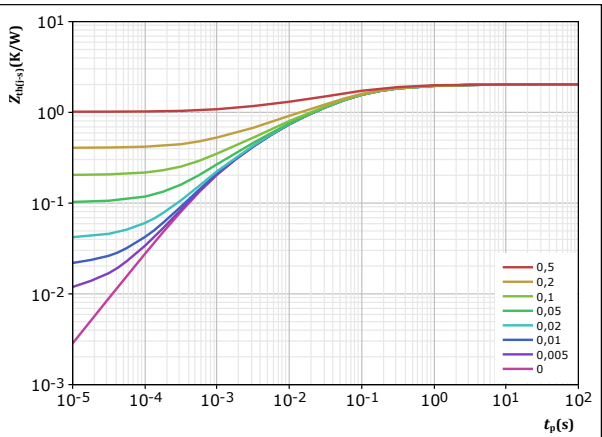

Vincotech

# 10-F0166RA050SC-M920G29 datasheet

## Brake Sw. Protection Diode Characteristics

figure 8. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


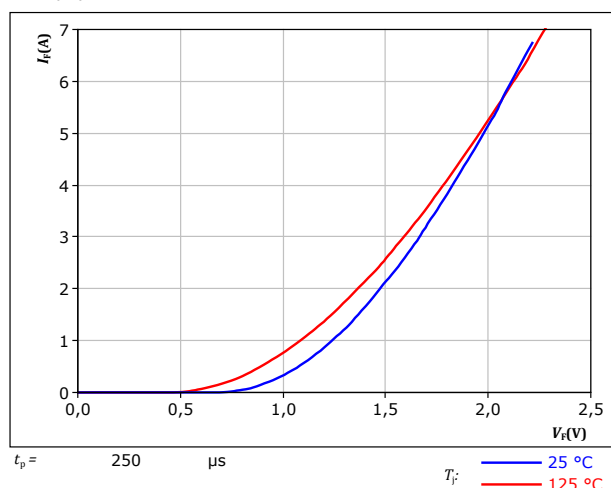


figure 9. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

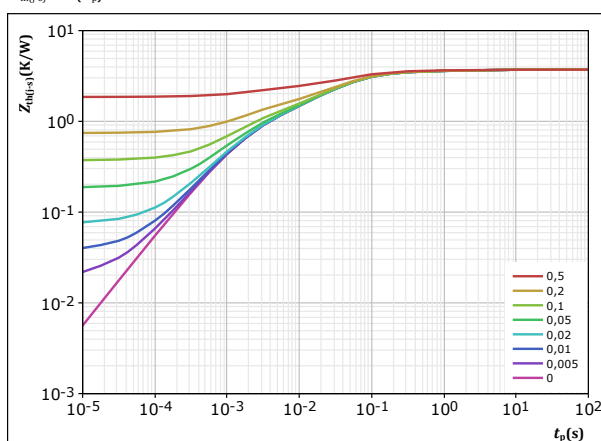

$D =$	$t_p / T$	
$R_{th(j-s)} =$	3,715	K/W
FWD thermal model values		
$R$ (K/W)	$\tau$ (s)	
1,58E-01	3,25E+00	
5,74E-01	1,68E-01	
1,74E+00	4,01E-02	
5,91E-01	8,37E-03	
6,54E-01	1,47E-03	



Vincotech

Rectifier Diode Characteristics

figure 10. Rectifier

Typical forward characteristics  
 $I_F = f(V_F)$


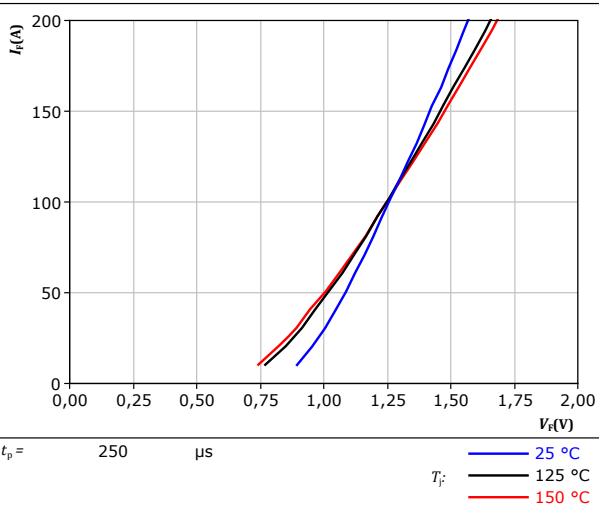


figure 11. Rectifier

Transient thermal impedance as a function of pulse width  
 $Z_{th(j-s)} = f(t_p)$



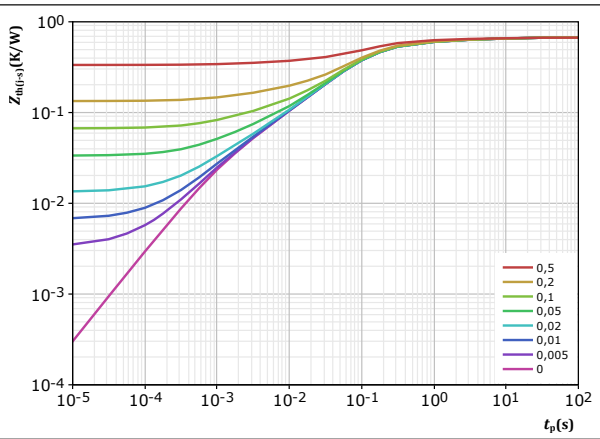

Vincotech

**10-F0166RA050SC-M920G29**  
datasheet


## Thermistor Characteristics

figure 12.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

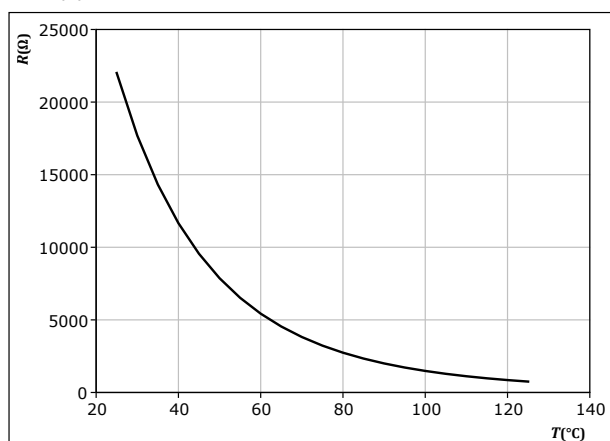




Vincotech

## Brake Switching Characteristics

figure 13. IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

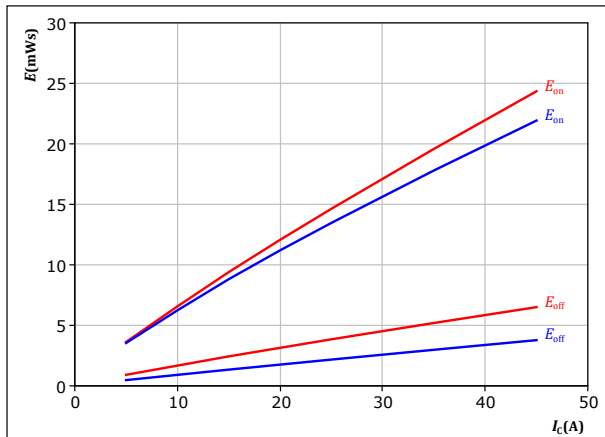

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$   $\Omega$   
 $R_{goff} = 8$   $\Omega$

$T_j$ : — 25 °C  
— 125 °C

figure 14. IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

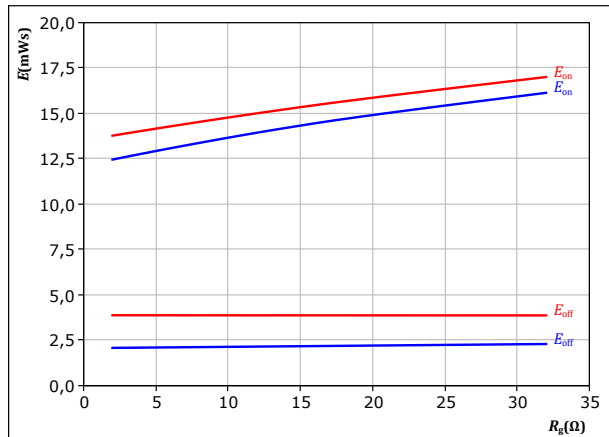

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_C = 25$  A

$T_j$ : — 25 °C  
— 125 °C

figure 15. Rectifier

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

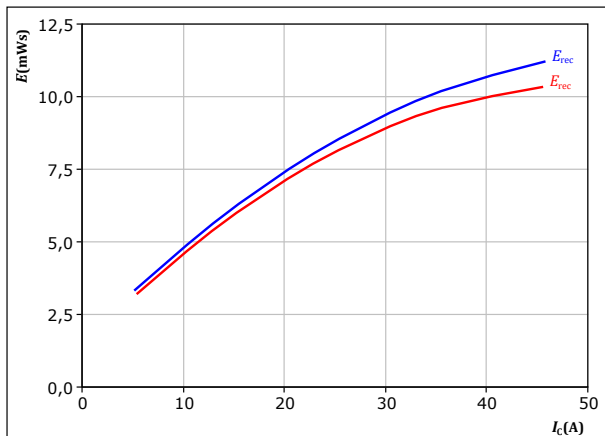

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$   $\Omega$

$T_j$ : — 25 °C  
— 125 °C

figure 16. Rectifier

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

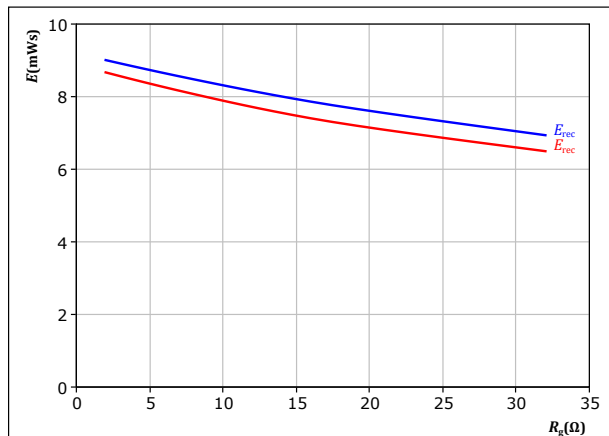

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_C = 25$  A

$T_j$ : — 25 °C  
— 125 °C



Vincotech


# 10-F0166RA050SC-M920G29 datasheet

## Brake Switching Characteristics

figure 17.

IGBT

Typical switching times as a function of collector current  
 $t = f(I_C)$

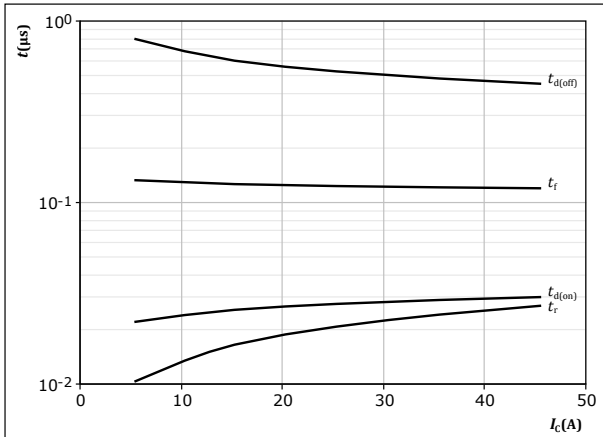


With an inductive load at

$T_j = 125$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$   $\Omega$   
 $R_{goff} = 8$   $\Omega$

figure 18.

IGBT

Typical switching times as a function of IGBT turn on gate resistor  
 $t = f(R_g)$

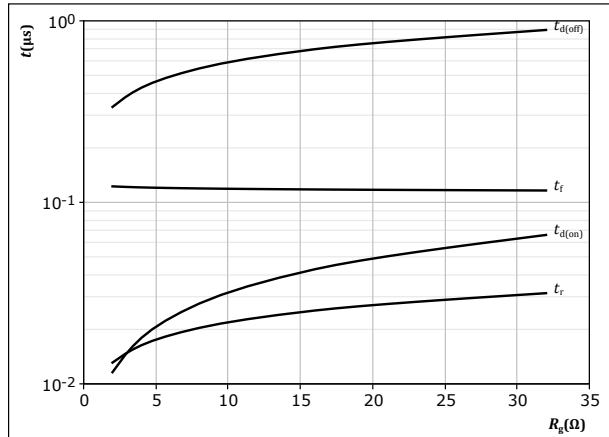


With an inductive load at

$T_j = 125$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_C = 25$  A

figure 19.

Rectifier

Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_C)$

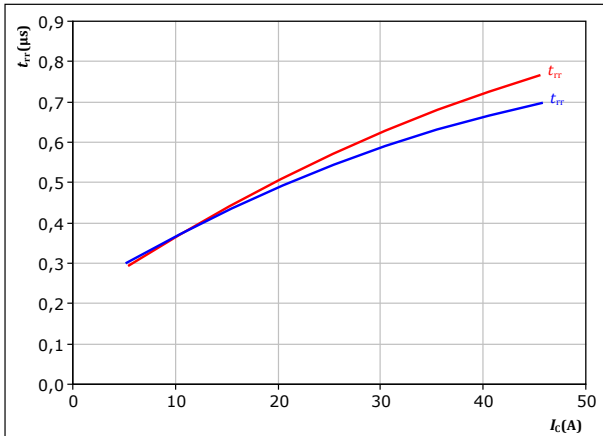

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$   $\Omega$

$T_j$ : — 25 °C  
— 125 °C

figure 20.

Rectifier

Typical reverse recovery time as a function of IGBT turn on gate resistor  
 $t_{rr} = f(R_{gon})$

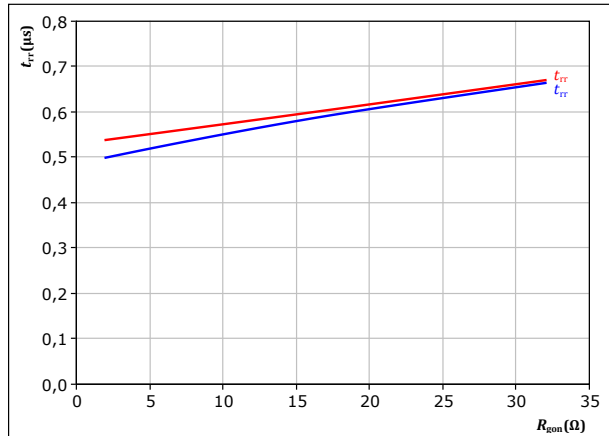

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_C = 25$  A

$T_j$ : — 25 °C  
— 125 °C



Vincotech

10-F0166RA050SC-M920G29  
datasheet


## Brake Switching Characteristics

figure 21.

Rectifier

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

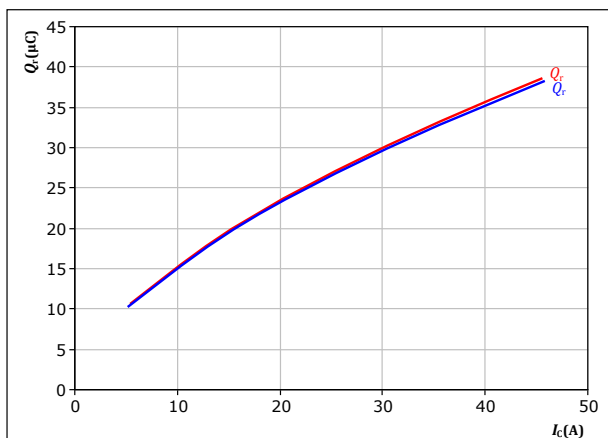

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ : — 25 °C  
— 125 °C

figure 23.

Rectifier

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

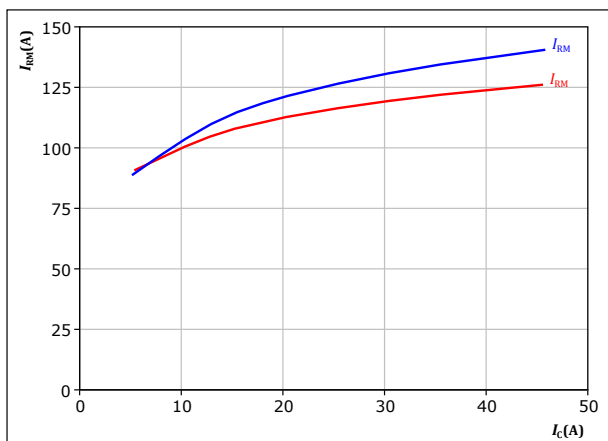

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ : — 25 °C  
— 125 °C

figure 22.

Rectifier

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

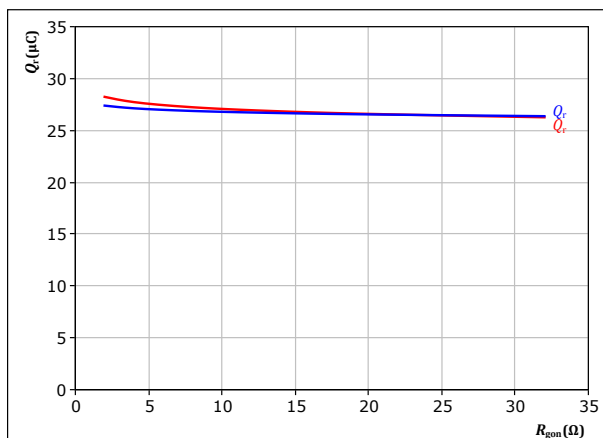

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_c = 25$  A


$T_j$ : — 25 °C  
— 125 °C

figure 24.

Rectifier

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

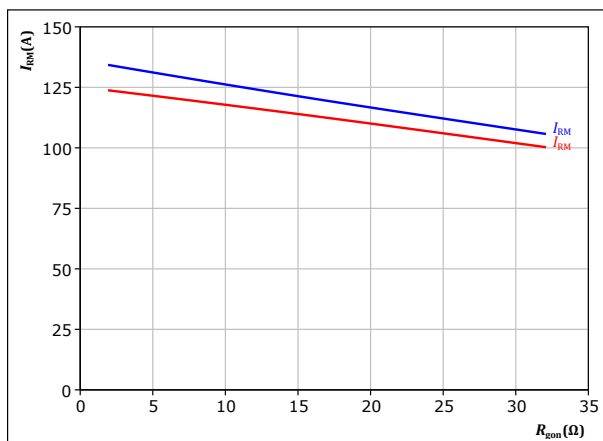

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_c = 25$  A

$T_j$ : — 25 °C  
— 125 °C






Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

## Brake Switching Characteristics

**figure 25.** Rectifier

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

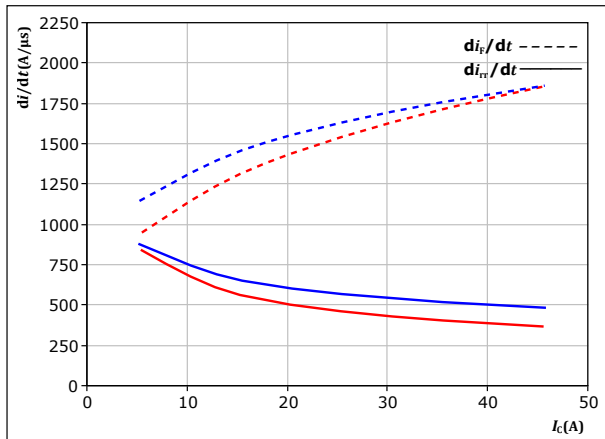


With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 8$  Ω

$T_j$ : — 25 °C  
— 125 °C

**figure 26.** Rectifier

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor  
 $di_f/dt, di_r/dt = f(R_{gon})$

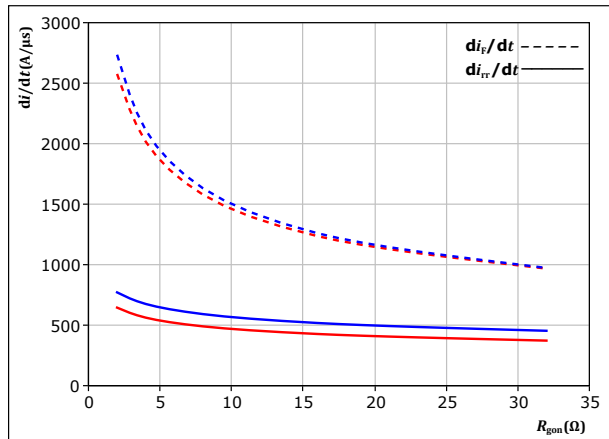

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_C = 25$  A

$T_j$ : — 25 °C  
— 125 °C

**figure 27.** IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

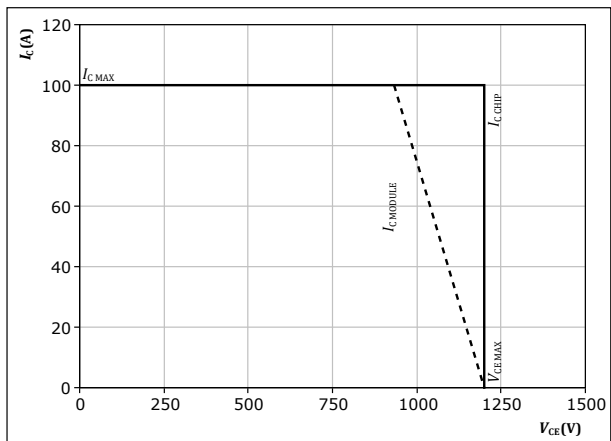

At  $T_j = 125$  °C  
 $R_{gon} = 8$  Ω  
 $R_{goff} = 8$  Ω



Vincotech

## Brake Switching Definitions

figure 28. IGBT

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

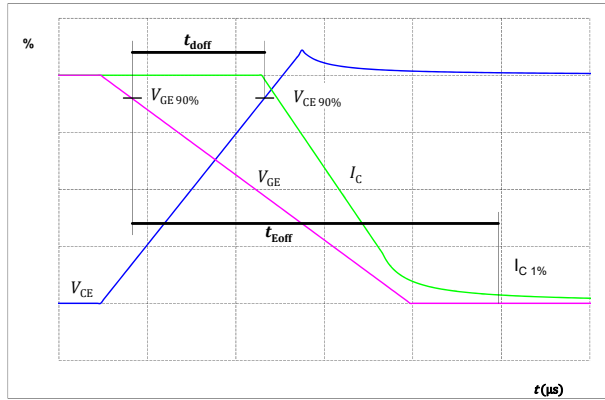


figure 29. IGBT

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

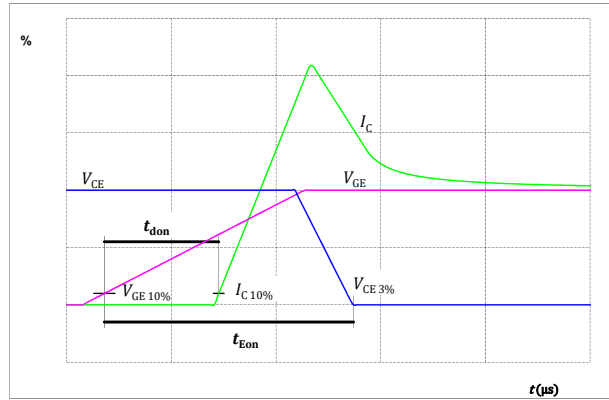


figure 30. IGBT

Turn-off Switching Waveforms & definition of  $t_f$


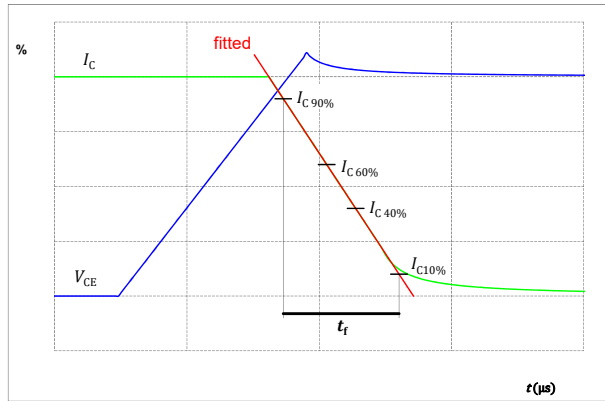


figure 31. IGBT

Turn-on Switching Waveforms & definition of  $t_r$



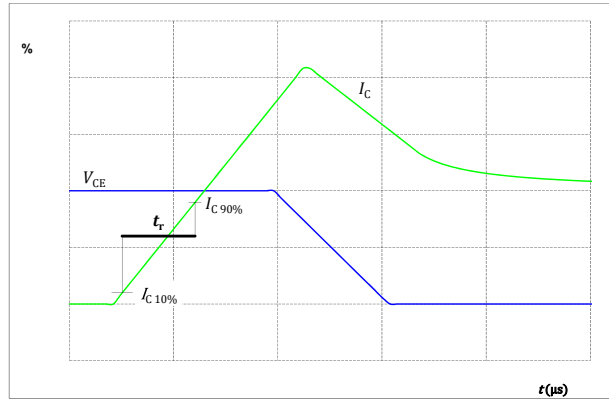

Vincotech

## Brake Switching Definitions

figure 32.

FWD

Turn-off Switching Waveforms & definition of  $t_{rr}$


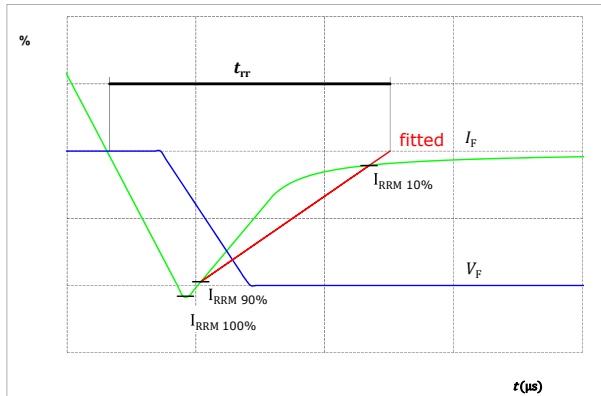


figure 33.

FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )



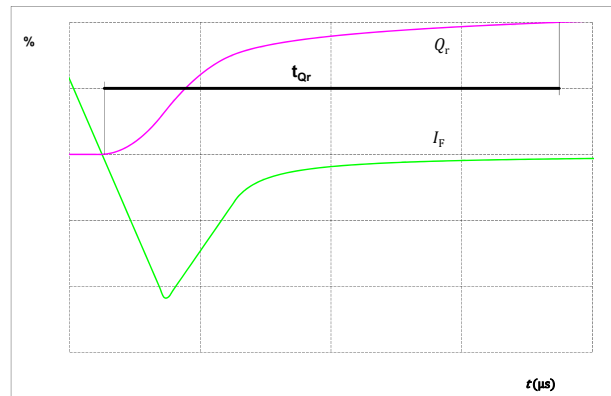

Vincotech

# 10-F0166RA050SC-M920G29

datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	10-F0166RA050SC-M920G29
With thermal paste (5,2 W/mK, PTM6000HV)	10-F0166RA050SC-M920G29-/7/

Marking						
	Text	Name	Date code	UL & VIN	Lot	Serial
		NN-NNNNNNNNNNNNNNNN- TTTTIVV	WWYY	UL VIN	LLLLL	SSSS
	Datamatrix	Type&Ver TTTTTIVV	Lot number LLLLL	Serial SSSS	Date code WWYY	


Pin table [mm]			
Pin	X	Y	Function
1	33,5	0	BrE
2	30,7	0	BrG
3	26,4	0	BrE
4	not assembled		
5	21,4	0	DC-
6	18,9	0	DC-
7	11,9	0	NTC1
8	not assembled		
9	4,7	0	NTC2
10	not assembled		
11	0	2,5	DC+
12	0	5	DC+
13	0	7,5	DC+
14	0	22,5	L1
15	2,5	22,5	L1
16	5	22,5	L1
17	12	22,5	L2
18	14,5	22,5	L2
19	17	22,5	L2
20	24	22,5	L3
21	26,5	22,5	L3
22	29	22,5	L3
23	33,5	17,1	BrC
24	33,5	14,6	BrC
25	33,5	7	Br+

### Outline

Tolerance of pinpositions: ±0.5mm at the end of pins  
Dimension of coordinate axis is only offset without tolerance



Vincotech

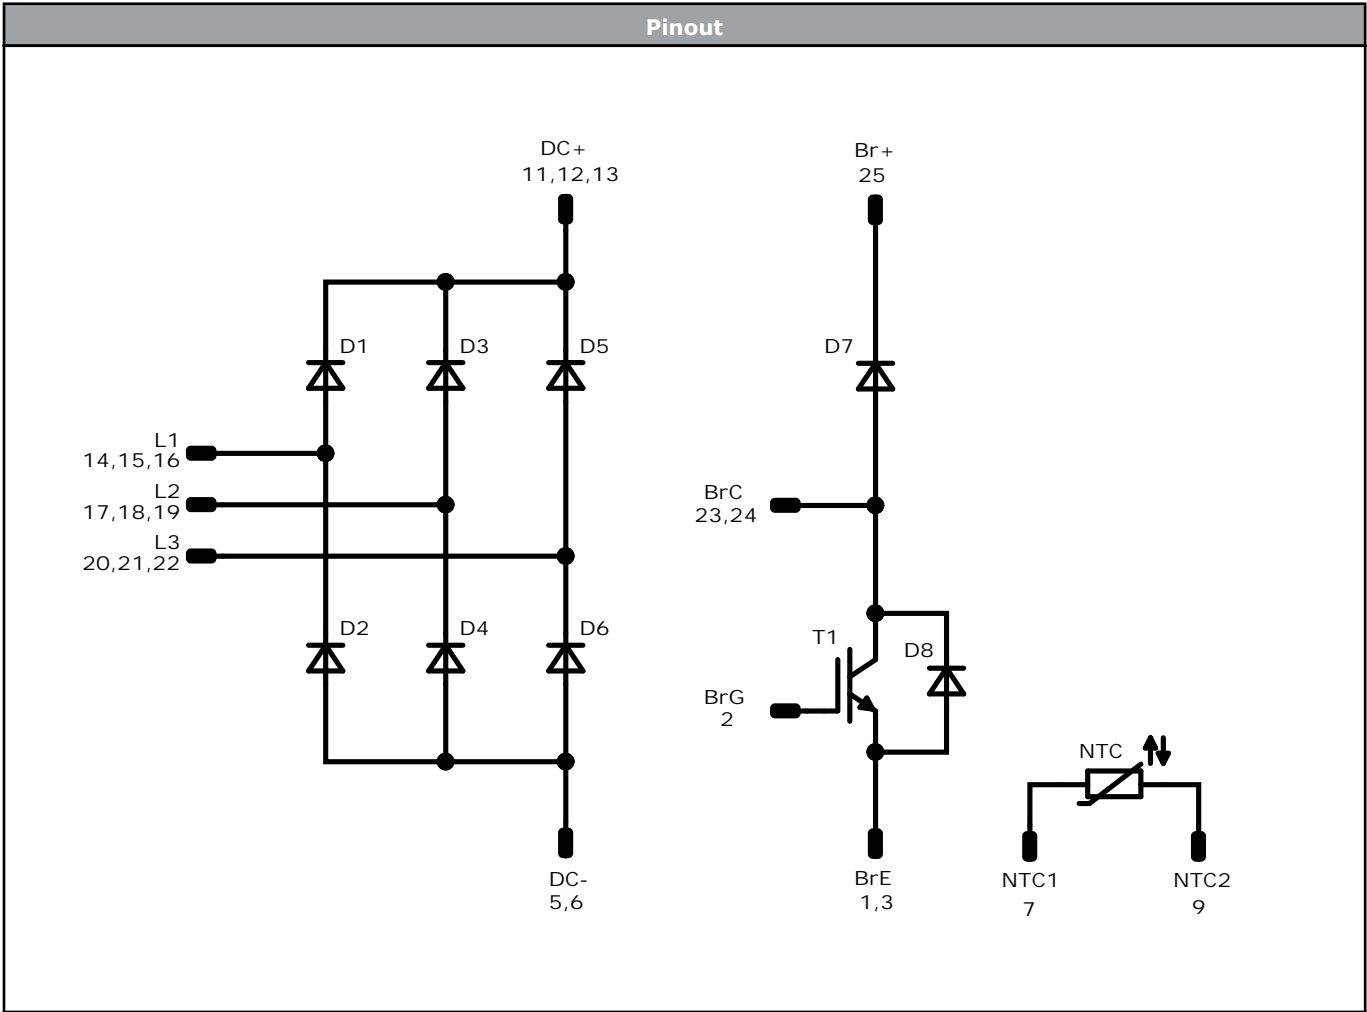


Identification					
ID	Component	Voltage	Current	Function	Comment
T1	IGBT	1200 V	50 A	Brake Switch	
D7	Rectifier	1600 V	12 A	Brake Diode	
D8	FWD	1200 V	3 A	Brake Sw. Protection Diode	
D1, D2, D3, D4, D5, D6	Rectifier	1600 V	65 A	Rectifier Diode	
NTC	NTC			Thermistor	



Vincotech

**10-F0166RA050SC-M920G29**  
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 135	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow 0</i> packages see vincotech.com website.				
Package data				
Package data for <i>flow 0</i> packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,sp}=175^{\circ}\text{C}$ and up to 3500VAC/1min isolation voltage. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
10-F0166RA050SC-M920G29-D2-14	25 Jun. 2025	Correct Voltage rating on page 1	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.