



Vincotech

# 10-FY126TA075SH-L829F68

datasheet

flowPACK 1

1200 V / 75 A

## Features

- High speed IGBT4
- Tandem diodes for improved thermal performance
- Integrated thermal sensor


## Target applications

- Embedded Drives
- Industrial Drives


## Types

- 10-FY126TA075SH-L829F68

## flow 1 12 mm housing



## Schematic

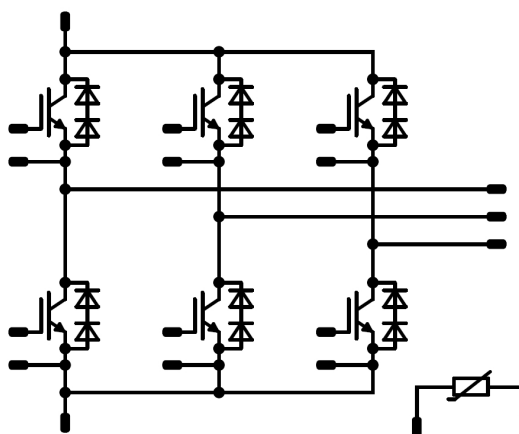



Vincotech

**10-FY126TA075SH-L829F68**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Inverter Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	60	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	225	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	141	W
Gate-emitter voltage	$V_{GES}$		$\pm 20$	V
Short circuit ratings	$t_{SC}$	$V_{GE} = 15\text{ V}$ , $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	10	$\mu\text{s}$
Maximum junction temperature	$T_{jmax}$		175	$^{\circ}\text{C}$

## Inverter Diode

Peak repetitive reverse voltage	$V_{RRM}$		1300	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	150	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	107	W
Maximum junction temperature	$T_{jmax}$		175	$^{\circ}\text{C}$

## Module Properties

### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	$^{\circ}\text{C}$
Operation temperature under switching condition	$T_{jop}$		-40...+( $T_{jmax} - 25$ )	$^{\circ}\text{C}$

### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	$V_{isol}$	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			7,81	mm
Comparative Tracking Index	CTI		$\geq 200$	

\*100 % tested in production



Vincotech

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Inverter Switch

#### Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0026	25	5,3	5,8	6,3	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		75	25 125 150	1,78	2,16 2,48 2,56	2,42 <sup>(1)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			1	µA
Gate-emitter leakage current	$I_{GES}$		20	0		25			120	nA
Internal gate resistance	$r_g$							None		Ω
Input capacitance	$C_{ies}$	$f = 1 \text{ Mhz}$	0	25		25		4400		pF
Reverse transfer capacitance	$C_{res}$							235		pF
Gate charge	$Q_g$		15		0	25		570		nC

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						0,68		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

#### Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 4 \Omega$ $R_{goff} = 4 \Omega$	$\pm 15$	600	75	25 125 150		62,8 63,4 62,8		ns
Rise time	$t_r$					25 125 150		10,8 12 12,8		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		160 211,6 223,8		ns
Fall time	$t_f$					25 125 150		31,59 71,82 78,33		ns
Turn-on energy (per pulse)	$E_{on}$					25 125 150		1,54 2,36 2,58		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125 150		2,54 4,33 4,84		mWs



Vincotech

**10-FY126TA075SH-L829F68**  
datasheet

## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]		Min	Typ	Max	

### Inverter Diode

#### Static

Forward voltage	$V_F$				75	25 125 150		3,36 3,11 3,04	3,84 <sup>(1)</sup>		V
Reverse leakage current	$I_R$	$V_i = 1300$ V				25			3,8		μA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,89			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----

#### Dynamic

Peak recovery current	$I_{RRM}$	$di/dt=8280$ A/μs $di/dt=8041$ A/μs $di/dt=7429$ A/μs	$\pm 15$	600	75	25 125 150		82,51 95,62 102,82			A
Reverse recovery time	$t_{rr}$					25 125 150		72,63 113,07 123,26			ns
Recovered charge	$Q_r$					25 125 150		2,62 4,8 5,45			μC
Reverse recovered energy	$E_{rec}$					25 125 150		1,01 1,91 2,17			mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		2653 1613 1699			A/μs



Vincotech

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Thermistor

#### Static

Rated resistance	$R$					25		22		kΩ
Deviation of $R_{100}$	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	$P$							5		mW
Power dissipation constant	$d$					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$						4000		K
Vincotech Thermistor Reference									I	

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.



Vincotech

10-FY126TA075SH-L829F68  
datasheet

## Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

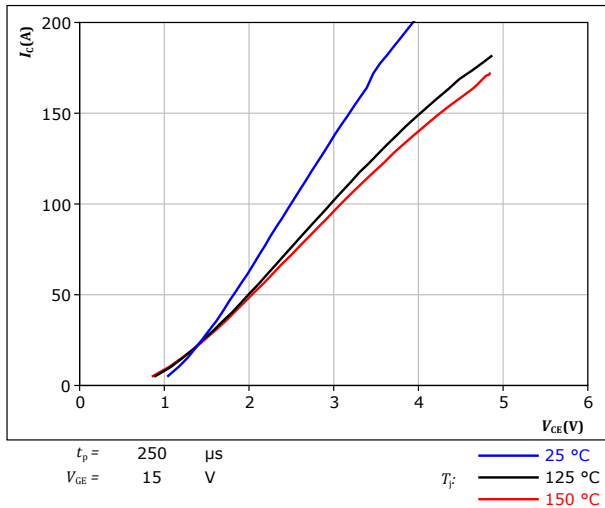


figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

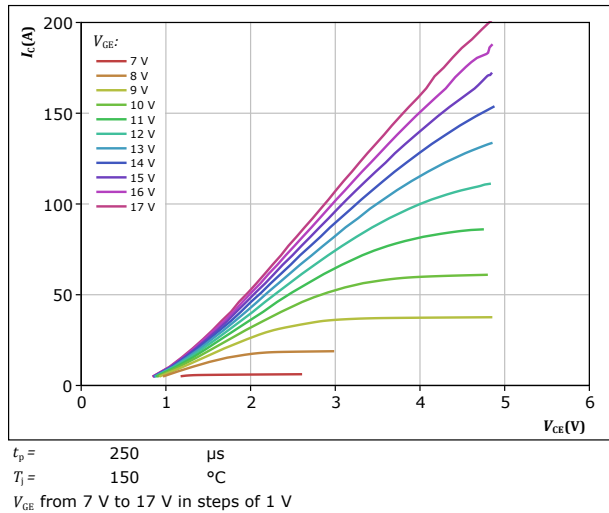


figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$


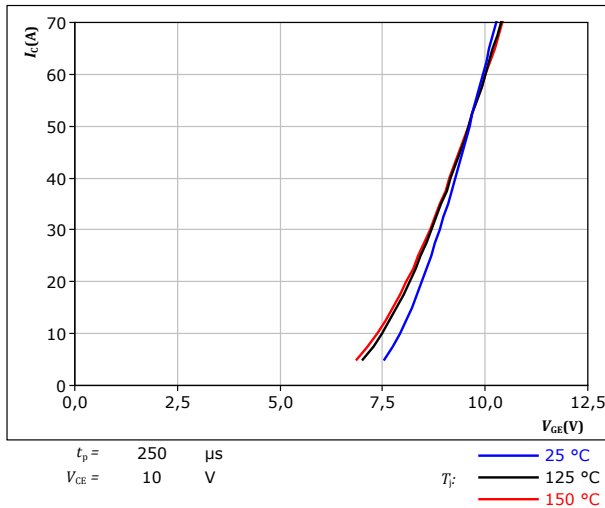


figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$



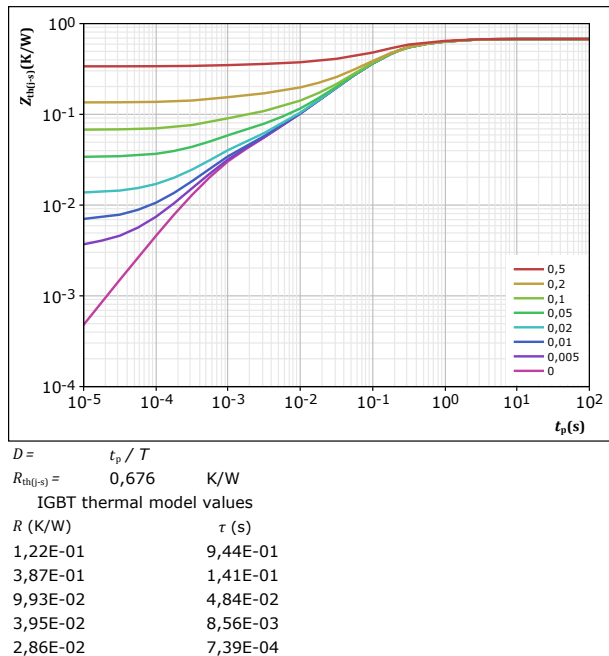

Vincotech

**10-FY126TA075SH-L829F68**  
datasheet


## Inverter Switch Characteristics

figure 5.

IGBT

Safe operating area

$I_C = f(V_{CE})$

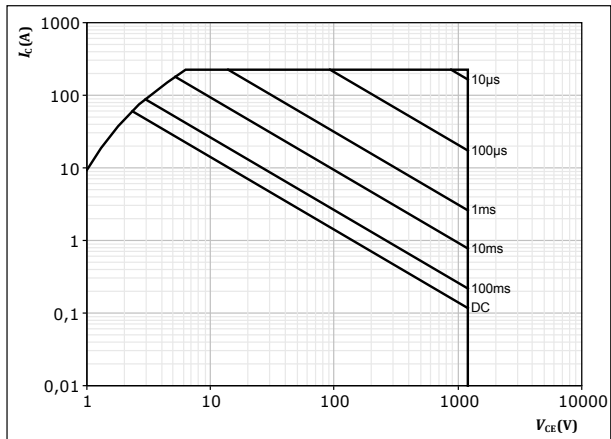

$D = \text{single pulse}$

$T_s = 80 \text{ } ^\circ\text{C}$

$V_{GE} = 15 \text{ V}$

$T_j = T_{jmax}$



Vincotech

**10-FY126TA075SH-L829F68**  
datasheet

## Inverter Diode Characteristics

figure 6.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


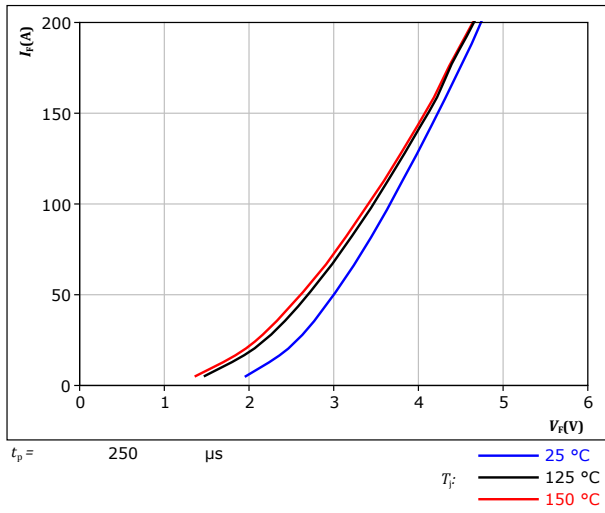


figure 7.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

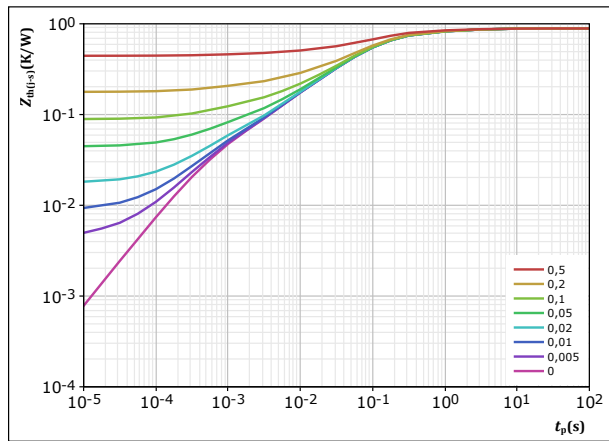

$D =$	$t_p / T$	
$R_{th(j-s)} =$	0,888	K/W
FWD thermal model values		
$R$ (K/W)	$\tau$ (s)	
5,36E-02	3,47E+00	
1,18E-01	6,00E-01	
4,31E-01	1,13E-01	
1,85E-01	3,35E-02	
6,73E-02	5,73E-03	
3,31E-02	5,79E-04	





Vincotech


**10-FY126TA075SH-L829F68**  
datasheet

## Thermistor Characteristics

**figure 8.** Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

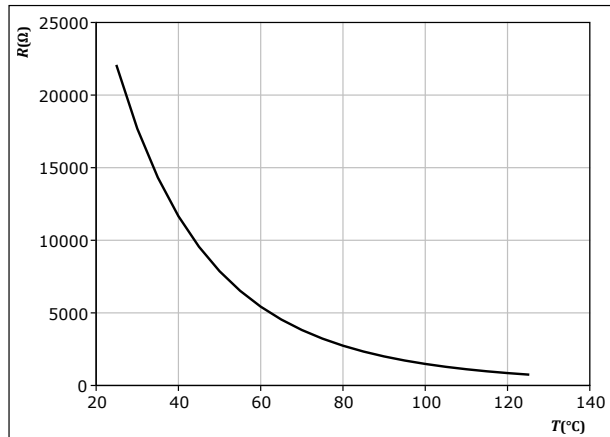



Vincotech

10-FY126TA075SH-L829F68  
datasheet


## Inverter Switching Characteristics

figure 9.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

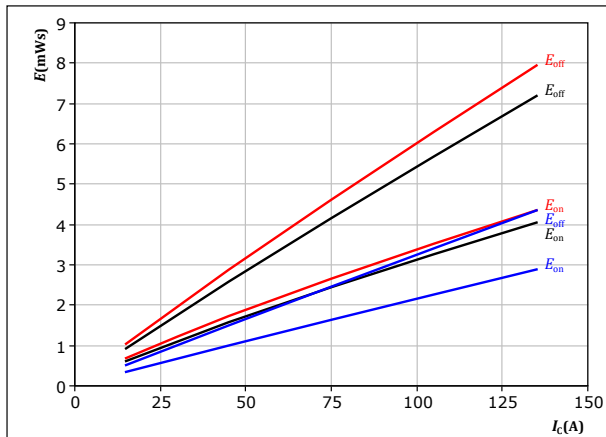

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$   $\Omega$   
 $R_{goff} = 4$   $\Omega$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 11.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

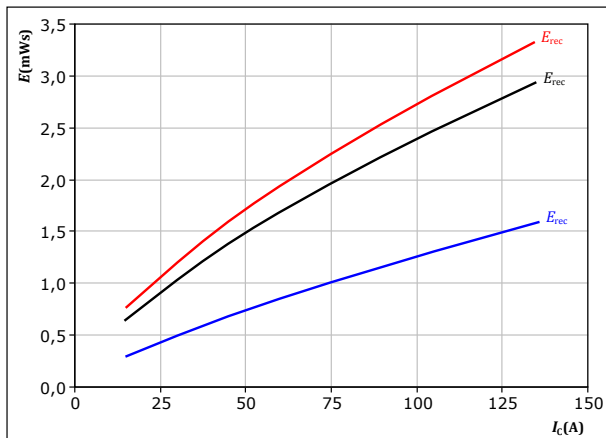

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$   $\Omega$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 10.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

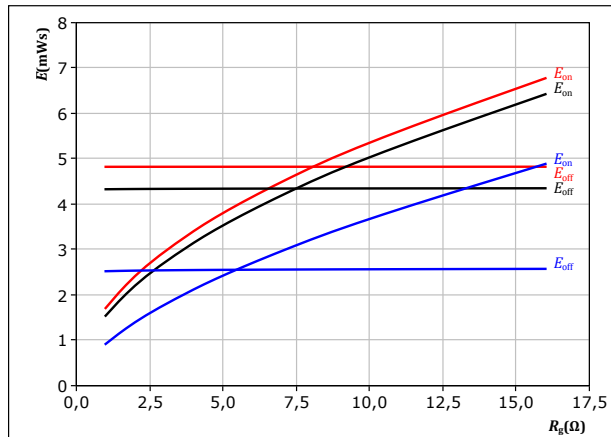

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 75$  A


$T_j$ : 25 °C  
125 °C  
150 °C

figure 12.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

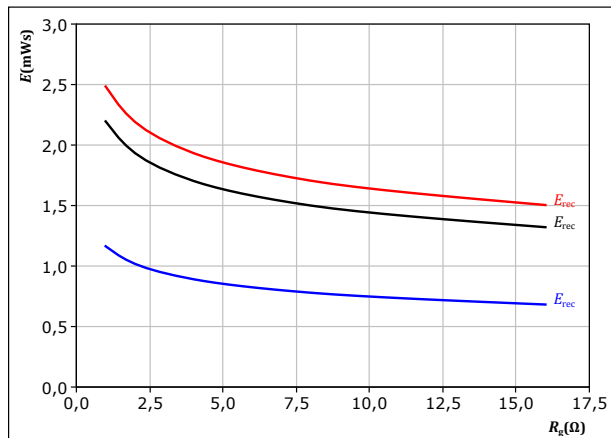

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 75$  A

$T_j$ : 25 °C  
125 °C  
150 °C



Vincotech


10-FY126TA075SH-L829F68  
datasheet

## Inverter Switching Characteristics

figure 13.

IGBT

Typical switching times as a function of collector current  
 $t = f(I_c)$

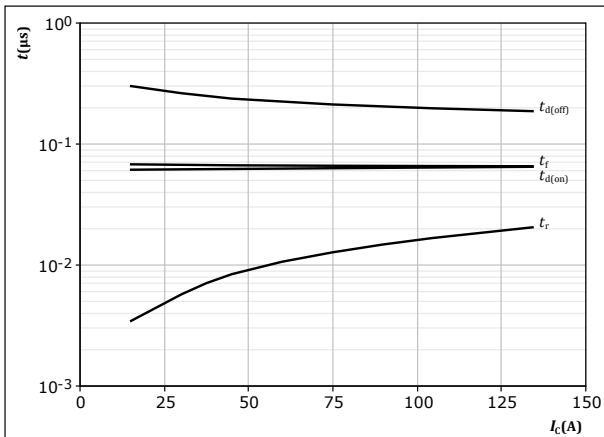


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$   $\Omega$   
 $R_{goff} = 4$   $\Omega$

figure 14.

IGBT

Typical switching times as a function of gate resistor  
 $t = f(R_g)$

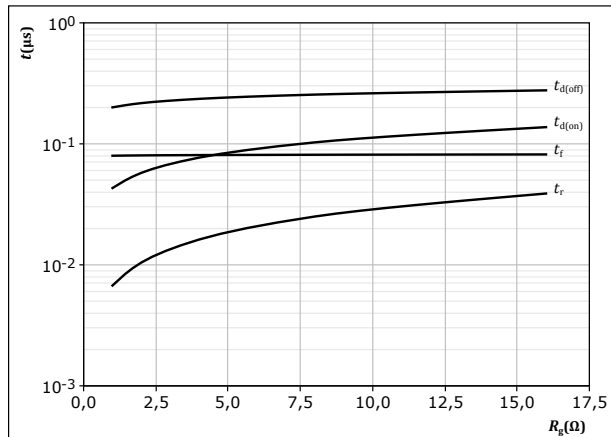


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 75$  A

figure 15.

FWD

Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_c)$

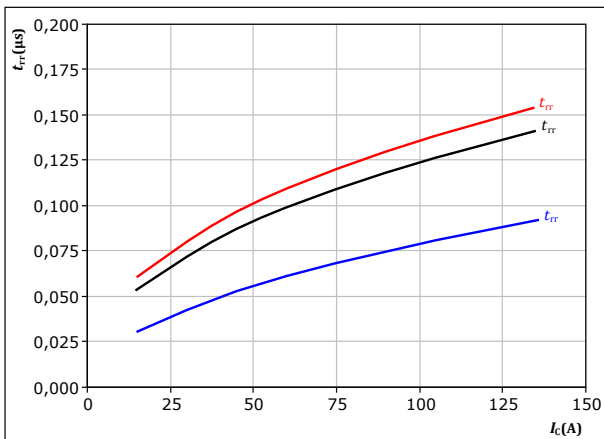

With an inductive load at


$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$   $\Omega$

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

figure 16.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor  
 $t_{rr} = f(R_{gon})$

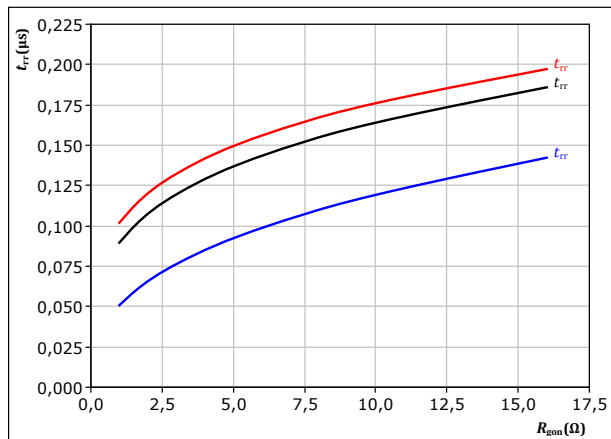

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 75$  A

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C



Vincotech

10-FY126TA075SH-L829F68  
datasheet


## Inverter Switching Characteristics

figure 17.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

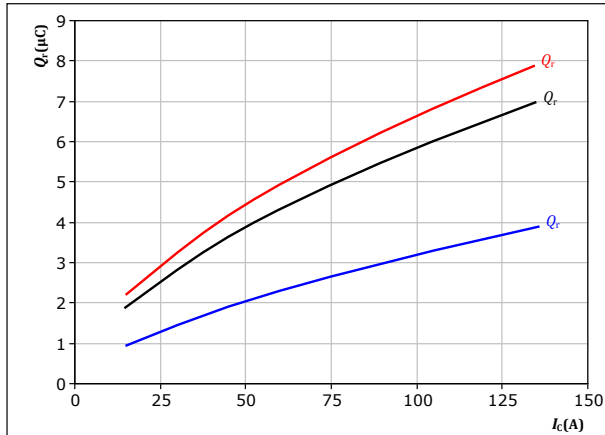

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$  Ω


$T_j$ : 25 °C  
125 °C  
150 °C

figure 19.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

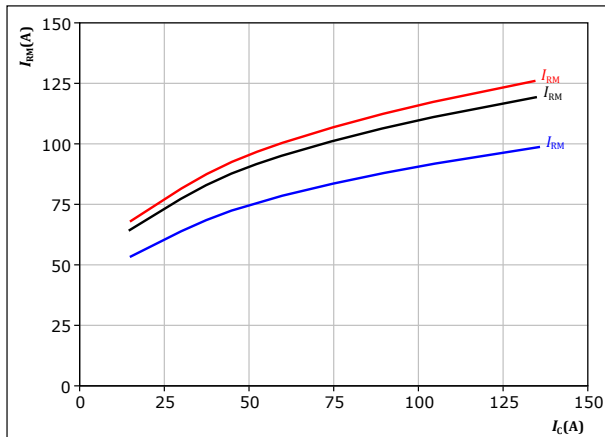

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$  Ω


$T_j$ : 25 °C  
125 °C  
150 °C

figure 18.

FWD

Typical recovered charge as a function of turn on gate resistor

$$Q_r = f(R_{gon})$$

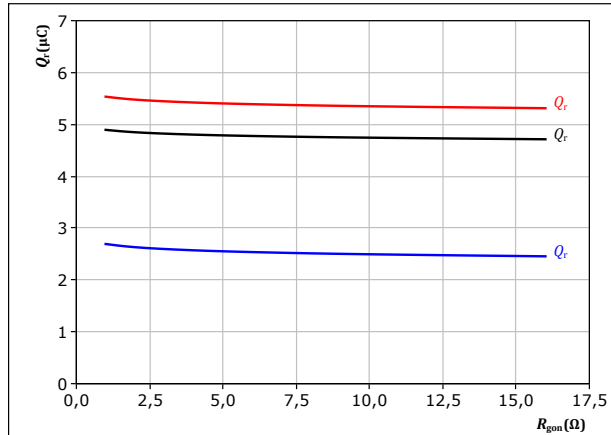

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 75$  A


$T_j$ : 25 °C  
125 °C  
150 °C

figure 20.

FWD

Typical peak reverse recovery current as a function of turn on gate resistor

$$I_{RM} = f(R_{gon})$$

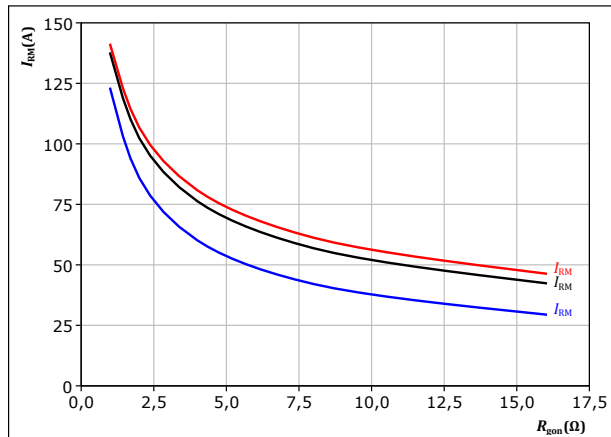

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 75$  A

$T_j$ : 25 °C  
125 °C  
150 °C




Vincotech

10-FY126TA075SH-L829F68  
datasheet

## Inverter Switching Characteristics

figure 21. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

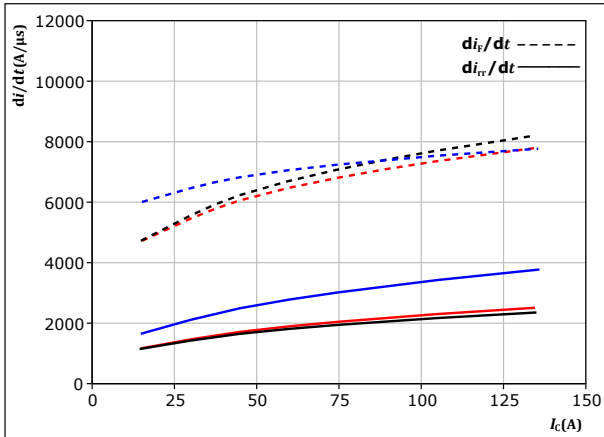

With an inductive load at


$V_{CE} = 600 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 4 \text{ } \Omega$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 22. FWD

Reverse bias safe operating area


$I_C = f(V_{CE})$

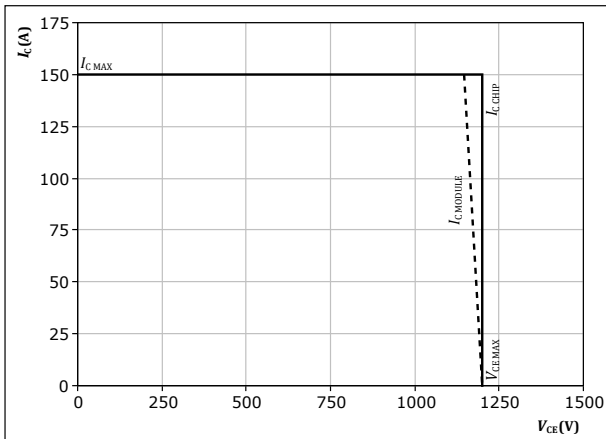

At  $T_j = 150 \text{ } ^\circ\text{C}$   
 $R_{gon} = 4 \text{ } \Omega$   
 $R_{goff} = 4 \text{ } \Omega$

figure 22. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor  
 $di_f/dt, di_r/dt = f(R_{gon})$

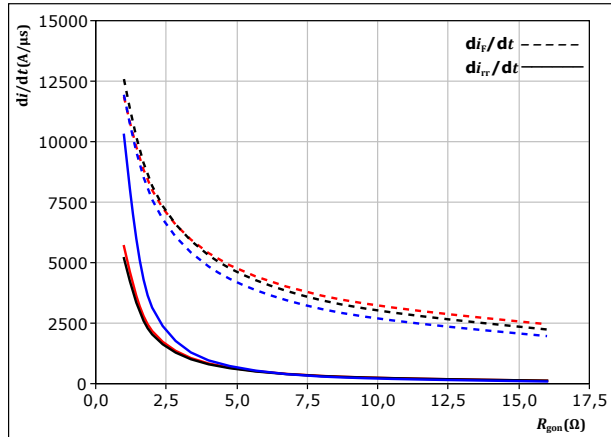

With an inductive load at

$V_{CE} = 600 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_C = 75 \text{ A}$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C



Vincotech

## Inverter Switching Definitions

figure 24. IGBT

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

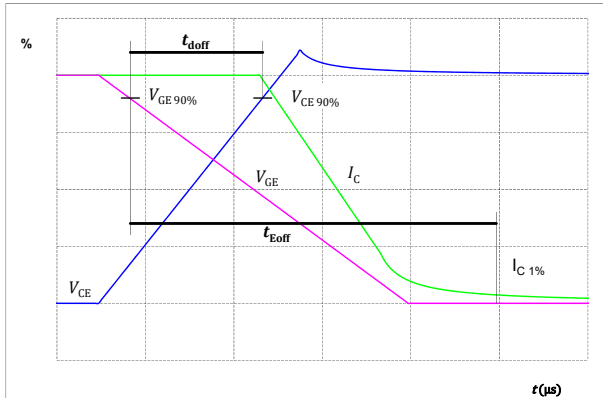


figure 25. IGBT

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

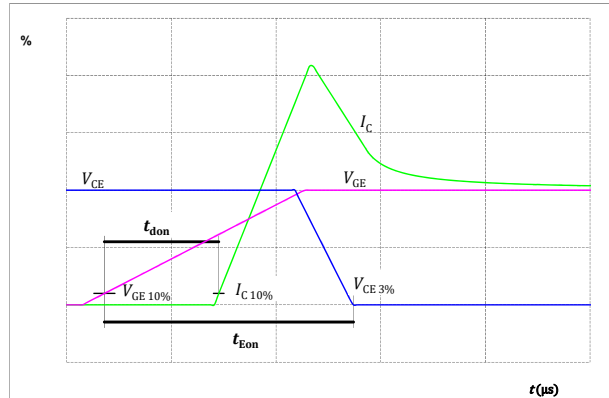


figure 26. IGBT

Turn-off Switching Waveforms & definition of  $t_f$


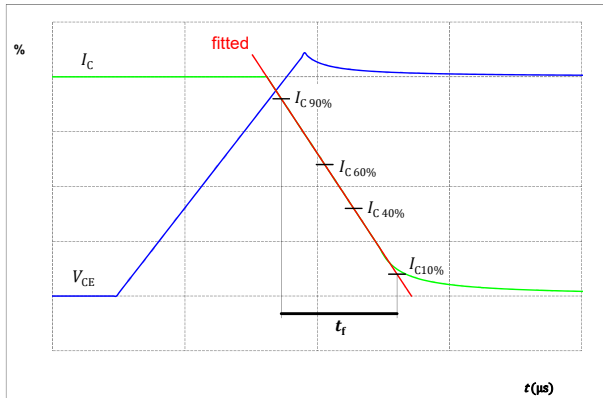


figure 27. IGBT

Turn-on Switching Waveforms & definition of  $t_r$



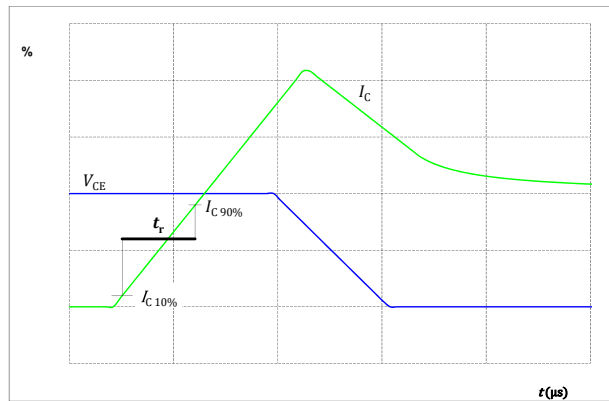

Vincotech

10-FY126TA075SH-L829F68  
datasheet

## Inverter Switching Definitions

figure 28.

FWD

Turn-off Switching Waveforms & definition of  $t_{rr}$


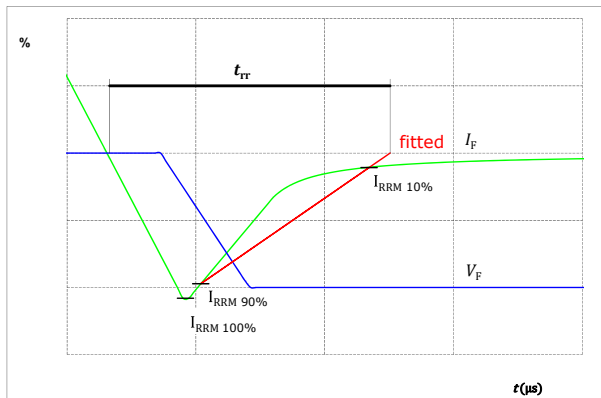


figure 29.

FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )



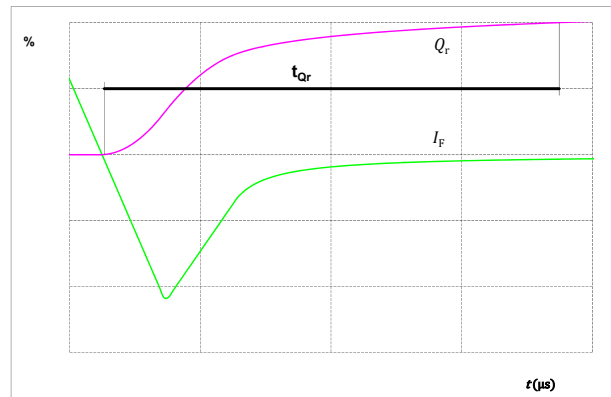


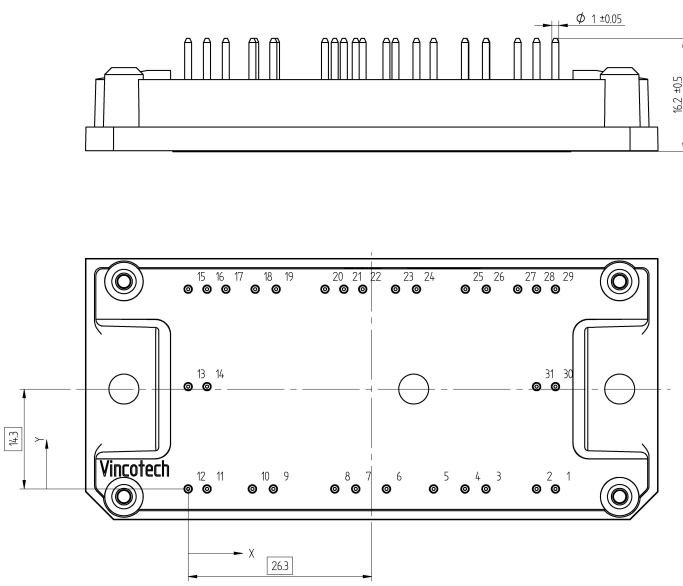
Vincotech

# 10-FY126TA075SH-L829F68

datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	10-FY126TA075SH-L829F68
With thermal paste	10-FY126TA075SH-L829F68-/3/

Marking					
	Text	Name NN-NNNNNNNNNNNNNN- TTTTTVV	Date code WWYY	UL & VIN UL VIN	Lot LLLLL
	Datamatrix	Type&Ver TTTTTTTV	Lot number LLLLL	Serial SSSS	Date code WWYY

Outline																																																																																																																																			
<p>Pin table [mm]</p> <table><thead><tr><th>Pin</th><th>X</th><th>Y</th><th>Function</th></tr></thead><tbody><tr><td>1</td><td>52,6</td><td>0</td><td>DC-123</td></tr><tr><td>2</td><td>49,9</td><td>0</td><td>DC-123</td></tr><tr><td>3</td><td>42,65</td><td>0</td><td>G15</td></tr><tr><td>4</td><td>39,65</td><td>0</td><td>S15</td></tr><tr><td>5</td><td>35,15</td><td>0</td><td>Therm1</td></tr><tr><td>6</td><td>28,4</td><td>0</td><td>Therm2</td></tr><tr><td>7</td><td>24</td><td>0</td><td>G13</td></tr><tr><td>8</td><td>21</td><td>0</td><td>S13</td></tr><tr><td>9</td><td>12,2</td><td>0</td><td>G11</td></tr><tr><td>10</td><td>9,2</td><td>0</td><td>S11</td></tr><tr><td>11</td><td>2,7</td><td>0</td><td>DC-123</td></tr><tr><td>12</td><td>0</td><td>0</td><td>DC-123</td></tr><tr><td>13</td><td>0</td><td>14,65</td><td>DC+123</td></tr><tr><td>14</td><td>2,7</td><td>14,65</td><td>DC+123</td></tr><tr><td>15</td><td>0</td><td>28,6</td><td>Ph1</td></tr><tr><td>16</td><td>2,7</td><td>28,6</td><td>Ph1</td></tr><tr><td>17</td><td>5,4</td><td>28,6</td><td>Ph1</td></tr><tr><td>18</td><td>9,6</td><td>28,6</td><td>S12</td></tr><tr><td>19</td><td>12,6</td><td>28,6</td><td>G12</td></tr><tr><td>20</td><td>19,6</td><td>28,6</td><td>Ph2</td></tr><tr><td>21</td><td>22,3</td><td>28,6</td><td>Ph2</td></tr><tr><td>22</td><td>25</td><td>28,6</td><td>Ph2</td></tr><tr><td>23</td><td>29,7</td><td>28,6</td><td>S14</td></tr><tr><td>24</td><td>32,7</td><td>28,6</td><td>G14</td></tr><tr><td>25</td><td>39,7</td><td>28,6</td><td>S16</td></tr><tr><td>26</td><td>42,7</td><td>28,6</td><td>G16</td></tr><tr><td>27</td><td>47,2</td><td>28,6</td><td>Ph3</td></tr><tr><td>28</td><td>49,9</td><td>28,6</td><td>Ph3</td></tr><tr><td>29</td><td>52,6</td><td>28,6</td><td>Ph3</td></tr><tr><td>30</td><td>52,6</td><td>14,65</td><td>DC+123</td></tr><tr><td>31</td><td>49,9</td><td>14,65</td><td>DC+123</td></tr></tbody></table>				Pin	X	Y	Function	1	52,6	0	DC-123	2	49,9	0	DC-123	3	42,65	0	G15	4	39,65	0	S15	5	35,15	0	Therm1	6	28,4	0	Therm2	7	24	0	G13	8	21	0	S13	9	12,2	0	G11	10	9,2	0	S11	11	2,7	0	DC-123	12	0	0	DC-123	13	0	14,65	DC+123	14	2,7	14,65	DC+123	15	0	28,6	Ph1	16	2,7	28,6	Ph1	17	5,4	28,6	Ph1	18	9,6	28,6	S12	19	12,6	28,6	G12	20	19,6	28,6	Ph2	21	22,3	28,6	Ph2	22	25	28,6	Ph2	23	29,7	28,6	S14	24	32,7	28,6	G14	25	39,7	28,6	S16	26	42,7	28,6	G16	27	47,2	28,6	Ph3	28	49,9	28,6	Ph3	29	52,6	28,6	Ph3	30	52,6	14,65	DC+123	31	49,9	14,65	DC+123
Pin	X	Y	Function																																																																																																																																
1	52,6	0	DC-123																																																																																																																																
2	49,9	0	DC-123																																																																																																																																
3	42,65	0	G15																																																																																																																																
4	39,65	0	S15																																																																																																																																
5	35,15	0	Therm1																																																																																																																																
6	28,4	0	Therm2																																																																																																																																
7	24	0	G13																																																																																																																																
8	21	0	S13																																																																																																																																
9	12,2	0	G11																																																																																																																																
10	9,2	0	S11																																																																																																																																
11	2,7	0	DC-123																																																																																																																																
12	0	0	DC-123																																																																																																																																
13	0	14,65	DC+123																																																																																																																																
14	2,7	14,65	DC+123																																																																																																																																
15	0	28,6	Ph1																																																																																																																																
16	2,7	28,6	Ph1																																																																																																																																
17	5,4	28,6	Ph1																																																																																																																																
18	9,6	28,6	S12																																																																																																																																
19	12,6	28,6	G12																																																																																																																																
20	19,6	28,6	Ph2																																																																																																																																
21	22,3	28,6	Ph2																																																																																																																																
22	25	28,6	Ph2																																																																																																																																
23	29,7	28,6	S14																																																																																																																																
24	32,7	28,6	G14																																																																																																																																
25	39,7	28,6	S16																																																																																																																																
26	42,7	28,6	G16																																																																																																																																
27	47,2	28,6	Ph3																																																																																																																																
28	49,9	28,6	Ph3																																																																																																																																
29	52,6	28,6	Ph3																																																																																																																																
30	52,6	14,65	DC+123																																																																																																																																
31	49,9	14,65	DC+123																																																																																																																																
																																																																																																																																			
<p>Tolerance of pinpositions: ±0,5mm at the end of pins Dimension of coordinate axis is only offset without tolerance</p>																																																																																																																																			






Vincotech

**10-FY126TA075SH-L829F68**  
datasheet

**Pinout**

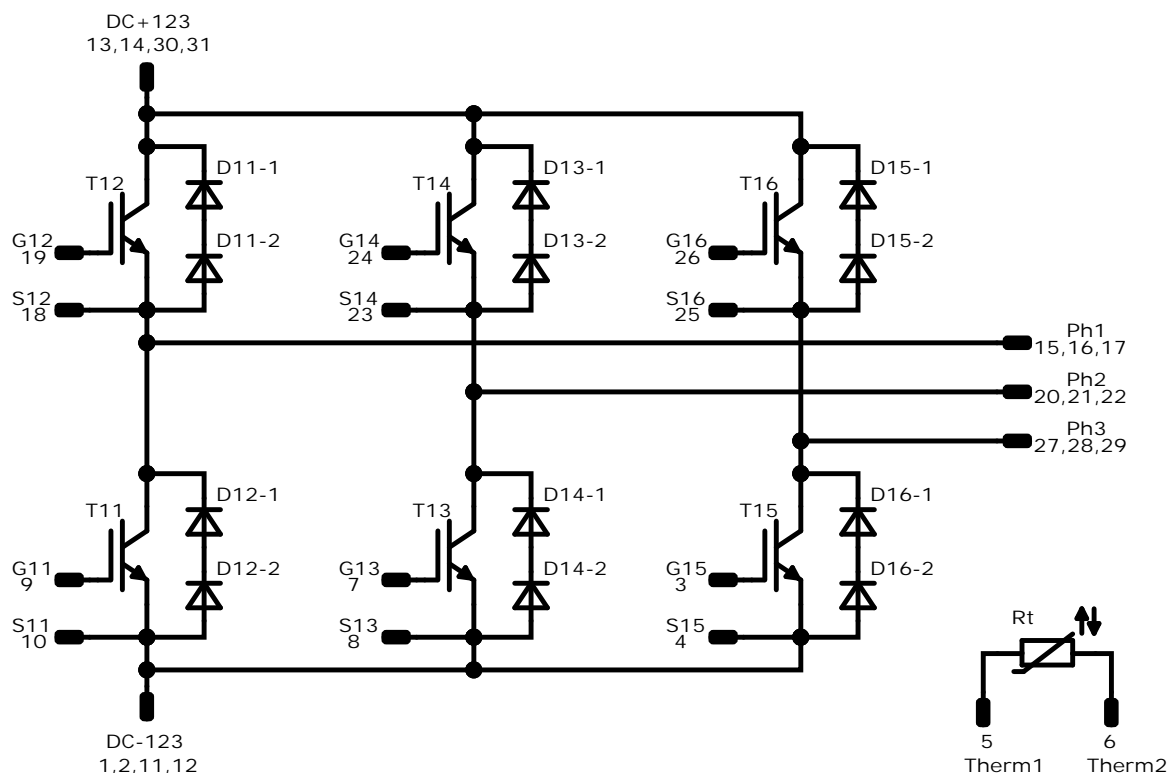

**Identification**

ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	1200 V	75 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1300 V	75 A	Inverter Diode	
Rt	NTC			Thermistor	



Vincotech

**10-FY126TA075SH-L829F68**  
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow 1</i> packages see vincotech.com website.

Package data
Package data for <i>flow 1</i> packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
10-FY126TA075SH-L829F68-D1-14	8 Apr. 2021	Initial Release	

#### DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

#### LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.