



Vincotech

10-FY07PMA050I701-P586A68

datasheet

flowPIM 1

650 V / 50 A

Topology features

- Kelvin Emitter for improved switching performance
- Open Emitter configuration
- Temperature sensor
- Converter+Brake+Inverter

Component features

- Easy paralleling
- Low collector emitter saturation voltage
- Low turn-off losses
- Positive temperature coefficient

Housing features

- Base isolation: Al_2O_3
- Convex shaped substrate for superior thermal contact
- Thermo-mechanical push-and-pull force relief
- Solder pin


Target applications

- Embedded Drives
- Industrial Drives


Types

- 10-FY07PMA050I701-P586A68

flow 1 12 mm housing

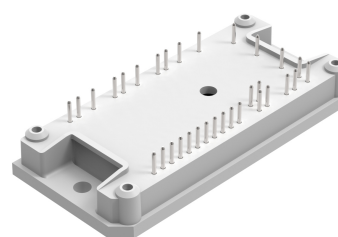

Schematic

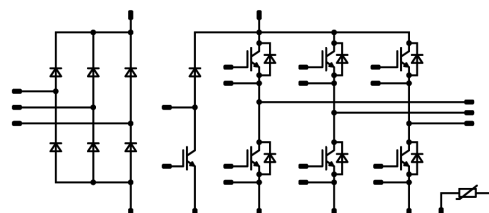



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		650	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	52	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	150	A
Turn off safe operating area		$T_j = 150\text{ °C}$, $V_{CE} = 1200\text{ V}$	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	74	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 400\text{ V}$ $T_j = 150\text{ °C}$	3	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Inverter Diode

Peak repetitive reverse voltage	V_{RRM}		650	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	65	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Brake Switch

Collector-emitter voltage	V_{CES}		650	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	52	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	150	A
Turn off safe operating area		$T_j = 150\text{ °C}$, $V_{CE} = 1200\text{ V}$	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	74	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 400\text{ V}$ $T_j = 150\text{ °C}$	3	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Brake Diode				
Peak repetitive reverse voltage	V_{RRM}		650	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	28	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	90	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	41	W
Maximum junction temperature	T_{jmax}		175	°C

Rectifier Diode

Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	62	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	400	A
Surge current capability	I^2t		800	A ² s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	89	W
Maximum junction temperature	T_{jmax}		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			7,91	mm
Comparative Tracking Index	CTI		≥ 200	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0005	25	4,35	5	5,65	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		50	25 125 150		1,3 1,36 1,38	1,65 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	650		25			20	µA
Gate-emitter leakage current	I_{GES}		20	0		25			100	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	$f = 1 \text{ Mhz}$	0	25		25		3050		pF
Output capacitance	C_{oes}							92		pF
Reverse transfer capacitance	C_{res}							31		pF
Gate charge	Q_g	$V_{CC} = 520 \text{ V}$	15		50	25		290		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 5,2 \text{ W/mK}$ (PTM)						1,29		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$	± 15	350	50	25 125 150		102,46 106,56 107,41		ns
Rise time	t_r					25 125 150		16,97 18,82 19,12		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		150,46 182,69 189,73		ns
Fall time	t_f					25 125 150		24,94 48,52 56,72		ns
Turn-on energy (per pulse)	E_{on}					25 125 150		0,343 0,495 0,548		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		0,905 1,3 1,41		mWs



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Diode

Static

Forward voltage	V_F				50	25 125 150		1,68 1,58 1,56	2 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 650$ V				25			20	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 5,2$ W/mK (PTM)						1,46		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RM}	$di/dt=3879$ A/µs $di/dt=3630$ A/µs $di/dt=3556$ A/µs	± 15	350	50	25 125 150		44,17 59,82 64,45		A
Reverse recovery time	t_{rr}					25 125 150		59,8 93,95 103,95		ns
Recovered charge	Q_r					25 125 150		1,12 2,4 2,76		µC
Reverse recovered energy	E_{rec}					25 125 150		0,314 0,676 0,781		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		1614,56 1386,03 1582,39		A/µs



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0005	25	4,35	5	5,65	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		50	25 125 150		1,3 1,36 1,38	1,65 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	650		25			20	µA
Gate-emitter leakage current	I_{GES}		20	0		25			100	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	$f = 1 \text{ Mhz}$	0	25		25		3050		pF
Output capacitance	C_{oes}							92		pF
Reverse transfer capacitance	C_{res}							31		pF
Gate charge	Q_g	$V_{CC} = 520 \text{ V}$	15		50	25		290		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 5,2 \text{ W/mK}$ (PTM)						1,29		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$	0/15	400	30	25 125 150		25,54 28,26 28,56		ns
Rise time	t_r					25 125 150		18,98 21,19 21,68		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		311,3 356,38 368,36		ns
Fall time	t_f					25 125 150		9,5 26,5 34,68		ns
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD} = 0,683 \mu\text{C}$ $Q_{tFWD} = 1,43 \mu\text{C}$ $Q_{tFWD} = 1,65 \mu\text{C}$				25 125 150		0,547 0,765 0,809		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		0,587 0,83 0,903		mWs



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Diode

Static

Forward voltage	V_F				30	25 125 150		1,63 1,53 1,5	2 ⁽¹⁾	V
Reverse leakage current	I_R	$V_r = 650$ V				25			20	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 5,2$ W/mK (PTM)						2,33		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RM}	$di/dt=1405$ A/µs $di/dt=1335$ A/µs $di/dt=1278$ A/µs	0/15	400	30	25 125 150		13,48 19,89 21,63		A
Reverse recovery time	t_{rr}					25 125 150		87,9 117,97 128,97		ns
Recovered charge	Q_r					25 125 150		0,683 1,43 1,65		µC
Reverse recovered energy	E_{rec}					25 125 150		0,171 0,365 0,434		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		545,68 413,13 350,2		A/µs



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]		Min	Typ	Max	

Rectifier Diode

Static

Forward voltage	V_F				35	25 125 150		1,19 1,16 1,16	1,5 ⁽¹⁾		V
Reverse leakage current	I_R	$V_r = 1600$ V				25 150				50 1000	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 5,2$ W/mK (PTM)						1,07			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----

Thermistor

Static

Rated resistance	R					25		22			kΩ
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5		%
Power dissipation	P					25		130			mW
Power dissipation constant	d					25		1,5			mW/K
B-value	$B_{(25/50)}$	Tol. ± 1 %						3962			K
B-value	$B_{(25/100)}$	Tol. ± 1 %						4000			K
Vincotech Thermistor Reference									I		

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Vincotech


10-FY07PMA050I701-P586A68
datasheet

Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

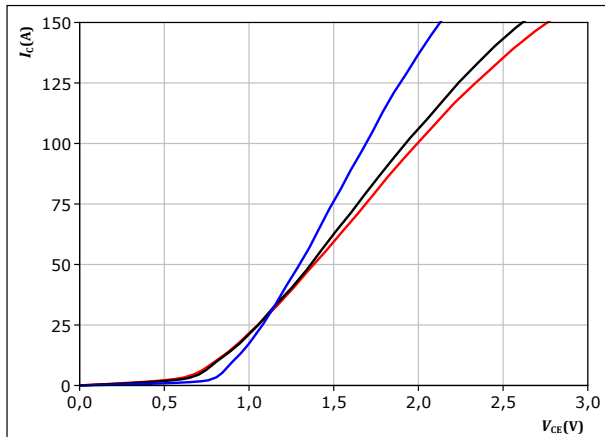


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j: 25 ^\circ C$
 $125 ^\circ C$
 $150 ^\circ C$

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

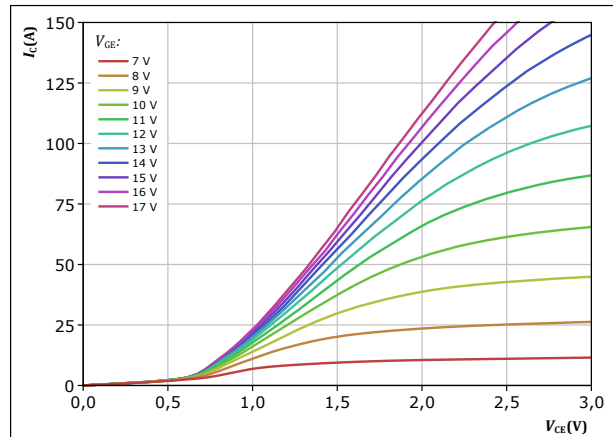


$t_p = 250 \mu s$
 $T_j = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

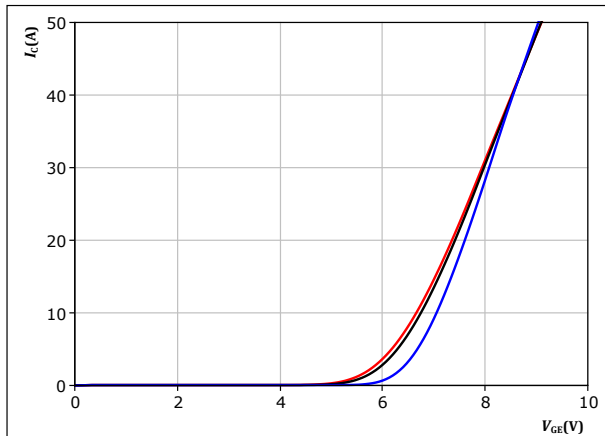


$t_p = 250 \mu s$
 $V_{CE} = 9 V$
 $T_j: 25 ^\circ C$
 $125 ^\circ C$
 $150 ^\circ C$

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

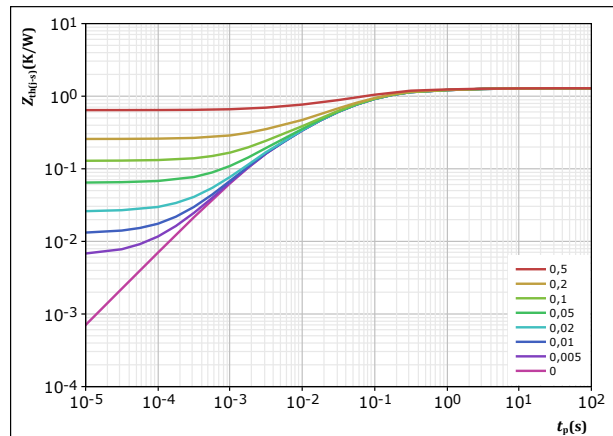

$D = t_p / T$
 $R_{th(j-s)} = 1,286 K/W$
IGBT thermal model values

$R (K/W)$	$\tau (s)$
3,87E-02	6,22E+00
1,15E-01	9,38E-01
5,66E-01	1,08E-01
4,34E-01	2,22E-02
1,33E-01	2,91E-03



Vincotech


Inverter Switch Characteristics

figure 5.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

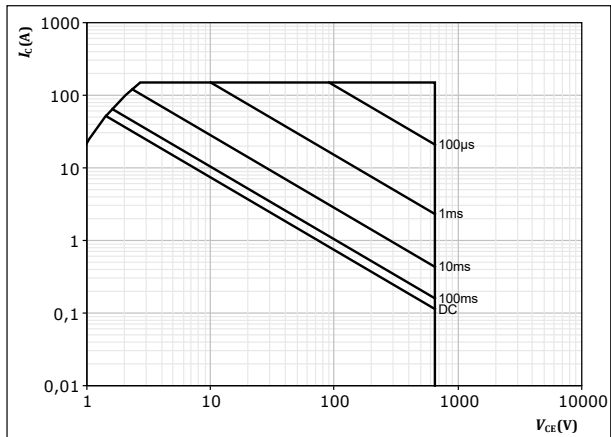

$D =$ single pulse

$T_s = 80$ °C

$V_{GE} = 15$ V


$T_j = T_{jmax}$

figure 6.

IGBT

Gate voltage vs gate charge

$$V_{GE} = f(Q_g)$$

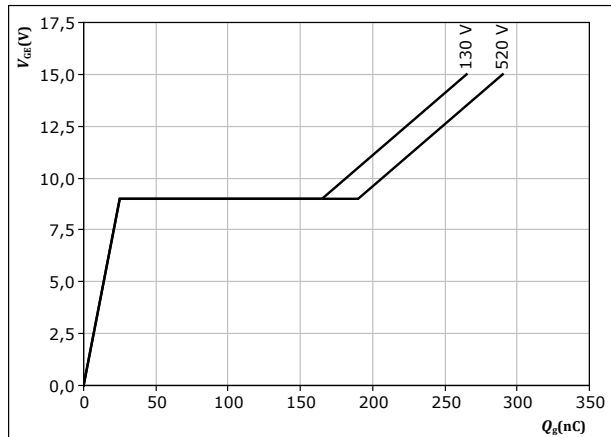

$I_C = 50$ A

$T_j = 25$ °C



Vincotech


Inverter Diode Characteristics

figure 7.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$

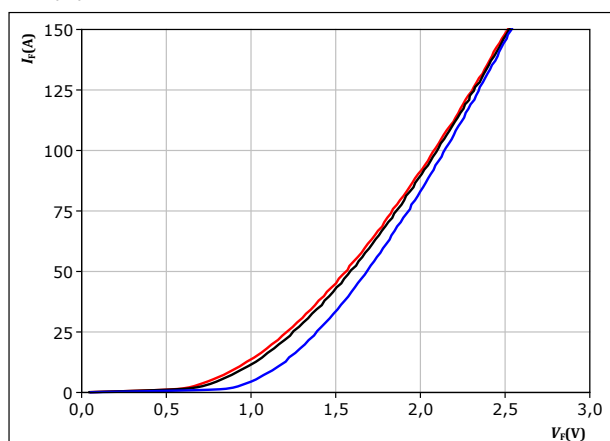

$t_p = 250 \mu s$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 8.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

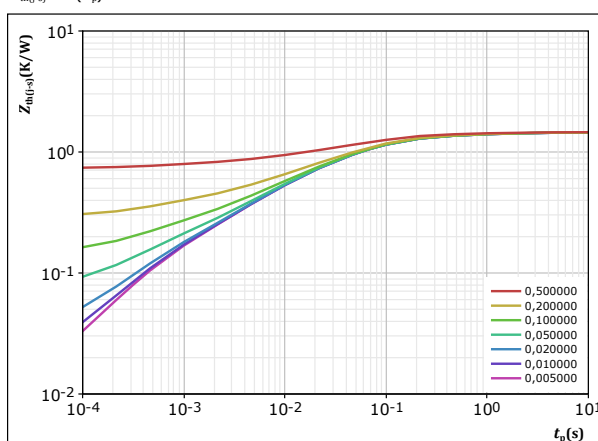

$D = t_p / T$

$R_{th(j-s)} = 1,458 \text{ K/W}$

FWD thermal model values

R (K/W)	τ (s)
2,26E-02	9,59E+01
7,28E-02	1,64E+00
1,76E-01	2,57E-01
5,97E-01	5,86E-02
3,56E-01	1,29E-02
1,47E-01	2,93E-03
9,73E-02	4,40E-04



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Brake Switch Characteristics

figure 9.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

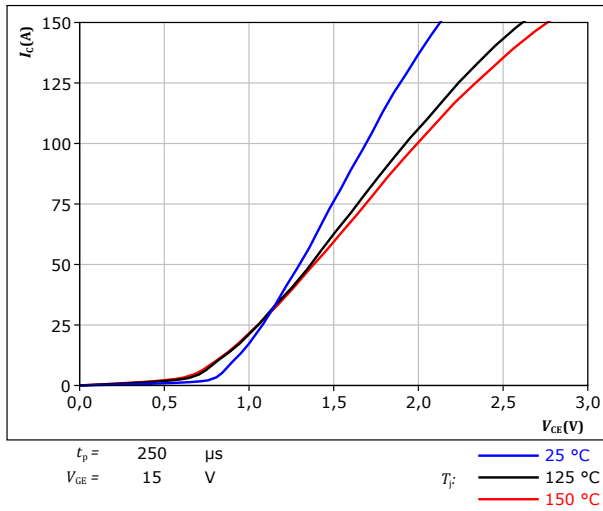


figure 10.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

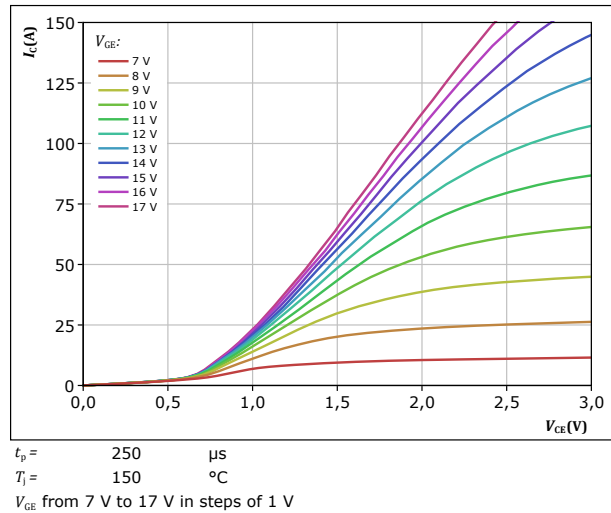


figure 11.

IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$


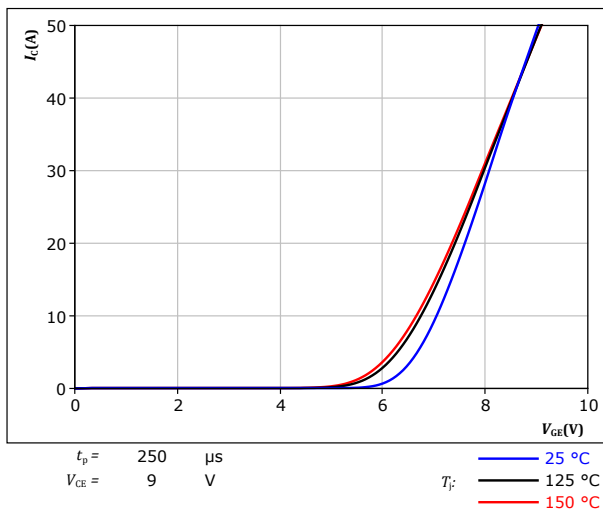


figure 12.

IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

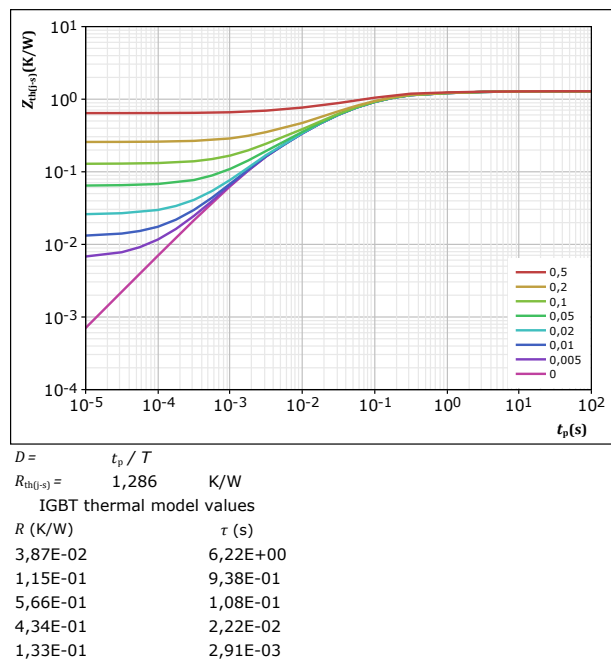



Vincotech

10-FY07PMA050I701-P586A68
datasheet


Brake Switch Characteristics

figure 13.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

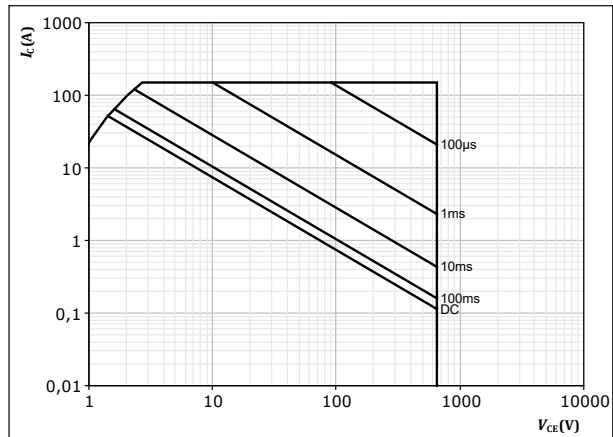


$D =$ single pulse
 $T_s = 80$ °C
 $V_{GE} = 15$ V
 $T_j = T_{jmax}$

figure 14.

IGBT

Gate voltage vs gate charge

$$V_{GE} = f(Q_g)$$

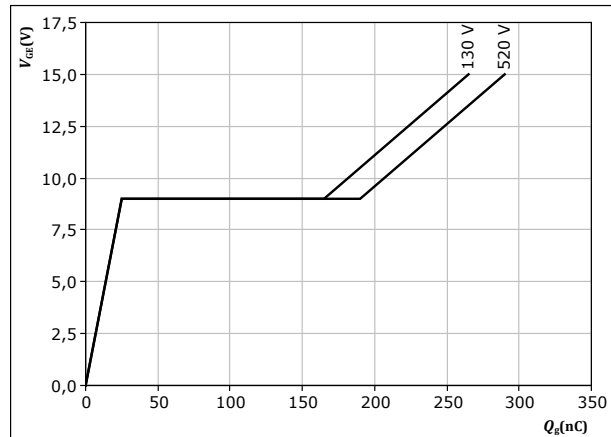

$I_C = 50$ A
 $T_j = 25$ °C



Vincotech


Brake Diode Characteristics

figure 15.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$

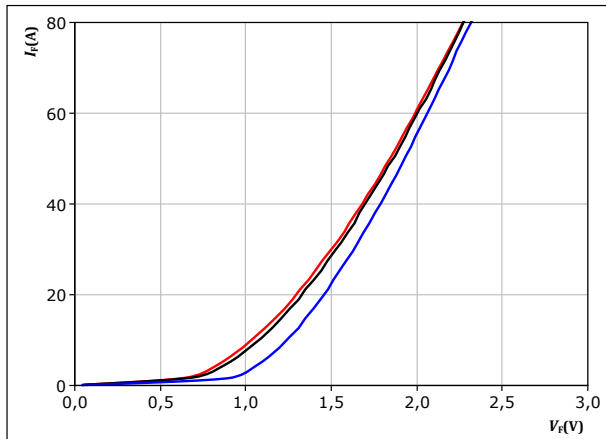

$t_p = 250 \mu s$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 16.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

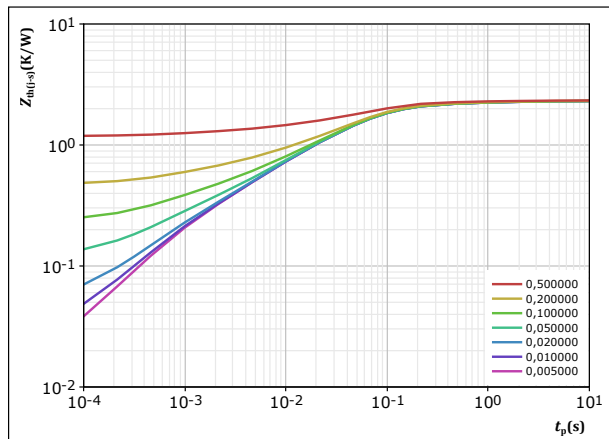

$D = t_p / T$
 $R_{th(j-s)} = 2,333 \text{ K/W}$

FWD thermal model values

R (K/W)	τ (s)
6,91E-02	5,30E+01
9,52E-02	1,49E+00
2,46E-01	2,44E-01
1,25E+00	5,58E-02
3,83E-01	1,34E-02
1,90E-01	3,34E-03
1,32E-01	6,23E-04



Vincotech

Rectifier Diode Characteristics

figure 17.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


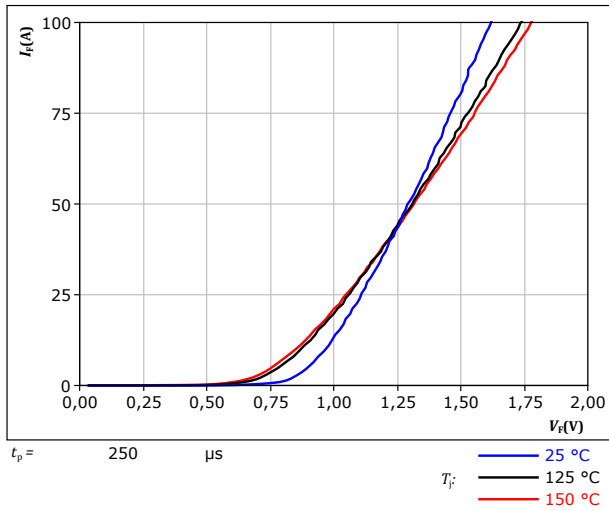


figure 18.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

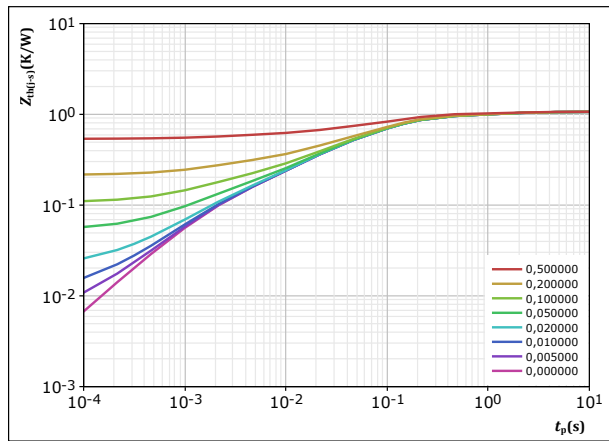



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Thermistor Characteristics

figure 19.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$






Vincotech

10-FY07PMA050I701-P586A68
datasheet

Inverter Switching Characteristics

figure 20. IGBT

Typical switching energy losses as a function of collector current
 $E = f(I_c)$

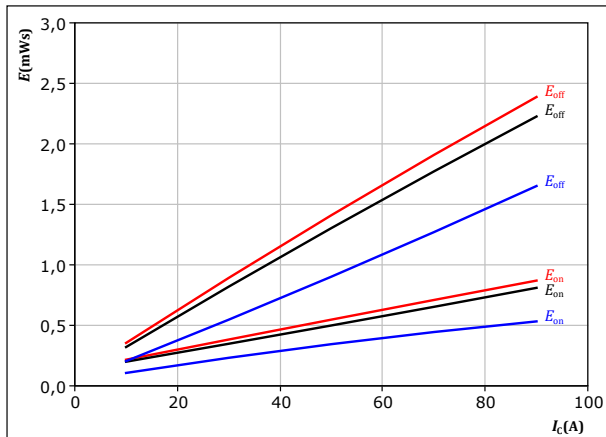


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 21. IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor
 $E = f(R_g)$

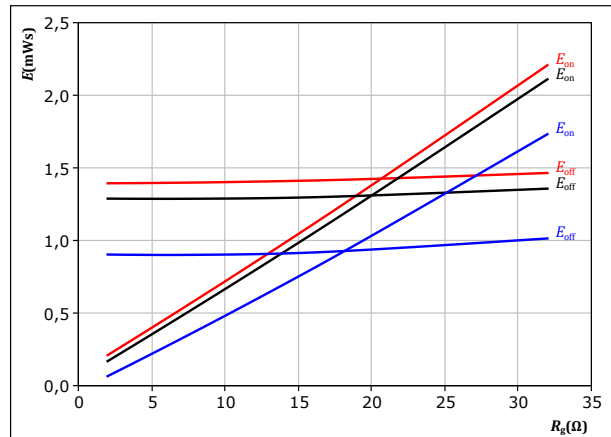


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 50$ A

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 22. FWD

Typical reverse recovered energy loss as a function of collector current
 $E_{rec} = f(I_c)$

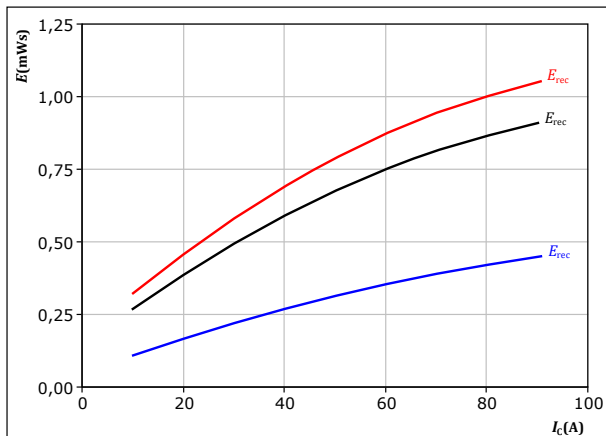


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 23. FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor
 $E_{rec} = f(R_g)$

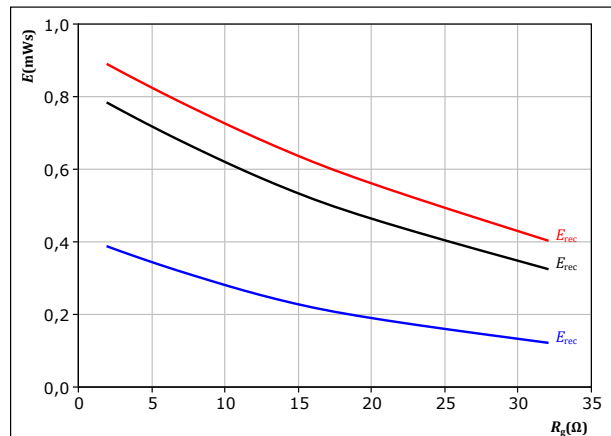

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 50$ A

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)




Vincotech

10-FY07PMA050I701-P586A68
datasheet

Inverter Switching Characteristics

figure 24. IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

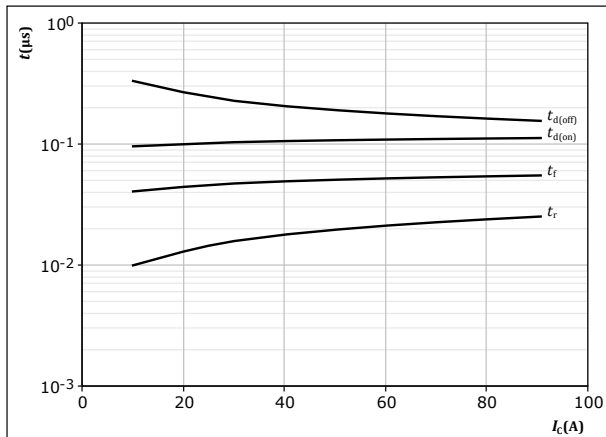


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

figure 25. IGBT

Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

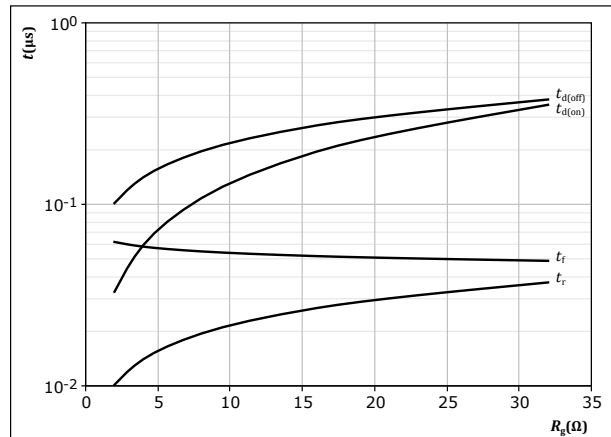


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_C = 50$ A

figure 26. FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

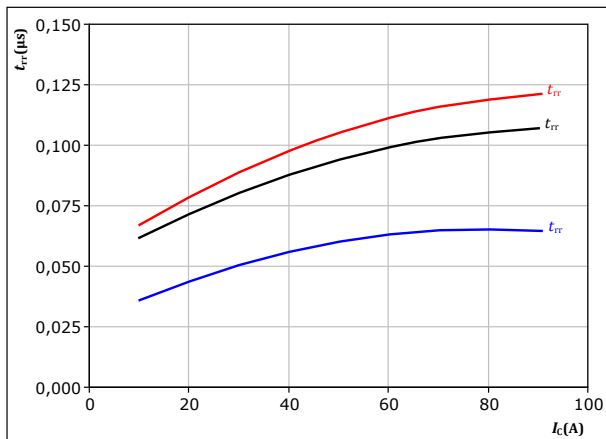


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 27. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

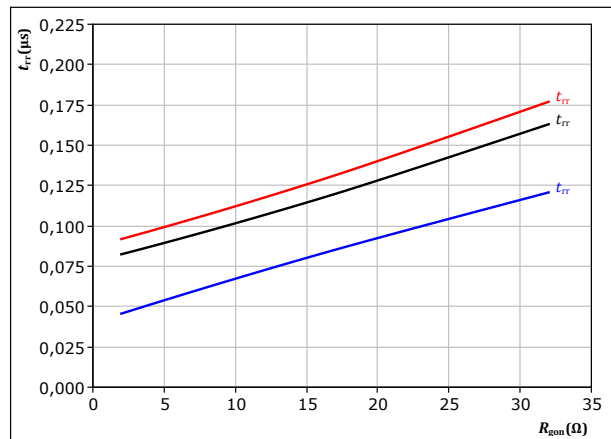

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_C = 50$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

10-FY07PMA050I701-P586A68
datasheet


Inverter Switching Characteristics

figure 28.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

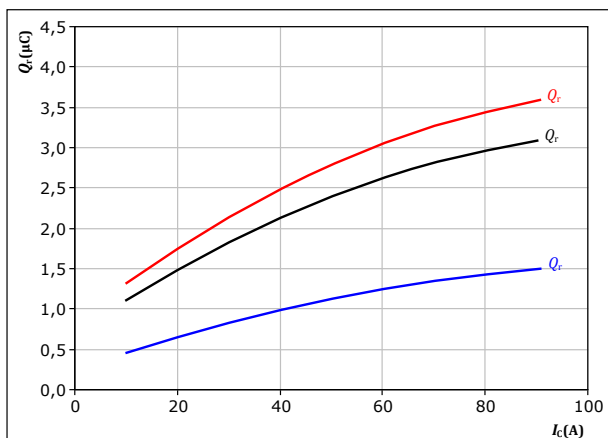

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω


T_j : 25 °C
125 °C
150 °C

figure 30.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

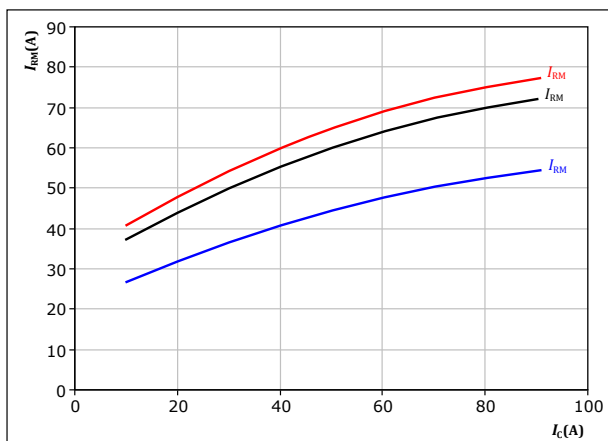

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω


T_j : 25 °C
125 °C
150 °C

figure 29.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

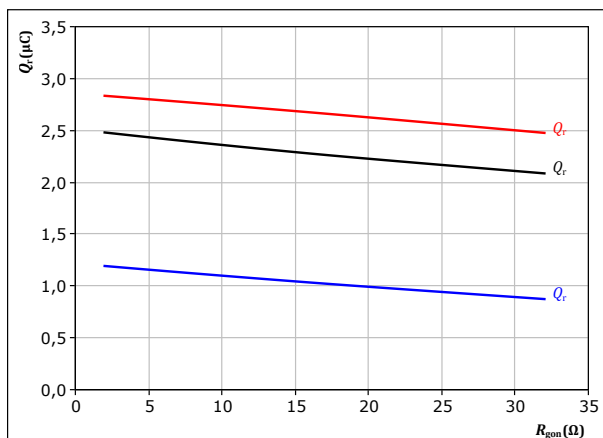

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 50$ A


T_j : 25 °C
125 °C
150 °C

figure 31.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

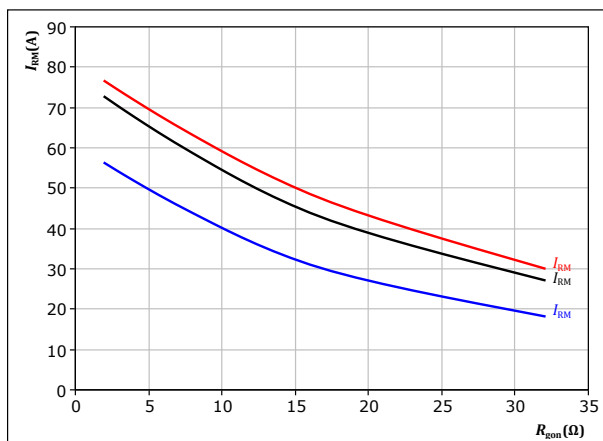

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 50$ A

T_j : 25 °C
125 °C
150 °C




Vincotech

10-FY07PMA050I701-P586A68
datasheet

Inverter Switching Characteristics

figure 32. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

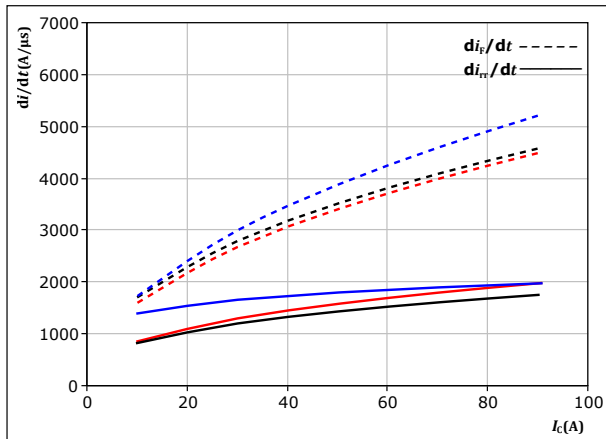

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

T_j : 25 °C
125 °C
150 °C

figure 34. IGBT

Reverse bias safe operating area


$I_C = f(V_{CE})$

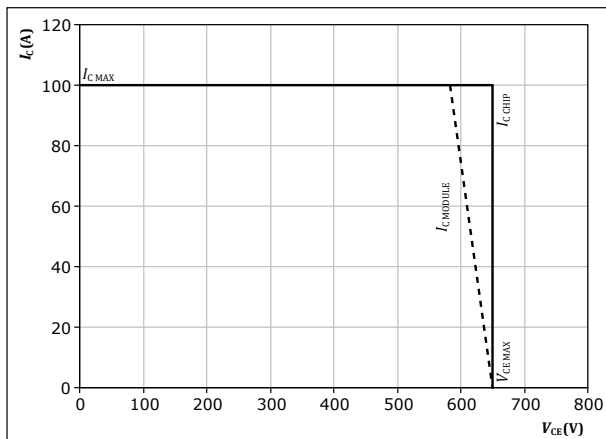

At $T_j = 150$ °C
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

figure 33. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

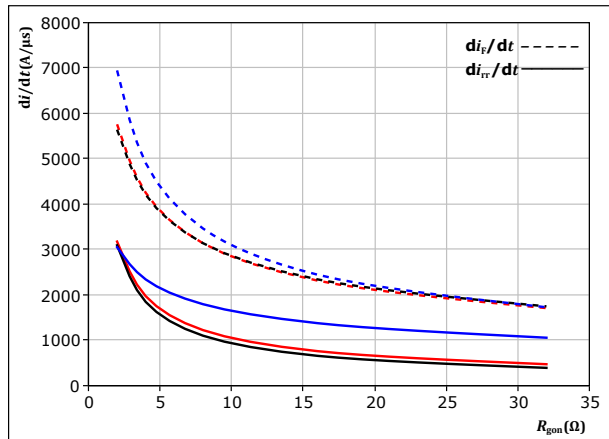

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_C = 50$ A

T_j : 25 °C
125 °C
150 °C



Vincotech

10-FY07PMA050I701-P586A68
datasheet


Brake Switching Characteristics

figure 35.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

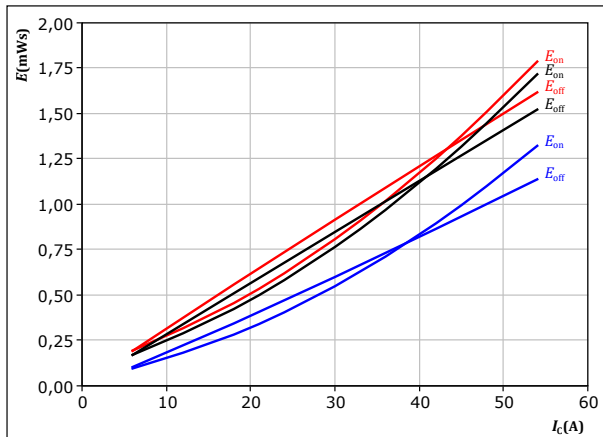

With an inductive load at

$V_{CE} = 400 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $R_{gon} = 8 \text{ } \Omega$
 $R_{goff} = 8 \text{ } \Omega$


T_j : 25 °C
125 °C
150 °C

figure 37.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

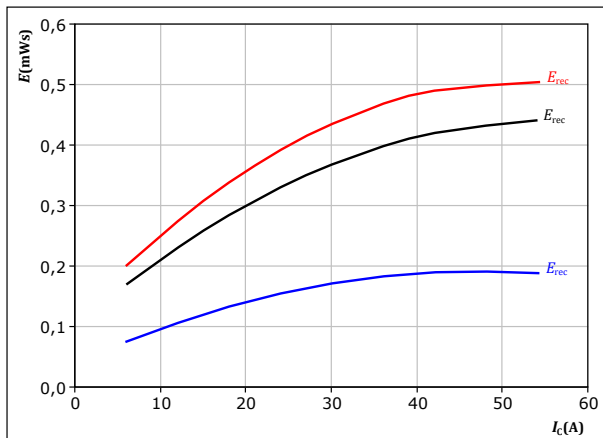

With an inductive load at

$V_{CE} = 400 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $R_{gon} = 8 \text{ } \Omega$


T_j : 25 °C
125 °C
150 °C

figure 36.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

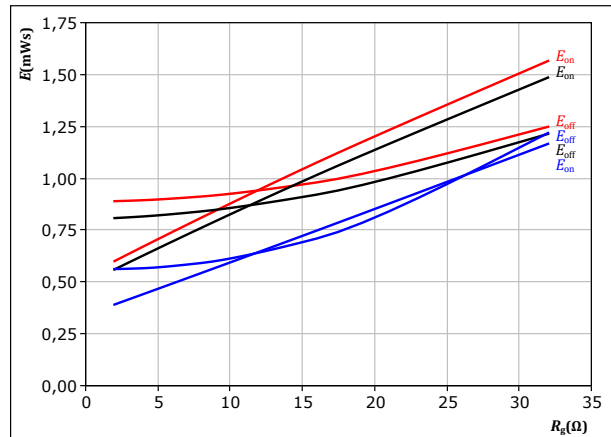

With an inductive load at

$V_{CE} = 400 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $I_c = 30 \text{ A}$


T_j : 25 °C
125 °C
150 °C

figure 38.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

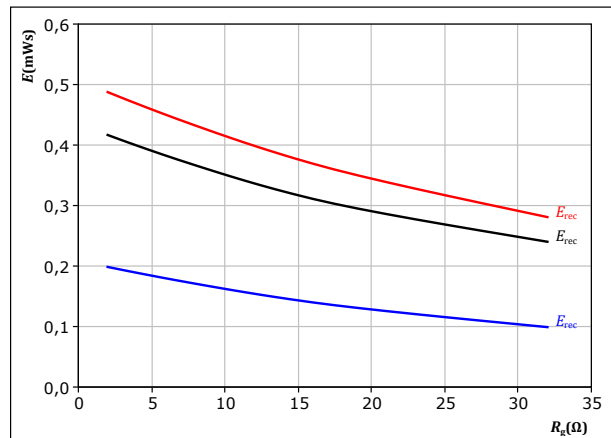

With an inductive load at

$V_{CE} = 400 \text{ V}$
 $V_{GE} = 0/15 \text{ V}$
 $I_c = 30 \text{ A}$

T_j : 25 °C
125 °C
150 °C



Vincotech


10-FY07PMA050I701-P586A68
datasheet

Brake Switching Characteristics

figure 39.

IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

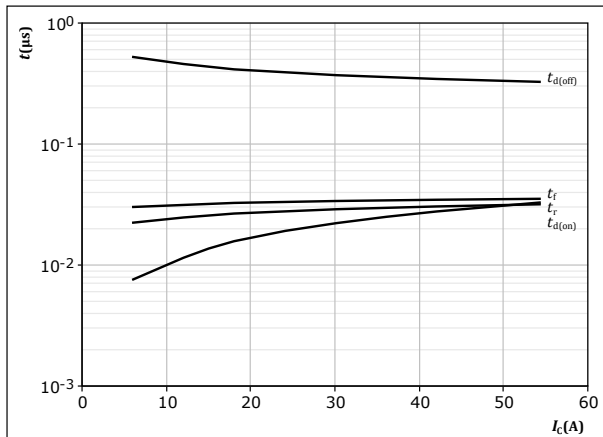


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

figure 40.

IGBT

Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

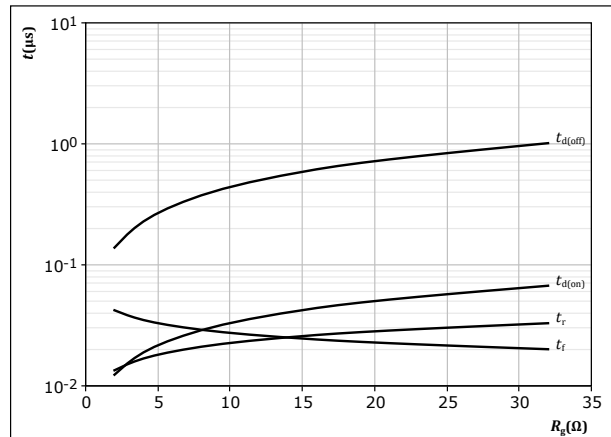


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $I_C = 30$ A

figure 41.

FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

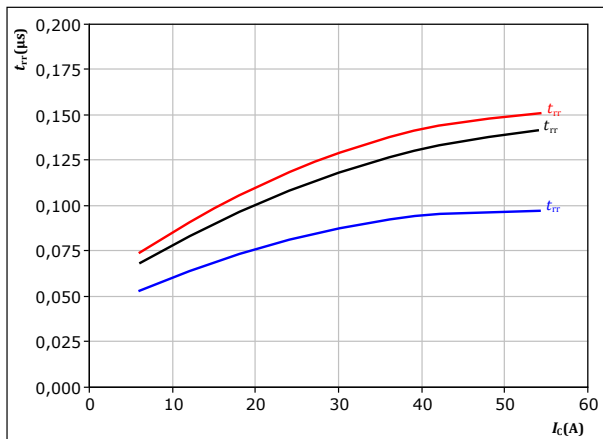

With an inductive load at


$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 42.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

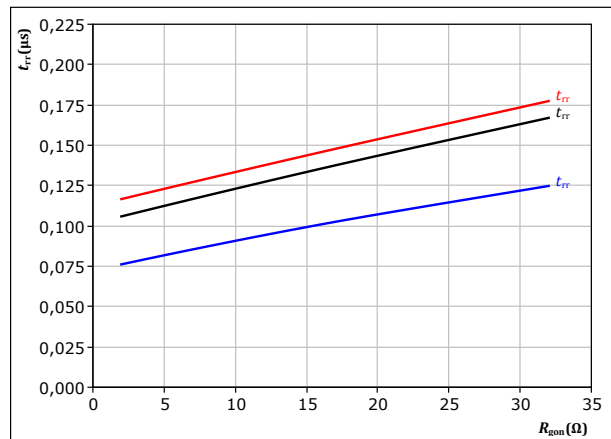

With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $I_C = 30$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

10-FY07PMA050I701-P586A68
datasheet


Brake Switching Characteristics

figure 43.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

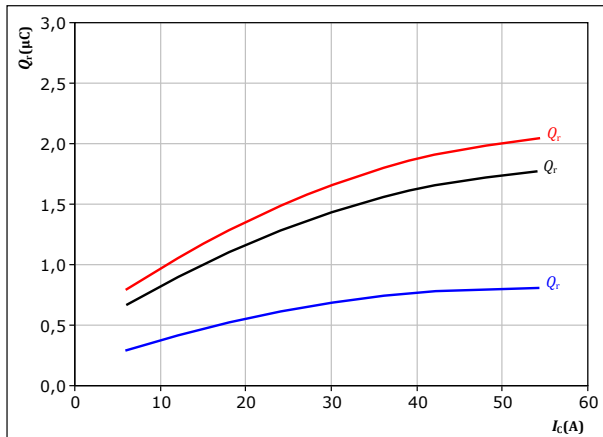

With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 45.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

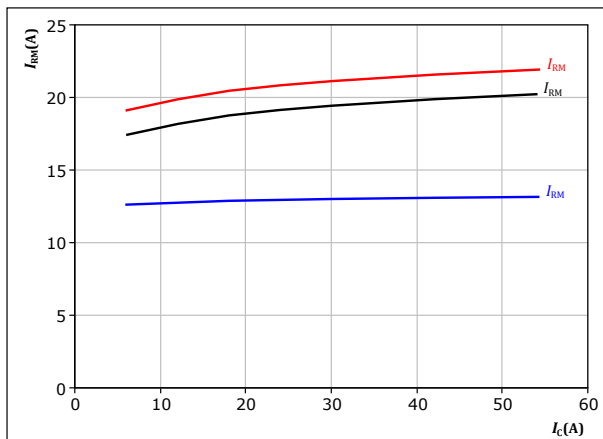

With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 44.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

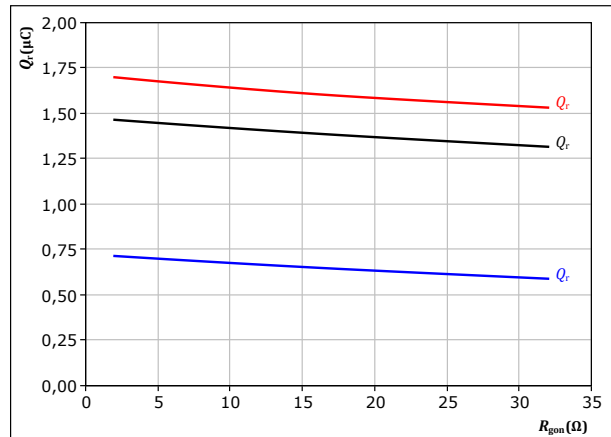

With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $I_c = 30$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 46.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

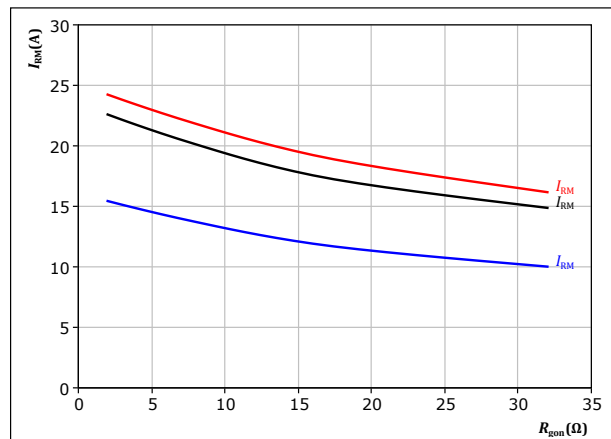

With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $I_c = 30$ A

T_j :
— 25 °C
— 125 °C
— 150 °C




Vincotech

10-FY07PMA050I701-P586A68
datasheet

Brake Switching Characteristics

figure 47. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

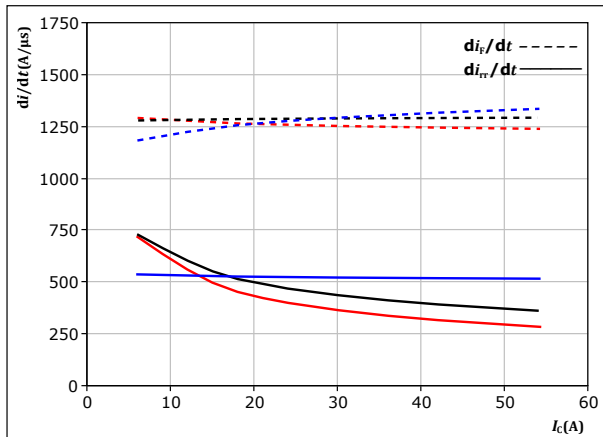


With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $R_{gon} = 8$ Ω
 $T_j = 25$ °C
 $T_j = 125$ °C
 $T_j = 150$ °C

figure 48. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

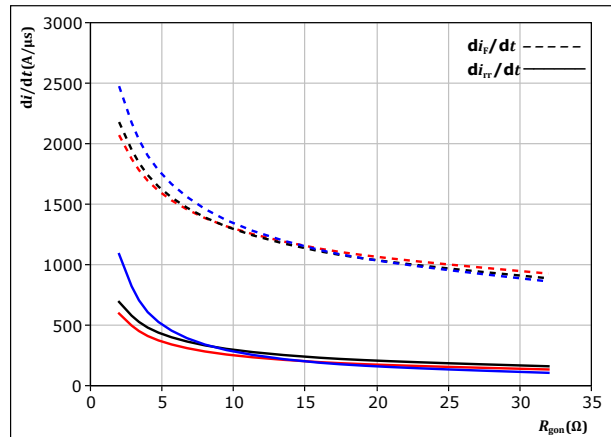


With an inductive load at

$V_{CE} = 400$ V
 $V_{GE} = 0/15$ V
 $I_C = 30$ A
 $T_j = 25$ °C
 $T_j = 125$ °C
 $T_j = 150$ °C

figure 49. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

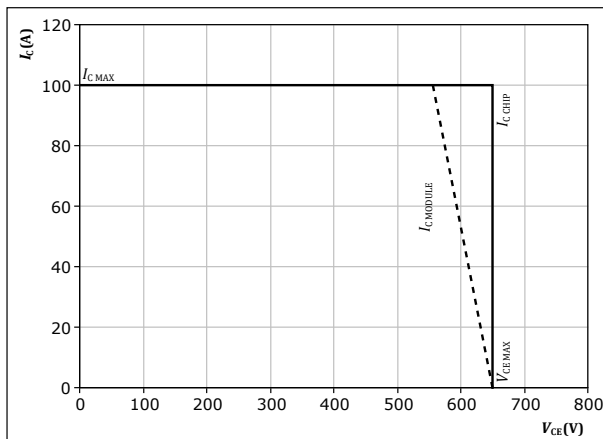

At $T_j = 150$ °C
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω



Vincotech

Switching Definitions

figure 50.

IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

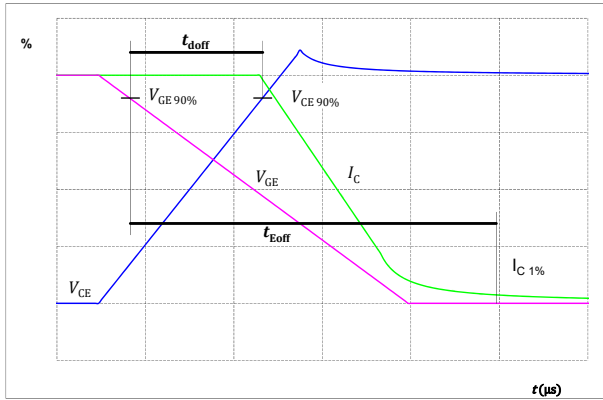


figure 51.

IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

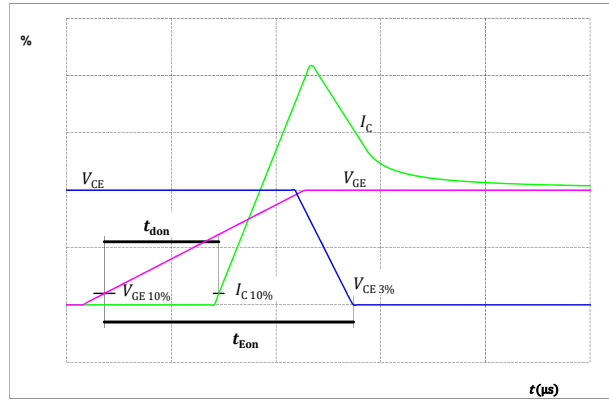


figure 52.

IGBT

Turn-off Switching Waveforms & definition of t_f


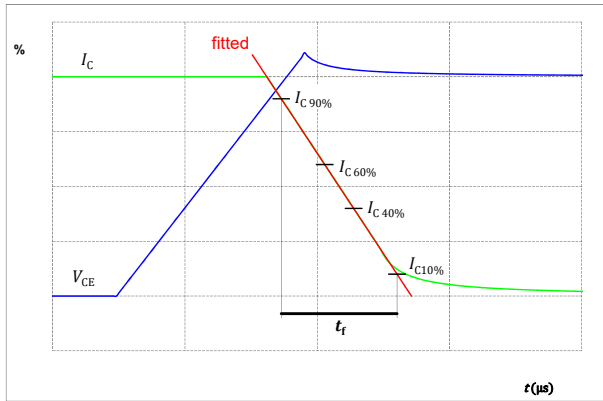


figure 53.

IGBT

Turn-on Switching Waveforms & definition of t_r



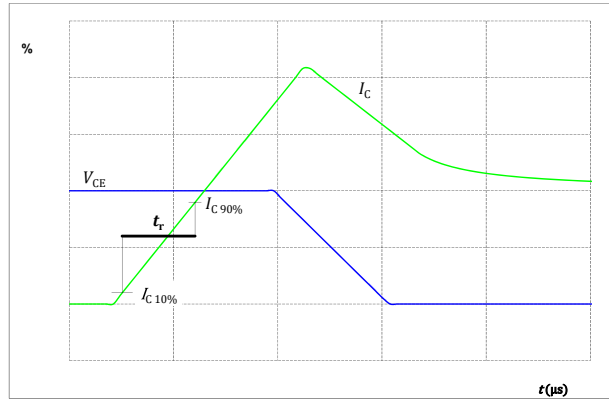

Vincotech

Switching Definitions

figure 54.

FWD

Turn-off Switching Waveforms & definition of t_{rr}



figure 55.

FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)





Vincotech

10-FY07PMA050I701-P586A68

datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	10-FY07PMA050I701-P586A68
With thermal paste (5,2 W/mK, PTM6000HV)	10-FY07PMA050I701-P586A68-/7/

Marking						
	Text	VIN	Date code	Type&Ver	UL	Lot
		VIN	WWYY	TTTTTTVV	UL	LLLL
	Datamatrix	Type&Ver	Lot number	Serial	Date code	Serial
		TTTTTTVV	LLLL	SSSS	WWYY	

Outline			
Pin table [mm]			
Pin	X	Y	Function
1	52,55	0	G27
2	47,7	0	DC-Rect
3	44,8	0	DC-Rect
4	37,8	0	DC+Rect
5	37,8	2,8	DC+Rect
6	35	0	DC+Inv
7	35	2,8	DC+Inv
8	28	0	Therm1
9	25,2	0	Therm2
10	22,4	0	DC-3
11	19,6	0	G15
12	16,8	0	S15
13	14	0	DC-2
14	11,2	0	G13
15	8,4	0	S13
16	5,6	0	DC-1
17	2,8	0	G11
18	0	0	S11
19	0	28,5	Ph1
20	2,8	28,5	G12
21	7,5	28,5	S12
22	14,5	28,5	Ph2
23	17,3	28,5	G14
24	22	28,5	S14
25	29	28,5	Ph3
26	31,8	28,5	G16
27	36,5	28,5	S16
28	43,5	28,5	ACIn1
29	52,55	25	ACIn2
30	52,55	16,9	ACIn3
31	52,55	8,6	Br
32	52,55	2,8	DC-Br

Top view dimensions: $\phi 1 \pm 0,05$, $16,2 \pm 0,5$


Bottom view dimensions: $14,25$, $26,25$

Tolerance of pinpositions: $\pm 0,5$ mm at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

Pinout

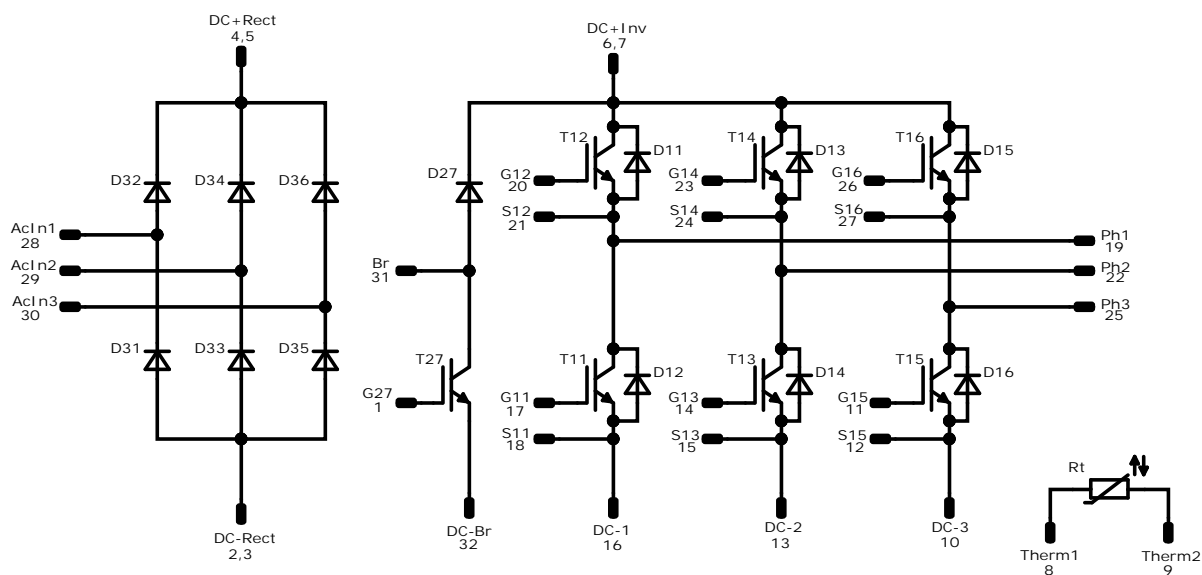


Identification

ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	650 V	50 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	650 V	50 A	Inverter Diode	
T27	IGBT	650 V	50 A	Brake Switch	
D27	FWD	650 V	30 A	Brake Diode	
D31, D32, D33, D34, D35, D36	Rectifier	1600 V	35 A	Rectifier Diode	
Rt	Thermistor			Thermistor	



Vincotech

10-FY07PMA050I701-P586A68
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow</i> 1 packages see vincotech.com website.				
Package data				
Package data for <i>flow</i> 1 packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,sp}=175^{\circ}\text{C}$ and up to 3500VAC/1min isolation voltage. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
10-FY07PMA050I701-P586A68-D2-14	1 Jun. 2025	Change Rectifier Diode	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.