




Inrush current resistor

400 Ω / 200 Ws

Features

- Ultra low profile thick-film on ceramic
- 2 kW peak power
- Easy spring fixing heatsink mountable
- Ideal for dynamic braking
- Available with fast-on terminals
- Pulse handling capability
- Non-flammable construction
- Optional preapplied phase-change material available

Outline

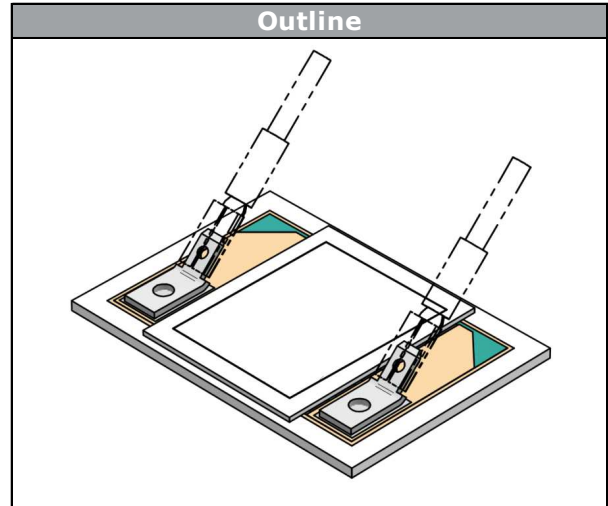

Specification

Parameter	Symbol	Condition	Value	Unit
Resistance	R		400	Ω
Tolerance			±20	%
Energy	E	$P_{max} = 2 \text{ kW}/100 \text{ ms}; T_s = 100 \text{ °C}, f = 50 \text{ N}$ (pressure to heatsink)	200	Ws
Power	P	$T_s = 100 \text{ °C}, f = 50 \text{ N}$ (pressure to heatsink)	100	W
Isolation Voltage	V_t	Isolation to heatsink	4000	V


Notes:

Repetitive energy on heatsink 200 Ws mounted on heatsink with preapplied phase change material with no forced air cooling ($T_s = 100 \text{ °C}, T_a = 25 \text{ °C}$)

Mounted with spring

- recommended spring force: min. 50 N
- press down / fixing is recommended in the middle of the cover substrate on a minimum of dia. 7 mm circular area.
- Recommended surface roughness of the heatsink: $R_z < 0.01 \text{ mm}$

Construction

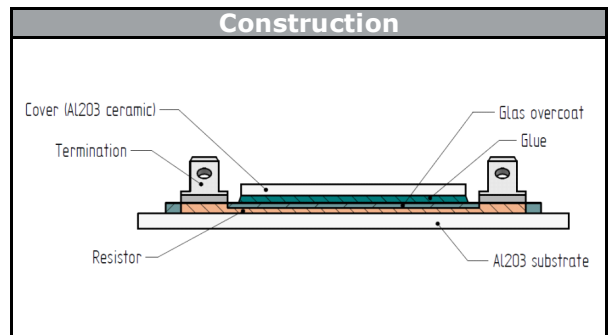



Qualification

Planned Qualification

Technology Qualification

Test Item	Test Conditions	Standard
Temperature Shock (TS)	T_{STGmin} / T_{STGmax} : -40 °C/+125 °C	DIN EN 60068-2-14
	100 cycles	Test Na
	$t_{dwell} = 30$ min (dwell time at each temperature)	MIL-STD-883E
	$t_{change} < 30$ sec (temperature change time)	Method 1010


Component Qualification

Test Item	Test Conditions	Standard
High Temperature Storage (HTS)	$T_{STG} = T_{max}$	DIN EN 60068-2-2
	$T_{STG} = 125$ °C	
	$t = 1000$ h (2*500h)	
High Humidity	$T_{STG} = 85$ °C; RH = 85%	DIN EN 60068-2-67
High Temperature Storage (HHTS)		
	$t = 1000$ h (2*500h)	

Electrical Characteristics

Qualification in progress


Mechanical Dimension [mm]

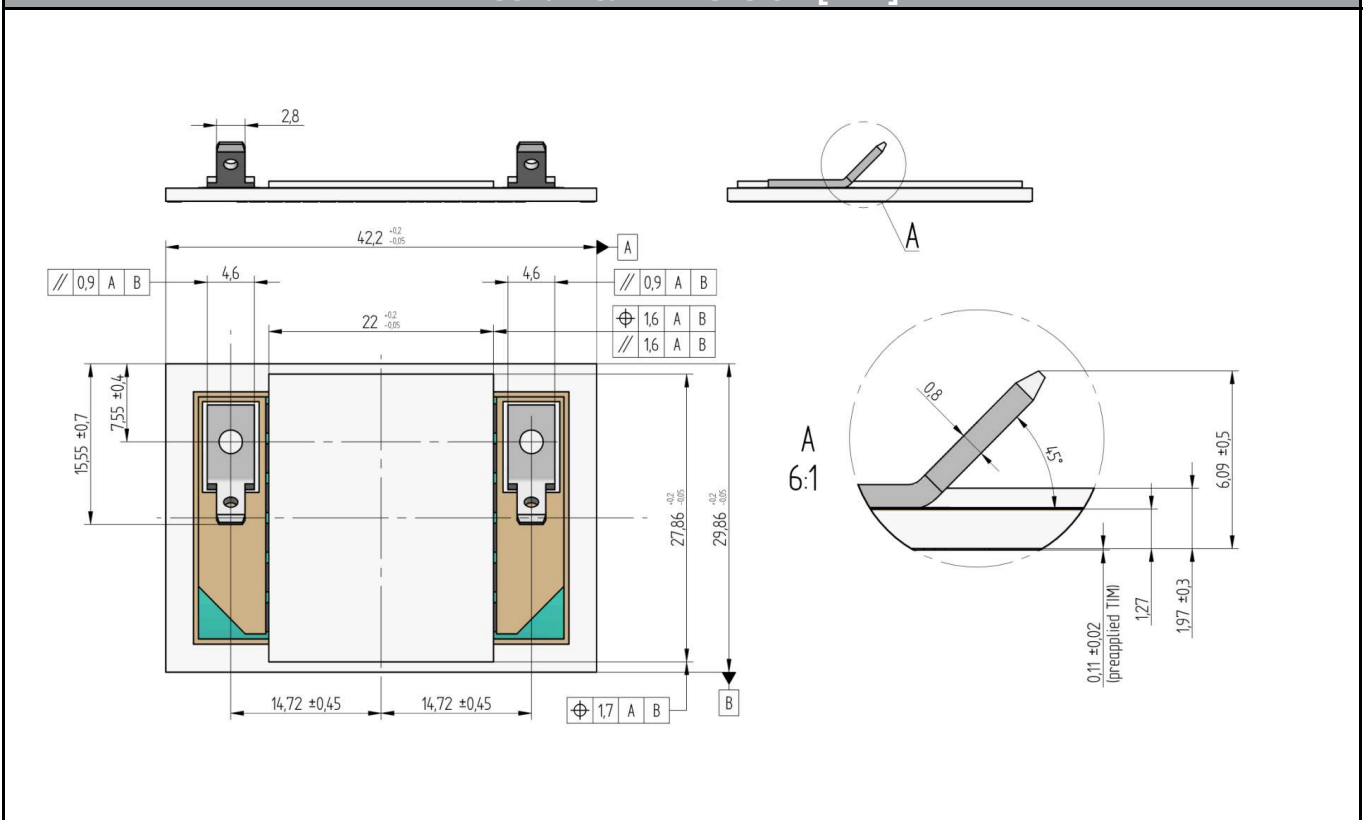



Vincotech

S30814-Q992-B
target datasheet

Ordering Code & Marking			
Version	Ordering Code	in DataMatrix as	in packaging barcode as
with thermal paste	S30814-Q992-B-/3/		Q992-B
 Q992-B 51 12345 0514	Text	Name	Ver
		Q992-B	51
		Date code	
		0514	



Vincotech

Packaging instruction			
Standard packaging quantity (SPQ)	294	>SPQ	Standard
		<SPQ	Sample

Handling instruction
For handling instructions see vincotech.com website.

Document No.:	Date:	Modification:	Pages
S30814-Q992-B-T2-14	28 Jun. 2016		

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.