
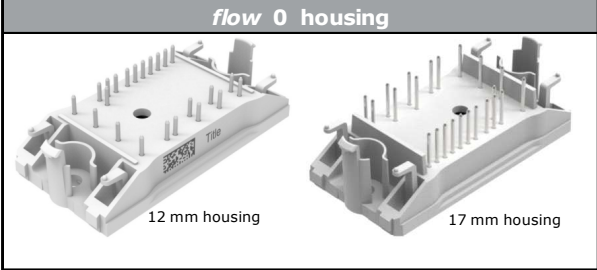


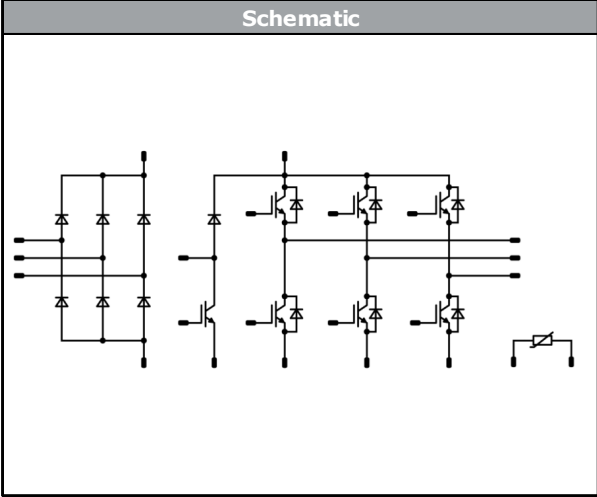

<i>flow PIM 0</i>	1200 V / 5 A
<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Features</div> <ul style="list-style-type: none"> IGBT M7 with low V_{CEsat} and improved EMC behavior Open emitter configuration Compact and low inductive design Built-in NTC 	<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">flow 0 housing</div> 
<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Target applications</div> <ul style="list-style-type: none"> Industrial Drives 	<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Schematic</div> 
<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Types</div> <ul style="list-style-type: none"> 10-FZ12PMA005M7-P848A28 10-F012PMA005M7-P848A29 	

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Rectifier Diode				
Peak Repetitive Reverse Voltage	V_{RRM}		1600	V
Continuous (direct) forward current	I_F		25	A
Surge (non-repetitive) forward current	I_{FSM}	50 Hz Single Half Sine Wave $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	200	A
Surge current capability	I_{Pt}		200	A^2s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	W
Maximum Junction Temperature	T_{jmax}		150	°C



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current	I_C		5	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	10	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	41	W
Gate-emitter voltage	V_{GES}		± 20	V
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$
Inverter Diode				
Peak repetitive reverse voltage	V_{RRM}		1200	V
Continuous (direct) forward current	I_F		5	A
Repetitive peak forward current	I_{FRM}	T_j limited by T_{jmax}	10	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	27	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$
Brake Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current	I_C		5	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	10	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	41	W
Gate-emitter voltage	V_{GES}		± 20	V
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$
Brake Diode				
Peak repetitive reverse voltage	V_{RRM}		1200	V
Continuous (direct) forward current	I_F		5	A
Repetitive peak forward current	I_{FRM}	T_j limited by T_{jmax}	10	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	27	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$



Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
-----------	--------	-----------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{top}		-40...(T _{max} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
		AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			min. 12,7	mm
Clearance		12 mm housing / 17 mm housing	9,29 / min. 12,7	mm
Comparative Tracking Index	CTI		> 200	

*100 % tested in production



Vincotech

10-FZ12PMA005M7-P848A28
10-F012PMA005M7-P848A29
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit	
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V]	I_C [A] I_D [A]	I_F [A]	T_j [°C]	Min	Typ	Max		
Rectifier Diode											
Static											
Forward voltage	V_F			30		25 125		1,22 1,21	1,8	V	
Reverse leakage current	I_r			1600		25 145			50 1100	μ A	
Thermal											
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)							1,59		K/W



Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	
Inverter Switch										
Static										
Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{CE}$			0,0005	25	5,4	6	6,6	V
Collector-emitter saturation voltage	V_{CEsat}		15		5	25 125 150		1,62 1,83 1,89	1,95	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			50	μA
Gate-emitter leakage current	I_{GES}		20	0		25			500	nA
Internal gate resistance	r_g							none		Ω
Input capacitance	C_{ies}							1100		pF
Output capacitance	C_{oes}		0	10		25		57		
Reverse transfer capacitance	C_{res}							11		
Gate charge	Q_g		15	600	5	25		40		nC
Thermal										
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						2,30		K/W
Dynamic										
Turn-on delay time	$t_{d(on)}$					25 125 150		153 150 147		ns
Rise time	t_r	$R_{goff} = 64$ Ω $R_{gon} = 64$ Ω				25 125 150		39 43 43		
Turn-off delay time	$t_{d(off)}$		±15	600	5	25 125 150		154 176 181		
Fall time	t_f					25 125 150		89 115 111		
Turn-on energy (per pulse)	E_{on}	$Q_{rFWD} = 0,6$ μC $Q_{rFWD} = 0,8$ μC $Q_{rFWD} = 1$ μC				25 125 150		0,480 0,601 0,643		
Turn-off energy (per pulse)	E_{off}					25 125 150		0,333 0,437 0,473		



Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GE} [V]	V_{CE} [V]	I_C [A]	T_j [°C]	Min	Typ	Max		

Inverter Diode

Static

Parameter	Symbol	V_{GS} [V]	V_{DS} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	Unit
Forward voltage	V_F			5	25 125 150		1,57 1,65 1,65	2,1	V
Reverse leakage current	I_R		1200		25			20	μA

Thermal

Parameter	Symbol	Conditions	Value	Unit
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)	3,50	K/W

Dynamic

Parameter	Symbol	V_{GS} [V]	V_{DS} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	Unit
Peak recovery current	I_{RRM}				25 125 150		4 4 4		A
Reverse recovery time	t_{rr}				25 125 150		259 376 434		ns
Recovered charge	Q_r			±15	600	5	0,551 0,773 0,985		μC
Reverse recovered energy	E_{rec}				25 125 150		0,186 0,273 0,378		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$				25 125 150		46 24 25		A/μs



Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	
Brake Switch										
Static										
Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{CE}$			0,0005	25	5,4	6	6,6	V
Collector-emitter saturation voltage	V_{CEsat}		15		5	25 125 150		1,62 1,83 1,89	1,95	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			50	μA
Gate-emitter leakage current	I_{GES}		20	0		25			500	nA
Internal gate resistance	r_g							none		Ω
Input capacitance	C_{ies}							1100		pF
Output capacitance	C_{oes}		0	10		25		57		
Reverse transfer capacitance	C_{res}							11		
Gate charge	Q_g		15	600	5	25		40		nC
Thermal										
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						2,30		K/W
Dynamic										
Turn-on delay time	$t_{d(on)}$					25 125 150		79 73 72		ns
Rise time	t_r	$R_{gon} = 64$ Ω				25 125 150		45 48 49		
Turn-off delay time	$t_{d(off)}$	$R_{goff} = 64$ Ω				25 125 150		234 262 270		
Fall time	t_f		15/0	600	5	25 125 150		101 114 117		
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD} = 0,6$ μC $Q_{tFWD} = 0,8$ μC $Q_{tFWD} = 0,9$ μC				25 125 150		0,480 0,609 0,634		
Turn-off energy (per pulse)	E_{off}					25 125 150		0,345 0,454 0,474		mWs



Characteristic Values

Parameter	Symbol	Conditions					Value			Unit	
		V_{GE} [V]	V_{CE} [V]	I_C [A]	T_j [°C]	Min	Typ	Max			
		V_{GS} [V]	V_{DS} [V]	I_D [A]	I_F [A]						
Brake Diode											
Static											
Forward voltage	V_F			5		25 125 150		1,57 1,65 1,65	2,1	V	
Reverse leakage current	I_R		1200			25			20	μA	
Thermal											
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)							3,50		K/W
Dynamic											
Peak recovery current	I_{RRM}					25 125 150		4 4 4		A	
Reverse recovery time	t_{rr}					25 125 150		259 386 431		ns	
Recovered charge	Q_r	$di/dt = 85$ A/μs $di/dt = 102$ A/μs $di/dt = 87$ A/μs	15/0	600	5	25 125 150		0,558 0,833 0,935		μC	
Reverse recovered energy	E_{rec}					25 125 150		0,200 0,314 0,363		mWs	
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		37 24 20		A/μs	
Thermistor											
Rated resistance	R					25		22		kΩ	
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5	%	
Power dissipation	P					25		5		mW	
Power dissipation constant						25		1,5		mW/K	
B-value	$B_{(25/50)}$	Tol. ±1 %				25		3962		K	
B-value	$B_{(25/100)}$	Tol. ±1 %				25		4000		K	
Vincotech NTC Reference									I		



Rectifier Diode Characteristics

figure 1. FWD
 Typical forward characteristics


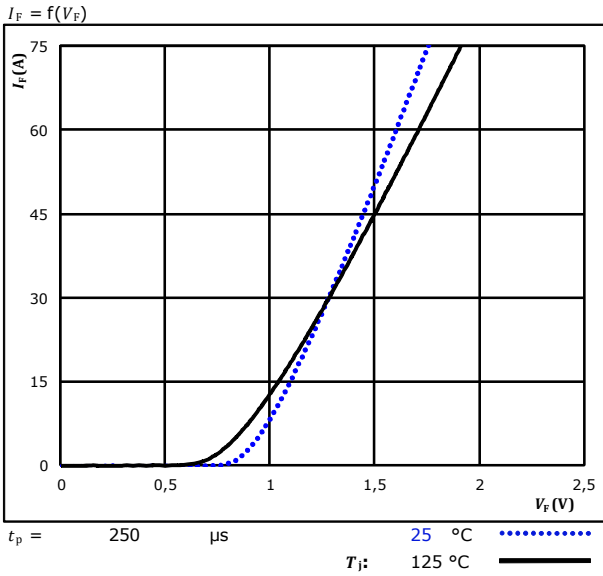


figure 2. FWD
 Transient thermal impedance as a function of pulse width



Diode thermal model values

R (K/W)	τ (s)
3,44E-02	9,66E+00
1,12E-01	1,22E+00
5,81E-01	1,45E-01
4,89E-01	5,05E-02
2,38E-01	9,26E-03
1,22E-01	1,79E-03
1,22E-01	1,79E-03

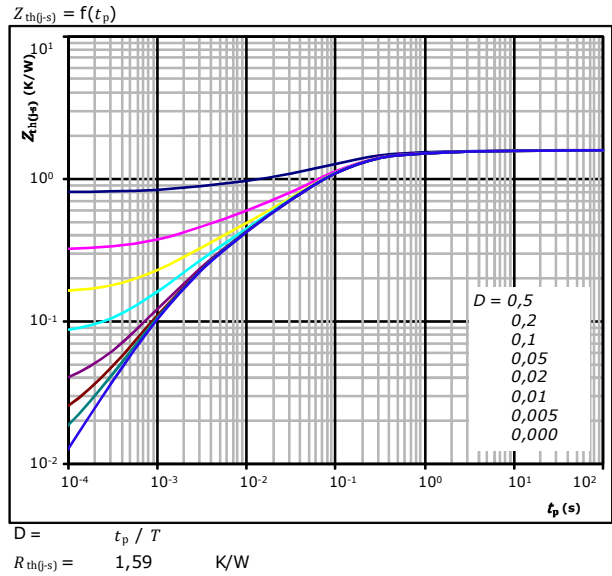

Inverter Switch Characteristics

figure 1. IGBT

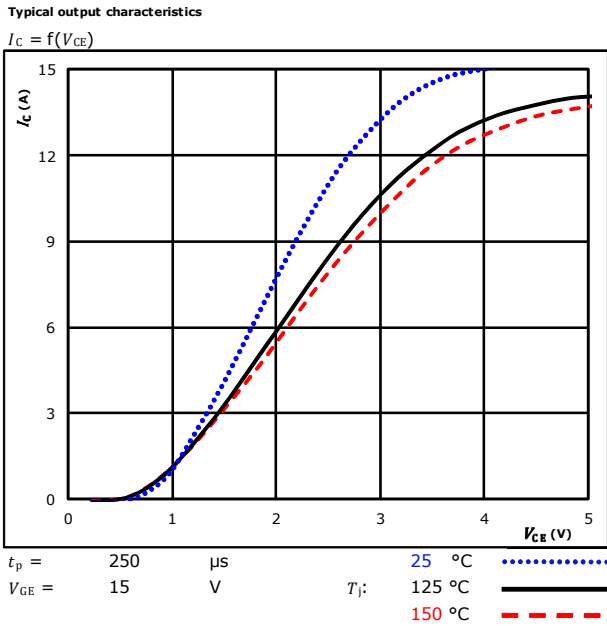


figure 2. IGBT

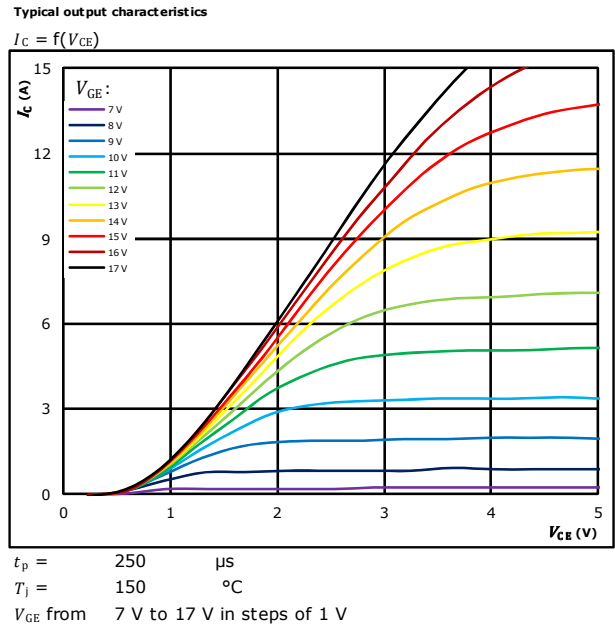


figure 3. IGBT


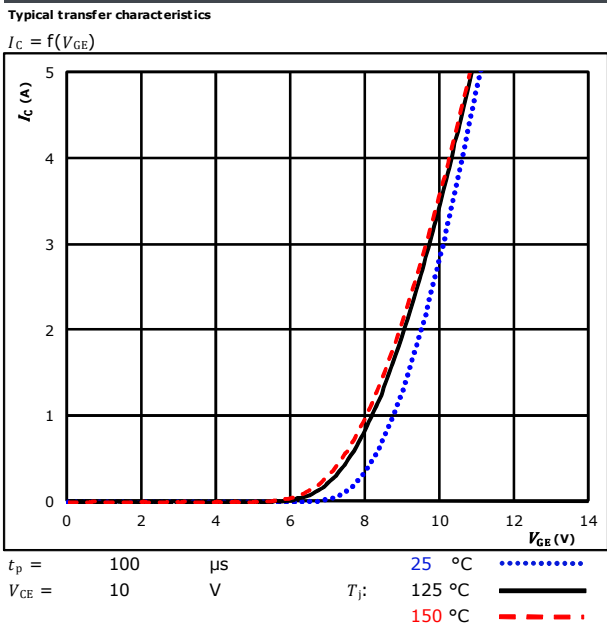


figure 4. IGBT



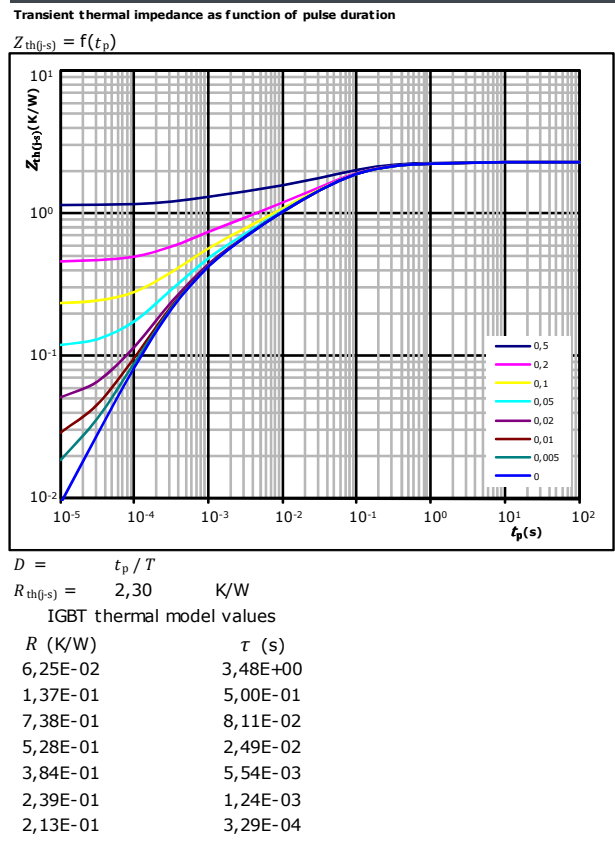


Inverter Switch Characteristics

figure 5. IGBT

Safe operating area

$I_C = f(V_{CE})$

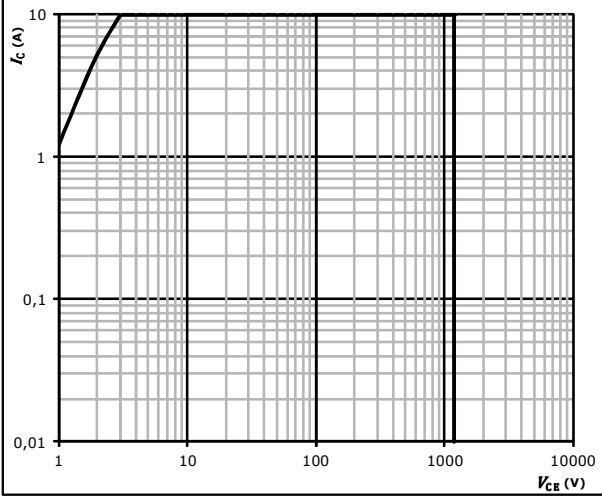

- $D =$ single pulse
- $T_s =$ 80 °C
- $V_{GE} =$ ±15 V
- $T_j =$ T_{jmax}




Inverter Diode Characteristics

figure 1. **FWD**

Typical forward characteristics

$$I_F = f(V_F)$$

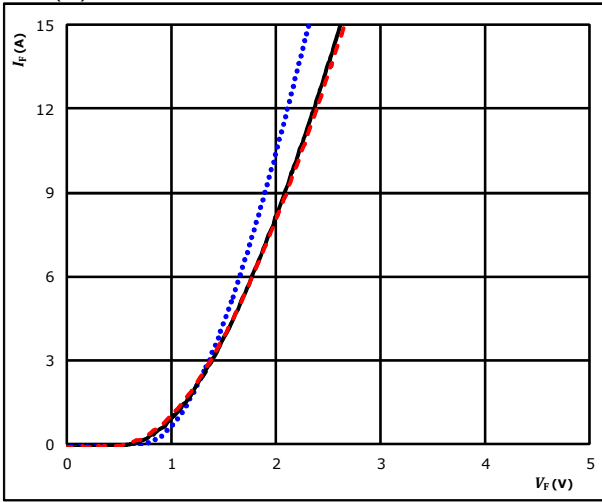

$t_p = 250 \mu s$ T_j :

25 °C


125 °C ————

150 °C - - - -

figure 2. **FWD**

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

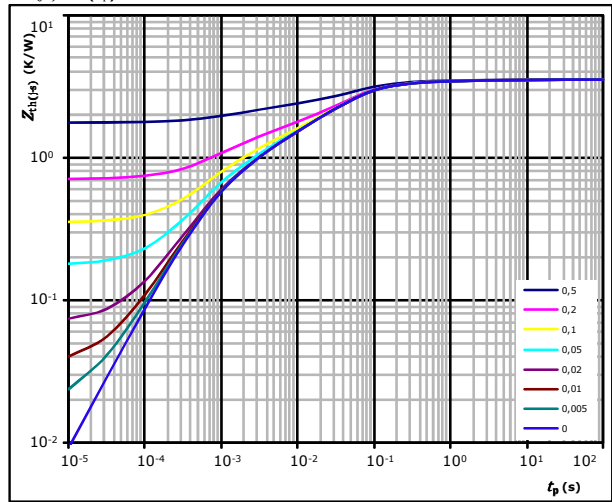

$D = \frac{t_p}{T}$

$R_{th(j-s)} = 3,50 \text{ K/W}$

FWD thermal model values

R (K/W)	τ (s)
8,03E-02	7,23E+00
2,34E-01	4,70E-01
1,33E+00	6,36E-02
7,92E-01	2,24E-02
5,71E-01	3,34E-03
4,85E-01	7,05E-04




Brake Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

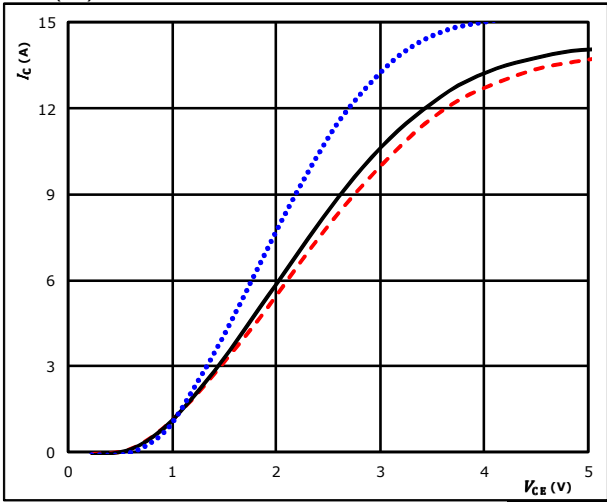


$t_p = 250 \mu s$ $T_j: 25 \text{ }^\circ C$
 $V_{GE} = 15 V$ $T_j: 125 \text{ }^\circ C$ ———
 $T_j: 150 \text{ }^\circ C$ - - - - -

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

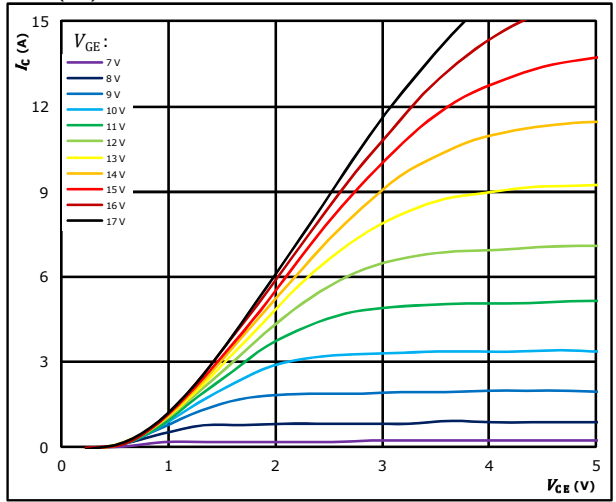


$t_p = 250 \mu s$
 $T_j = 150 \text{ }^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

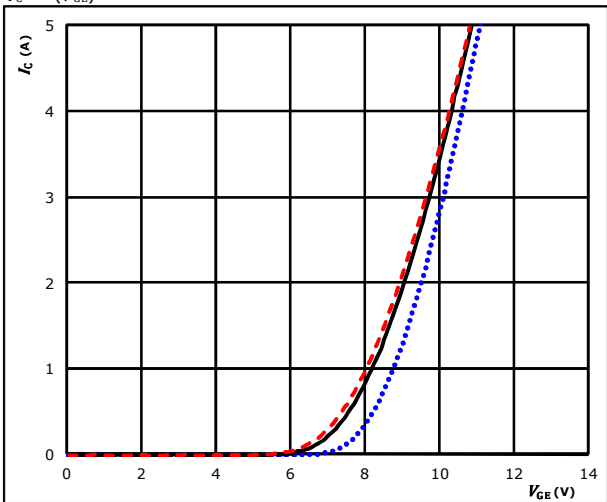


$t_p = 100 \mu s$ $T_j: 25 \text{ }^\circ C$
 $V_{CE} = 10 V$ $T_j: 125 \text{ }^\circ C$ ———
 $T_j: 150 \text{ }^\circ C$ - - - - -

figure 4. IGBT

Transient thermal impedance as function of pulse duration

$$Z_{th(\theta-s)} = f(t_p)$$

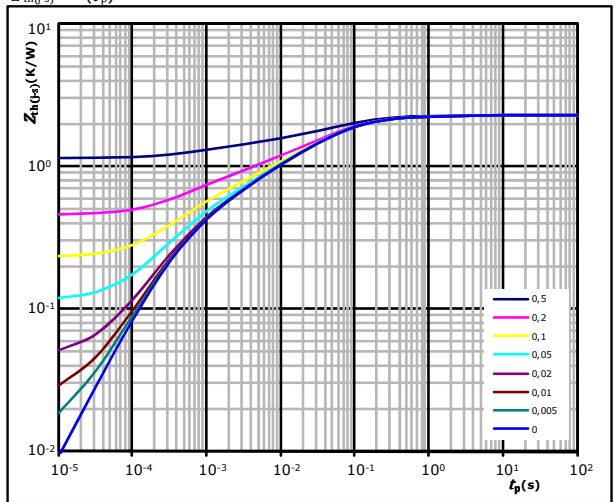

$D = t_p / T$
 $R_{th(\theta-s)} = 2,30 \text{ K/W}$

IGBT thermal model values

R (K/W)	τ (s)
6,25E-02	3,48E+00
1,37E-01	5,00E-01
7,38E-01	8,11E-02
5,28E-01	2,49E-02
3,84E-01	5,54E-03
2,39E-01	1,24E-03
2,13E-01	3,29E-04




Brake Switch Characteristics

figure 5. IGBT

Safe operating area

$I_C = f(V_{CE})$

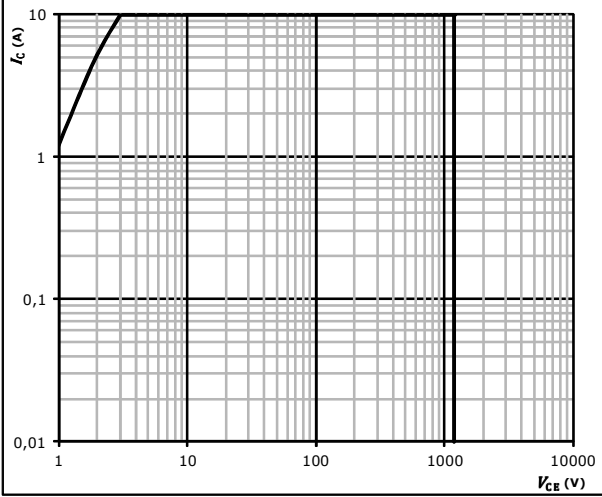

- $D =$ single pulse
- $T_s =$ 80 °C
- $V_{GE} =$ ±15 V
- $T_j =$ T_{jmax}




Brake Diode Characteristics

figure 1. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

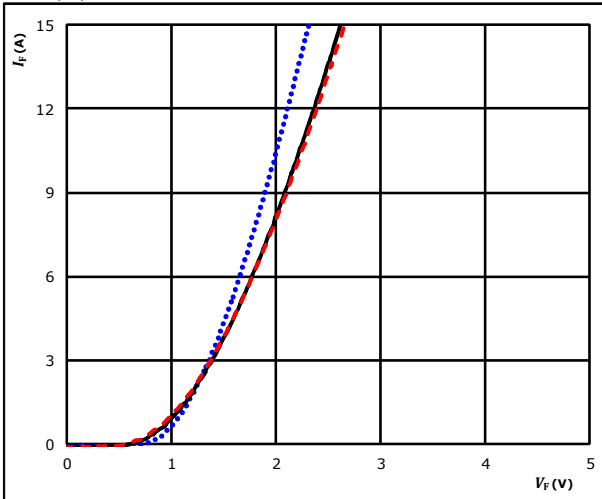


$t_p = 250 \mu s$
 T_j : 25 °C
 125 °C ———
 150 °C - - -

figure 2. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

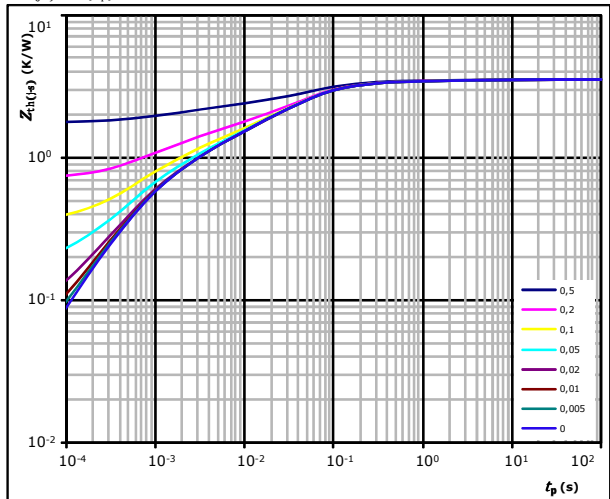

$D = t_p / T$
 $R_{th(j-s)} = 3,50 \text{ K/W}$
 FWD thermal model values


R (K/W)	τ (s)
8,03E-02	7,23E+00
2,34E-01	4,70E-01
1,33E+00	6,36E-02
7,92E-01	2,24E-02
5,71E-01	3,34E-03
4,85E-01	7,05E-04

Thermistor Characteristics

figure 1. Thermistor

Typical NTC characteristic as a function of temperature

$$R = f(T)$$

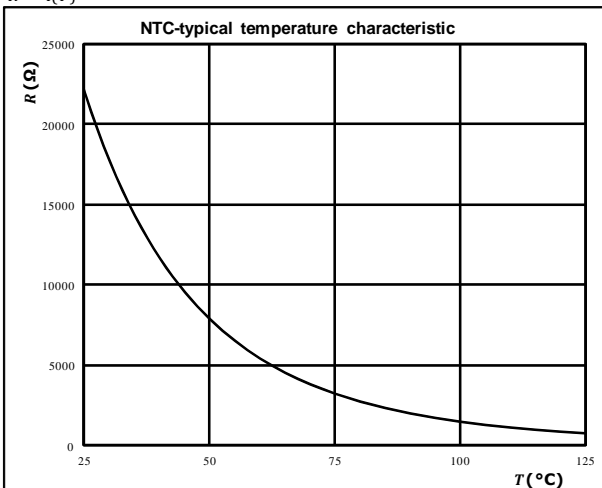




Inverter Switching Characteristics

figure 1. IGBT

Typical switching energy losses as a function of collector current

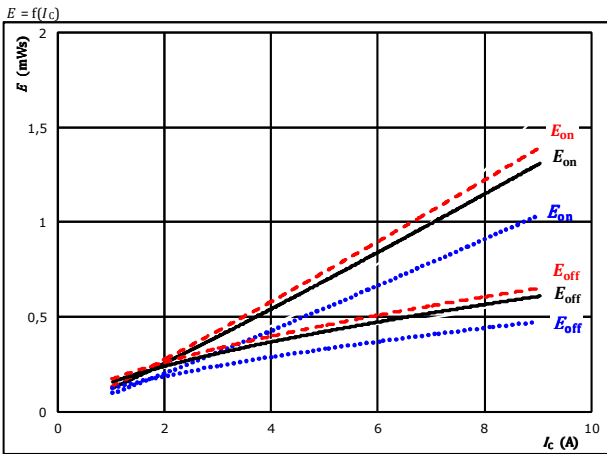


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 64$ Ω
 $R_{goff} = 64$ Ω

T_j : 25 °C (dotted blue), 125 °C (solid black), 150 °C (dashed red)

figure 2. IGBT

Typical switching energy losses as a function of gate resistor

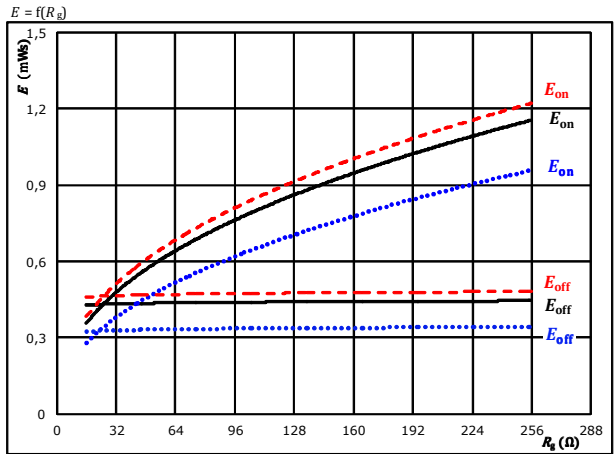


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 5$ A

T_j : 25 °C (dotted blue), 125 °C (solid black), 150 °C (dashed red)

figure 3. FWD

Typical reverse recovered energy loss as a function of collector current

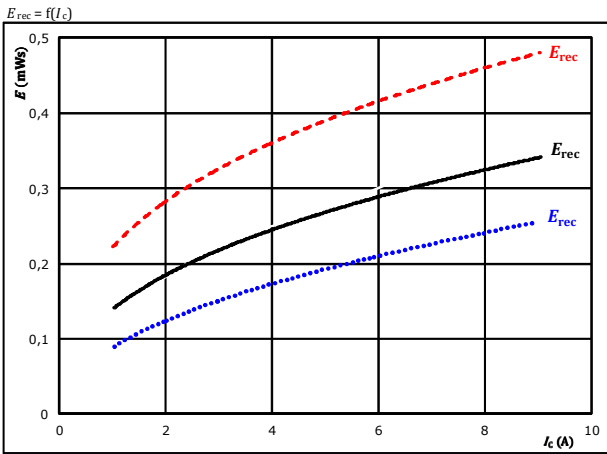


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 64$ Ω

T_j : 25 °C (dotted blue), 125 °C (solid black), 150 °C (dashed red)

figure 4. FWD

Typical reverse recovered energy loss as a function of gate resistor

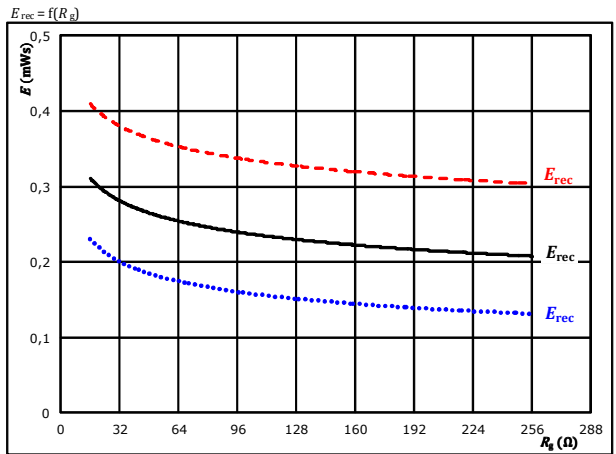

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 5$ A

T_j : 25 °C (dotted blue), 125 °C (solid black), 150 °C (dashed red)




Inverter Switching Characteristics

figure 5. IGBT

Typical switching times as a function of collector current

$$t = f(I_c)$$

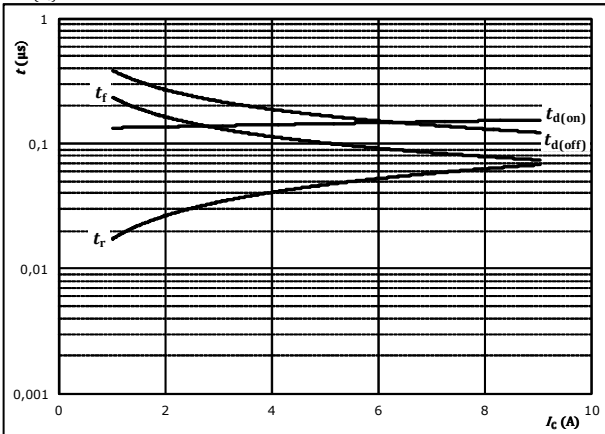


With an inductive load at

$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$R_{gon} =$	64	Ω
$R_{goff} =$	64	Ω

figure 6. IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

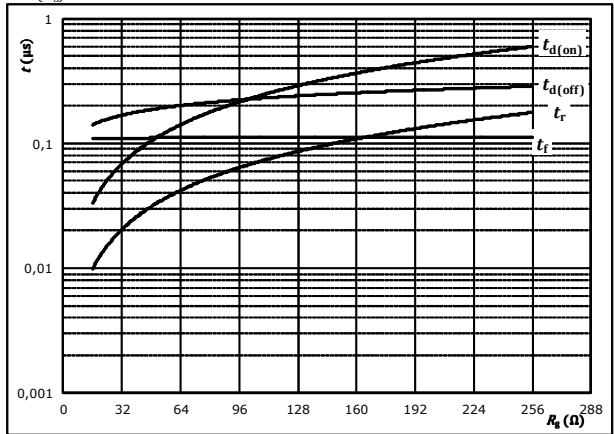


With an inductive load at

$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$I_c =$	5	A

figure 7. FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_c)$$

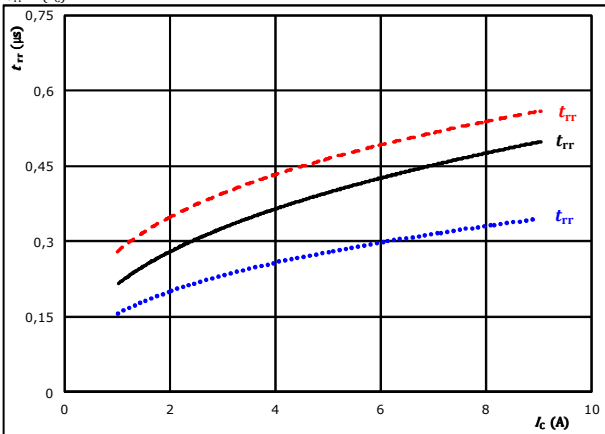


At	$V_{CE} =$	600	V	$T_j:$	25 °C
	$V_{GE} =$	±15	V		125 °C	————
	$R_{gon} =$	64	Ω		150 °C	- - - -

figure 8. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

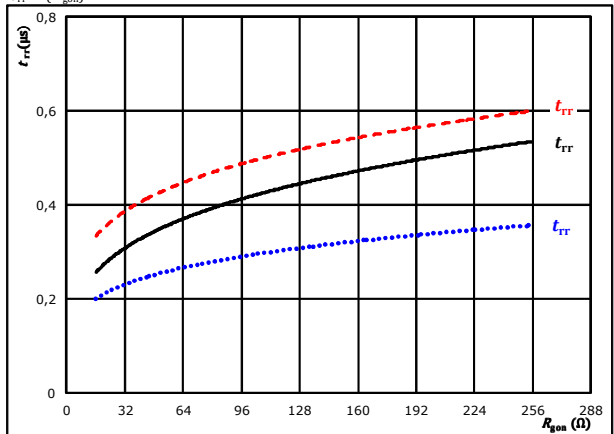

At	$V_{CE} =$	600	V	$T_j:$	25 °C
	$V_{GE} =$	±15	V		125 °C	————
	$I_c =$	5	A		150 °C	- - - -



Inverter Switching Characteristics

figure 9. FWD

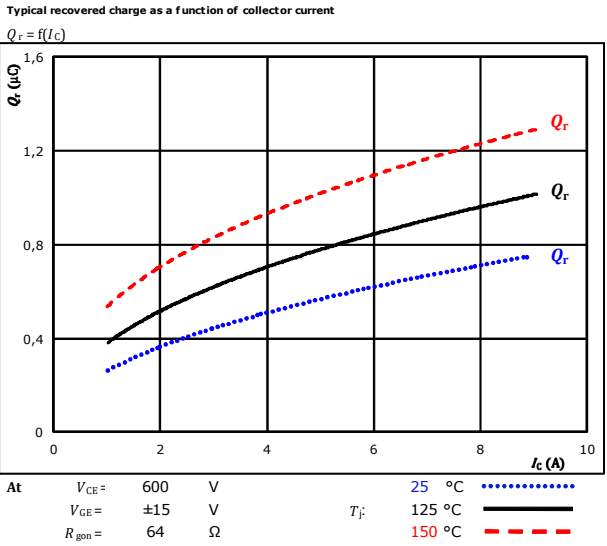


figure 10. FWD

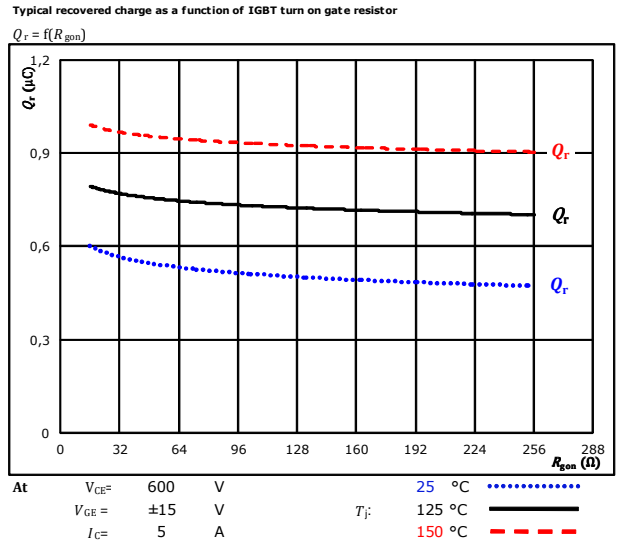


figure 11. FWD


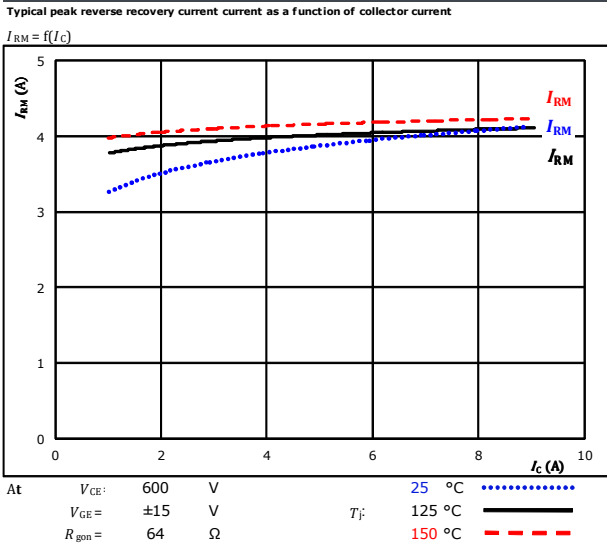


figure 12. FWD



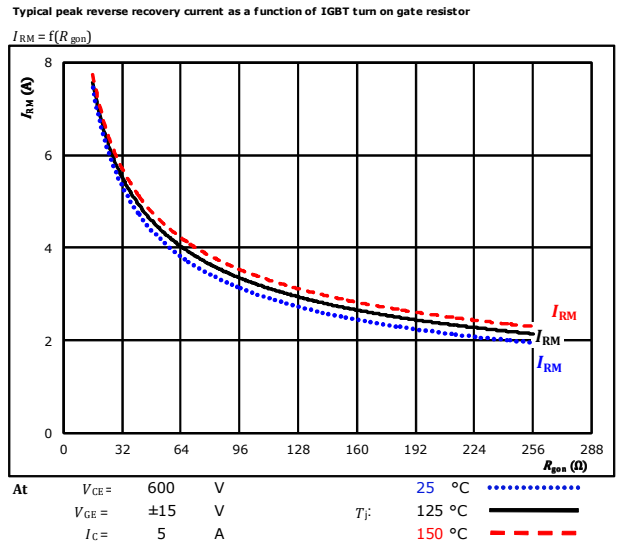

Vincotech


10-FZ12PMA005M7-P848A28
10-F012PMA005M7-P848A29
 datasheet

Inverter Switching Characteristics

figure 13. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current

$$di_f/dt, di_{rr}/dt = f(I_c)$$

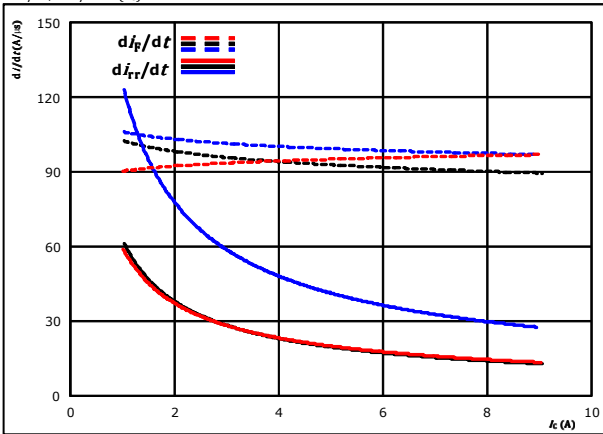


At $V_{CE} = 600$ V $T_j = 25$ °C
 $V_{GE} = \pm 15$ V $T_j = 125$ °C ———
 $R_{gpn} = 64$ Ω $T_j = 150$ °C - - - - -

figure 14. FWD

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$$di_f/dt, di_{rr}/dt = f(R_{gpn})$$

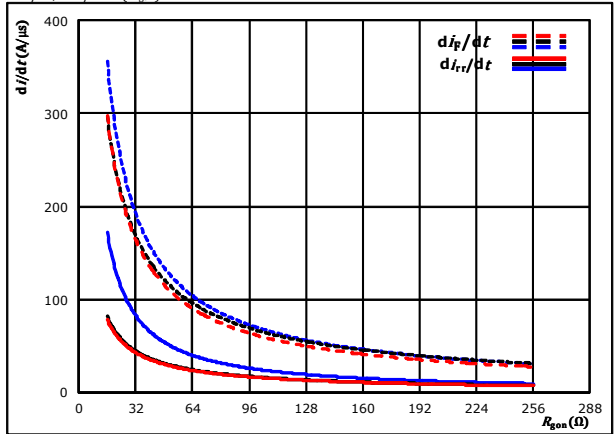


At $V_{CE} = 600$ V $T_j = 25$ °C
 $V_{GE} = \pm 15$ V $T_j = 125$ °C ———
 $I_c = 5$ A $T_j = 150$ °C - - - - -

figure 15. IGBT

Reverse bias safe operating area

$$I_c = f(V_{CE})$$

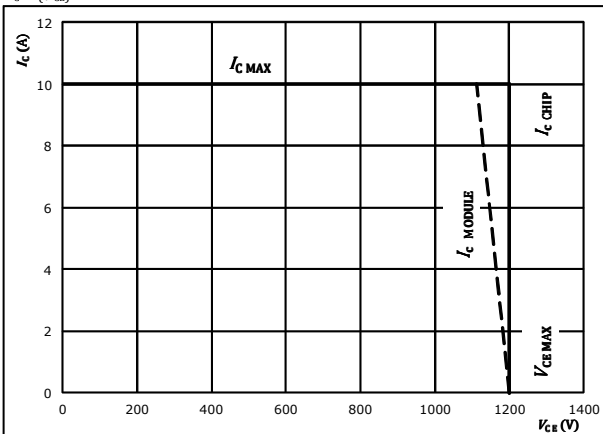

At $T_j = 175$ °C
 $R_{gpn} = 64$ Ω
 $R_{goff} = 64$ Ω




Inverter Switching Definitions

General conditions

T_j	=	125 °C
R_{gon}	=	64 Ω
R_{goff}	=	64 Ω

figure 1. IGBT


Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

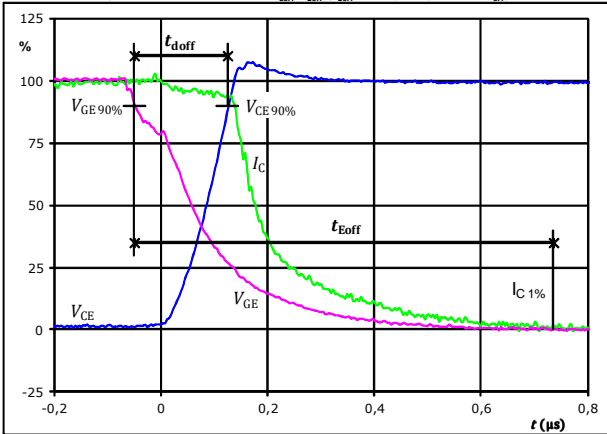

$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_{doff} =$	0,176	μs
$t_{Eoff} =$	0,786	μs

figure 2. IGBT


Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

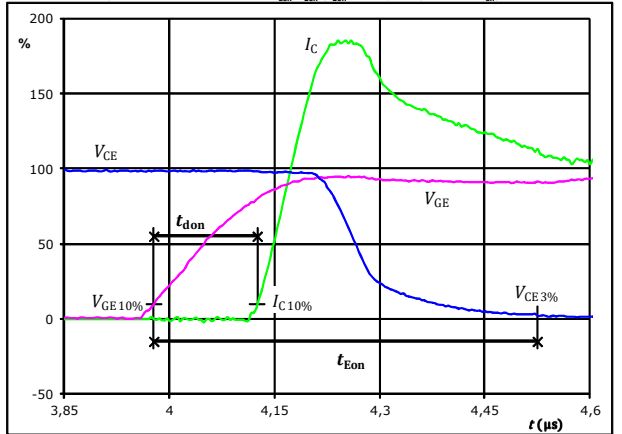

$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_{don} =$	0,149	μs
$t_{Eon} =$	0,547	μs

figure 3. IGBT


Turn-off Switching Waveforms & definition of t_f

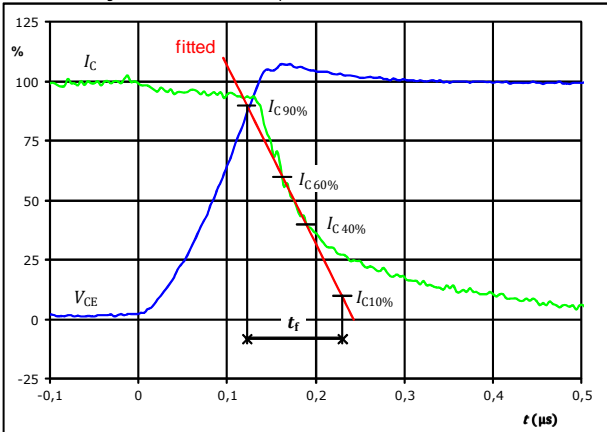

$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_f =$	0,115	μs

figure 4. IGBT

Turn-on Switching Waveforms & definition of t_r

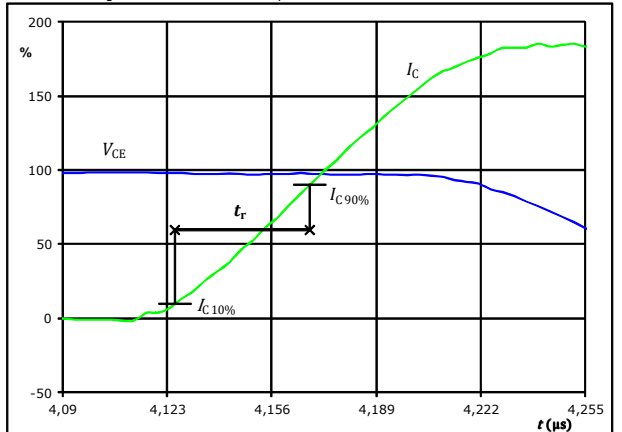


$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_r =$	0,043	μs



Vincotech


Inverter Switching Characteristics

figure 5. IGBT

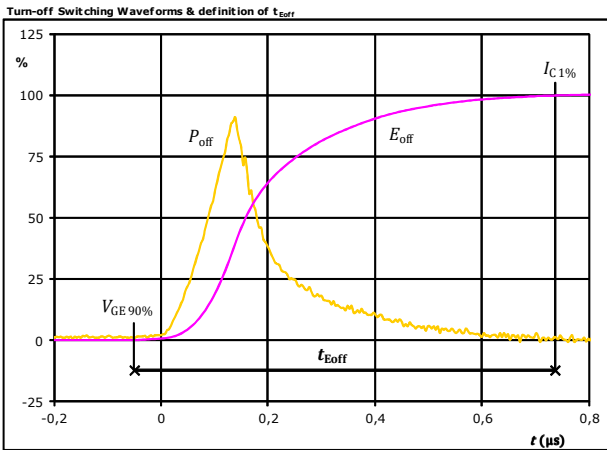


$P_{off}(100\%) =$	3,01	kW
$E_{off}(100\%) =$	0,44	mJ
$t_{Eoff} =$	0,79	μs

figure 6. IGBT

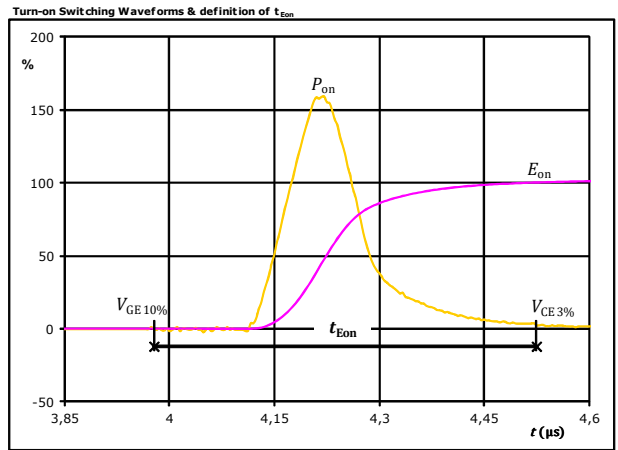

$P_{on}(100\%) =$	3,01	kW
$E_{on}(100\%) =$	0,60	mJ
$t_{Eon} =$	0,55	μs

figure 7. FWD

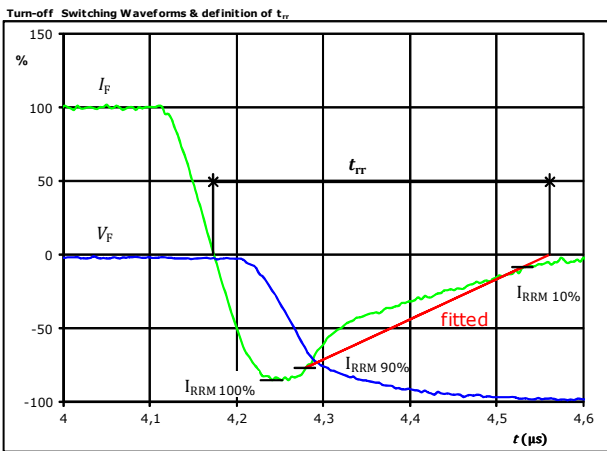

$V_F(100\%) =$	600	V
$I_F(100\%) =$	5	A
$I_{RRM}(100\%) =$	-4	A
$t_{rr} =$	0,387	μs




Vincotech

10-FZ12PMA005M7-P848A28
10-F012PMA005M7-P848A29
 datasheet


Inverter Switching Characteristics

figure 8. FWD

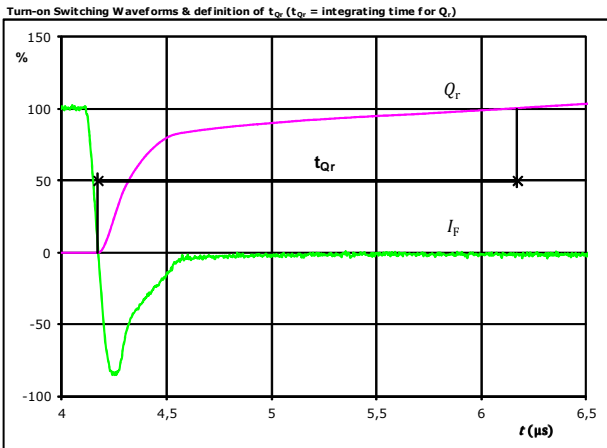

I_F (100%) =	5	A
Q_r (100%) =	0,87	μC
t_{Qr} =	2,00	μs

figure 9. FWD

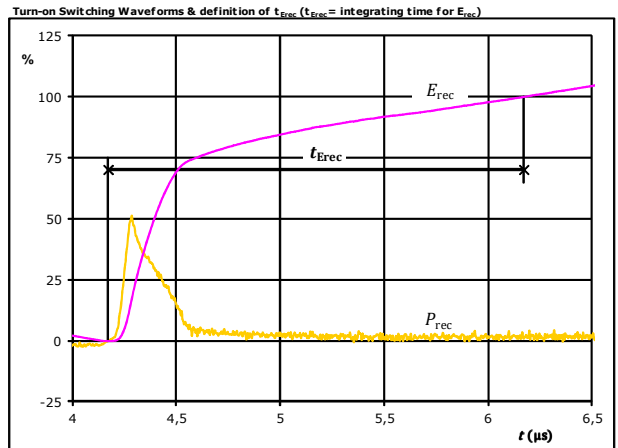


P_{rec} (100%) =	3,01	kW
E_{rec} (100%) =	0,33	mJ
t_{Erec} =	2,00	μs



Brake Switching Characteristics

figure 1. IGBT

Typical switching energy losses as a function of collector current

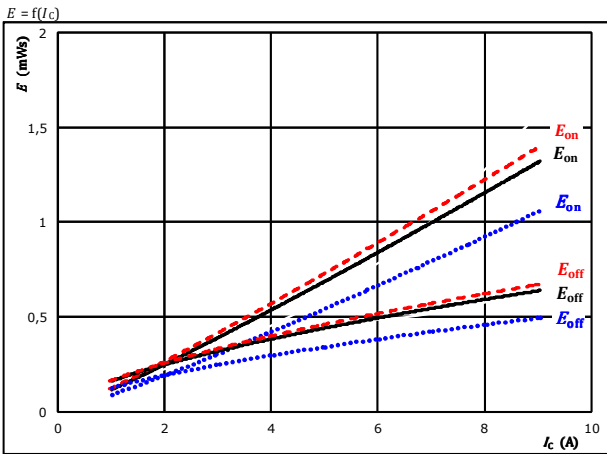


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = 15/0$ V
 $R_{gon} = 64$ Ω
 $R_{goff} = 64$ Ω

T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)

figure 2. IGBT

Typical switching energy losses as a function of gate resistor

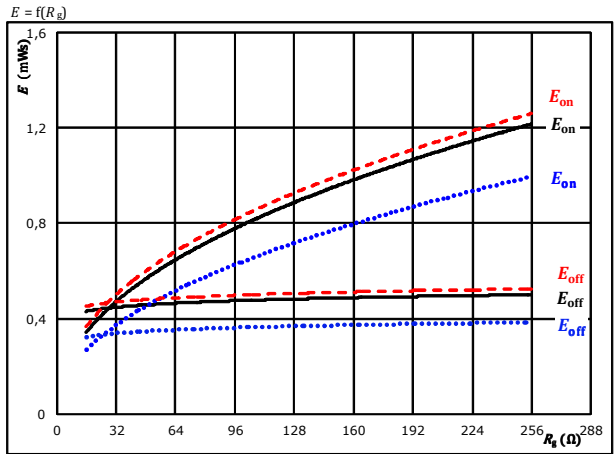


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = 15/0$ V
 $I_C = 5$ A

T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)

figure 3. FWD

Typical reverse recovered energy loss as a function of collector current

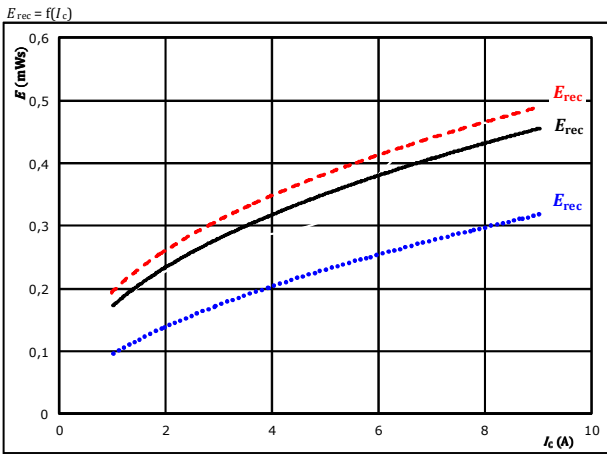


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = 15/0$ V
 $R_{gon} = 64$ Ω

T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)

figure 4. FWD

Typical reverse recovered energy loss as a function of gate resistor

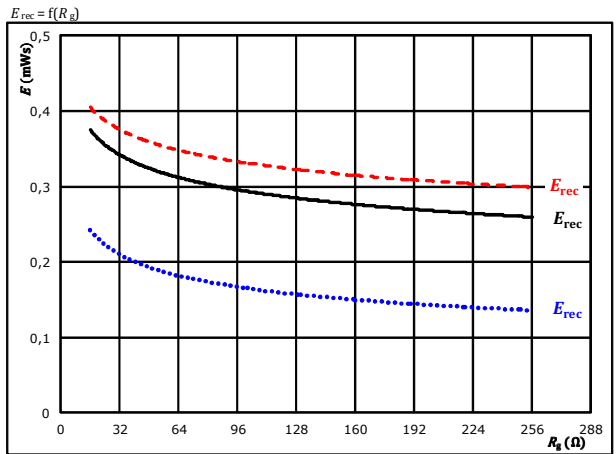

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = 15/0$ V
 $I_C = 5$ A

T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)



Brake Switching Characteristics

figure 5. IGBT
 Typical switching times as a function of collector current

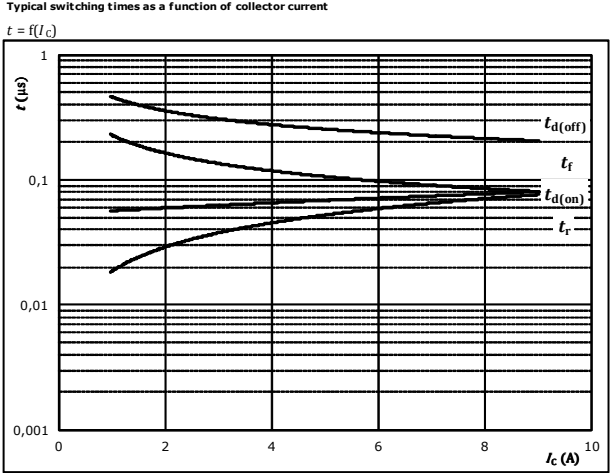


figure 6. IGBT
 Typical switching times as a function of gate resistor

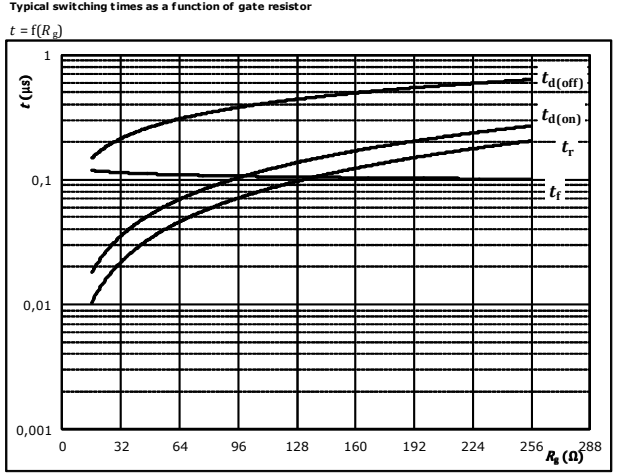


figure 7. FWD
 Typical reverse recovery time as a function of collector current


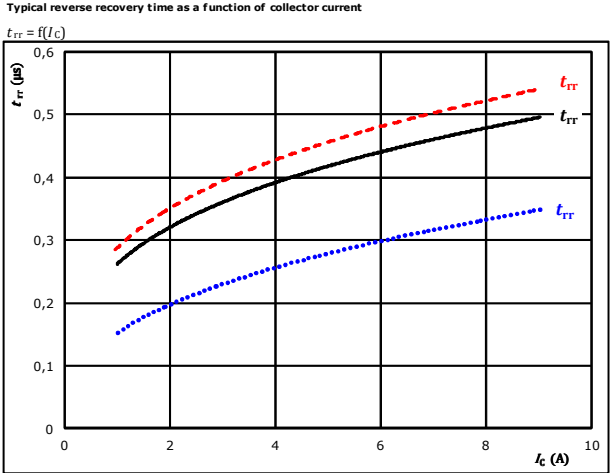


figure 8. FWD
 Typical reverse recovery time as a function of IGBT turn on gate resistor



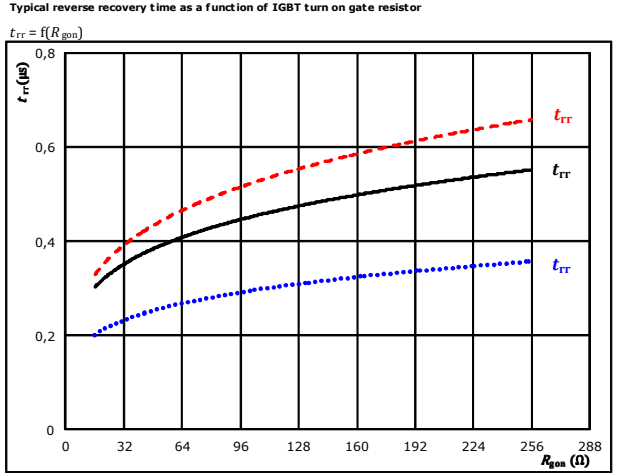


Brake Switching Characteristics

figure 9. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

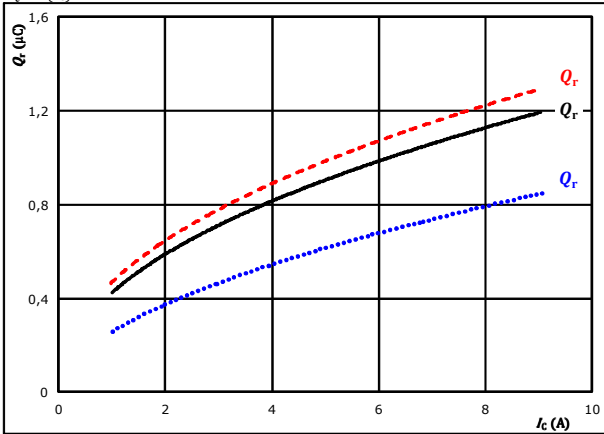


At $V_{CE} = 600$ V $T_j = 25$ °C
 $V_{GE} = 15/0$ V $T_j = 125$ °C ———
 $R_{gpn} = 64$ Ω $T_j = 150$ °C - - - - -

figure 10. FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gpn})$$

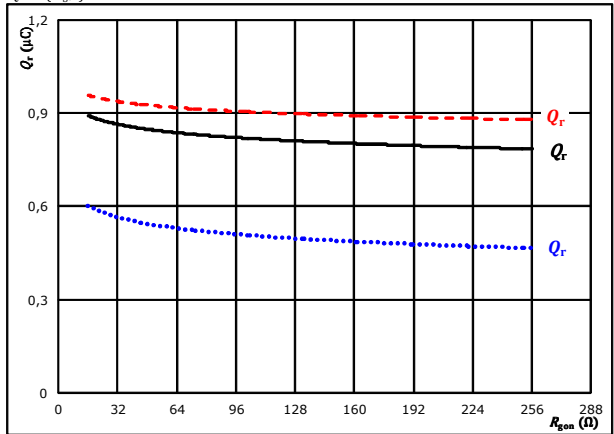


At $V_{CE} = 600$ V $T_j = 25$ °C
 $V_{GE} = 15/0$ V $T_j = 125$ °C ———
 $I_c = 5$ A $T_j = 150$ °C - - - - -

figure 11. FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

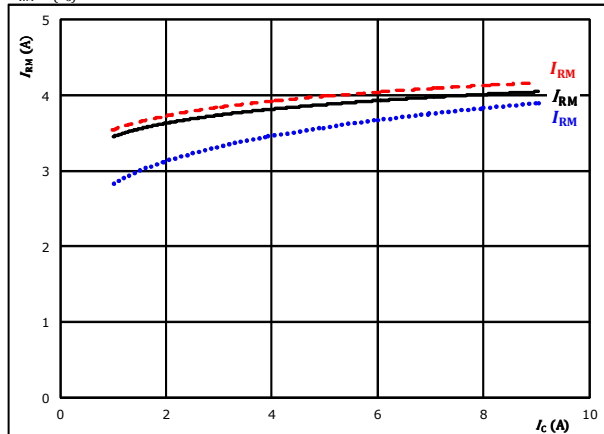


At $V_{CE} = 600$ V $T_j = 25$ °C
 $V_{GE} = 15/0$ V $T_j = 125$ °C ———
 $R_{gpn} = 64$ Ω $T_j = 150$ °C - - - - -

figure 12. FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gpn})$$

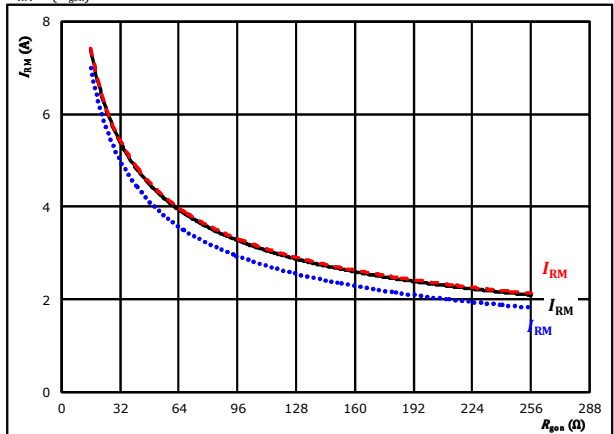


At $V_{CE} = 600$ V $T_j = 25$ °C
 $V_{GE} = 15/0$ V $T_j = 125$ °C ———
 $I_c = 5$ A $T_j = 150$ °C - - - - -



Brake Switching Characteristics

figure 13. FWD


Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_{rr}/dt = f(I_c)$

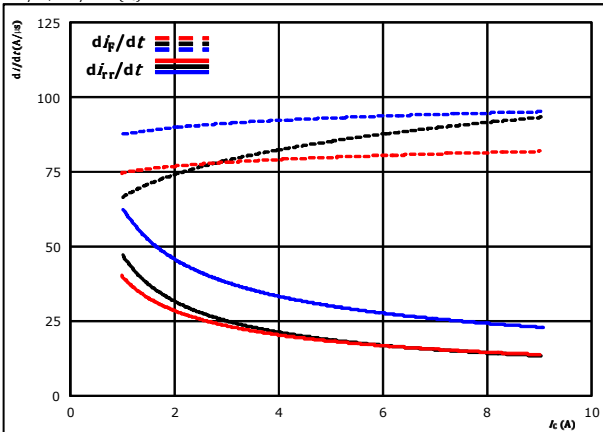

At $V_{CE} = 600$ V $T_j = 25$ °C (dotted blue)
 $V_{GE} = 15/0$ V $T_j = 125$ °C (solid black)
 $R_{gpn} = 64$ Ω $T_j = 150$ °C (dashed red)

figure 14. FWD


Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{gpn})$

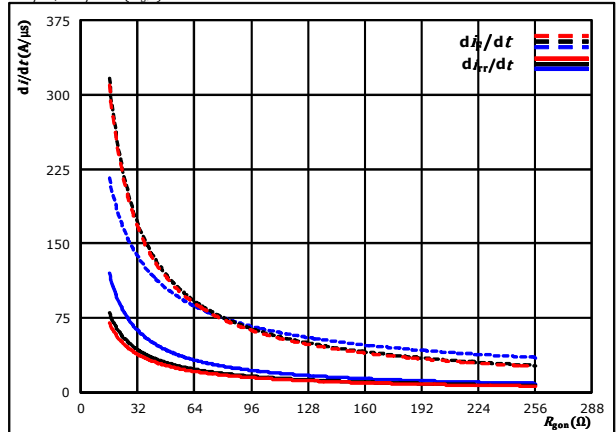

At $V_{CE} = 600$ V $T_j = 25$ °C (dotted blue)
 $V_{GE} = 15/0$ V $T_j = 125$ °C (solid black)
 $I_c = 5$ A $T_j = 150$ °C (dashed red)

figure 15. IGBT

Reverse bias safe operating area
 $I_c = f(V_{CB})$

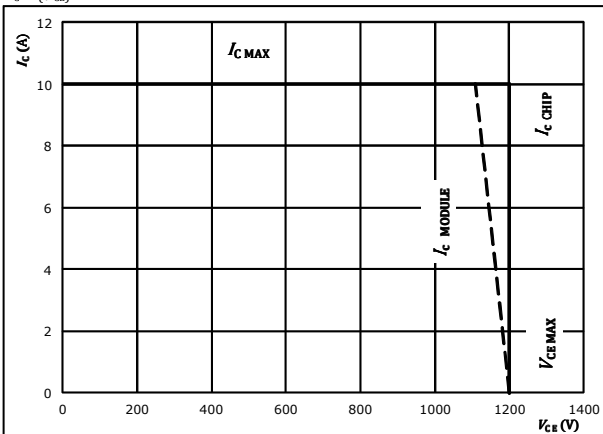

At $T_j = 175$ °C
 $R_{gpn} = 64$ Ω
 $R_{goff} = 64$ Ω




Brake Switching Definitions

General conditions

T_j	=	125 °C
R_{gon}	=	64 Ω
R_{goff}	=	64 Ω

figure 1. IGBT


Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

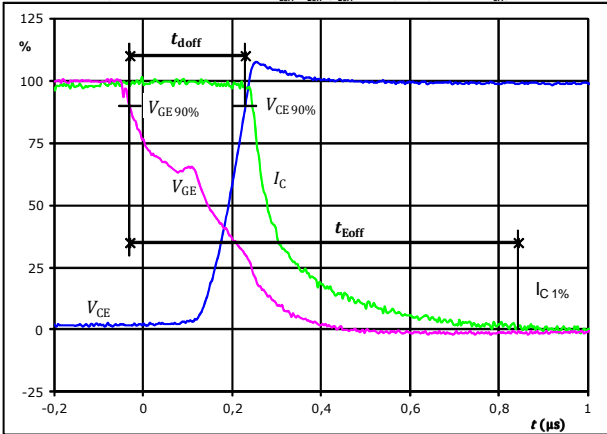

$V_{GE}(0\%) =$	0	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_{doff} =$	0,262	μs
$t_{Eoff} =$	0,874	μs

figure 2. IGBT


Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

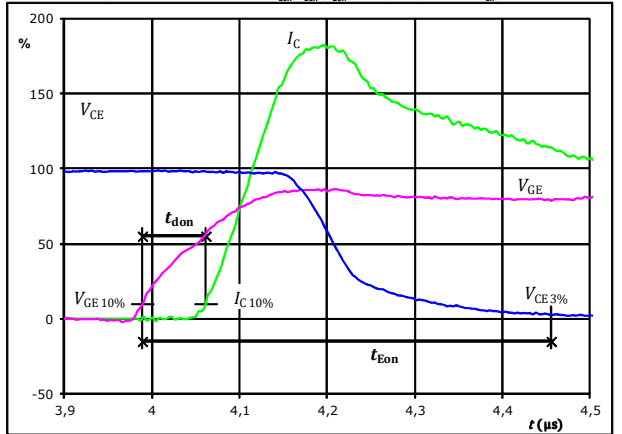

$V_{GE}(0\%) =$	0	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_{don} =$	0,073	μs
$t_{Eon} =$	0,467	μs

figure 3. IGBT


Turn-off Switching Waveforms & definition of t_f

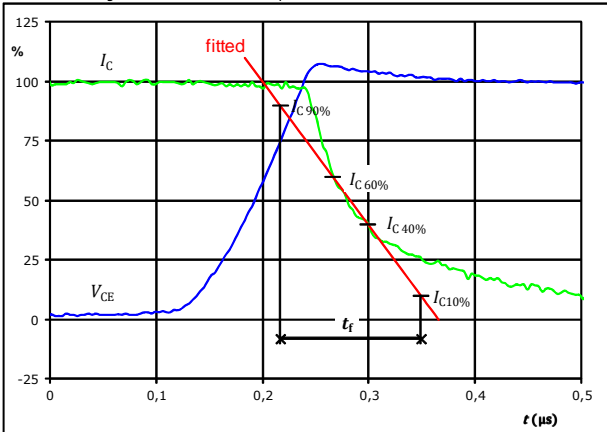

$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_f =$	0,114	μs

figure 4. IGBT

Turn-on Switching Waveforms & definition of t_r

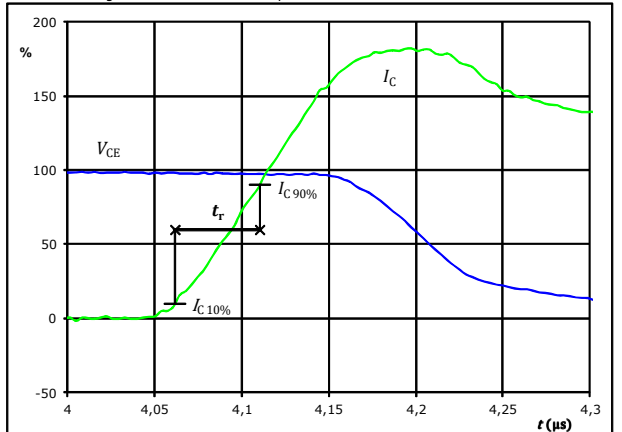


$V_C(100\%) =$	600	V
$I_C(100\%) =$	5	A
$t_r =$	0,048	μs



Vincotech


Brake Switching Characteristics

figure 5. IGBT

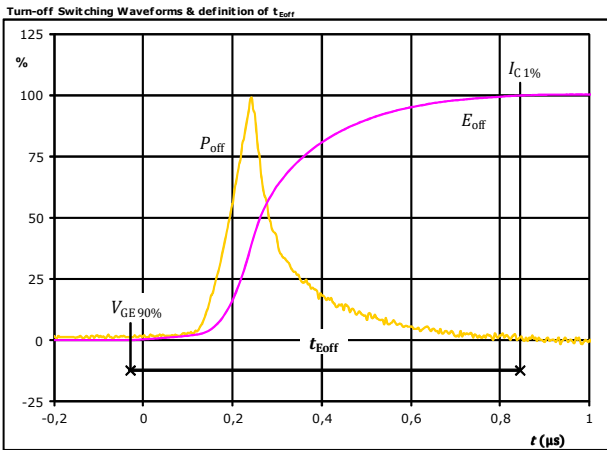


$P_{\text{off}}(100\%) = 3,03$ kW
 $E_{\text{off}}(100\%) = 0,45$ mJ
 $t_{\text{Eoff}} = 0,87$ μs

figure 6. IGBT

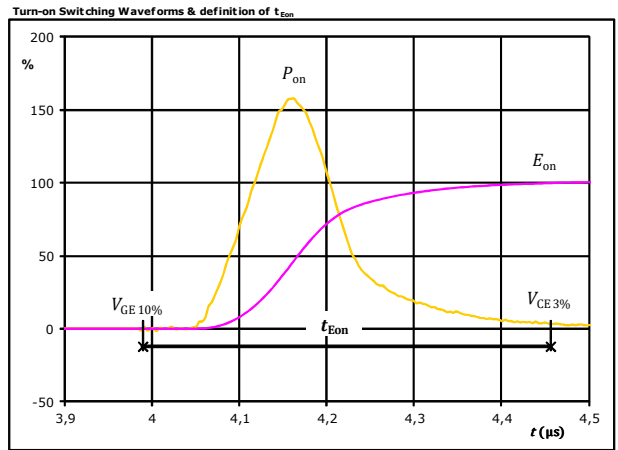

$P_{\text{on}}(100\%) = 3,03$ kW
 $E_{\text{on}}(100\%) = 0,61$ mJ
 $t_{\text{Eon}} = 0,47$ μs

figure 7. FWD

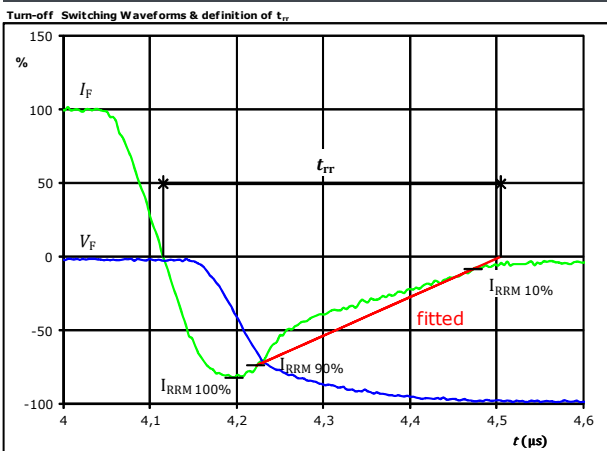

$V_F(100\%) = 600$ V
 $I_F(100\%) = 5$ A
 $I_{\text{RRM}}(100\%) = -4$ A
 $t_{\text{rr}} = 0,386$ μs




Vincotech

10-FZ12PMA005M7-P848A28
10-F012PMA005M7-P848A29
 datasheet


Brake Switching Characteristics

figure 8. FWD

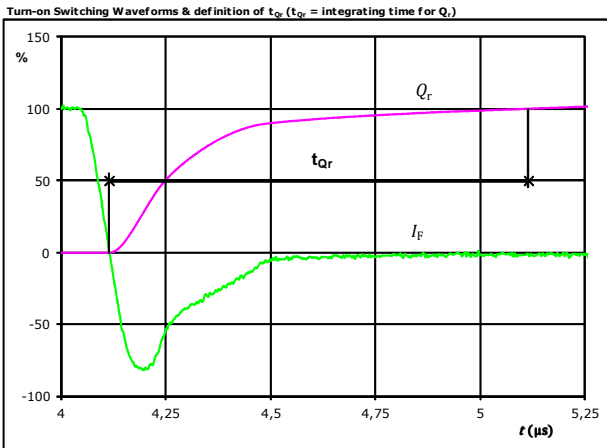


I_F (100%) =	5	A
Q_r (100%) =	0,83	μC
t_{Qr} =	1,00	μs


figure 9. FWD

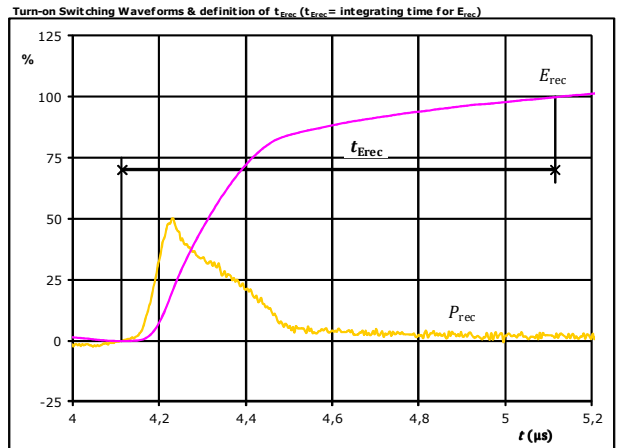

P_{rec} (100%) =	3,03	kW
E_{rec} (100%) =	0,31	mJ
t_{Erec} =	1,00	μs




Ordering Code & Marking						
Version			Ordering Code			
without thermal paste 12 mm housing with solder pins			10-FZ12PMA005M7-P848A28			
without thermal paste 17 mm housing with solder pins			10-F012PMA005M7-P848A29			
NN-NNNNNNNNNNNN TTTTWW WWYY UL VIN LLLLL SSSS						
Text	Name		Date code	UL & VIN	Lot	Serial
	NN-NNNNNNNNNNNNNN-TTTTWW		WWYY	UL VIN	LLLLL	SSSS
Datamatrix	Type&Ver	Lot number	Serial	Date code		
	TTTTWW	LLLLL	SSSS	WWYY		

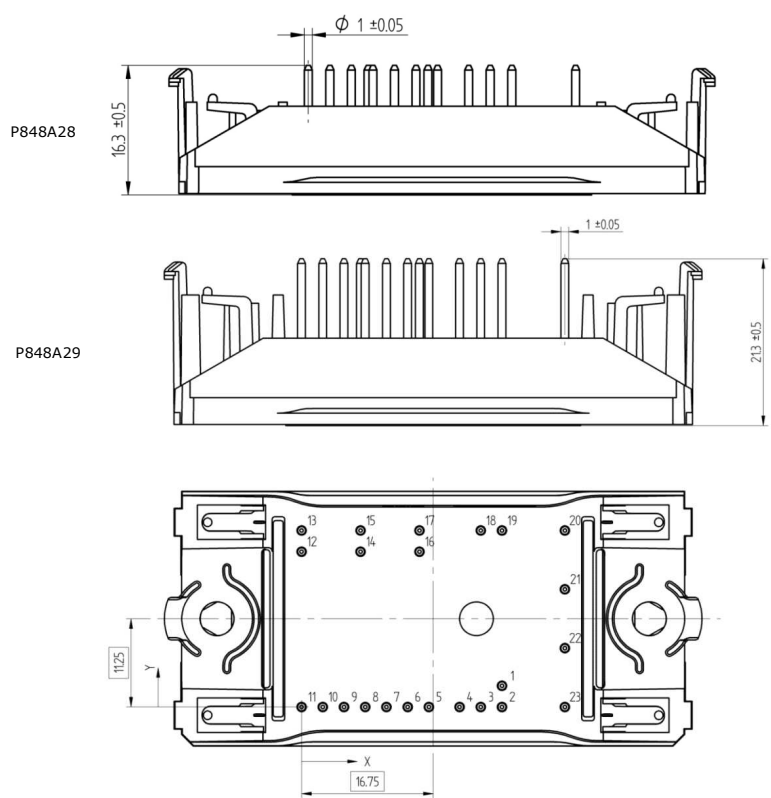Pin table				Outline	
Pin	X	Y	Function	 <p>P848A28</p> <p>P848A29</p> <p>Tolerance of pinpositions: ±0.5mm at the end of pins Dimension of coordinate axis is only offset without tolerance</p>	
1	25,5	2,7	Therm1		
2	25,5	0	Therm2		
3	22,8	0	DC-Rect		
4	20,1	0	G27		
5	16,2	0	DC-Br		
6	13,5	0	G15		
7	10,8	0	DC-3		
8	8,1	0	G13		
9	5,4	0	DC-2		
10	2,7	0	G11		
11	0	0	DC-1		
12	0	19,8	G12		
13	0	22,5	Ph1		
14	7,5	19,8	G14		
15	7,5	22,5	Ph2		
16	15	19,8	G16		
17	15	22,5	Ph3		
18	22,8	22,5	DC+Inv		
19	25,5	22,5	DC+Rect		
20	33,5	22,5	Br		
21	33,5	15	ACIn1		
22	33,5	7,5	ACIn2		
23	33,5	0	ACIn3		



Vincotech

Pinout

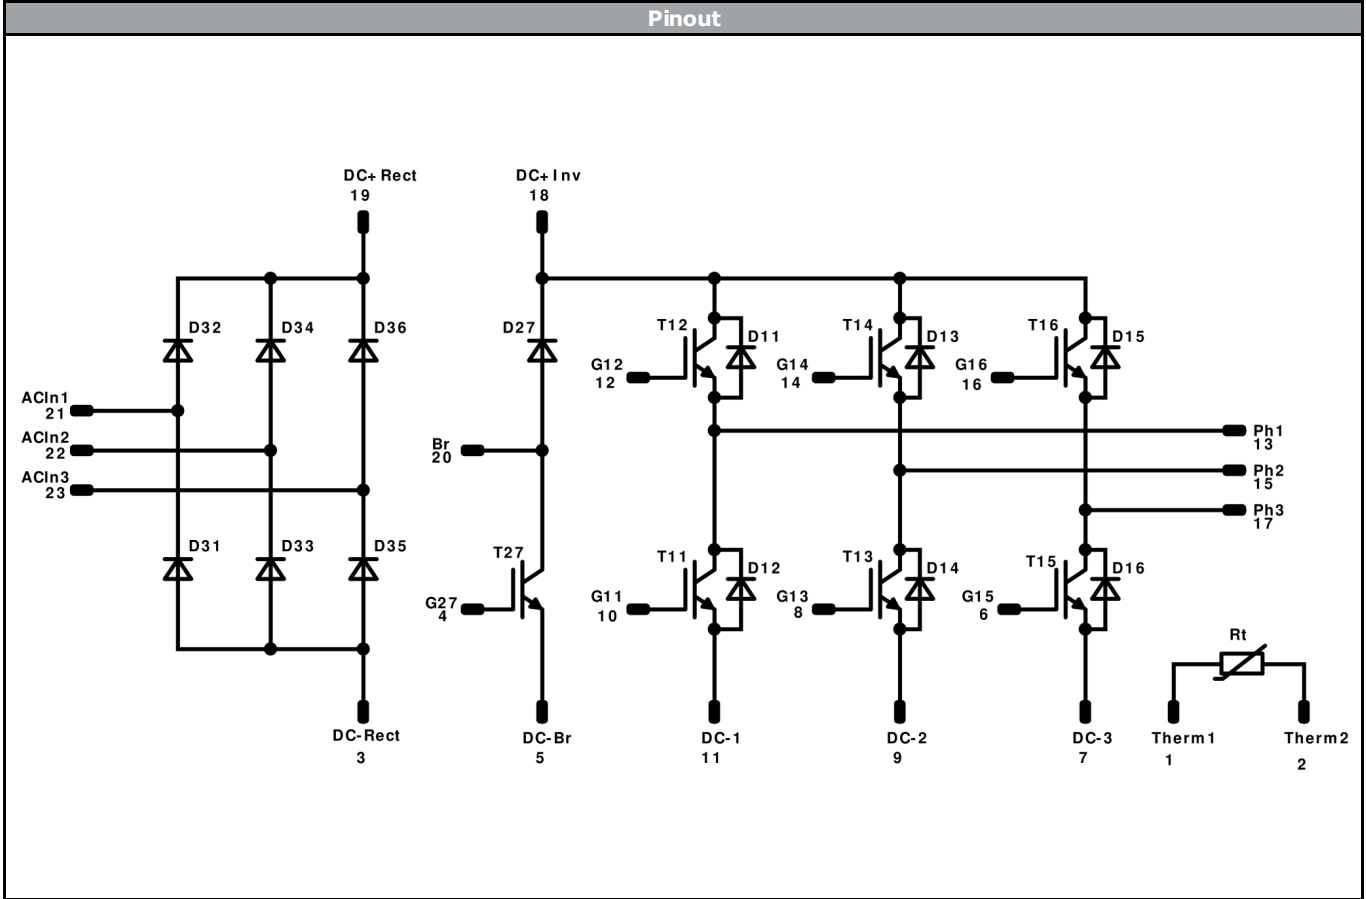

Identification

ID	Component	Voltage	Current	Function	Comment
D31, D32, D33, D34, D35, D36	Rectifier	1600 V	25 A	Rectifier Diode	
T11, T12, T13, T14, T15, T16	IGBT	1200 V	5 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1200 V	5 A	Inverter Diode	
T27	IGBT	1200 V	5 A	Brake Switch	
D27	FWD	1200 V	5 A	Brake Diode	
Rt	NTC			Thermistor	




Vincotech

Packaging instruction			
Standard packaging quantity (SPQ) 135	>SPQ	Standard	<SPQ Sample

Handling instruction
Handling instructions for <i>flow 0</i> packages see vincotech.com website.

Package data
Package data for <i>flow 0</i> packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-Fx12PMA005M7-P848A2x-D1-14	17 Nov. 2017		

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.