



flowMNPC E2

1200 V / 16 mΩ

Topology features

- Kelvin Emitter for improved switching performance
- Temperature sensor
- Mixed Voltage Neutral Point Clamped Topology (T-Type)

Component features

- High Blocking Voltage with low drain source on state resistance
- High speed SiC-MOSFET technology
- Resistant to Latch-up

Housing features

- Base isolation: Al₂O₃
- Convex shaped substrate for superior thermal contact
- Compact housing
- CTI600 housing material
- Thermo-mechanical push-and-pull force relief
- Press-fit pin
- Reliable cold welding connection


Target applications

- Charging Stations
- Power Supply
- Solar Inverters
- UPS


Types

- 10-EY12NMA016ME-LS28F16T

flow E2 12 mm housing



Schematic

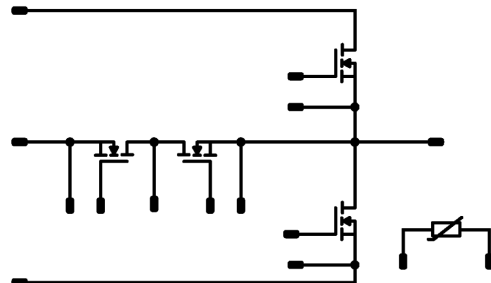



Vincotech

10-EY12NMA016ME-LS28F16T
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Buck Switch				
Drain-source voltage	V_{DSS}		1200	V
Drain current (DC current)	I_D	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	65	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	240	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	106	W
Gate-source voltage	V_{GSS}		-4 / 15	V
		dynamic	-8 / 19	
Maximum Junction Temperature	T_{jmax}		175	°C

Boost Switch

Drain-source voltage	V_{DSS}		650	V
Drain current (DC current)	I_D	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	78	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	396	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	148	W
Gate-source voltage	V_{GSS}		-4 / 15	V
		dynamic	-8 / 19	
Maximum Junction Temperature	T_{jmax}		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			9,08	mm
Comparative Tracking Index	CTI		≥ 600	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		

Buck Switch

Static

Drain-source on-state resistance ⁽¹⁾	$r_{DS(on)}$		15		80	25 175	11,2	16 28,8	20,8	mΩ
Gate-source threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$			0,023	25	1,8	2,5	3,6	V
Gate to Source Leakage Current	I_{GSS}		15	0		25		20	500	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	1200		25		2	38	μA
Internal gate resistance	r_g							0,85		Ω
Gate charge	Q_g		-4/15	800	80	25		236		nC
Short-circuit input capacitance	C_{iss}	$f = 100$ kHz	0	1000	0	25		6714		pF
Short-circuit output capacitance	C_{oss}							258		
Reverse transfer capacitance	C_{rss}							16		
Diode forward voltage	V_{SD}		0		40	25		4,6		V

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,9		K/W
--	---------------	---------------------------------------	--	--	--	--	--	-----	--	-----



Vincotech

10-EY12NMA016ME-LS28F16T
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		
Dynamic										
Turn-on delay time	$t_{d(on)}$	$R_{gon} = 16 \Omega$ $R_{goff} = 16 \Omega$	0/15	350	65	25		51,82		ns
						125		42,35		
						150		40,49		
Rise time	t_r					25		38,52		
						125		33,54		ns
						150		32,69		
Turn-off delay time	$t_{d(off)}$					25		249,01		
						125		283,97		ns
						150		293,29		
Fall time	t_f					25		19,57		
						125		21,59		ns
						150		21,93		
Turn-on energy (per pulse)	E_{on}	$Q_{rFWD}=0,29 \mu C$ $Q_{rFWD}=0,355 \mu C$ $Q_{rFWD}=0,399 \mu C$				25		1,09		mWs
						125		0,927		
						150		0,917		
Turn-off energy (per pulse)	E_{off}					25		0,936		
						125		1,01		mWs
						150		1,04		
Peak recovery current	I_{RRM}					25		17,48		A
						125		20,58		
						150		22,2		
Reverse recovery time	t_{rr}					25		41,7		ns
						125		41,89		
						150		42,64		
Recovered charge	Q_r	$di/dt=2070 A/\mu s$ $di/dt=2751 A/\mu s$ $di/dt=2914 A/\mu s$				25		0,29		μC
						125		0,355		
						150		0,399		
Reverse recovered energy	E_{rec}					25		0,028		
						125		0,041		mWs
						150		0,048		
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25		1657,39		$A/\mu s$
						125		1828,55		
						150		1879,35		



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		

Boost Switch

Static

Drain-source on-state resistance ⁽¹⁾	$r_{DS(on)}$		15		52,8	25 175		15 20	20	mΩ
Gate-source threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$			0,01452	25	1,8	2,6	3,6	V
Gate to Source Leakage Current	I_{GSS}		15	0		25		30	300	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	650		25		3	96	μA
Internal gate resistance	r_g							1		Ω
Gate charge	Q_g		-4/15	400	52,8	25		189		nC
Short-circuit input capacitance	C_{iss}	$f = 1$ Mhz						4800		pF
Short-circuit output capacitance	C_{oss}		0	600	0	25		300		
Reverse transfer capacitance	C_{rss}							24		
Diode forward voltage	V_{SD}		0		26,4	25		4,8		V

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,64		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

10-EY12NMA016ME-LS28F16T
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		
Dynamic										
Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$	0/15	350	75	25	24,19		ns	
						125	21,45			
						150	21,11			
Rise time	t_r					25	19,52			
						125	16,92		ns	
						150	16,22			
Turn-off delay time	$t_{d(off)}$					25	114,39			
						125	127,75		ns	
						150	131,53			
Fall time	t_f					25	11,21			
						125	12,32		ns	
						150	12,14			
Turn-on energy (per pulse)	E_{on}	$Q_{rFWD}=0,392 \mu C$ $Q_{rFWD}=0,584 \mu C$ $Q_{rFWD}=0,744 \mu C$				25	0,618		mWs	
						125	0,543			
						150	0,553			
Turn-off energy (per pulse)	E_{off}					25	0,605			
						125	0,601		mWs	
						150	0,608			
Peak recovery current	I_{RRM}					25	38,92		A	
						125	43,86			
						150	47,03			
Reverse recovery time	t_{rr}					25	17,87		ns	
						125	26,46			
						150	28,35			
Recovered charge	Q_r	$di/dt=4516 A/\mu s$ $di/dt=4850 A/\mu s$ $di/dt=5052 A/\mu s$				25	0,392		μC	
						125	0,584			
						150	0,744			
Reverse recovered energy	E_{rec}					25	0,038			
						125	0,084		mWs	
						150	0,12			
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25	5823,78		A/ μs	
						125	3695,75			
						150	2756,4			



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit	
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	V_{CE} [V]	V_F [V]	I_D [A]	I_C [A]	I_F [A]		T_j [°C]

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R100	$A_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	P					25		130		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$						4000		K
Vincotech Thermistor Reference									I	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Buck Switch Characteristics

figure 1. MOSFET

Typical output characteristics
 $I_D = f(V_{DS})$

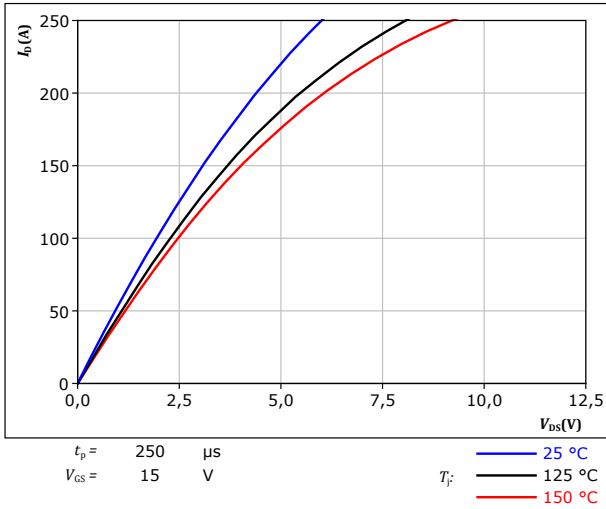


figure 2. MOSFET

Typical output characteristics
 $I_D = f(V_{DS})$

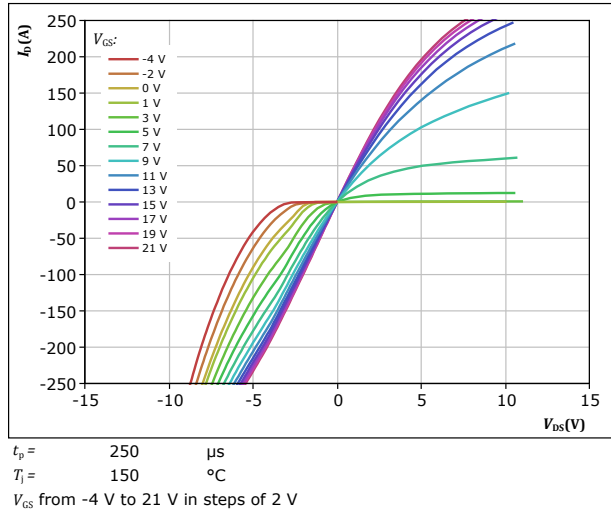


figure 3. MOSFET

Typical transfer characteristics
 $I_D = f(V_{GS})$


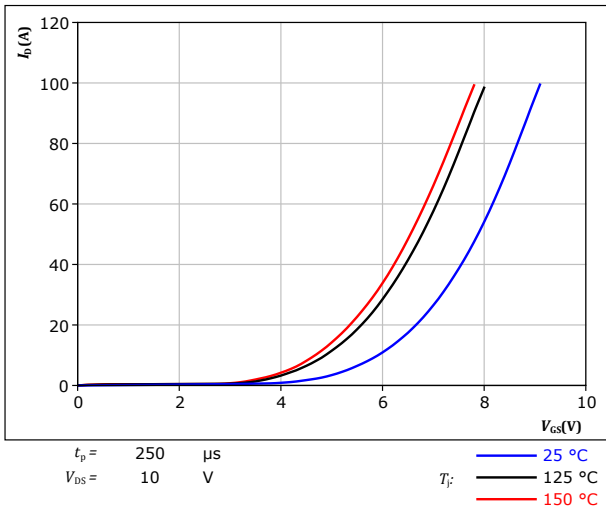


figure 4. MOSFET

Typical reverse drain current characteristics
 $I_{SD} = f(V_{SD})$



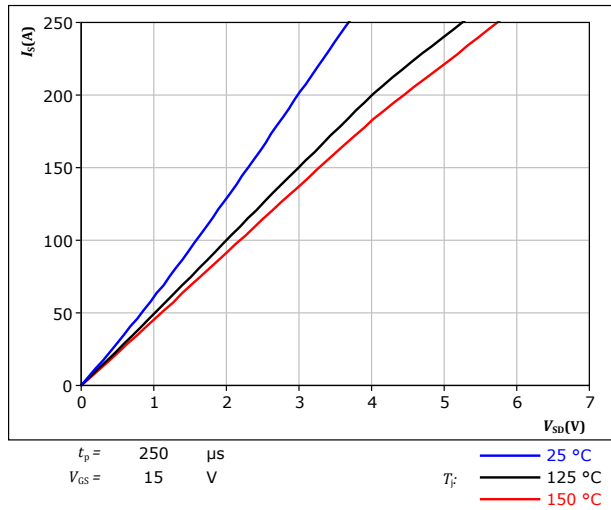


Buck Switch Characteristics

figure 5. MOSFET

Transient thermal impedance as a function of pulse width

$$Z_{th(j-c)} = f(t_p)$$

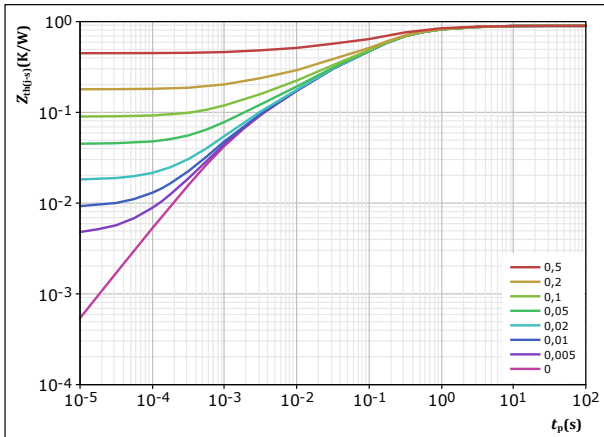

$$D = \frac{t_p}{T}$$

$$R_{th(j-c)} = 0,898 \text{ K/W}$$


MOSFET thermal model values

R (K/W)	τ (s)
5,87E-02	3,51E+00
1,94E-01	5,46E-01
4,24E-01	1,38E-01
1,67E-01	1,40E-02
5,45E-02	1,40E-03

figure 6. MOSFET

Safe operating area

$$I_D = f(V_{DS})$$

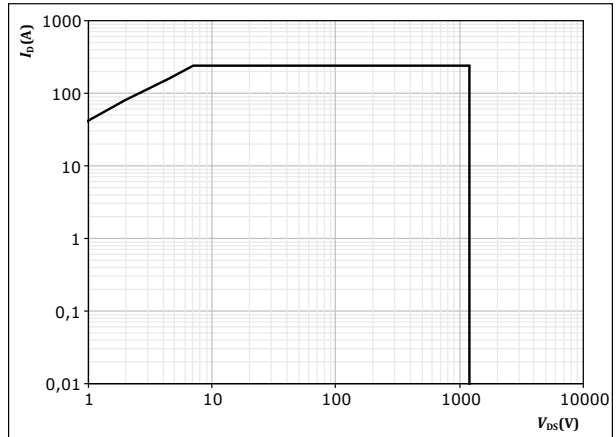

D = single pulse

$$T_s = 80 \text{ } ^\circ\text{C}$$

$$V_{GS} = 15 \text{ V}$$

$$T_i = T_{jmax}$$



Boost Switch Characteristics

figure 7. MOSFET

Typical output characteristics
 $I_D = f(V_{DS})$

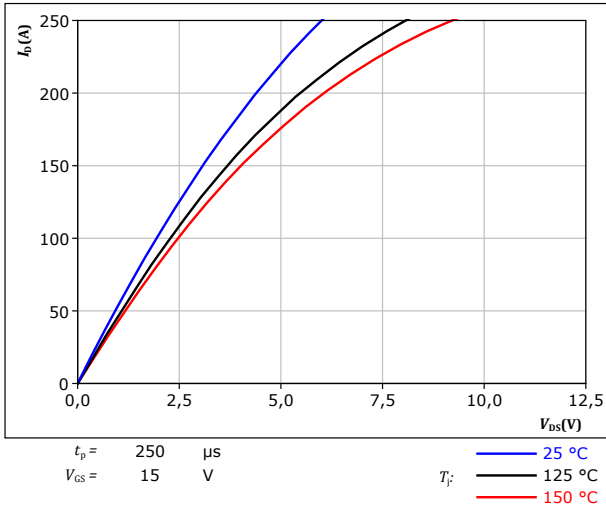


figure 8. MOSFET

Typical output characteristics
 $I_D = f(V_{DS})$

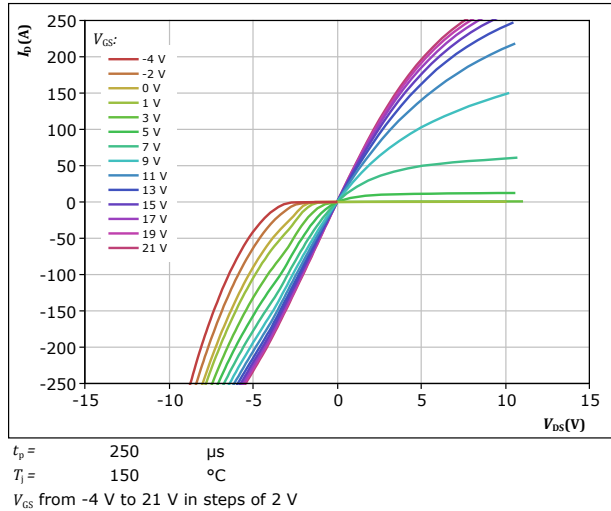


figure 9. MOSFET

Typical transfer characteristics
 $I_D = f(V_{GS})$


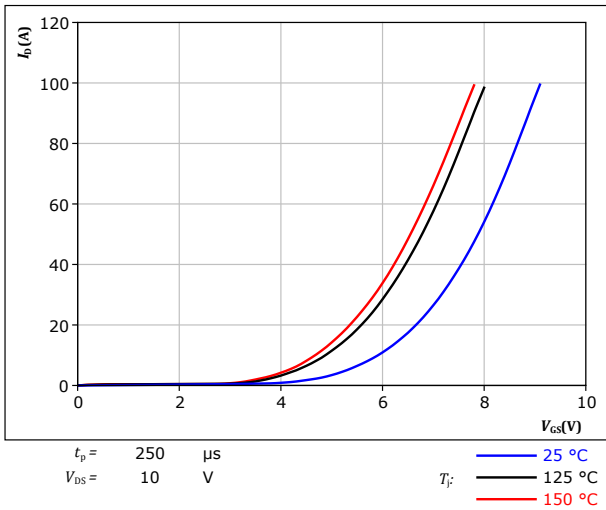


figure 10. MOSFET

Typical reverse drain current characteristics
 $I_{SD} = f(V_{SD})$



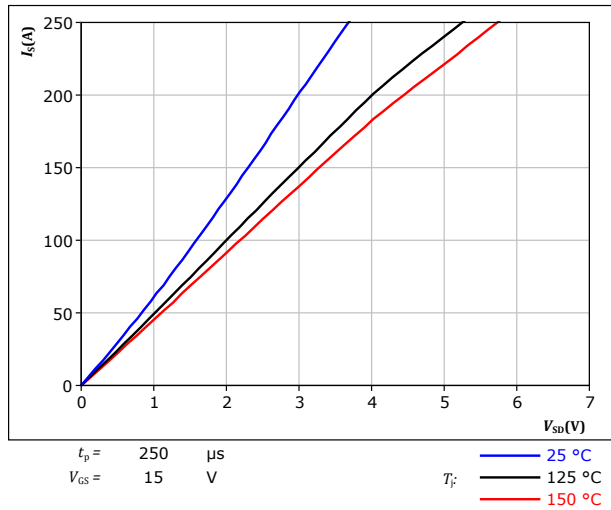


Boost Switch Characteristics

figure 11. MOSFET

Transient thermal impedance as a function of pulse width

$$Z_{th(j-c)} = f(t_p)$$

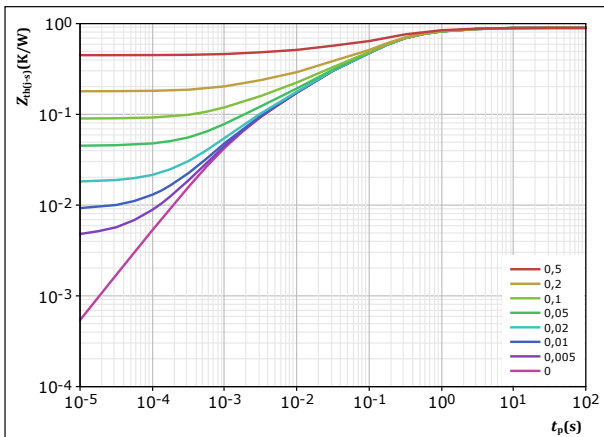

$$D = t_p / T$$

$$R_{th(j-c)} = 0,898 \text{ K/W}$$


MOSFET thermal model values

R (K/W)	τ (s)
5,87E-02	3,51E+00
1,94E-01	5,46E-01
4,24E-01	1,38E-01
1,67E-01	1,40E-02
5,45E-02	1,40E-03

figure 12. MOSFET

Safe operating area

$$I_D = f(V_{DS})$$

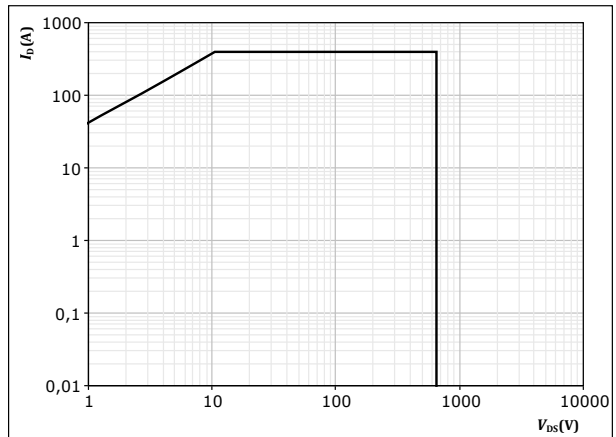

D = single pulse

$$T_c = 80 \text{ } ^\circ\text{C}$$


$$V_{GS} = 15 \text{ V}$$

$$T_j = T_{jmax}$$

figure 13. MOSFET

Gate voltage vs gate charge

$$V_{GS} = f(Q_g)$$

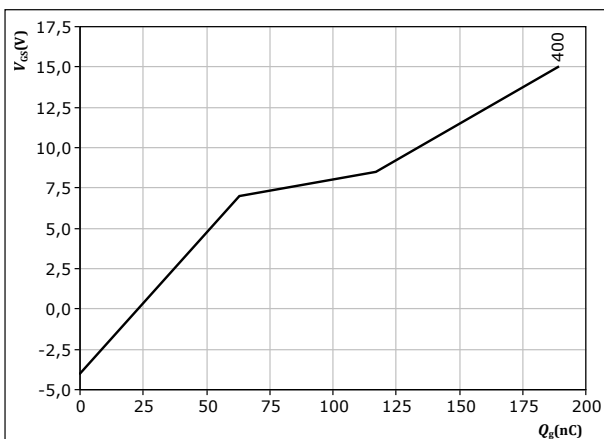

$$I_D = 17.6 \text{ A}$$

$$T_j = 25 \text{ } ^\circ\text{C}$$




Thermistor Characteristics

figure 14. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

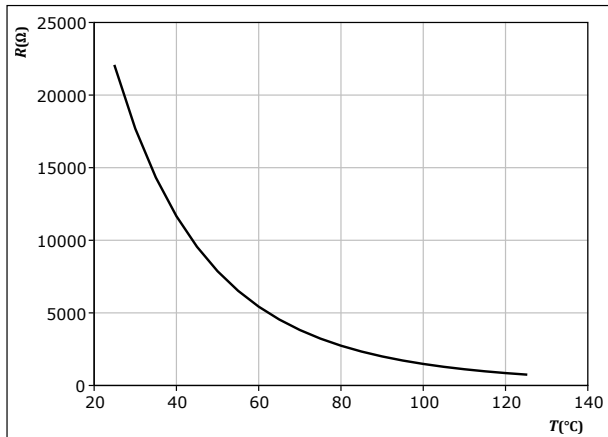




Buck Switching Characteristics

figure 15. MOSFET

Typical switching energy losses as a function of drain current
 $E = f(I_D)$

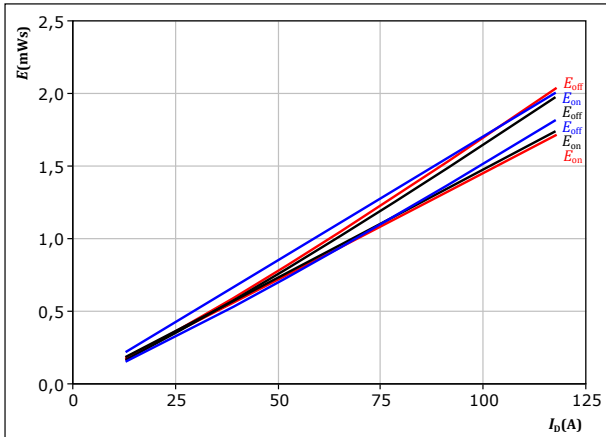


With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 16. MOSFET

Typical switching energy losses as a function of MOSFET turn on gate resistor
 $E = f(R_g)$

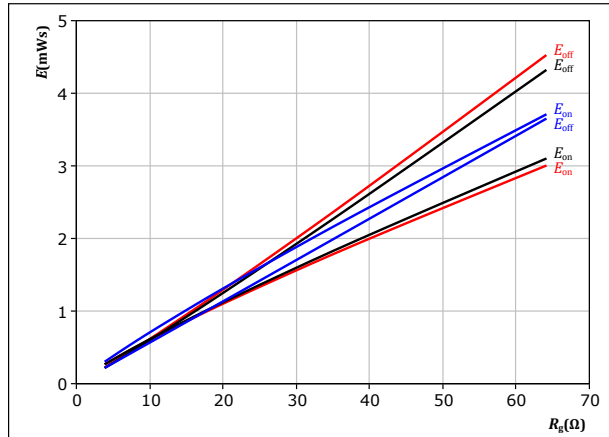


With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 17. MOSFET

Typical reverse recovered energy loss as a function of drain current
 $E_{rec} = f(I_D)$

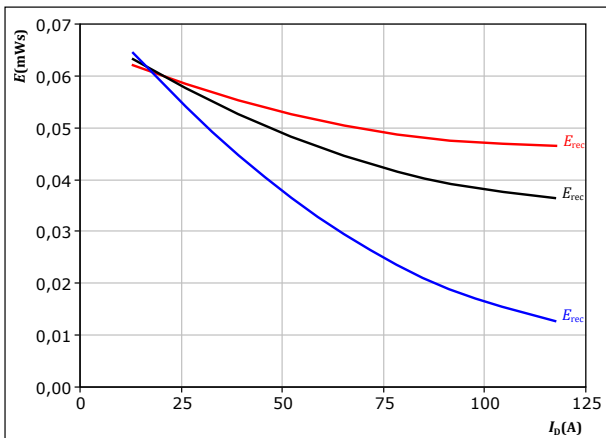


With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gon} = 16$ Ω

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 18. MOSFET

Typical reverse recovered energy loss as a function of MOSFET turn on gate resistor
 $E_{rec} = f(R_g)$

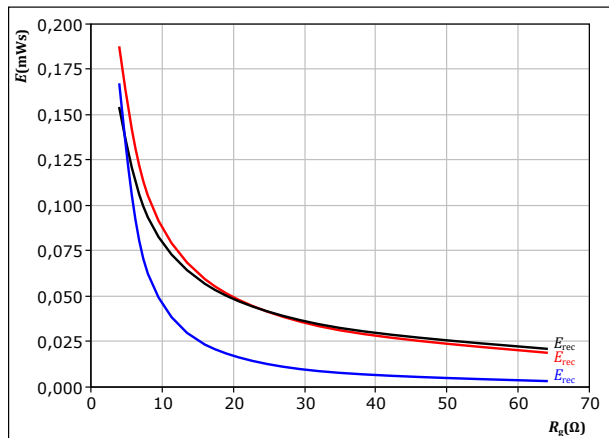

With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A


T_j :
— 25 °C
— 125 °C
— 150 °C



Buck Switching Characteristics

figure 19. MOSFET


Typical switching times as a function of drain current
 $t = f(I_D)$

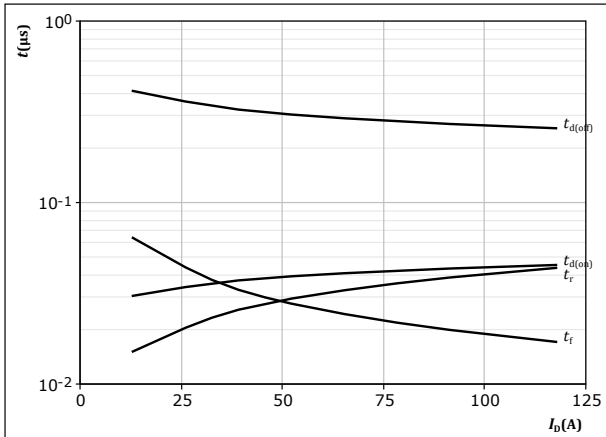

With an inductive load at
 $T_j = 150$ °C
 $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

figure 20. MOSFET


Typical switching times as a function of MOSFET turn on gate resistor
 $t = f(R_g)$

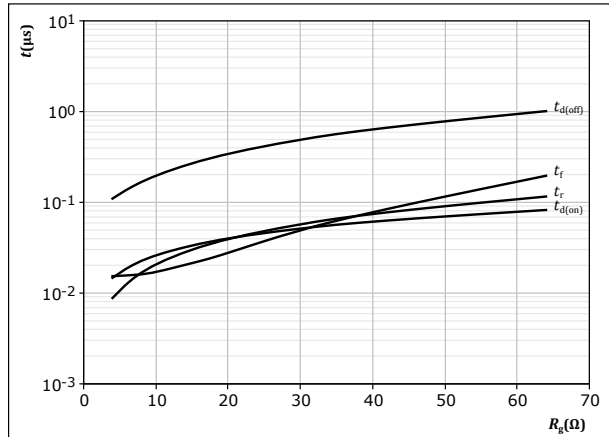

With an inductive load at
 $T_j = 150$ °C
 $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A

figure 21. MOSFET


Typical reverse recovery time as a function of drain current
 $t_{rr} = f(I_D)$

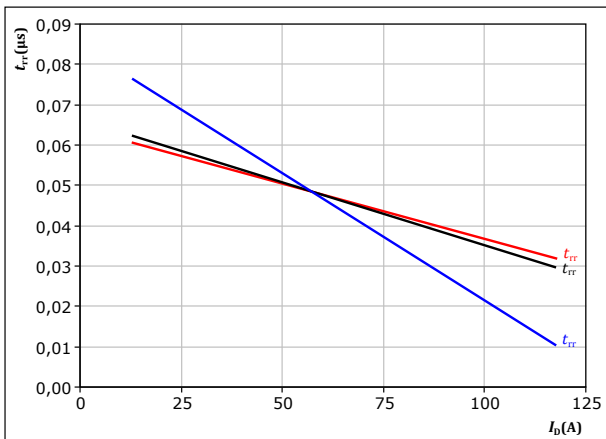

At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gon} = 16$ Ω
 T_j : — 25 °C
— 125 °C
— 150 °C

figure 22. MOSFET

Typical reverse recovery time as a function of MOSFET turn on gate resistor
 $t_{rr} = f(R_{gon})$

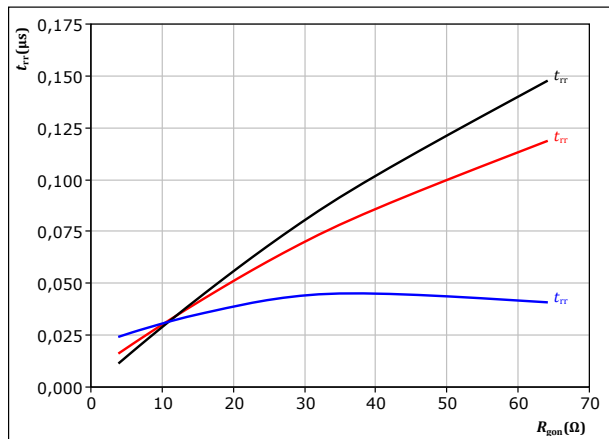

At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A
 T_j : — 25 °C
— 125 °C
— 150 °C




Buck Switching Characteristics

figure 23. MOSFET

Typical recovered charge as a function of drain current

$$Q_r = f(I_D)$$

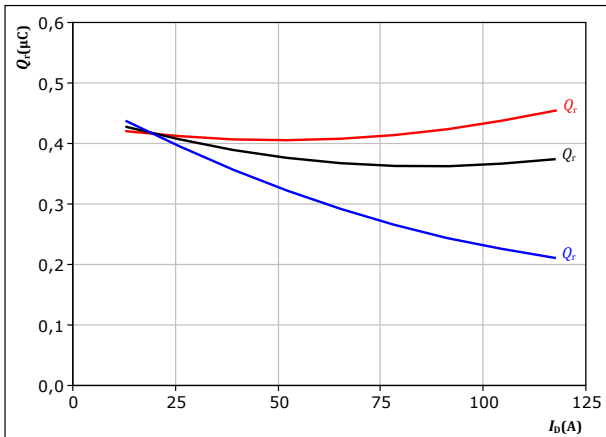


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gson} = 16$ Ω

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 24. MOSFET

Typical recovered charge as a function of MOSFET turn on gate resistor

$$Q_r = f(R_{gson})$$

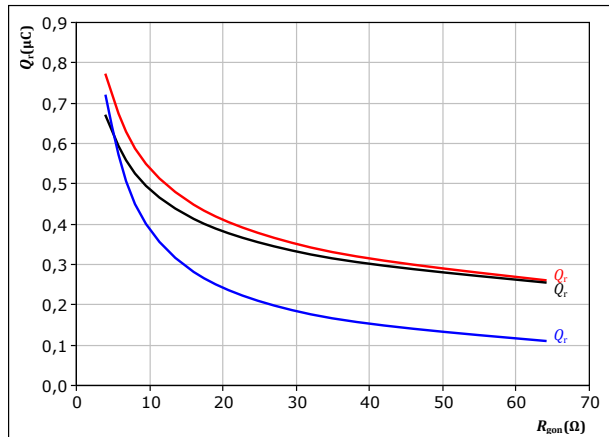


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 25. MOSFET

Typical peak reverse recovery current as a function of drain current

$$I_{RM} = f(I_D)$$

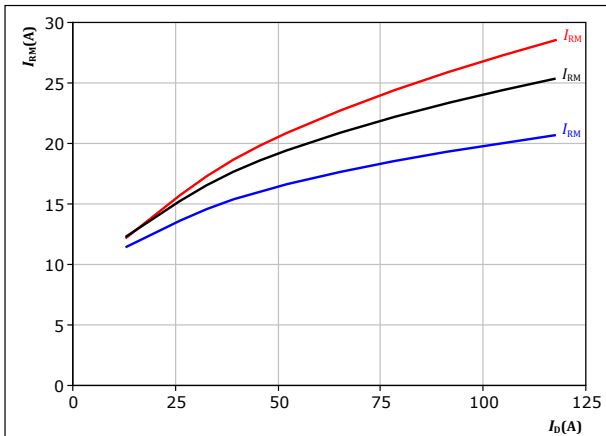


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gson} = 16$ Ω

T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 26. MOSFET

Typical peak reverse recovery current as a function of MOSFET turn on gate resistor

$$I_{RM} = f(R_{gson})$$

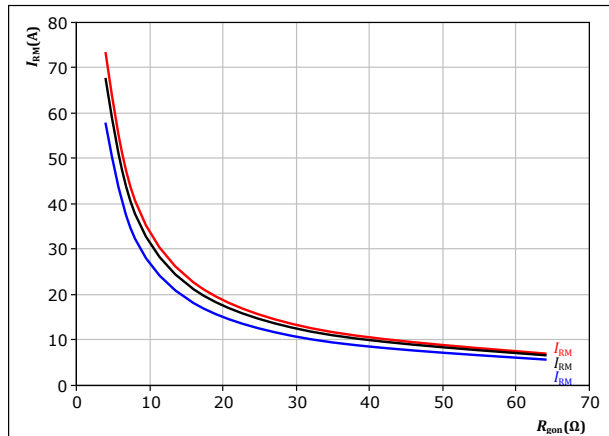

At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A


T_j : 25 °C (blue), 125 °C (black), 150 °C (red)



Buck Switching Characteristics

figure 27. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of drain current
 $di_f/dt, di_{rr}/dt = f(I_D)$

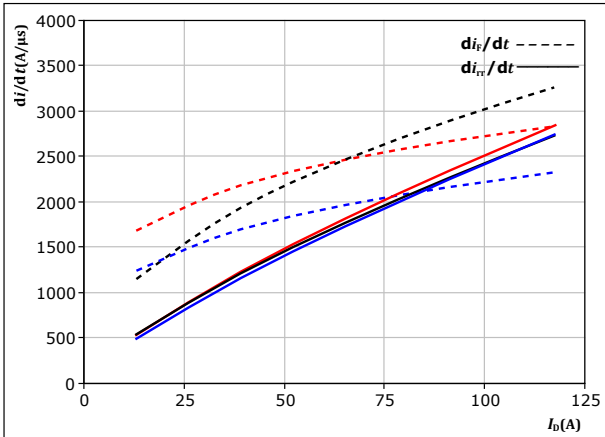


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{g(on)} = 16$ Ω

T_j : 25 °C (blue)
 125 °C (black)
 150 °C (red)

figure 28. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{g(on)})$

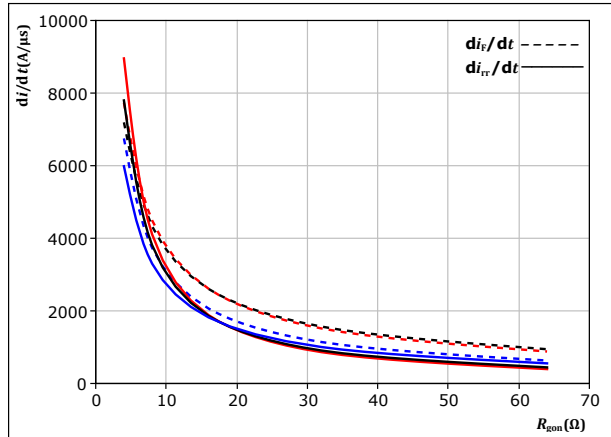


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 65$ A

T_j : 25 °C (blue)
 125 °C (black)
 150 °C (red)

figure 29. MOSFET

Reverse bias safe operating area

$I_D = f(V_{DS})$

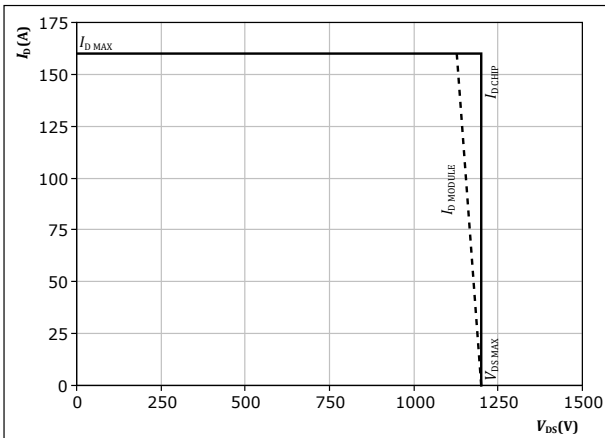


At $T_j = 150$ °C
 $R_{g(on)} = 16$ Ω
 $R_{g(off)} = 16$ Ω



Boost Switching Characteristics

figure 30. MOSFET

Typical switching energy losses as a function of drain current
 $E = f(I_D)$

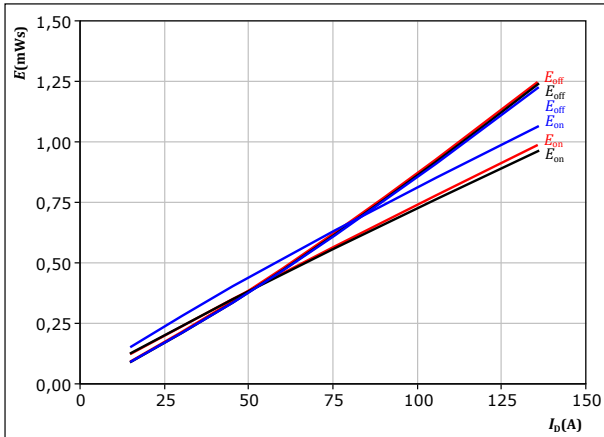


With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gon} = 8$ Ω
 $R_{goff} = 8$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 31. MOSFET

Typical switching energy losses as a function of MOSFET turn on gate resistor
 $E = f(R_g)$

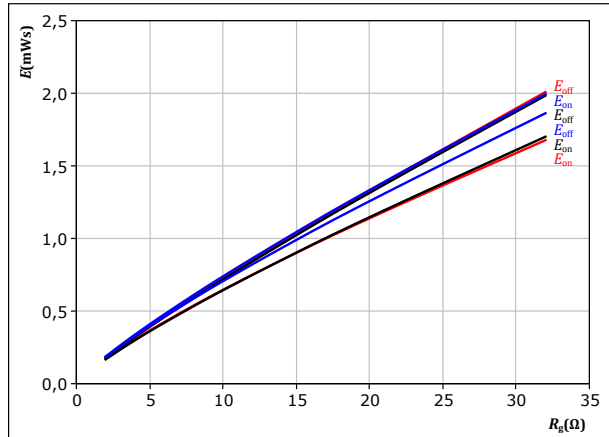


With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 32. MOSFET

Typical reverse recovered energy loss as a function of drain current
 $E_{rec} = f(I_D)$

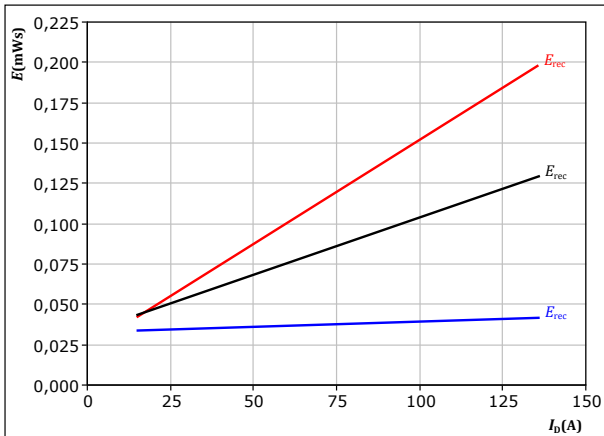


With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gon} = 8$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 33. MOSFET

Typical reverse recovered energy loss as a function of MOSFET turn on gate resistor
 $E_{rec} = f(R_g)$

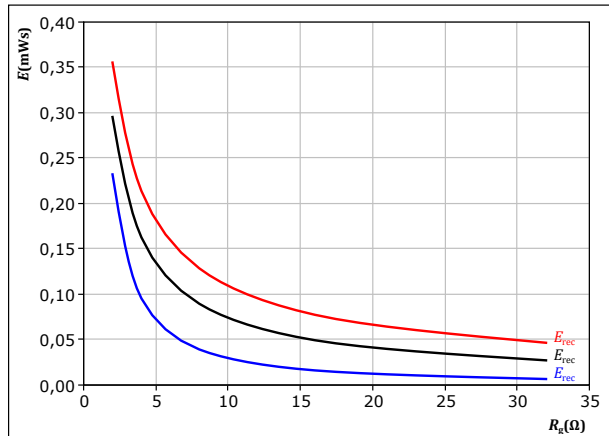

With an inductive load at

$V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A


T_j : — 25 °C
 — 125 °C
 — 150 °C



Boost Switching Characteristics

figure 34. MOSFET


Typical switching times as a function of drain current
 $t = f(I_D)$

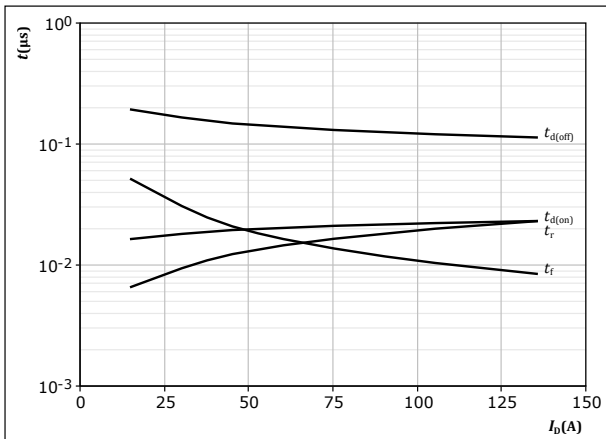

With an inductive load at
 $T_j = 150$ °C
 $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{g(on)} = 8$ Ω
 $R_{g(off)} = 8$ Ω

figure 35. MOSFET


Typical switching times as a function of MOSFET turn on gate resistor
 $t = f(R_g)$

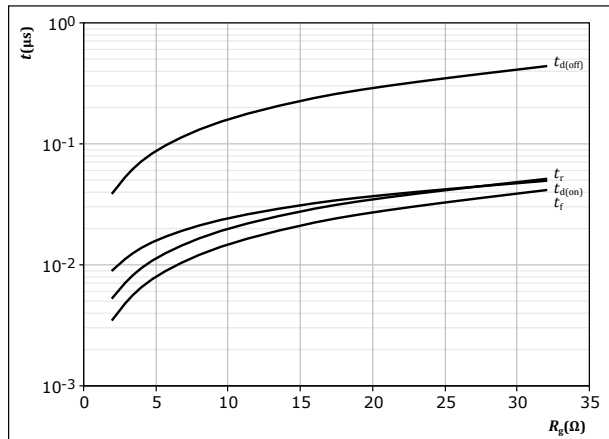

With an inductive load at
 $T_j = 150$ °C
 $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A

figure 36. MOSFET


Typical reverse recovery time as a function of drain current
 $t_{rr} = f(I_D)$

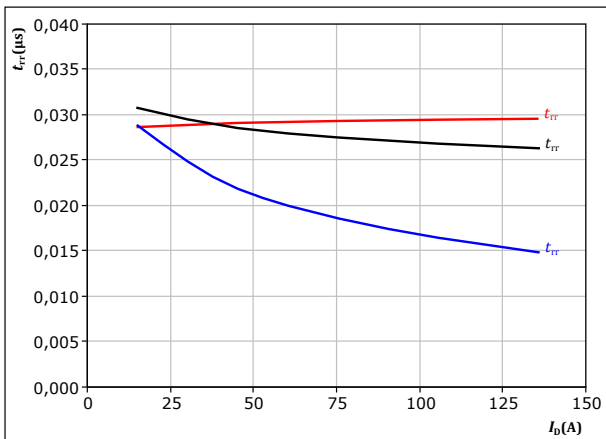

At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{g(on)} = 8$ Ω
 T_j : — 25 °C
— 125 °C
— 150 °C

figure 37. MOSFET

Typical reverse recovery time as a function of MOSFET turn on gate resistor
 $t_{rr} = f(R_{g(on)})$

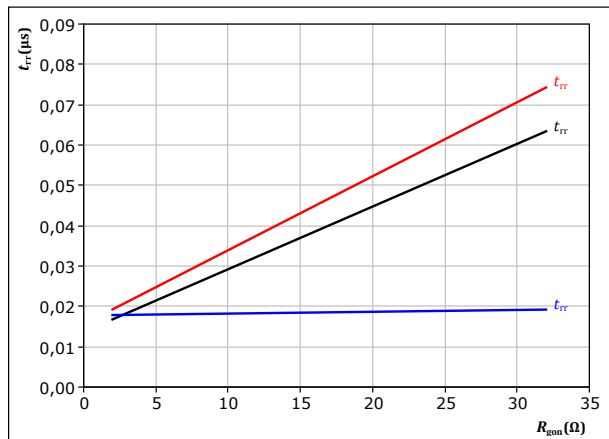

At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A
 T_j : — 25 °C
— 125 °C
— 150 °C




Boost Switching Characteristics

figure 38. MOSFET

Typical recovered charge as a function of drain current

$$Q_r = f(I_D)$$

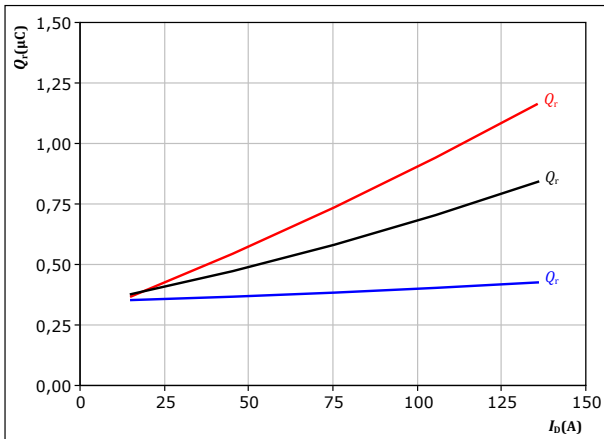


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gson} = 8$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 39. MOSFET

Typical recovered charge as a function of MOSFET turn on gate resistor

$$Q_r = f(R_{gson})$$

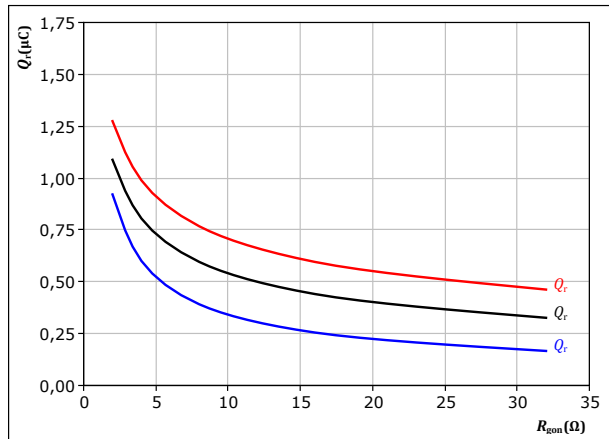


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 40. MOSFET

Typical peak reverse recovery current as a function of drain current

$$I_{RM} = f(I_D)$$

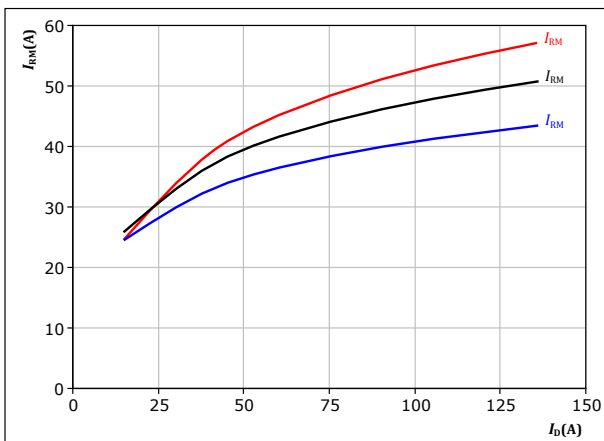


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{gson} = 8$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 41. MOSFET

Typical peak reverse recovery current as a function of MOSFET turn on gate resistor

$$I_{RM} = f(R_{gson})$$

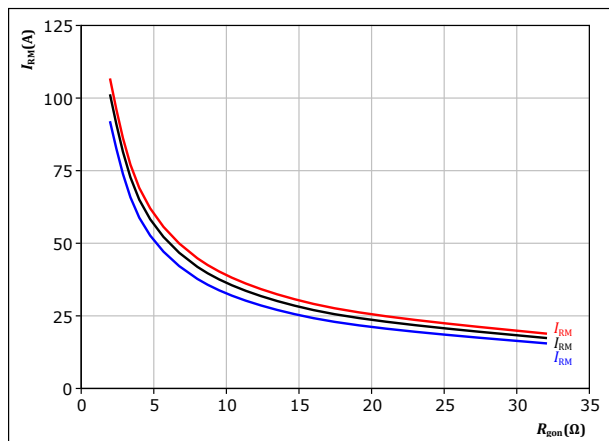

At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A


T_j : — 25 °C
 — 125 °C
 — 150 °C



Boost Switching Characteristics

figure 42. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of drain current
 $di_f/dt, di_{rr}/dt = f(I_D)$

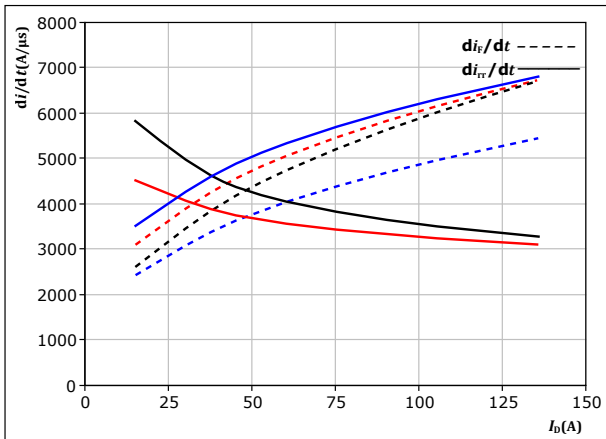


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $R_{g(on)} = 8$ Ω

$T_j = 25$ °C
 $T_j = 125$ °C
 $T_j = 150$ °C

figure 43. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{g(on)})$

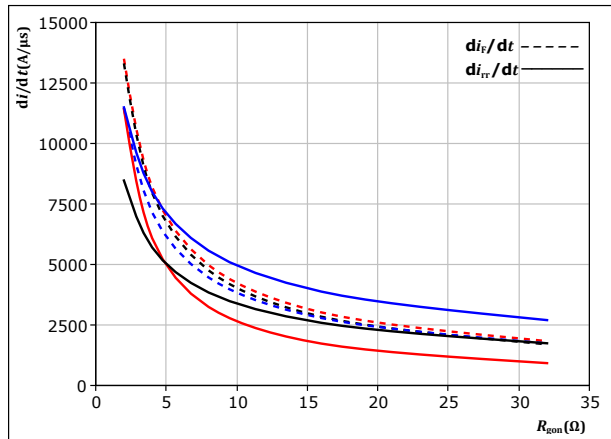


At $V_{DS} = 350$ V
 $V_{GS} = 0/15$ V
 $I_D = 75$ A

$T_j = 25$ °C
 $T_j = 125$ °C
 $T_j = 150$ °C

figure 44. MOSFET

Reverse bias safe operating area

$I_D = f(V_{DS})$

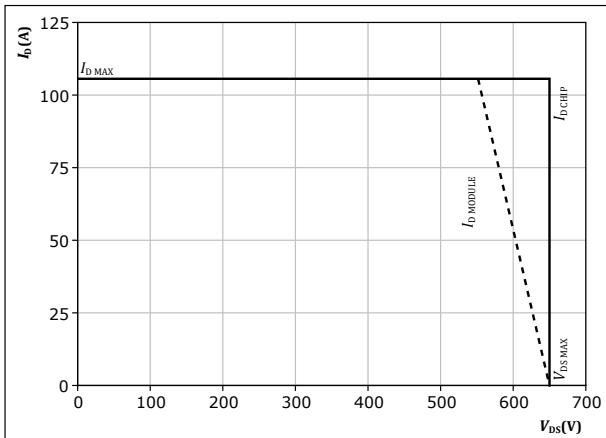

At $T_j = 150$ °C
 $R_{g(on)} = 8$ Ω
 $R_{g(off)} = 8$ Ω



Switching Definitions

figure 45. MOSFET

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

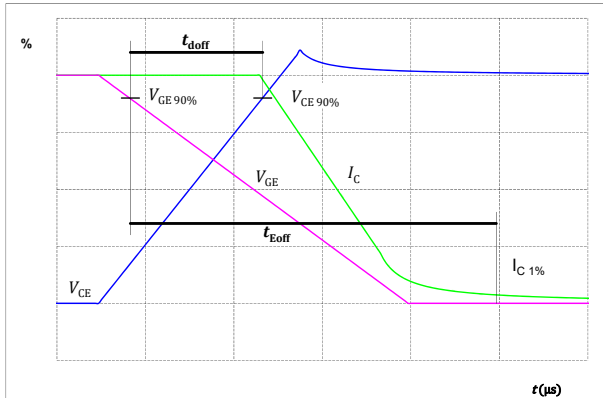


figure 46. MOSFET

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

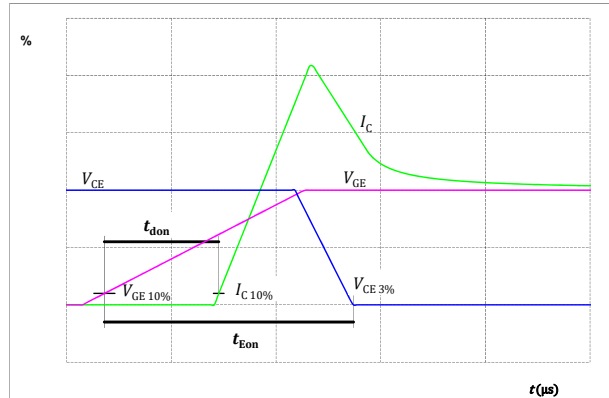


figure 47. MOSFET

Turn-off Switching Waveforms & definition of t_f


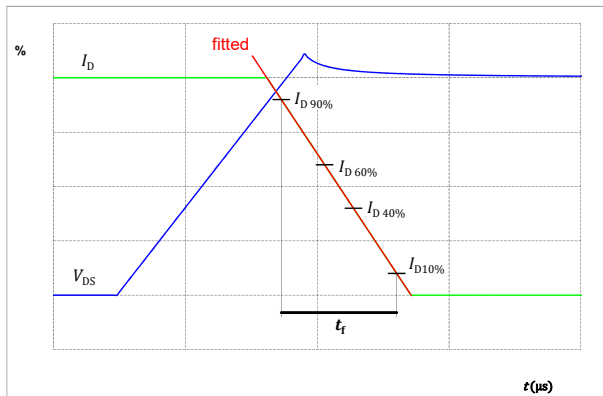


figure 48. MOSFET

Turn-on Switching Waveforms & definition of t_r



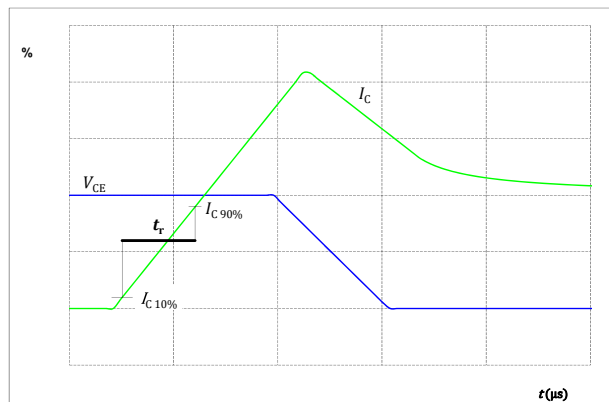

Switching Definitions

figure 49. FWD

Turn-off Switching Waveforms & definition of t_{tr}

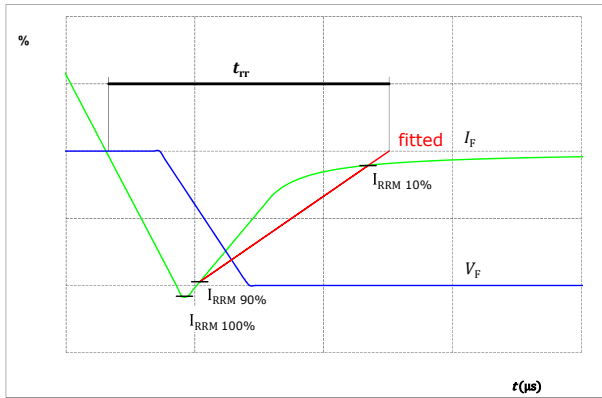


figure 50. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)


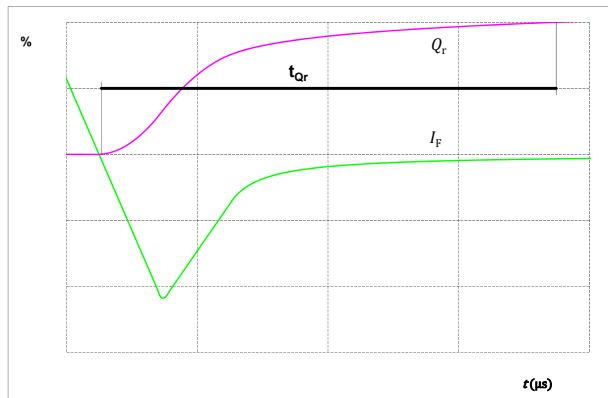



figure 51. FWD

Turn-on Switching Waveforms & definition of t_{Erec} (t_{Erec} = integrating time for E_{rec})



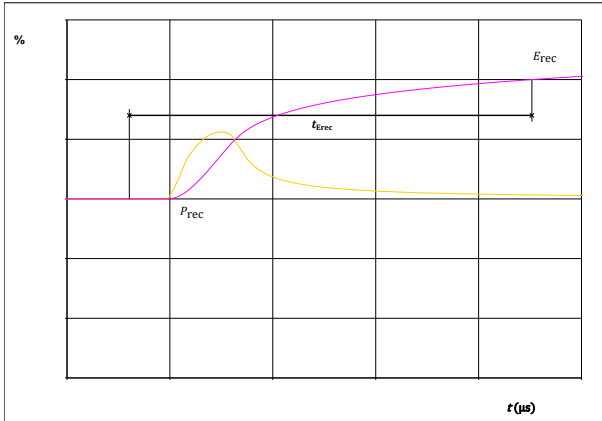

Vincotech

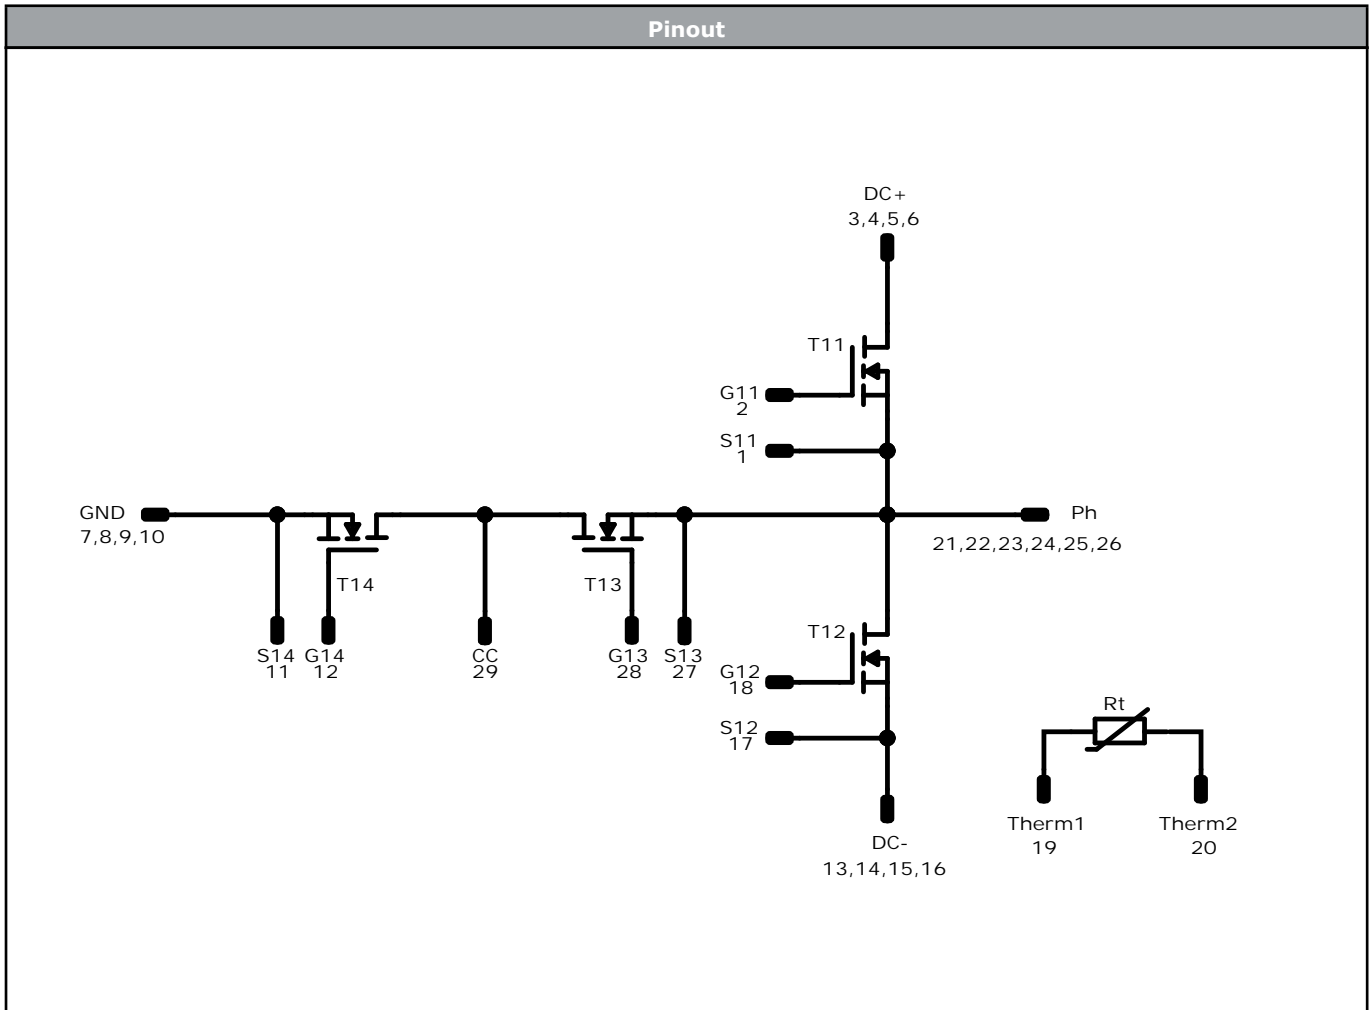

Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12	MOSFET	1200 V	16 mΩ	Buck Switch	
T13, T14	MOSFET	650 V	15 mΩ	Boost Switch	
Rt	Thermistor			Thermistor	



Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow</i> E2 packages see vincotech.com website.

Package data
Package data for <i>flow</i> E2 packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,op}=175^{\circ}\text{C}$ and up to 3500VAC/1min isolation voltage. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
10-EY12NMA016ME-LS28F16T-D2-14	17 Apr. 2024	Change of Buck and Boost Switch static characteristics	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.