



Vincotech

10-EY12SAA003MS-PT49F78T

target datasheet

for virtual products created by Vincotech Product Creator, only for evaluation purposes,
no commitment for product development!

flowDUAL E2

1200 V / 2.8mR

Topology features

- Common emitter point Half Bridge
- Temperature sensor

Component features

- High Blocking Voltage with low drain source on state resistance
- High speed SiC-MOSFET technology
- Resistant to Latch-up

Housing features

- Base isolation: Al_2O_3
- Convex shaped substrate for superior thermal contact
- Compact housing
- CTI600 housing material
- Thermo-mechanical push-and-pull force relief
- Press-fit pin
- Reliable cold welding connection


Target applications

- Solid-State Circuit Breakers
- Embedded Drives
- General Purpose Drives
- Industrial Drives


Types

- 10-EY12SAA003MS-PT49F78T

flow E2 12 mm housing



Schematic

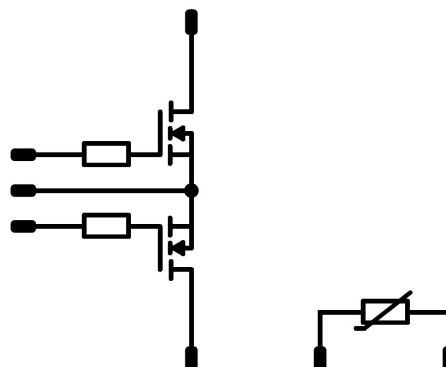



Vincotech

10-EY12SAA003MS-PT49F78T
target datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
AC Switch				
Drain-source voltage	V_{DS}		1200	V
Drain current	I_D	$T_j = T_{jmax}$	426	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	1704	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	334	W
Gate-source voltage	V_{GS}	static	-5 / 18	V
		dynamic	-10 / 22	V
Maximum Junction Temperature	T_{jmax}		175	°C



Vincotech

10-EY12SAA003MS-PT49F78T
target datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+(T_{jmax} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage $t_p = 2\text{ s}$	6000	V
Creepage distance			TBD	mm
Clearance			TBD	mm
Comparative Tracking Index	CTI		≥ 600	



Vincotech

10-EY12SAA003MS-PT49F78T
target datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

AC Switch

Static

Drain-source on-state resistance	$r_{DS(on)}$		18		426	25		2,83	4,17	mΩ
Diode forward voltage	V_{SD}		0		426	25		4,1		V
Gate-source threshold voltage	$V_{GS(th)}$		0		0,04	25	1,7	2,25	2,75	V
Gate to Source Leakage Current	I_{GSS}		22	0		25			600	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	1200	0	25			60	μA
Internal gate resistance	r_g							0,5		Ω
Gate charge	Q_g			0	426	25		1128		nC
Short-circuit input capacitance	C_{iss}	$f = 500 \text{ kHz}$	0	800	0	25		28080		pF
Short-circuit output capacitance	C_{oss}							1410		
Reverse transfer capacitance	C_{rss}							48		

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 5,2 \text{ W/mK}$ (PTM)						0,28		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 1484 \text{ Ω}$				100	-5		5	%
Power dissipation	P							130		mW
Power dissipation constant						25		1,5		mW/K
B-value	$B_{(25/50)}$					25		3962		K
B-value	$B_{(25/100)}$					25		4000		K
Vincotech Thermistor Reference									I	




Vincotech

10-EY12SAA003MS-PT49F78T
target datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	10-EY12SAA003MS-PT49F78T
With thermal paste (5,2 W/mK, PTM6000HV)	10-EY12SAA003MS-PT49F78T-/7/

Marking						
	Text	Name	Date code	UL & VIN	Lot	Serial
		NN-NNNNNNNNNNNNNNNN- TTTTIV	WWYY	UL VIN	LLLL	SSSS
	Datamatrix	Type&Ver TTTTTIV	Lot number LLLLL	Serial SSSS	Date code WWYY	

Outline																		
<table><tr><th colspan="4">Pin table [mm]</th></tr><tr><th>Pin</th><th>X</th><th>Y</th><th>Function</th></tr><tr><td>1</td><td>TBD</td><td>TBD</td><td>TBD</td></tr></table>					Pin table [mm]				Pin	X	Y	Function	1	TBD	TBD	TBD	<p>center of press-fit pinhead for correction parameter see the handling instruction</p> <p>10mm ±0.5</p> <p>0.5mm ±0.05</p> <p>35</p> <p>4</p> <p>1</p>	
Pin table [mm]																		
Pin	X	Y	Function															
1	TBD	TBD	TBD															
<p>Tolerance of pin pitch: n/10mm at the end of pins Dimension of connector axis is not offset without tolerance</p>																		

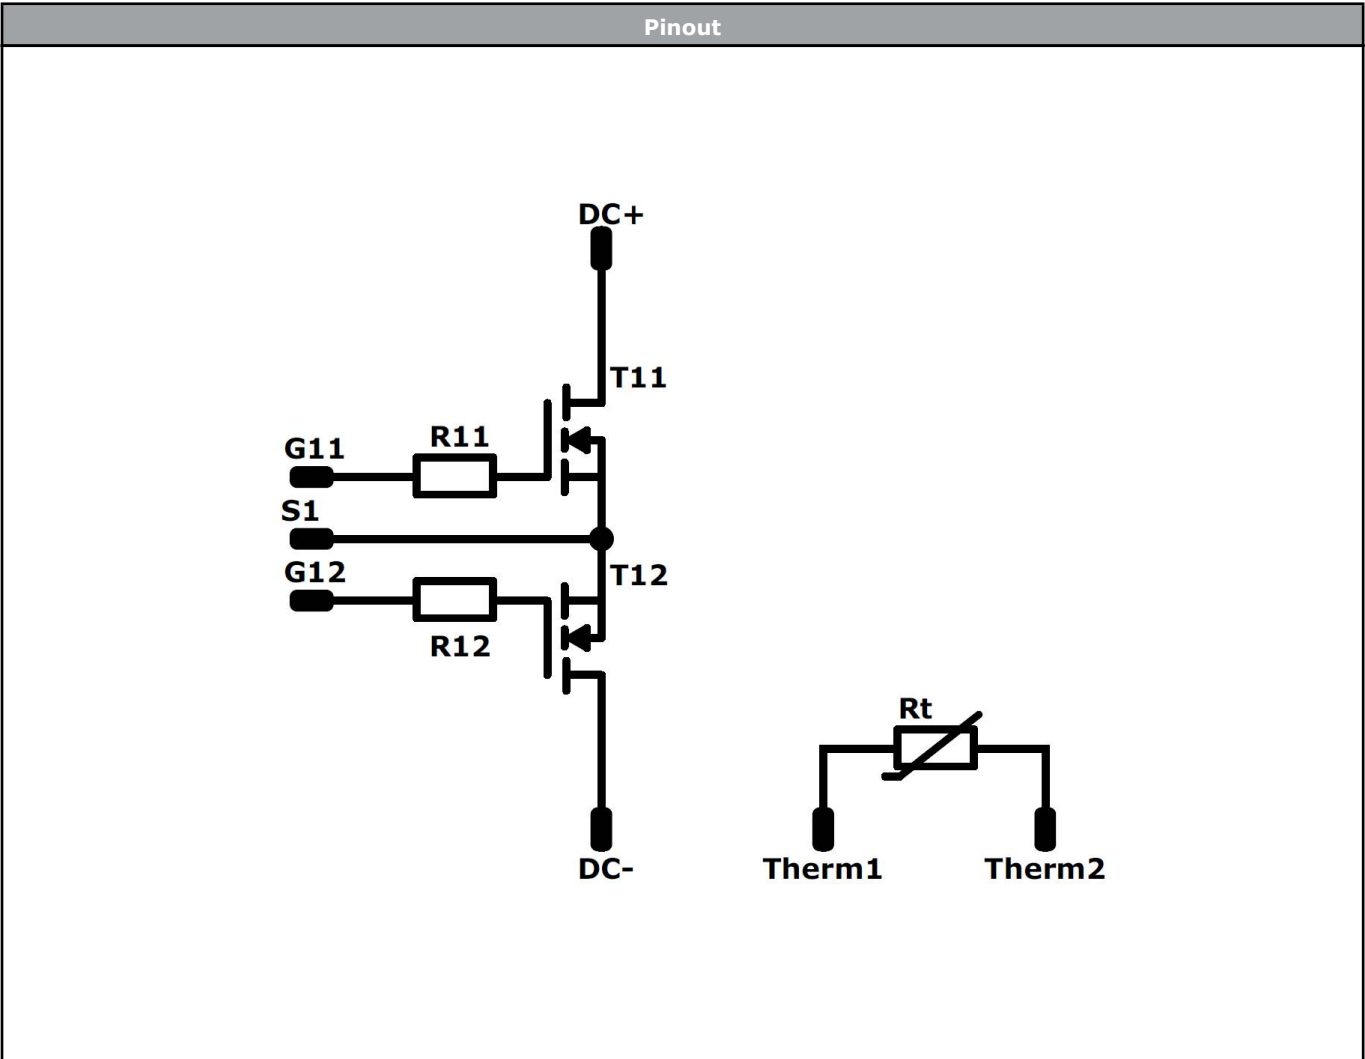


Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12	MOSFET	1200 V	426 A	AC Switch	
R11, R12	Resistor			Resistor (Gate)	
Rt	Thermistor			Thermistor	



Vincotech

10-EY12SAA003MS-PT49F78T
target datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow</i> E2 packages see vincotech.com website.				
Package data				
Packaging data for <i>flow</i> E2 packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,sp}=175^{\circ}\text{C}$ and up to 3500VAC/1min isolation voltage. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
10-EY12SAA003MS-PT49F78T-T0-14	30 Sep. 2025	Preliminary Release	

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

Disclaimer

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.