



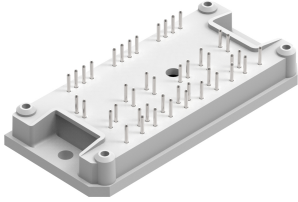

| | | | |
|---|--|---|--|
| flow3xMNPC 1 | | 1200 V / 25 A | |
| Features | | flow 1 12 mm housing | |
| <ul style="list-style-type: none">• 3 phase mixed voltage component topology• Neutral point clamped inverter• Reactive power capability• Low inductance layout | |  | |
| Target applications | | Schematic | |
| <ul style="list-style-type: none">• Solar inverter• UPS | |  | |
| Types | | | |
| <ul style="list-style-type: none">• 10-FY12M3A025SH-M746F08 | | | |

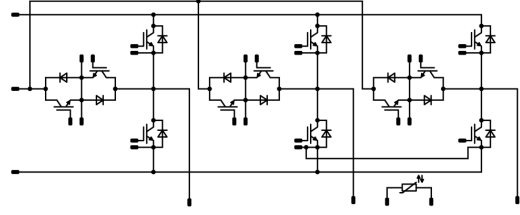

Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|-----------------------------------|------------|--|----------|--------------------|
| Buck Switch | | | | |
| Collector-emitter voltage | V_{CES} | | 1200 | V |
| Collector current (DC current) | I_C | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 31 | A |
| Repetitive peak collector current | I_{CRM} | t_p limited by T_{jmax} | 75 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 94 | W |
| Gate-emitter voltage | V_{GES} | | ± 20 | V |
| Short circuit ratings | t_{SC} | $V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$ | 10 | μs |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |

Buck Diode

| | | | | |
|--|------------|---------------------------------------|-----|--------------------|
| Peak repetitive reverse voltage | V_{RRM} | | 600 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 22 | A |
| Surge (non-repetitive) forward current | I_{FSM} | $T_j = 25\text{ °C}$ | 150 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 41 | W |
| Maximum junction temperature | T_{jmax} | | 150 | $^{\circ}\text{C}$ |

Boost Switch

| | | | | |
|-----------------------------------|------------|--|----------|--------------------|
| Collector-emitter voltage | V_{CES} | | 600 | V |
| Collector current (DC current) | I_C | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 27 | A |
| Repetitive peak collector current | I_{CRM} | t_p limited by T_{jmax} | 60 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 56 | W |
| Gate-emitter voltage | V_{GES} | | ± 20 | V |
| Short circuit ratings | t_{SC} | $V_{GE} = 15\text{ V}$, $V_{CC} = 360\text{ V}$ $T_j = 150\text{ °C}$ | 6 | μs |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|--|------------|---|-------|------------------|
| Boost Diode | | | | |
| Peak repetitive reverse voltage | V_{RRM} | | 1200 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 13 | A |
| Surge (non-repetitive) forward current | I_{FSM} | Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 25\text{ °C}$ | 36 | A |
| Surge current capability | I^2t | | 0 | A ² s |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 39 | W |
| Maximum junction temperature | T_{jmax} | | 175 | °C |

Module Properties

Thermal Properties

| | | | | |
|---|-----------|--|----------------------------|----|
| Storage temperature | T_{stg} | | -40...+125 | °C |
| Operation temperature under switching condition | T_{jop} | | -40...+($T_{jmax} - 25$) | °C |

Isolation Properties

| | | | | |
|----------------------------|------------|-------------------------------------|-------|----|
| Isolation voltage | V_{isol} | DC Test Voltage* $t_p = 2\text{ s}$ | 6000 | V |
| Isolation voltage | V_{isol} | AC Voltage $t_p = 1\text{ min}$ | 2500 | V |
| Creepage distance | | | >12,7 | mm |
| Clearance | | | 8,35 | mm |
| Comparative Tracking Index | CTI | | ≥ 200 | |

*100 % tested in production



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------------------------|---|-------------------------------------|------------|-----|--------|-----|--|------|
| | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | | |

Buck Switch

Static

| | | | | | | | | | | |
|--------------------------------------|---------------|-------------------|----|------|---------|-----------|------|--------------|---------------------|----|
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}$ | | | 0,00085 | 25 | 5,3 | 5,8 | 6,3 | V |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | | 15 | | 25 | 25 125 | 1,78 | 2,11 2,42 | 2,42 ⁽¹⁾ | V |
| Collector-emitter cut-off current | I_{CES} | | 0 | 1200 | | 25 | | | 2,4 | μA |
| Gate-emitter leakage current | I_{GES} | | 20 | 0 | | 25 | | | 120 | nA |
| Internal gate resistance | r_g | | | | | | | None | | Ω |
| Input capacitance | C_{ies} | | | | | | | 1430 | | pF |
| Output capacitance | C_{oes} | $f = 1$ Mhz | 0 | 25 | | 25 | | 115 | | pF |
| Reverse transfer capacitance | C_{res} | | | | | | | 75 | | pF |
| Gate charge | Q_g | $V_{CC} = 960$ V | 15 | | 25 | 25 | | 115 | | nC |

Thermal

| | | | | | | | | | | |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽²⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK (PSX) | | | | | | 1,01 | | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|-----------------------------|--------------|--|-----|-------|----|-----|--|-------|--|-----|
| Turn-on delay time | $t_{d(on)}$ | $R_{gon} = 16$ Ω $R_{goff} = 16$ Ω | ±15 | 350 | 15 | 25 | | 73 | | ns |
| | | | | | | 125 | | 74,2 | | |
| Rise time | t_r | | | | | 25 | | 15 | | |
| | | | | | | 125 | | 18 | | |
| Turn-off delay time | $t_{d(off)}$ | | | | | 25 | | 166,4 | | |
| | | | | | | 125 | | 219,8 | | |
| Fall time | t_f | | | | | 25 | | 21,09 | | |
| | | 125 | | 116,3 | | | | | | |
| Turn-on energy (per pulse) | E_{on} | $Q_{tFWD} = 0,191$ μC $Q_{tFWD} = 0,442$ μC | | | | 25 | | 0,17 | | mWs |
| | | | | | | 125 | | 0,3 | | |
| Turn-off energy (per pulse) | E_{off} | | | | | 25 | | 0,367 | | mWs |
| | | | | | | 125 | | 0,629 | | |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------------------------|---|-------------------------------------|------------|-----|--------|-----|--|------|
| | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | | |

Buck Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|---------------|--|--|----|-----------|------|--------------|---------------------|----|
| Forward voltage | V_F | | | | 15 | 25 125 | 1,88 | 2,47 1,73 | 2,73 ⁽¹⁾ | V |
| Reverse leakage current | I_R | $V_i = 600$ V | | | | 25 | | | 100 | μA |

Thermal

| | | | | | | | | | | |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽²⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK (PSX) | | | | | | 1,71 | | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|---------------------------------------|----------------------|--|-----|-----|----|-----------|--|----------------|--|------|
| Peak recovery current | I_{RRM} | $di/dt=1415$ A/μs $di/dt=1159$ A/μs | ±15 | 350 | 15 | 25 125 | | 16,08 22,27 | | A |
| Reverse recovery time | t_{rr} | | | | | 25 125 | | 23,04 32,92 | | ns |
| Recovered charge | Q_r | | | | | 25 125 | | 0,191 0,442 | | μC |
| Reverse recovered energy | E_{rec} | | | | | 25 125 | | 0,025 0,05 | | mWs |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ | | | | | 25 125 | | 1860 1998 | | A/μs |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------------------------|---|-------------------------------------|------------|-----|--------|-----|--|------|
| | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | | |

Boost Switch

Static

| | | | | | | | | | | |
|--------------------------------------|---------------|-------------------|----|-----|---------|-----------|-----|-------------|--------------------|----|
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}$ | | | 0,00029 | 25 | 5 | 5,8 | 6,5 | V |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | | 15 | | 20 | 25 125 | 1,1 | 1,53 1,7 | 1,9 ⁽¹⁾ | V |
| Collector-emitter cut-off current | I_{CES} | | 0 | 600 | | 25 | | | 1,1 | μA |
| Gate-emitter leakage current | I_{GES} | | 20 | 0 | | 25 | | | 300 | nA |
| Internal gate resistance | r_g | | | | | | | None | | Ω |
| Input capacitance | C_{ies} | | | | | | | 1100 | | pF |
| Output capacitance | C_{oes} | $f = 1$ Mhz | 0 | 25 | | 25 | | 71 | | pF |
| Reverse transfer capacitance | C_{res} | | | | | | | 32 | | pF |
| Gate charge | Q_g | $V_{CC} = 480$ V | 15 | | 20 | 25 | | 120 | | nC |

Thermal

| | | | | | | | | | | |
|--|---------------|---------------------------------------|--|--|--|--|--|-----|--|-----|
| Thermal resistance junction to sink ⁽²⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK (PSX) | | | | | | 1,7 | | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|-----|--|-----|

Dynamic

| | | | | | | | | | | |
|-----------------------------|--------------|---|-----|-------|----|-----|--|-------|--|-----|
| Turn-on delay time | $t_{d(on)}$ | $R_{gon} = 16$ Ω $R_{goff} = 16$ Ω | ±15 | 350 | 15 | 25 | | 72,4 | | ns |
| | | | | | | 125 | | 74,2 | | |
| Rise time | t_r | | | | | 25 | | 14 | | |
| | | | | | | 125 | | 15,6 | | |
| Turn-off delay time | $t_{d(off)}$ | | | | | 25 | | 131,2 | | |
| | | | | | | 125 | | 157,2 | | |
| Fall time | t_f | | | | | 25 | | 33,89 | | |
| | | 125 | | 68,86 | | | | | | |
| Turn-on energy (per pulse) | E_{on} | $Q_{tFWD} = 0,693$ μC $Q_{tFWD} = 1,51$ μC | | | | 25 | | 0,313 | | mWs |
| | | | | | | 125 | | 0,387 | | |
| Turn-off energy (per pulse) | E_{off} | | | | | 25 | | 0,379 | | mWs |
| | | | | | | 125 | | 0,529 | | |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | | Values | | | Unit |
|-----------|--------|--------------|--------------|--------------|--------------|-----------|-----------|------------|-----|-----|------|
| | | V_{GS} [V] | V_{GE} [V] | V_{DS} [V] | V_{CE} [V] | I_D [A] | I_C [A] | T_j [°C] | Min | Typ | |

Boost Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|----------------|--|--|---|------------------|--|--------------|--|----|
| Forward voltage | V_F | | | | 8 | 25 125 150 | | 2,18 2,31 | 2,65 ⁽¹⁾ 2,68 ⁽¹⁾ | V |
| Reverse leakage current | I_R | $V_r = 1200$ V | | | | 25 150 | | 0,3 | 0,06 0,7 | mA |

Thermal

| | | | | | | | | | | |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽²⁾ | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK (PSX) | | | | | | 2,44 | | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|---------------------------------------|----------------------|--|----------|-------|----|------------|--|-------|--|---------|
| Peak recovery current | I_{RRM} | $di/dt=1124$ A/ μ s $di/dt=1109$ A/ μ s | ± 15 | 350 | 15 | 25 | | 21,09 | | A |
| Reverse recovery time | t_{rr} | | | | | 125 | | 24,46 | | |
| | | | | | | 25 | | 29,92 | | ns |
| Recovered charge | Q_r | | | | | 125 | | 0,693 | | μ C |
| | | | | | | 25 | | 1,51 | | |
| Reverse recovered energy | E_{rec} | 125 | | 0,137 | | mWs | | | | |
| | | 25 | | 0,382 | | | | | | |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ | 25 | | 1972 | | A/ μ s | | | | |
| | | 125 | | 2214 | | | | | | |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit | |
|-----------|--------|--------------|--------------|--------------|--------------|-----------|-----------|-----------|-----------|------|------------|
| | | V_{GS} [V] | V_{GE} [V] | V_{DS} [V] | V_{CE} [V] | V_F [V] | I_D [A] | I_C [A] | I_F [A] | | T_j [°C] |

Thermistor

Static

| | | | | | | | | | | |
|--------------------------------|----------------|-------------------------|--|--|--|-----|----|------|---|------|
| Rated resistance | R | | | | | 25 | | 22 | | kΩ |
| Deviation of R_{100} | $A_{R/R}$ | $R_{100} = 1484 \Omega$ | | | | 100 | -5 | | 5 | % |
| Power dissipation | P | | | | | | | 5 | | mW |
| Power dissipation constant | d | | | | | 25 | | 1,5 | | mW/K |
| B-value | $B_{(25/50)}$ | Tol. $\pm 1 \%$ | | | | | | 3962 | | K |
| B-value | $B_{(25/100)}$ | Tol. $\pm 1 \%$ | | | | | | 4000 | | K |
| Vincotech Thermistor Reference | | | | | | | | | I | |

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.




Buck Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

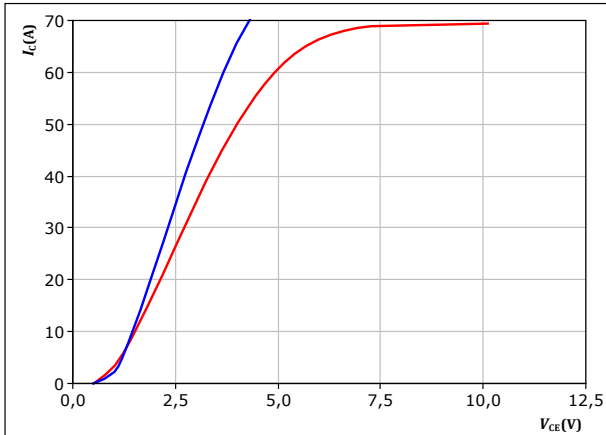


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j:$ — 25 °C
— 125 °C

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

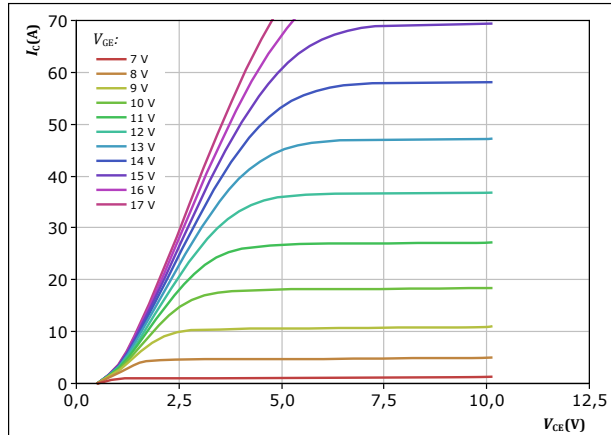


$t_p = 250 \mu s$
 $T_j = 125 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

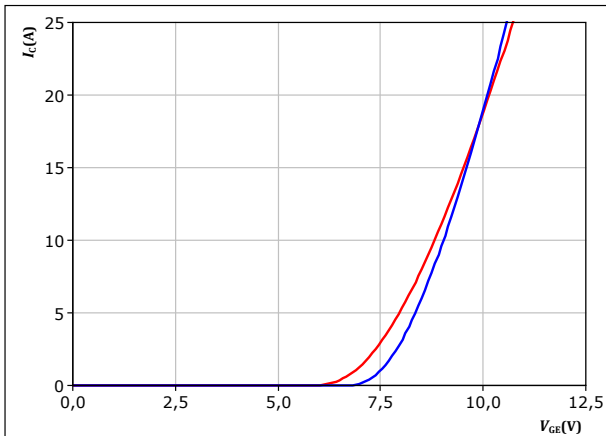


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_j:$ — 25 °C
— 125 °C

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

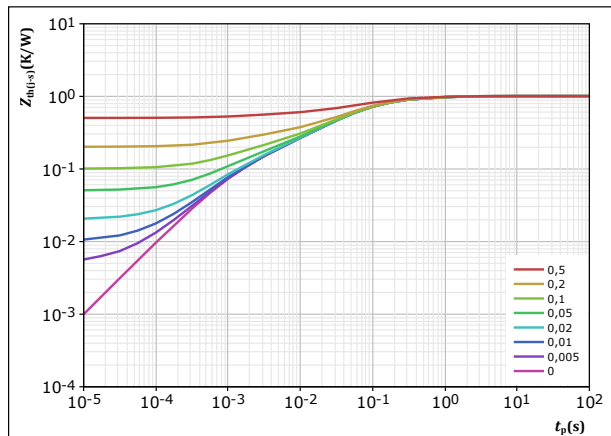

$D = t_p / T$
 $R_{th(j-s)} = 1,009 \text{ K/W}$
IGBT thermal model values

| R (K/W) | τ (s) |
|----------|------------|
| 8,44E-02 | 1,03E+00 |
| 2,46E-01 | 1,79E-01 |
| 4,48E-01 | 5,38E-02 |
| 1,38E-01 | 1,04E-02 |
| 5,48E-02 | 1,66E-03 |
| 3,85E-02 | 8,73E-04 |




Buck Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

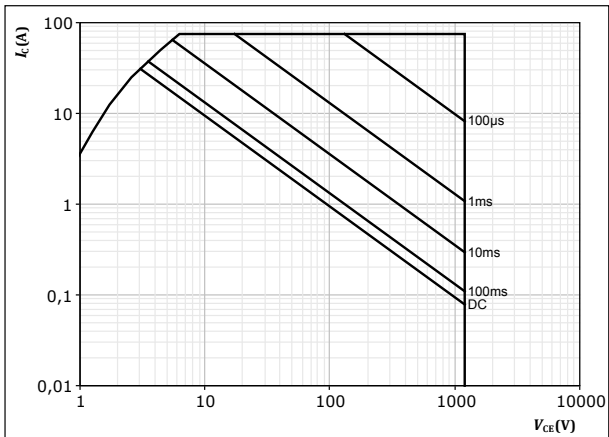

$D =$ single pulse
 $T_s = 80 \text{ } ^\circ\text{C}$
 $V_{CE} = 15 \text{ V}$
 $T_j = T_{jmax}$



Buck Diode Characteristics

figure 6. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


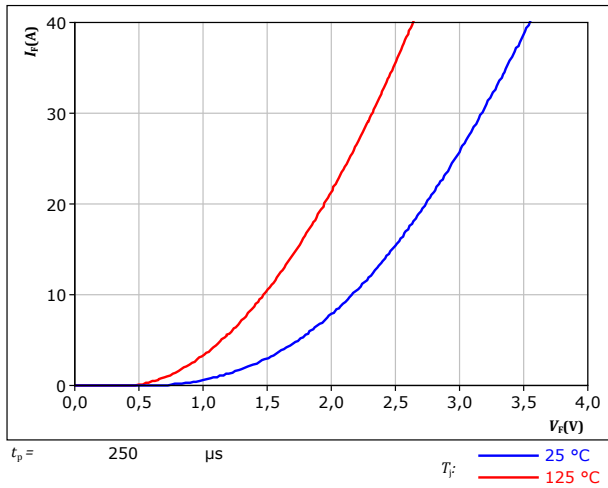


figure 7. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

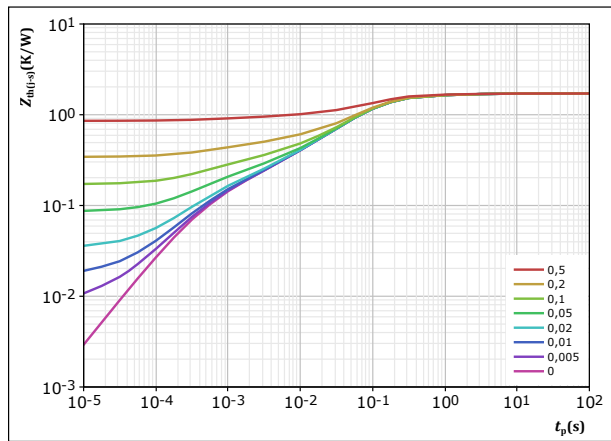

$D = t_p / T$

$R_{th(j-s)} = 1,713 \text{ K/W}$

FWD thermal model values


| $R \text{ (K/W)}$ | $\tau \text{ (s)}$ |
|-------------------|--------------------|
| 7,49E-02 | 2,70E+00 |
| 1,69E-01 | 4,49E-01 |
| 9,61E-01 | 9,37E-02 |
| 2,39E-01 | 3,41E-02 |
| 1,24E-01 | 6,38E-03 |
| 7,56E-02 | 1,23E-03 |
| 7,06E-02 | 3,59E-04 |



Boost Switch Characteristics

figure 8. IGBT


Typical output characteristics
 $I_C = f(V_{CE})$

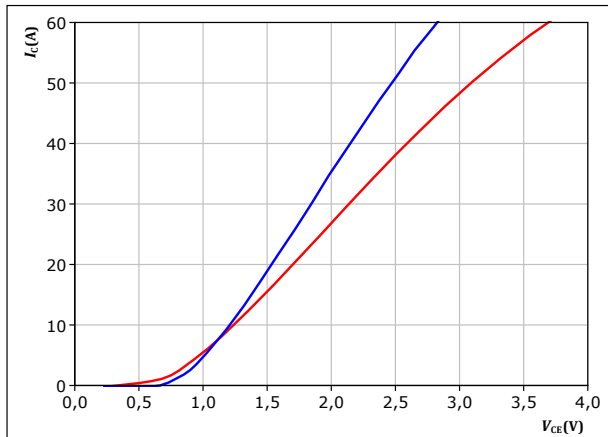

$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_f: 25^\circ C$ (blue line)
 $125^\circ C$ (red line)

figure 9. IGBT


Typical output characteristics
 $I_C = f(V_{CE})$

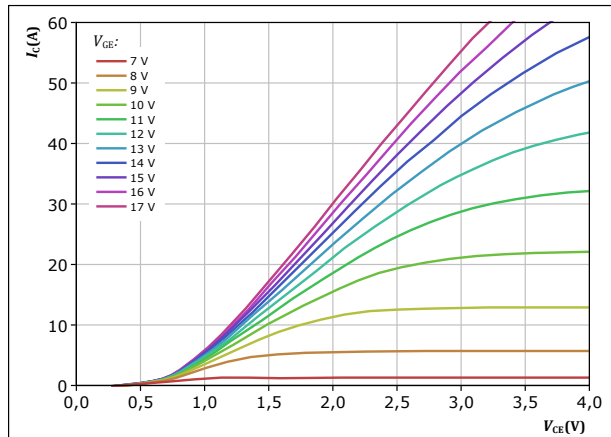

$t_p = 250 \mu s$
 $T_f = 125^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 10. IGBT


Typical transfer characteristics
 $I_C = f(V_{GE})$

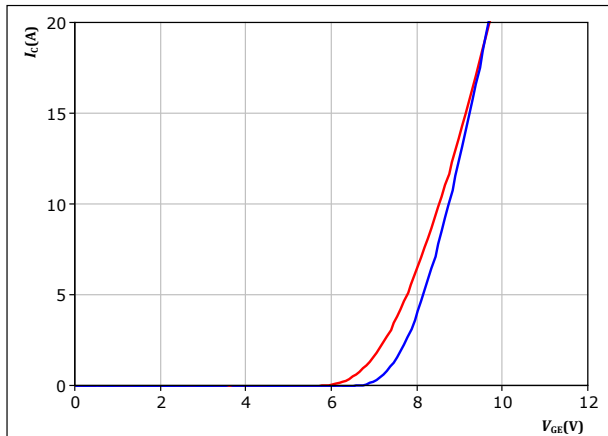

$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_f: 25^\circ C$ (blue line)
 $125^\circ C$ (red line)

figure 11. IGBT

Short circuit withstand time as a function of V_{GE}
 $t_{sc} = f(V_{GE})$

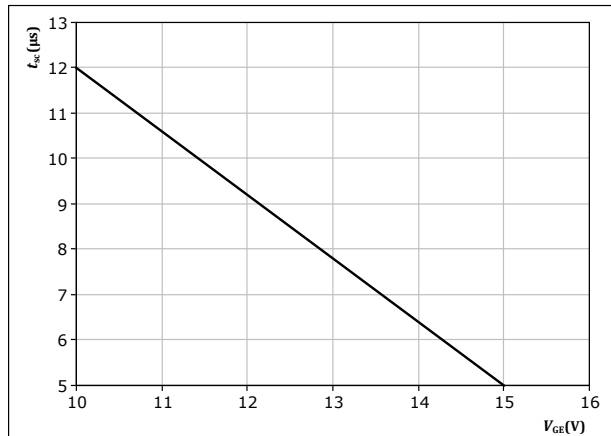


At $V_{CE} = 333 V$
 $T_f \leq 333^\circ C$



Boost Switch Characteristics

figure 12. IGBT


Typical short circuit current as a function of V_{GE}
 $I_{SC} = f(V_{GE})$

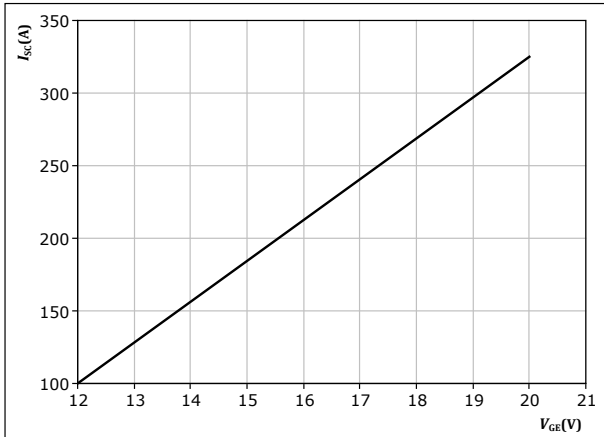

At $V_{CE} = 333$ V
 $T_j \leq 333$ °C

figure 13. IGBT

Transient thermal impedance as a function of pulse width
 $Z_{th(j-s)} = f(t_p)$

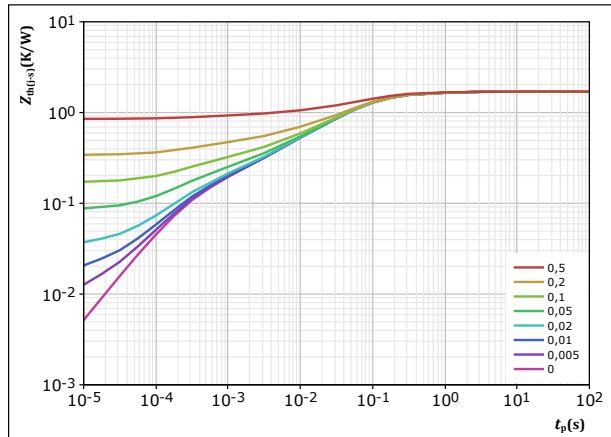


$D = t_p / T$
 $R_{th(j-s)} = 1,701$ K/W
IGBT thermal model values

| R (K/W) | τ (s) |
|-----------|------------|
| 9,97E-02 | 1,34E+00 |
| 3,46E-01 | 1,70E-01 |
| 8,15E-01 | 5,34E-02 |
| 2,54E-01 | 7,74E-03 |
| 7,70E-02 | 1,33E-03 |
| 1,09E-01 | 2,63E-04 |

figure 14. IGBT


Safe operating area
 $I_C = f(V_{CE})$

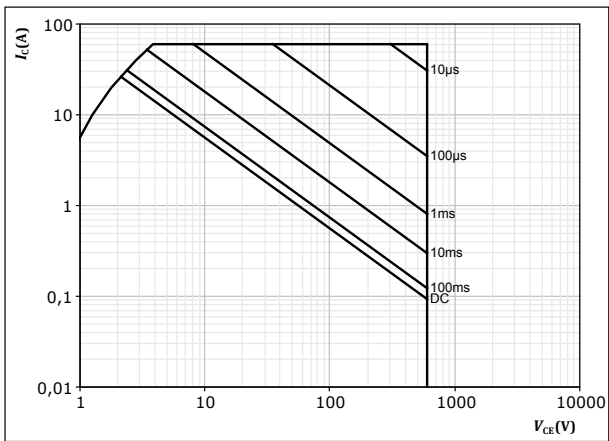

$D =$ single pulse
 $T_j = 80$ °C
 $V_{GE} = 15$ V
 $T_j = T_{jmax}$

figure 15. IGBT

Gate voltage vs gate charge
 $V_{GE} = f(Q_g)$

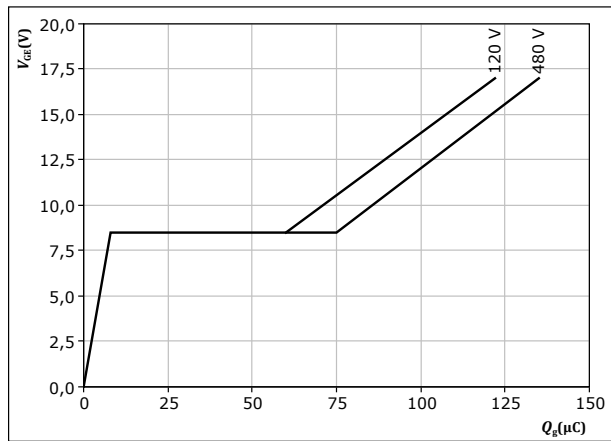

$I_C = 33$ A
 $T_j = 25$ °C




Boost Diode Characteristics

figure 16. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

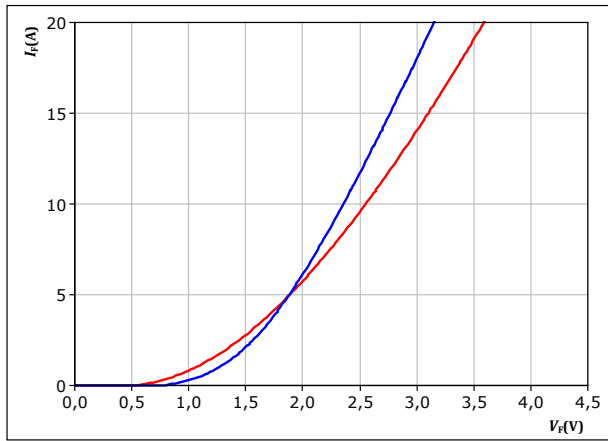


$t_p = 250 \mu s$
 T_j : — 25 °C
 — 125 °C

figure 17. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

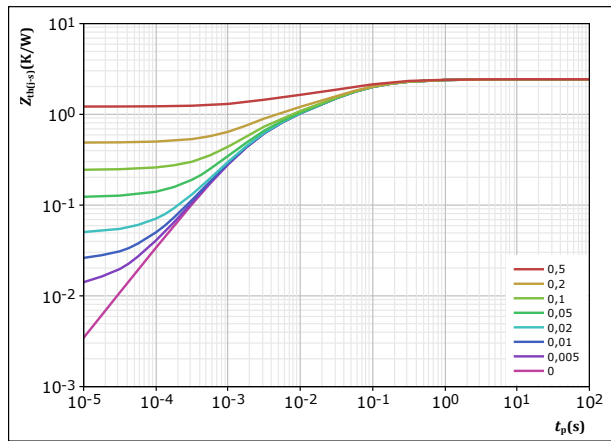

$D = t_p / T$
 $R_{th(j-s)} = 2,436 \text{ K/W}$
 FWD thermal model values

| $R \text{ (K/W)}$ | $\tau \text{ (s)}$ |
|-------------------|--------------------|
| 1,03E-01 | 1,23E+00 |
| 3,89E-01 | 1,75E-01 |
| 9,47E-01 | 4,78E-02 |
| 5,16E-01 | 8,99E-03 |
| 4,81E-01 | 1,81E-03 |




Thermistor Characteristics

figure 18. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

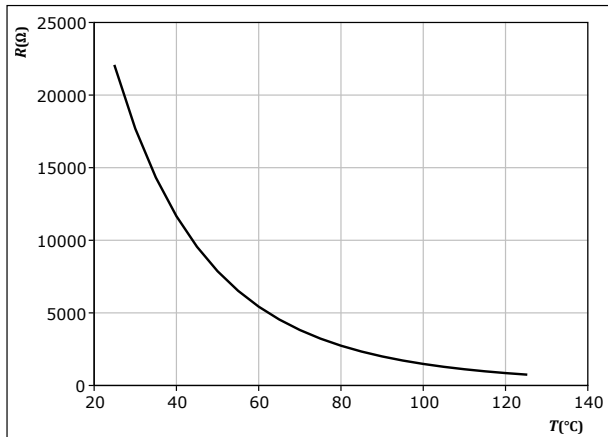




Buck Switching Characteristics

figure 19. IGBT


Typical switching energy losses as a function of collector current
 $E = f(I_c)$

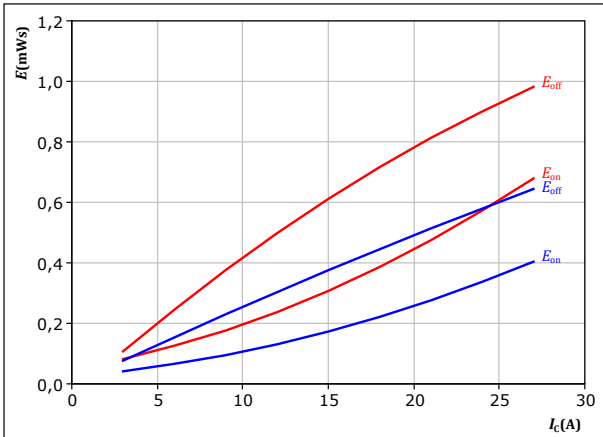

With an inductive load at
 $V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω
 T_j : — 25 °C
— 125 °C

figure 20. IGBT


Typical switching energy losses as a function of gate resistor
 $E = f(R_g)$

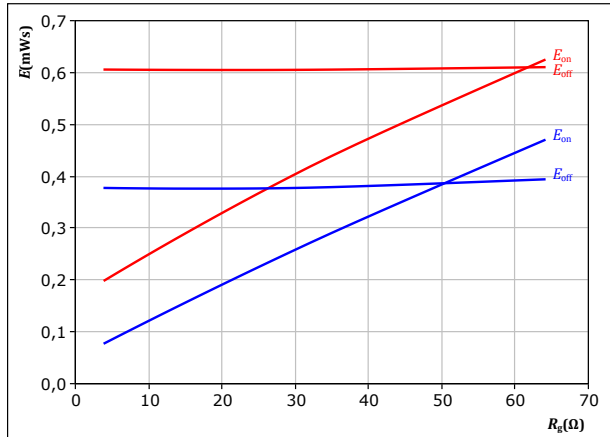

With an inductive load at
 $V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A
 T_j : — 25 °C
— 125 °C

figure 21. FWD


Typical reverse recovered energy loss as a function of collector current
 $E_{rec} = f(I_c)$

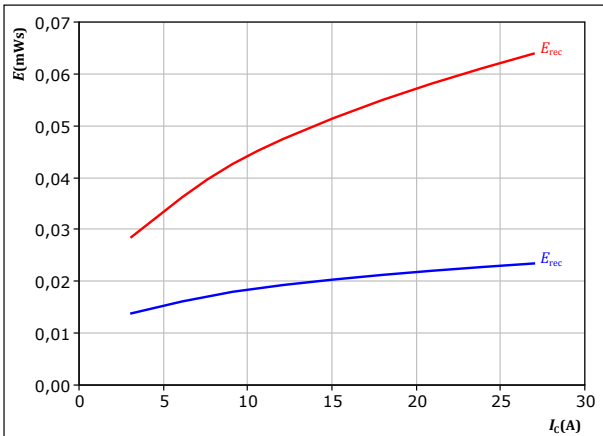

With an inductive load at
 $V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 T_j : — 25 °C
— 125 °C

figure 22. FWD

Typical reverse recovered energy loss as a function of gate resistor
 $E_{rec} = f(R_g)$

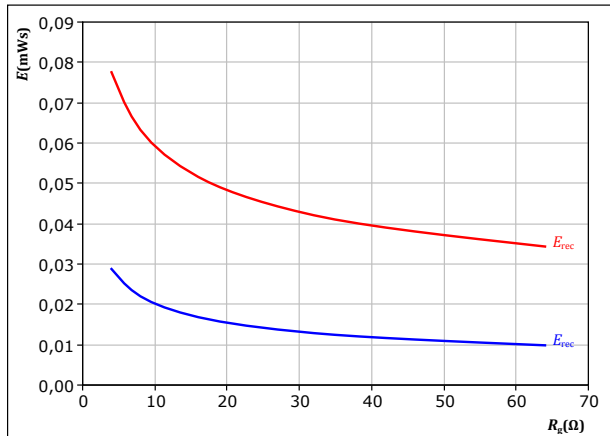


With an inductive load at
 $V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A
 T_j : — 25 °C
— 125 °C



Buck Switching Characteristics

figure 23. IGBT


Typical switching times as a function of collector current
 $t = f(I_c)$

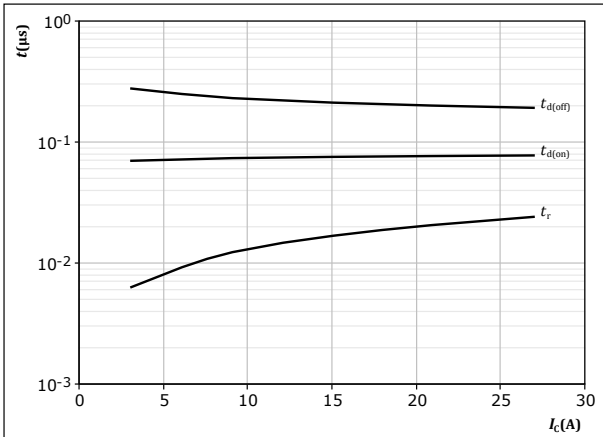

With an inductive load at
 $T_j = 125 \text{ }^\circ\text{C}$
 $V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g(on)} = 16 \text{ } \Omega$
 $R_{g(off)} = 16 \text{ } \Omega$

figure 24. IGBT


Typical switching times as a function of gate resistor
 $t = f(R_g)$

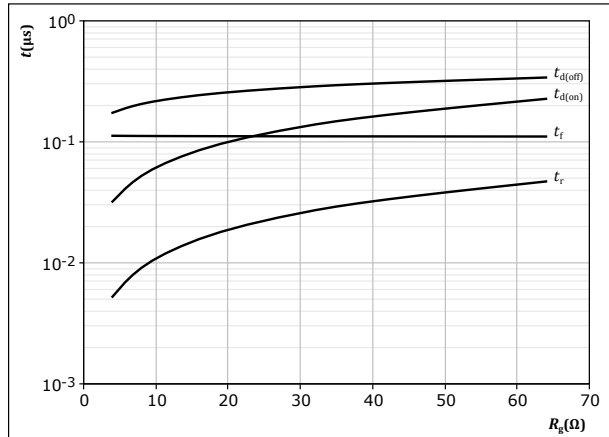

With an inductive load at
 $T_j = 125 \text{ }^\circ\text{C}$
 $V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 15 \text{ A}$

figure 25. FWD


Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_c)$

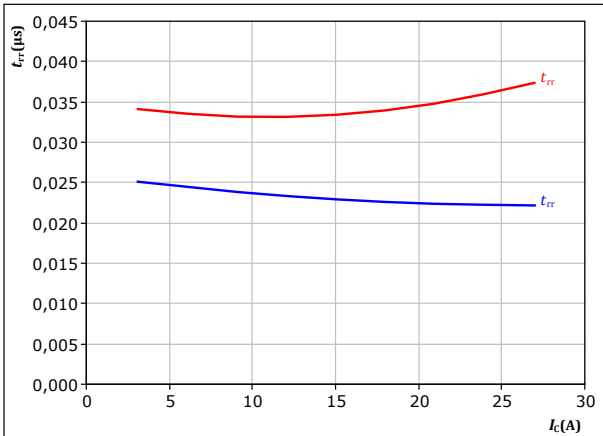

With an inductive load at
 $V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g(on)} = 16 \text{ } \Omega$
 $T_j: \text{ — } 25 \text{ }^\circ\text{C}$
 $\text{ — } 125 \text{ }^\circ\text{C}$

figure 26. FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor
 $t_{rr} = f(R_{g(off)})$

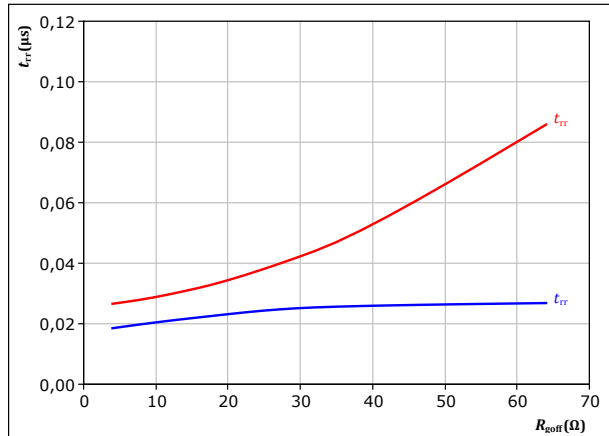

With an inductive load at
 $V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 15 \text{ A}$
 $T_j: \text{ — } 25 \text{ }^\circ\text{C}$
 $\text{ — } 125 \text{ }^\circ\text{C}$




Buck Switching Characteristics

figure 27. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

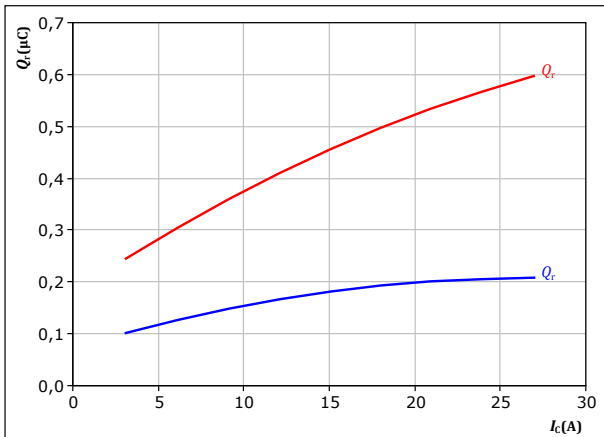

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{goff} = 16$ Ω

T_j : — 25 °C
— 125 °C

figure 28. FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

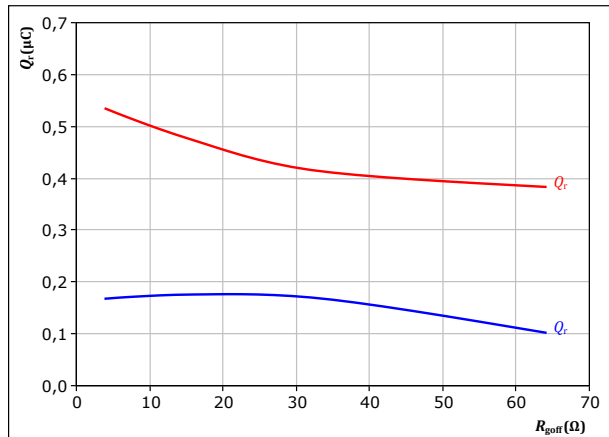

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A

T_j : — 25 °C
— 125 °C

figure 29. FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

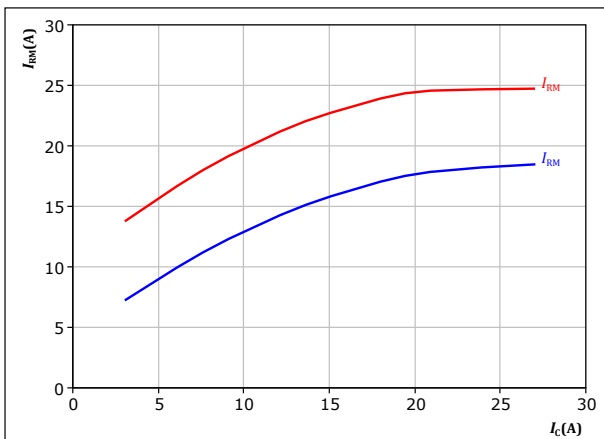

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{goff} = 16$ Ω

T_j : — 25 °C
— 125 °C

figure 30. FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

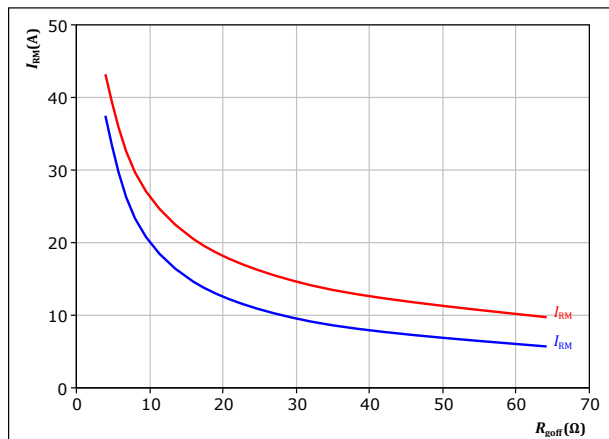

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A


T_j : — 25 °C
— 125 °C



Buck Switching Characteristics

figure 31. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

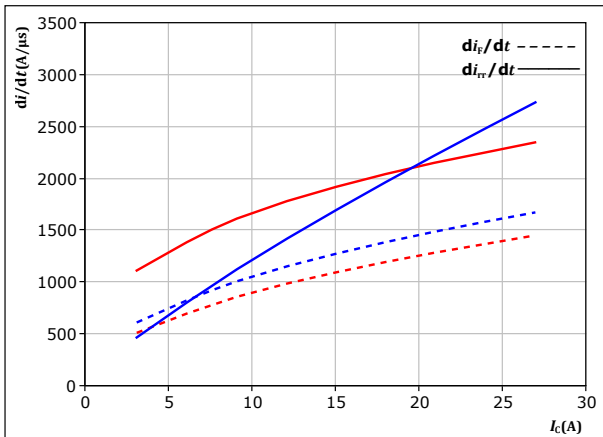


With an inductive load at

$V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{goff} = 16 \text{ } \Omega$

T_j : — 25 °C
 — 125 °C

figure 32. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_r/dt = f(R_{goff})$

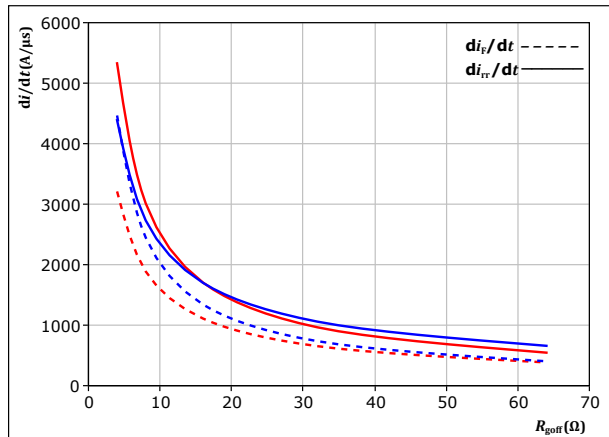

With an inductive load at


$V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 15 \text{ A}$

T_j : — 25 °C
 — 125 °C

figure 33. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

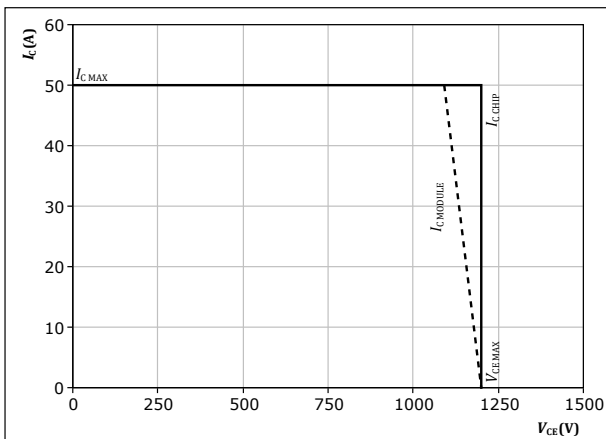


At $T_j = 125 \text{ } ^\circ\text{C}$
 $R_{goff} = 16 \text{ } \Omega$
 $R_{goff} = 16 \text{ } \Omega$



Boost Switching Characteristics

figure 34. IGBT

Typical switching energy losses as a function of collector current
 $E = f(I_c)$

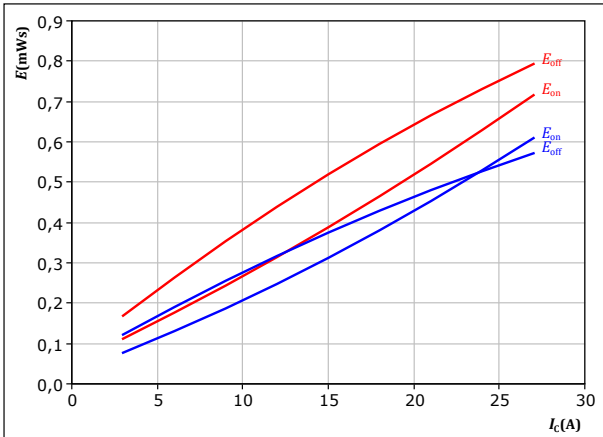


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

T_j : — 25 °C
 — 125 °C

figure 35. IGBT

Typical switching energy losses as a function of gate resistor
 $E = f(R_g)$

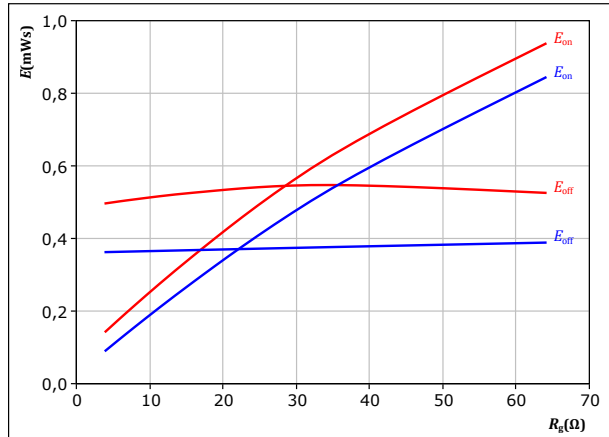


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A

T_j : — 25 °C
 — 125 °C

figure 36. FWD

Typical reverse recovered energy loss as a function of collector current
 $E_{rec} = f(I_c)$

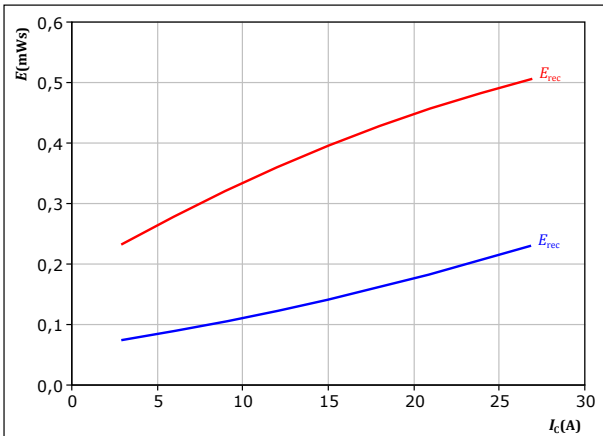


With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω

T_j : — 25 °C
 — 125 °C

figure 37. FWD

Typical reverse recovered energy loss as a function of gate resistor
 $E_{rec} = f(R_g)$

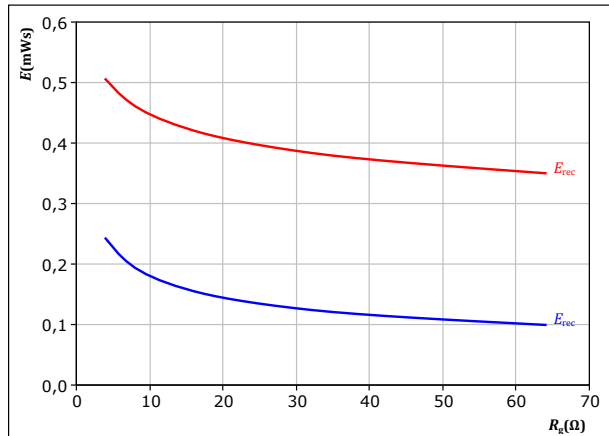

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A


T_j : — 25 °C
 — 125 °C



Boost Switching Characteristics

figure 38. IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

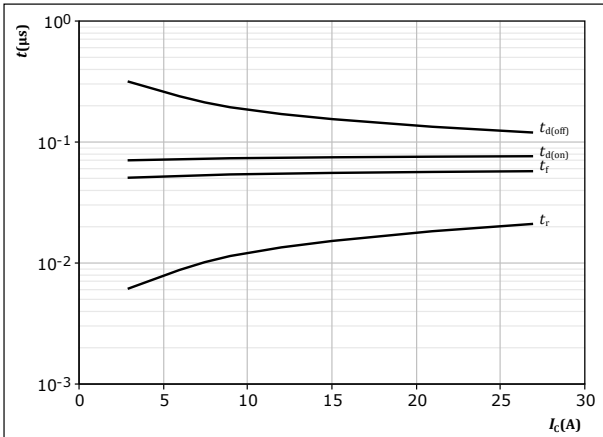


With an inductive load at

$T_j = 125 \text{ } ^\circ\text{C}$
 $V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g(on)} = 16 \text{ } \Omega$
 $R_{g(off)} = 16 \text{ } \Omega$

figure 39. IGBT

Typical switching times as a function of gate resistor
 $t = f(R_g)$

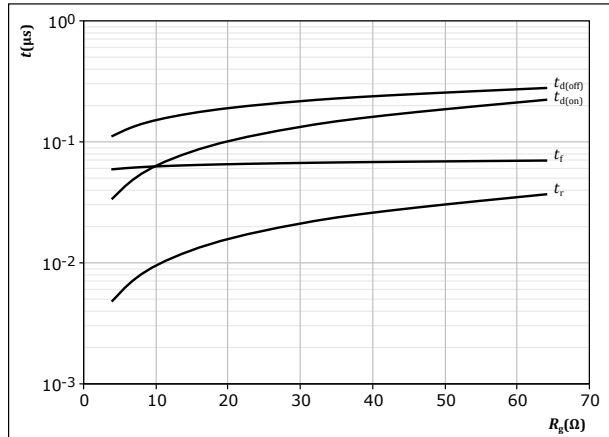


With an inductive load at

$T_j = 125 \text{ } ^\circ\text{C}$
 $V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 15 \text{ A}$

figure 40. FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

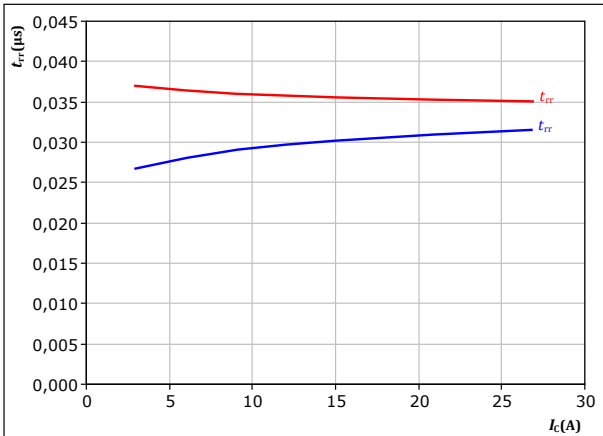


With an inductive load at

$V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g(on)} = 16 \text{ } \Omega$

T_j : — 25 °C
— 125 °C

figure 41. FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor
 $t_{rr} = f(R_{g(off)})$

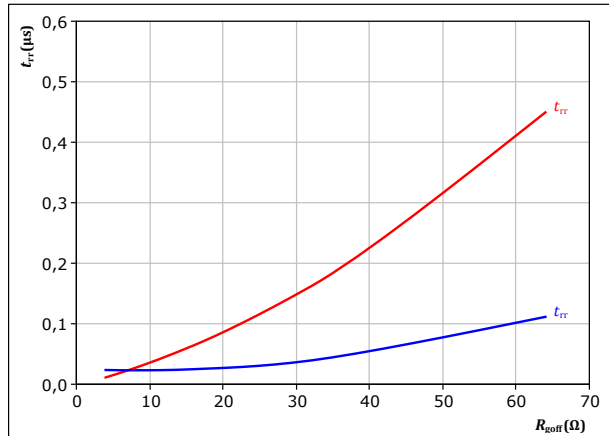

With an inductive load at

$V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 15 \text{ A}$

T_j : — 25 °C
— 125 °C




Boost Switching Characteristics

figure 42. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

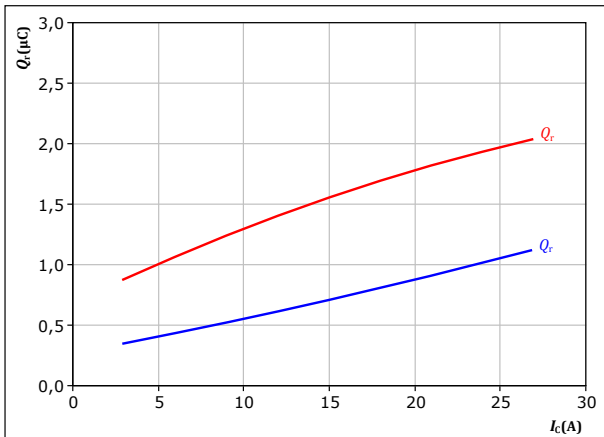

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{goff} = 16$ Ω

T_j : — 25 °C
— 125 °C

figure 43. FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

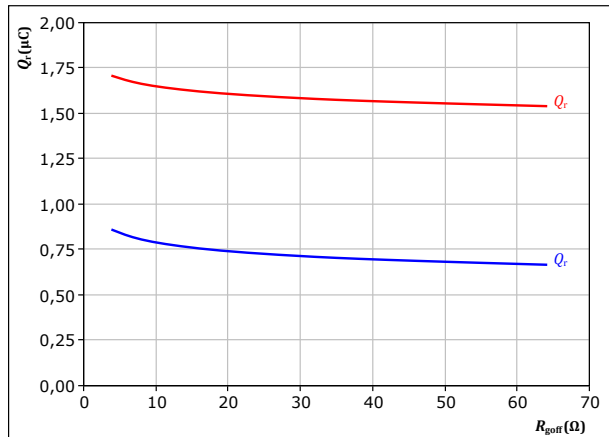

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A

T_j : — 25 °C
— 125 °C

figure 44. FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

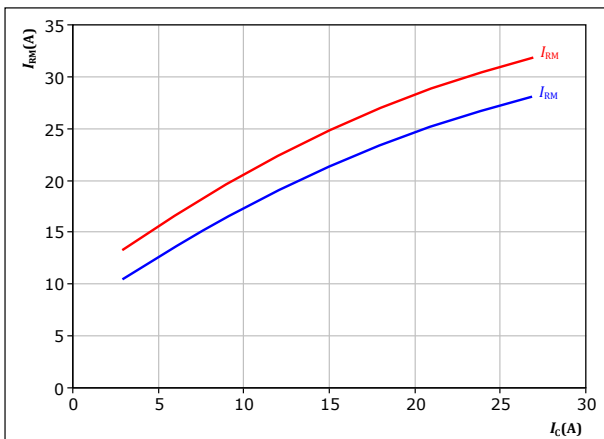

With an inductive load at


$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $R_{goff} = 16$ Ω

T_j : — 25 °C
— 125 °C

figure 45. FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

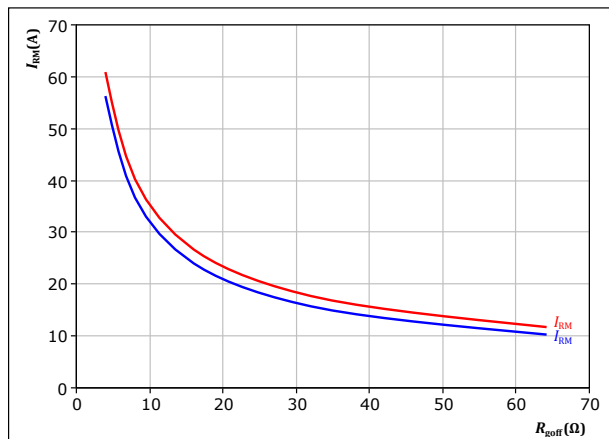

With an inductive load at

$V_{CE} = 350$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A


T_j : — 25 °C
— 125 °C



Boost Switching Characteristics

figure 46. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

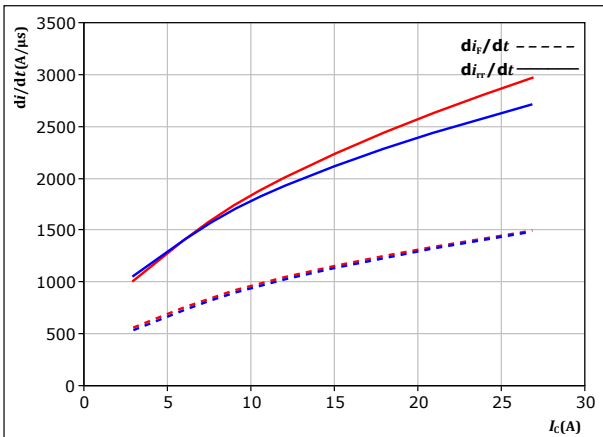


With an inductive load at

$V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{goff} = 16 \text{ } \Omega$

T_j : — 25 °C
 — 125 °C

figure 47. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_r/dt = f(R_{goff})$

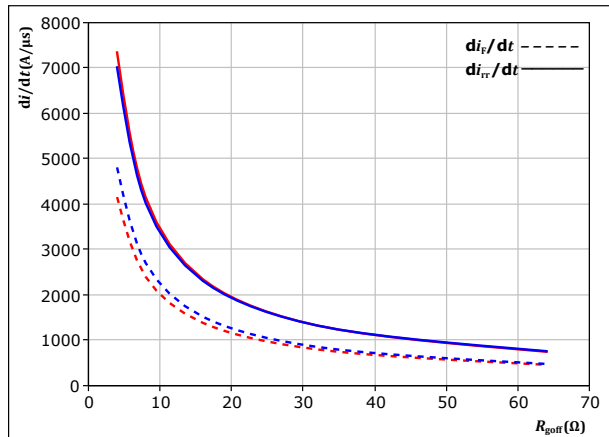

With an inductive load at


$V_{CE} = 350 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 15 \text{ A}$

T_j : — 25 °C
 — 125 °C

figure 48. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

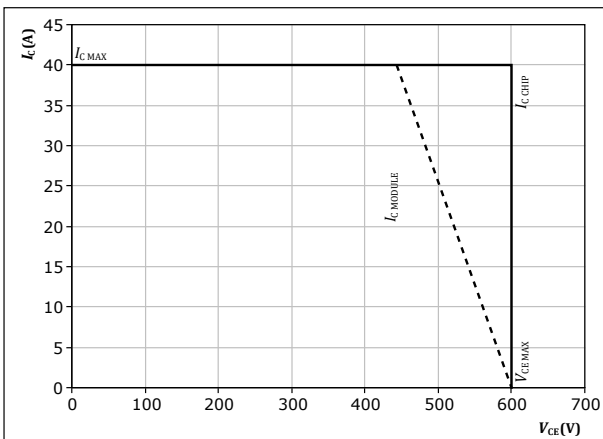

At $T_j = 125 \text{ } ^\circ\text{C}$
 $R_{goff} = 16 \text{ } \Omega$
 $R_{goff} = 16 \text{ } \Omega$



Switching Definitions

figure 49. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

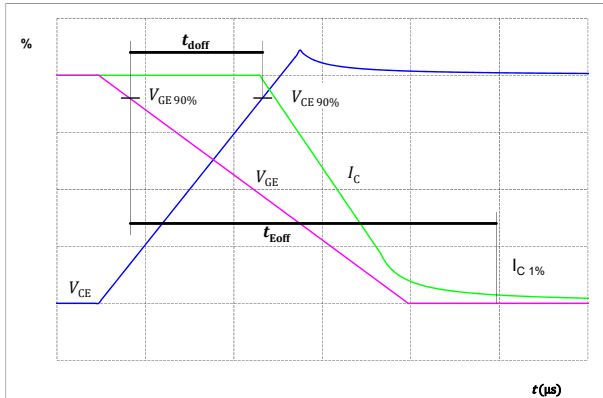


figure 50. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

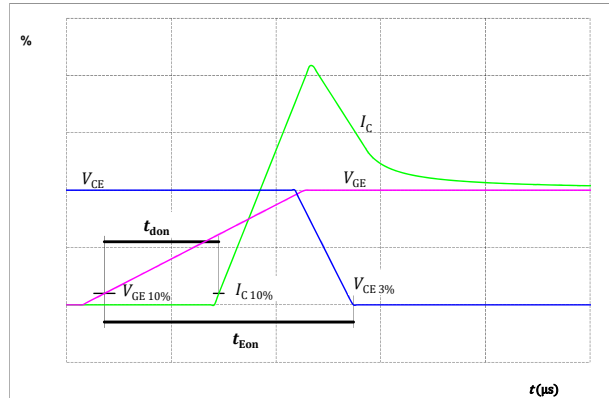


figure 51. IGBT

Turn-off Switching Waveforms & definition of t_f


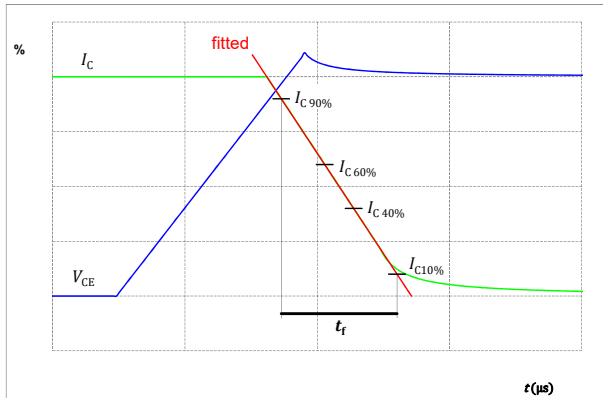


figure 52. IGBT

Turn-on Switching Waveforms & definition of t_r



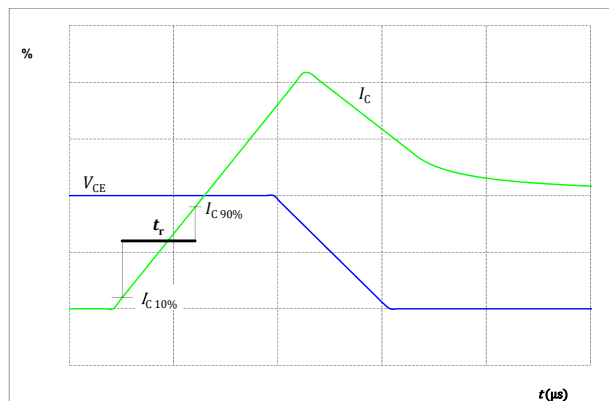

Switching Definitions

figure 53. FWD

Turn-off Switching Waveforms & definition of t_{rr}


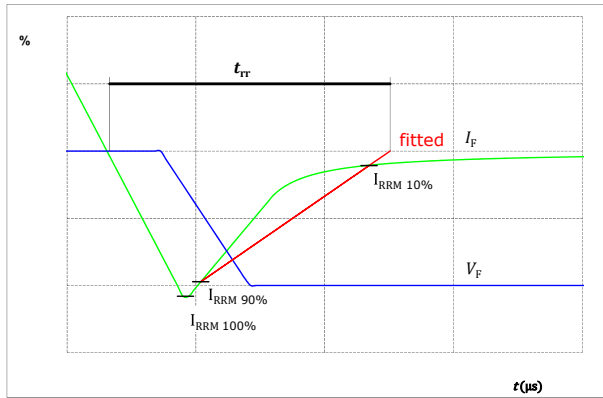


figure 54. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)



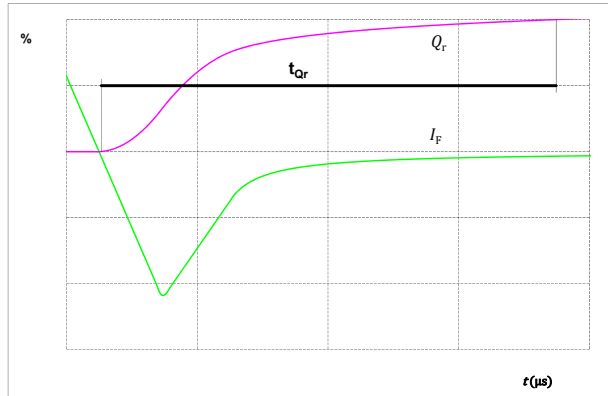

Vincotech



10-FY12M3A025SH-M746F08
datasheet

| Ordering Code | |
|--|-----------------------------|
| Version | Ordering Code |
| Without thermal paste | 10-FY12M3A025SH-M746F08 |
| With thermal paste (5,2 W/mK, PTM6000HV) | 10-FY12M3A025SH-M746F08-/7/ |
| With thermal paste (3,4 W/mK, PSX-P7) | 10-FY12M3A025SH-M746F08-/3/ |

| Marking | | | | | | |
|---------|-------------------|---|----------------------------|-------------------------------|--------------------------|-----------------------|
| | Text | Name NN-NNNNNNNNNNNNNN- TTTTIV | Date code WWYY | UL & VIN UL VIN | Lot LLLLL | Serial SSSS |
| | Datamatrix | Type&Ver TTTTIV | Lot number LLLLL | Serial SSSS | Date code WWYY | |

Outline


| Pin table [mm] | | | |
|----------------|-------|-------|----------|
| Pin | X | Y | Function |
| 1 | 52,2 | 0 | +DC |
| 2 | 46,2 | 0 | GND |
| 3 | 47 | 3 | G3 |
| 4 | 40,9 | 0 | GND |
| 5 | 44 | 3 | S3 |
| 6 | 34,9 | 0 | -DC |
| 7 | 34,9 | 3 | -DC |
| 8 | 28,9 | 0 | GND |
| 9 | 25,9 | 2 | S7 |
| 10 | 22,9 | 0 | GND |
| 11 | 22,9 | 3 | G7 |
| 12 | 16,9 | 0 | +DC |
| 13 | 16,9 | 3 | +DC |
| 14 | 10,9 | 0 | GND |
| 15 | 10,9 | 3 | G11 |
| 16 | 6 | 0 | GND |
| 17 | 7,9 | 3 | S11 |
| 18 | 0 | 0 | -DC |
| 19 | 4,75 | 8,9 | S12 |
| 20 | 1,75 | 7,9 | G12 |
| 21 | 13,25 | 13,7 | S10 |
| 22 | 13,25 | 10,7 | G10 |
| 23 | 21,25 | 10,7 | G6 |
| 24 | 21,25 | 13,7 | S6 |
| 25 | 30,4 | 9,7 | S8 |
| 26 | 33,4 | 9,7 | G8 |
| 27 | 40,15 | 11,2 | S4 |
| 28 | 40,15 | 8,2 | G4 |
| 29 | 50,45 | 10,7 | S2 |
| 30 | 50,45 | 13,7 | G2 |
| 31 | 0 | 16,35 | NTC |
| 32 | 0 | 19,35 | NTC |
| 33 | 5,45 | 28,2 | OUT3 |
| 34 | 8,25 | 28,2 | OUT3 |
| 35 | 11,25 | 28,2 | G9 |
| 36 | 14,25 | 28,2 | S9 |
| 37 | 23 | 28,2 | S5 |
| 38 | 26 | 28,2 | G5 |
| 39 | 29 | 28,2 | OUT2 |
| 40 | 31,8 | 28,2 | OUT2 |
| 41 | 40,4 | 28,2 | OUT1 |
| 42 | 43,2 | 28,2 | OUT1 |
| 43 | 46,2 | 28,2 | G1 |
| 44 | 49,2 | 28,2 | S1 |

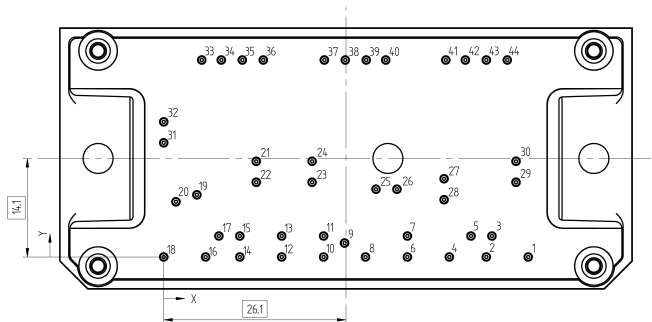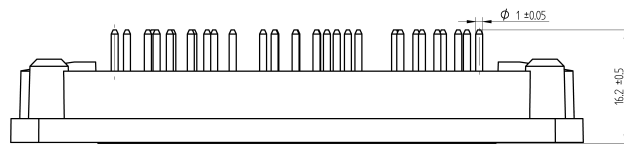

Tolerance of pinpositions: $\pm 0,5\text{mm}$ at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

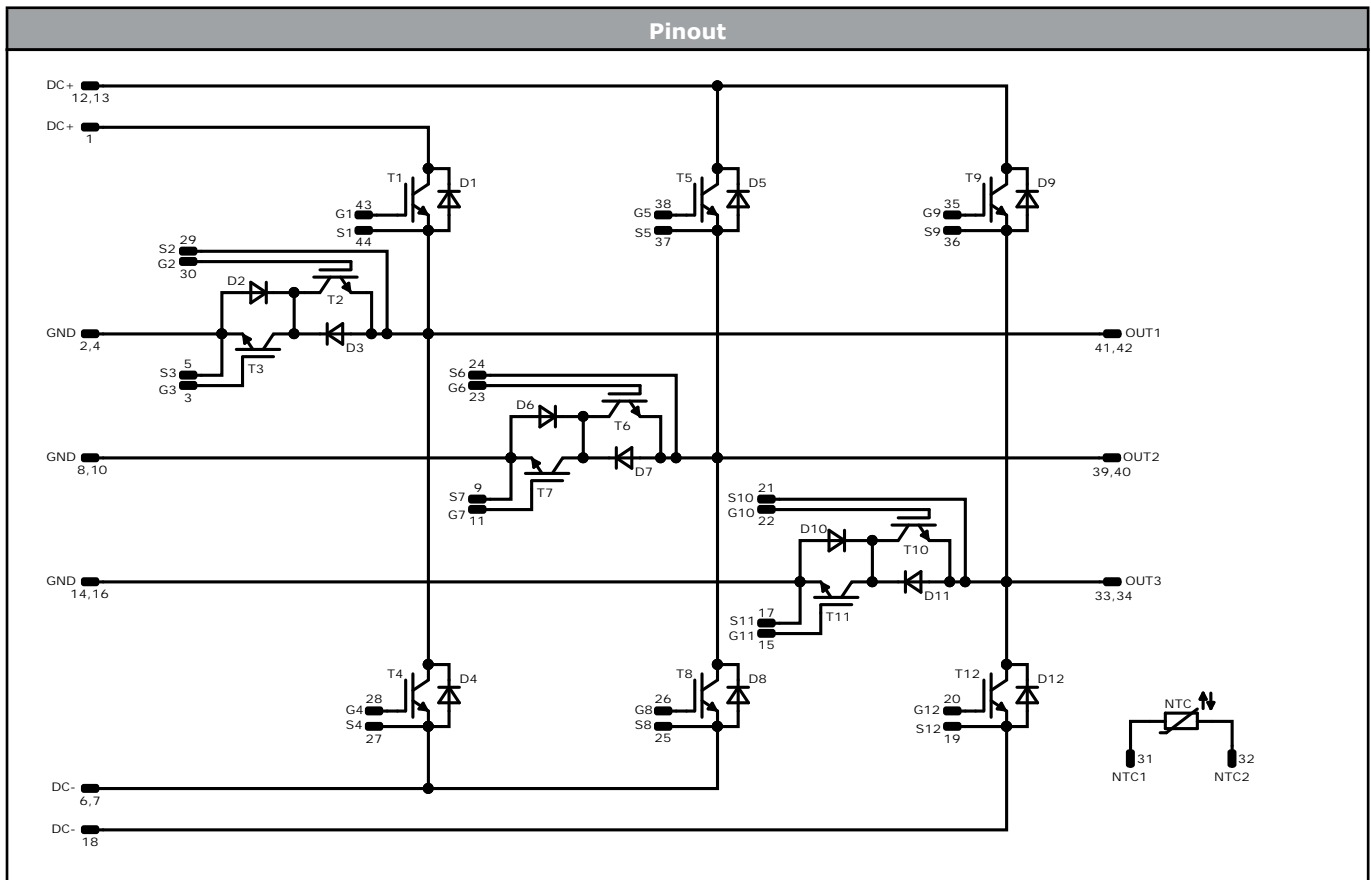

| Identification | | | | | |
|--------------------------|------------|---------|---------|--------------|---------|
| ID | Component | Voltage | Current | Function | Comment |
| T1, T4, T5, T8, T9, T12 | IGBT | 1200 V | 25 A | Buck Switch | |
| D2, D3, D6, D7, D10, D11 | FWD | 600 V | 15 A | Buck Diode | |
| T3, T2, T7, T6, T11, T10 | IGBT | 600 V | 20 A | Boost Switch | |
| D1, D4, D5, D8, D9, D12 | FWD | 1200 V | 8 A | Boost Diode | |
| NTC | Thermistor | | | Thermistor | |




Vincotech

| Packaging instruction | | | | |
|---------------------------------------|------|----------|------|--------|
| Standard packaging quantity (SPQ) 100 | >SPQ | Standard | <SPQ | Sample |

| Handling instruction |
|---|
| Handling instructions for <i>flow 1</i> packages see vincotech.com website. |

| Package data |
|--|
| Package data for <i>flow 1</i> packages see vincotech.com website. |

| Vincotech thermistor reference |
|--|
| See Vincotech thermistor reference table at vincotech.com website. |

| UL recognition and file number |
|---|
| This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.  |

| Document No.: | Date: | Modification: | Pages |
|-------------------------------|--------------|--|-------|
| 10-FY12M3A025SH-M746F08-D6-14 | 12 Sep. 2021 | New Datasheet format, module is unchanged Introduce Rth values with PSX-P7 TIM Separate datasheet for pressfit pin version | |

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.