
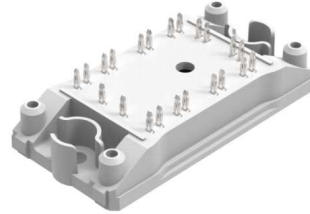


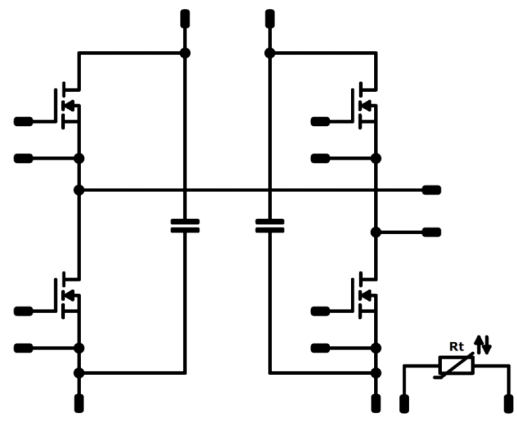

Vincotech

<i>fast</i> PACK 0 SiC	900 V / 35 mΩ
<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Features</div> <ul style="list-style-type: none"> 900 V, SiC MOS Switching frequency up to 400 kHz Suitable for hard switching / soft switching Increased power density NTC 	<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">flow 0 17mm housing</div> 
<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Target applications</div> <ul style="list-style-type: none"> Power Supply 	<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Schematic</div> 
<div style="background-color: #eee; padding: 2px; margin-bottom: 5px;">Types</div> <ul style="list-style-type: none"> 10-PC094PC035ME03-L629F46Y 	

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
H-Bridge Switch				
Drain-source voltage	V_{DSS}		900	V
Drain current	I_D	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	180	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	63	W
Gate-source voltage	V_{GSS}		-8/+18	V
Maximum Junction Temperature	T_{jmax}		150	°C
DC Link Capacitance				
Maximum DC voltage	V_{MAX}		1000	V
Operation Temperature	T_{op}		-55...+125	°C



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
-----------	--------	-----------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...(T _{max} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage $t_p = 2\text{ s}$	4000	V
Creepage distance			min. 12,7	mm
Clearance			9,6	mm
Comparative Tracking Index	CTI		> 200	



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GE} [V]	V_{GS} [V]	V_{CE} [V]	V_{DS} [V]	I_C [A]	I_D [A]	T_j [°C]	Min	

H-Bridge Switch

Static

Drain-source on-state resistance	$r_{DS(on)}$		15		40	25 150		35 45	39	mΩ
Gate-source threshold voltage	$V_{GS(th)}$	$V_{GS} = V_{DS}$			0,01	25	1,8	2,1	4	V
Gate to Source Leakage Current	I_{GSS}		15	0		25			500	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	900		25			200	μA
Internal gate resistance	r_g							2,35		Ω
Gate charge	Q_g							61		nC
Gate to source charge	Q_{GS}	-4/15	400	40	25			15		
Gate to drain charge	Q_{GD}							24		
Short-circuit input capacitance	C_{iss}							1320		pF
Short-circuit output capacitance	C_{oss}	$f = 1$ MHz	0	600	25			120		
Reverse transfer capacitance	C_{rss}							8		

Reverse Diode Static

Diode forward voltage	V_{SD}		-4		10	25		4,8		V
-----------------------	----------	--	----	--	----	----	--	-----	--	---

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	phase-change material $\lambda = 3,4$ W/mK						1,12		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

DC Link Capacitance

Capacitance	C							94		nF
Tolerance							-10		+10	%
Climatic category							55/125/56			



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	I_D [A]	I_C [A]	T_j [°C]	Min	Typ	

Thermistor

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	P					25		5		mW
Power dissipation constant						25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$				25		3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$				25		4000		K
Vincotech NTC Reference									I	



Vincotech


Ordering Code & Marking						
Version			Ordering Code			
without thermal paste 12mm housing with Press-fit pins			10-PC094PC035ME03-L629F46Y			
Text	Name		Date code	UL & VIN	Lot	Serial
	NN-NNNNNNNNNNNNNNN-TTTTIV		WWYY	UL VIN	LLLLL	SSSS
Datamatrix	Type&Ver	Lot number	Serial	Date code		
	TTTTTIV	LLLLL	SSSS	WWYY		

Pin table [mm]			
Pin	X	Y	Function
1	0	22,5	G11
2	2,9	22,5	S11
3	8,3	22,5	DC-1
4	10,8	22,5	DC-1
5	19,6	22,5	DC+1
6	22,1	22,5	DC+1
7	29,1	22,5	S12
8	32	22,5	G12
9	33,5	17,8	Ph1
10	33,5	15,3	Ph1
11	33,5	7,2	Ph2
12	33,5	4,7	Ph2
13	32	0	G14
14	29,1	0	S14
15	22,1	0	DC+2
16	19,6	0	DC+2
17	10,8	0	DC-2
18	8,3	0	DC-2
19	2,9	0	S13
20	0	0	G13
21	0	8	Therm1
22	0	14,5	Therm2

Tolerance of pinpositions: ±0,5mm at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

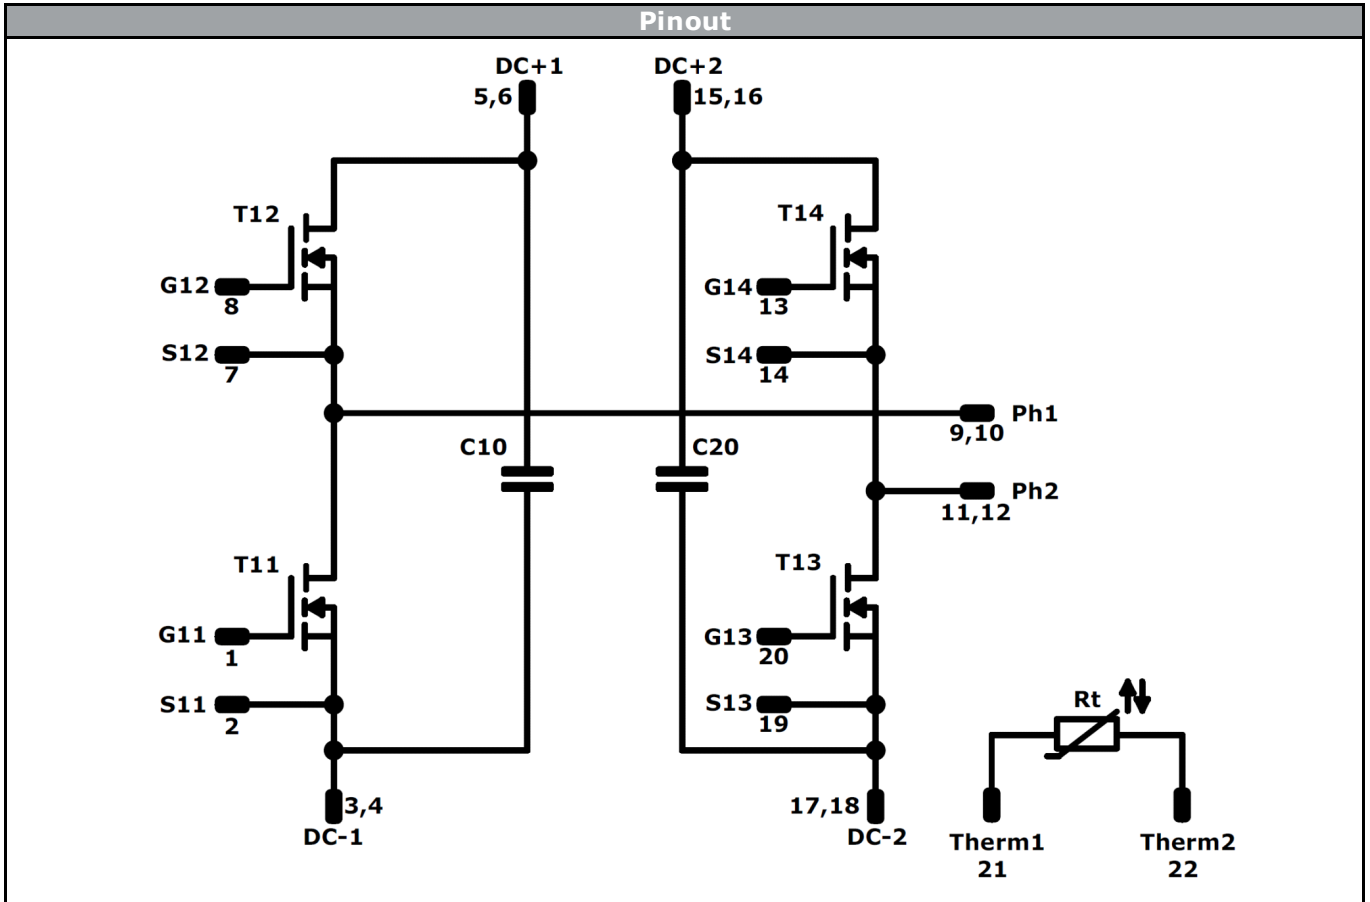

Identification					
ID	Component	Voltage	Current	Function	Comment
T11-T14	MOSFET	900 V	35 mΩ	H-Bridge Switch	
C10, C20	Capacitor	1000 V		DC Link Capacitance	
Rt	Thermistor			Thermistor	




Vincotech

Packaging instruction			
Standard packaging quantity (SPQ) 135	>SPQ	Standard	<SPQ Sample

Handling instruction
Handling instructions for <i>flow 0</i> packages see vincotech.com website.

Package data
Package data for <i>flow 0</i> packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-PC094PC035ME03-L629F46Y-T1-14	22 Mar. 2017		

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.