
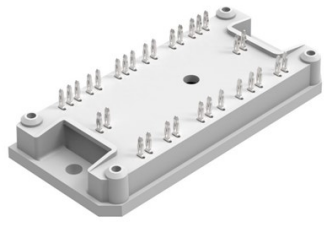


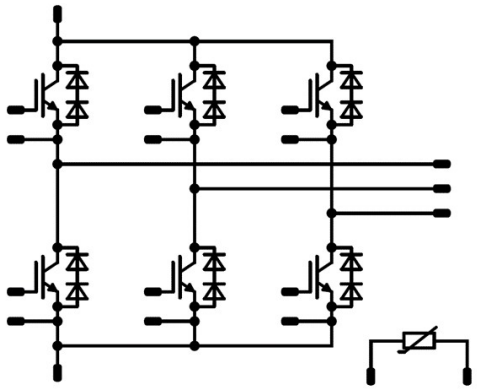

Vincotech

flowPACK 1		1200 V / 40 A
<div style="background-color: #eee; padding: 5px; margin-bottom: 10px;">Features</div> <ul style="list-style-type: none"> High speed IGBT4 Tandem diodes for improved thermal performance Integrated thermal sensor <div style="background-color: #eee; padding: 5px; margin-bottom: 10px;">Target applications</div> <ul style="list-style-type: none"> Embedded Drives Industrial Drives <div style="background-color: #eee; padding: 5px;">Types</div> <ul style="list-style-type: none"> 10-PY126TA040SH-L827F68Y 	<div style="background-color: #eee; padding: 5px; margin-bottom: 10px;">flow 1 12 mm housing</div>  <div style="background-color: #eee; padding: 5px; margin-bottom: 10px;">Schematic</div> 	

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	120	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	111	W
Gate-emitter voltage	V_{GES}		±20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$ $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	10	µs
Maximum junction temperature	T_{jmax}		175	°C



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Diode				
Peak repetitive reverse voltage	V_{RRM}		1300	V
Continuous (direct) forward current	I_F	$T_j = T_{j\text{max}}$ $T_s = 80\text{ °C}$	34	A
Repetitive peak forward current	I_{FRM}		80	A
Total power dissipation	P_{tot}	$T_j = T_{j\text{max}}$ $T_s = 80\text{ °C}$	88	W
Maximum junction temperature	$T_{j\text{max}}$		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...($T_{j\text{max}} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
		AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			min. 12,7	mm
Clearance			7,9	mm
Comparative Tracking Index	CTI		> 200	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Parameter	Symbol	$V_{GE} = V_{CE}$	V_{GS} [V]	V_{GE} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	Unit
Gate-emitter threshold voltage	$V_{GE(th)}$				0,0015	25	5,3	5,8	6,3	V
Collector-emitter saturation voltage	V_{CESat}		15		40	25 125 150	1,78	1,94 2,24 2,32	2,42	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			5	μA
Gate-emitter leakage current	I_{GES}		20	0		25			120	nA
Internal gate resistance	r_g							none		Ω
Input capacitance	C_{ies}							2330		pF
Output capacitance	C_{oes}	$f = 1 \text{ Mhz}$	0	25		25		150		
Reverse transfer capacitance	C_{res}							130		
Gate charge	Q_g		15	960	40	25		185		nC

Thermal

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)				0,86 K/W

Dynamic

Parameter	Symbol	Conditions	V_{GS} [V]	V_{GE} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	Unit		
Turn-on delay time	$t_{d(on)}$	$R_{gon} = 8 \Omega$ $R_{goff} = 8 \Omega$				25 125 150		62 63 64		ns		
Rise time	t_r					25 125 150		13 15 16				
Turn-off delay time	$t_{d(off)}$					25 125 150		165 217 229				
Fall time	t_f					25 125 150		55 63 79				
Turn-on energy (per pulse)	E_{on}		$Q_{t-FWD} = 1,4 \mu\text{C}$ $Q_{t-FWD} = 2,7 \mu\text{C}$ $Q_{t-FWD} = 2,9 \mu\text{C}$				25 125 150		1,170 1,709 1,840			mWs
Turn-off energy (per pulse)	E_{off}						25 125 150		1,463 2,332 2,535			



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GE} [V]	V_{CE} [V]	I_C [A]	T_j [°C]	Min	Typ	Max		

Inverter Diode

Static

Parameter	Symbol	V_{GE} [V]	V_{CE} [V]	I_C [A]	T_j [°C]	Min	Typ	Max	Unit
Forward voltage	V_F			40	25 125 150		3,05 2,92 2,86	3,84	V
Reverse leakage current	I_R		1300		25			2,1	μA

Thermal

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)		1,08		K/W

Dynamic

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Peak recovery current	I_{RRM}		25 125 150	41 48 50		A
Reverse recovery time	t_{rr}		25 125 150	74 126 133		ns
Recovered charge	Q_r	$di/dt = 3039$ A/μs $di/dt = 3062$ A/μs $di/dt = 2575$ A/μs	±15 600 40	25 125 150	1,442 2,660 2,927	μC
Reverse recovered energy	E_{rec}		25 125 150	0,500 0,965 1,062		mWs
Peak rate of fall of recovery current	$(di_{rf}/dt)_{max}$		25 125 150	2993 705 751		A/μs

Thermistor

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Rated resistance	R		25	22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484$ Ω	100	-5	5	%
Power dissipation	P		25	5		mW
Power dissipation constant			25	1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ±1 %	25	3962		K
B-value	$B_{(25/100)}$	Tol. ±1 %	25	4000		K
Vincotech NTC Reference					I	



Inverter Switch Characteristics

figure 1. IGBT

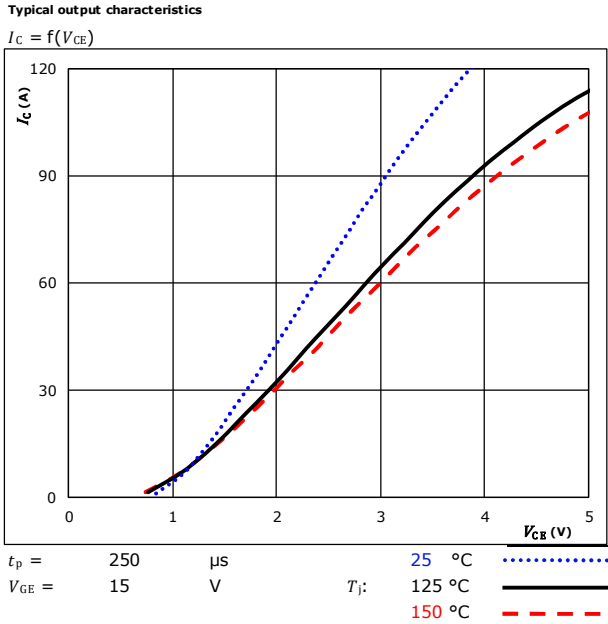


figure 2. IGBT

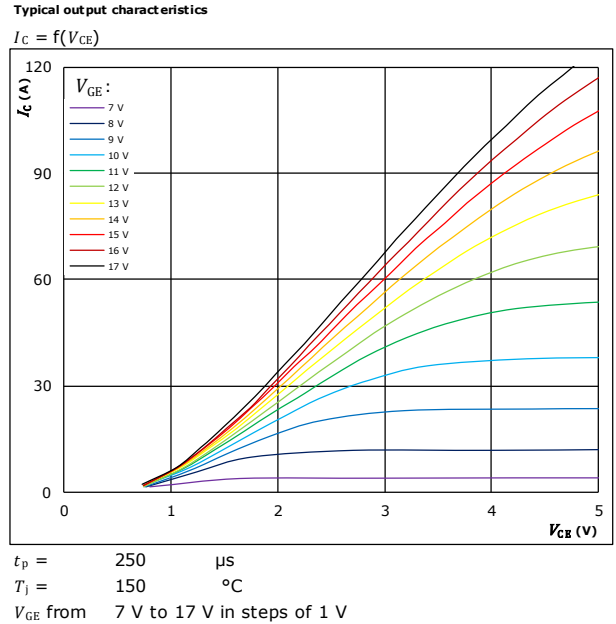


figure 3. IGBT


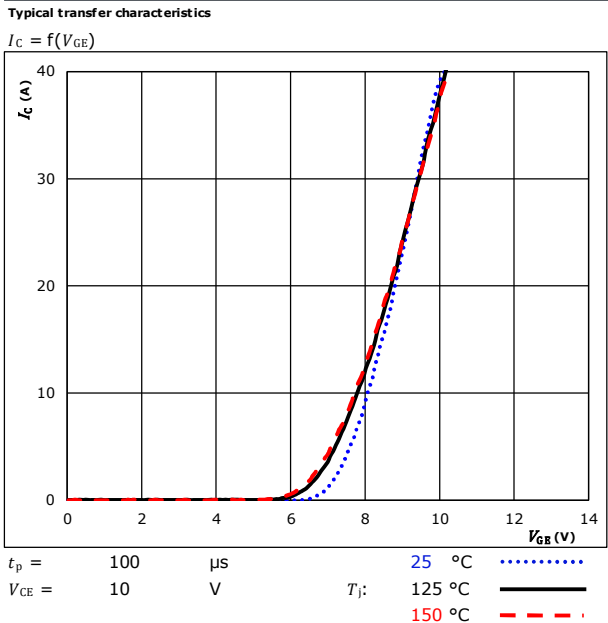


figure 4. IGBT




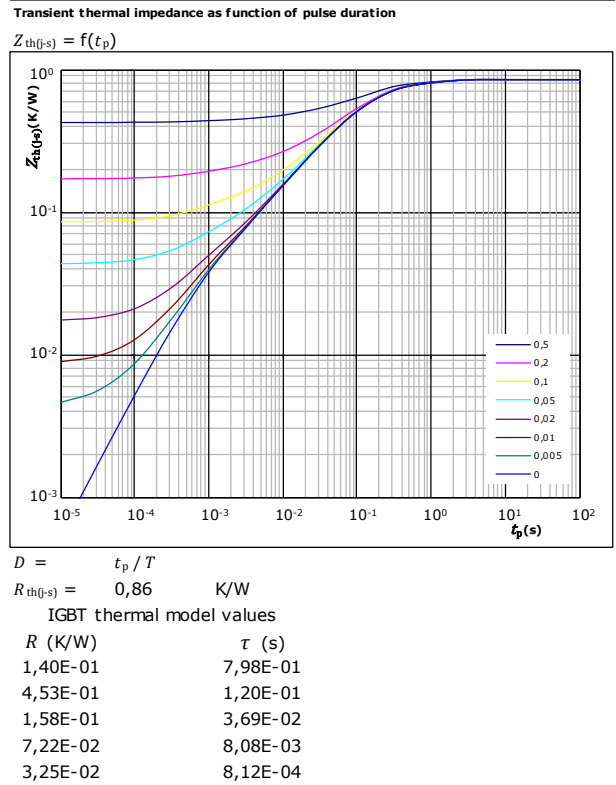

Inverter Switch Characteristics

figure 5. IGBT


Gate voltage vs gate charge

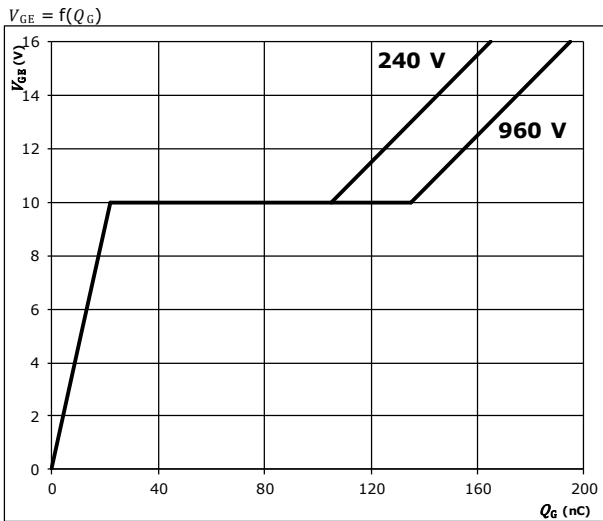

$I_C = 40$ A

figure 6. IGBT


Safe operating area

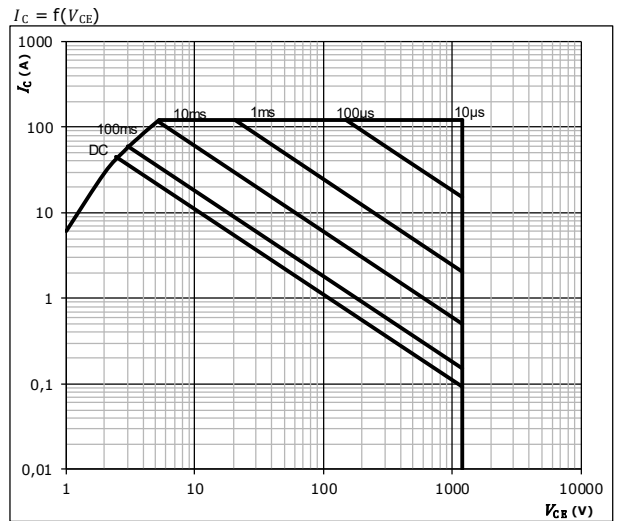

$D =$ single pulse
 $T_s = 80$ °C
 $V_{GE} = \pm 15$ V
 $T_j = T_{jmax}$

figure 7. IGBT


Short circuit duration as a function of V_{GE}

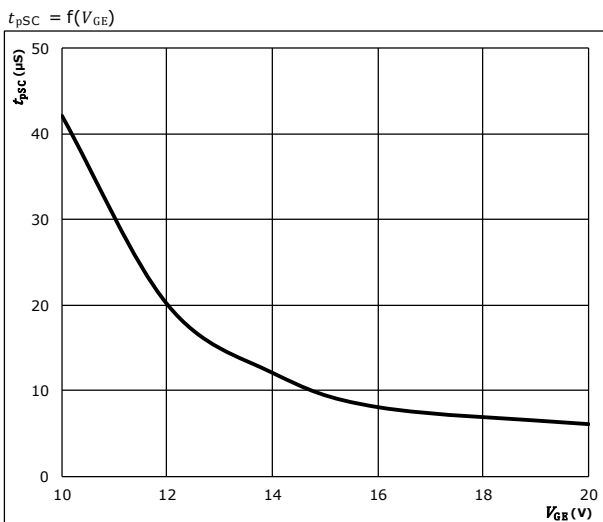

$V_{CE} = 600$ V
 $T_j \leq 150$ °C

figure 8. IGBT

Typical short circuit current as a function of V_{GE}

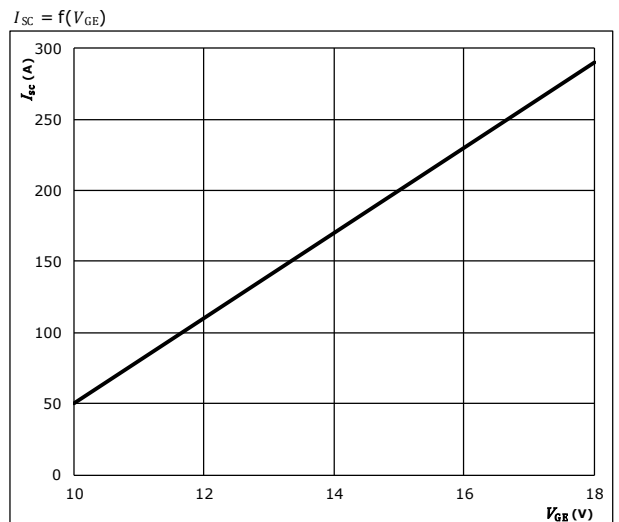

$V_{CE} \leq 600$ V
 $T_j \leq 25$ °C




Inverter Diode Characteristics

figure 1. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

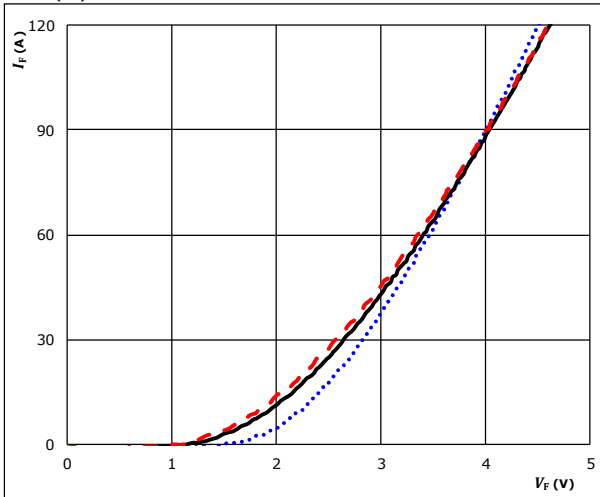


$t_p = 250 \mu s$
 T_j : 25 °C
125 °C ———
150 °C - - -

figure 2. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

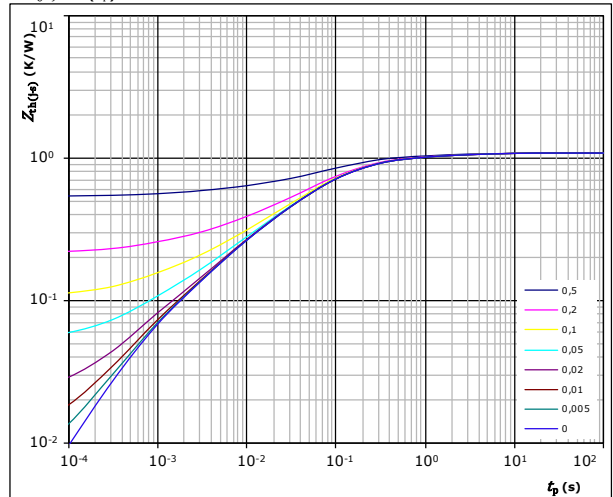

$D = t_p / T$
 $R_{th(j-s)} = 1,08 \text{ K/W}$
FWD thermal model values


R (K/W)	τ (s)
4,47E-02	5,62E+00
1,14E-01	8,52E-01
4,25E-01	1,42E-01
3,22E-01	3,69E-02
1,30E-01	5,98E-03
4,74E-02	7,52E-04

Thermistor Characteristics

figure 1. Thermistor

Typical NTC characteristic as a function of temperature

$$R = f(T)$$

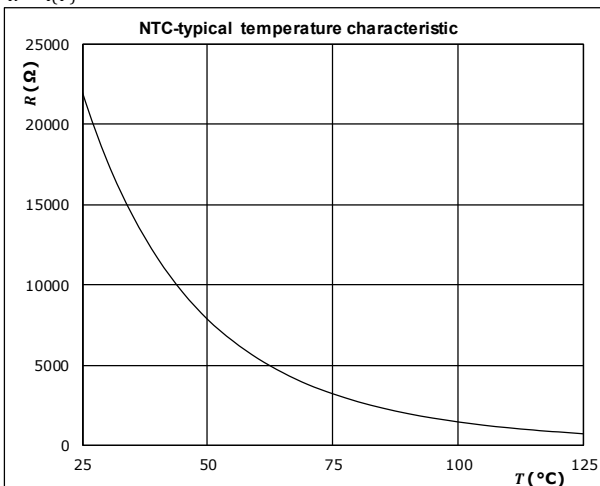




Inverter Switching Characteristics

figure 1. IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

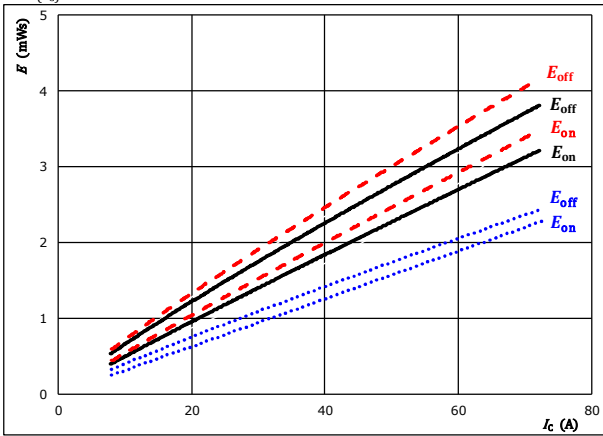


With an inductive load at

$V_{CE} = 600$ V	$T_j = 25$ °C
$V_{GE} = \pm 15$ V	$T_j = 125$ °C	————
$R_{gon} = 8$ Ω	$T_j = 150$ °C	-----
$R_{goff} = 8$ Ω		

figure 2. IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

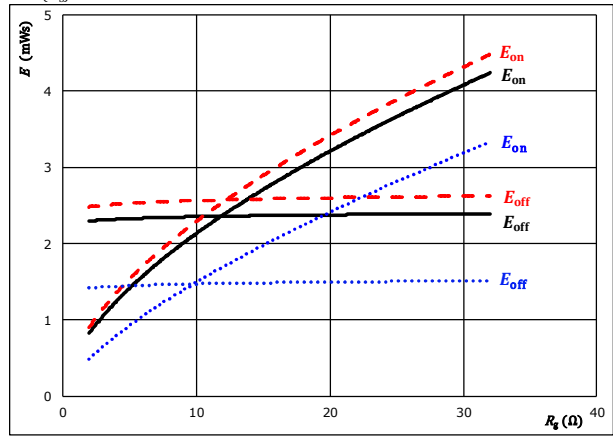


With an inductive load at

$V_{CE} = 600$ V	$T_j = 25$ °C
$V_{GE} = \pm 15$ V	$T_j = 125$ °C	————
$I_c = 40$ A	$T_j = 150$ °C	-----

figure 3. FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

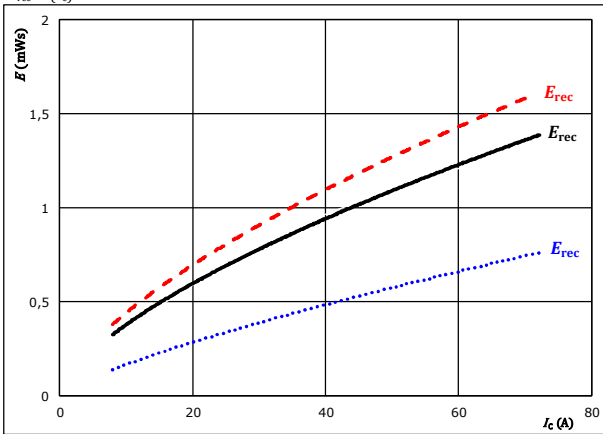


With an inductive load at

$V_{CE} = 600$ V	$T_j = 25$ °C
$V_{GE} = \pm 15$ V	$T_j = 125$ °C	————
$R_{gon} = 8$ Ω	$T_j = 150$ °C	-----

figure 4. FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

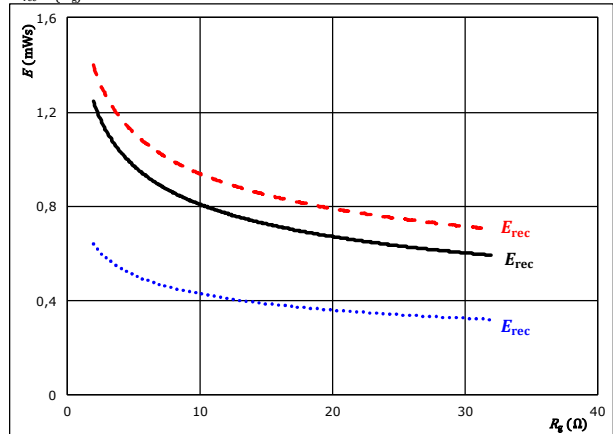

With an inductive load at

$V_{CE} = 600$ V	$T_j = 25$ °C
$V_{GE} = \pm 15$ V	$T_j = 125$ °C	————
$I_c = 40$ A	$T_j = 150$ °C	-----




Inverter Switching Characteristics

figure 5. IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

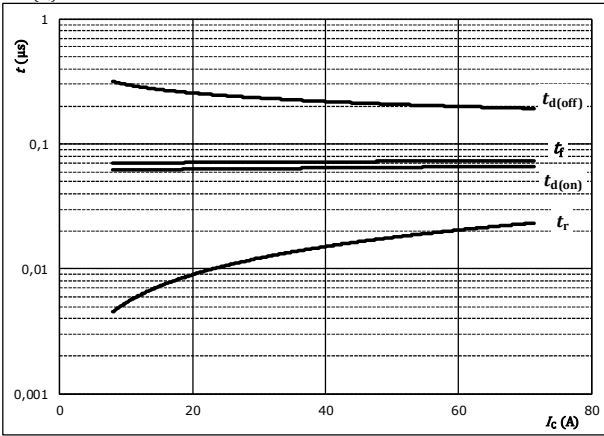


With an inductive load at

- $T_j = 150$ °C
- $V_{CE} = 600$ V
- $V_{GE} = \pm 15$ V
- $R_{g(on)} = 8$ Ω
- $R_{g(off)} = 8$ Ω

figure 6. IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

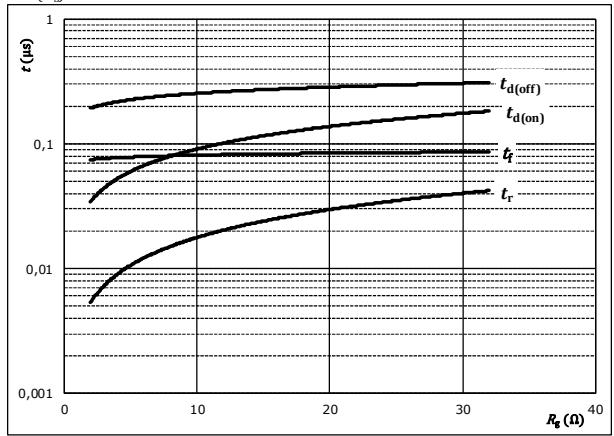


With an inductive load at

- $T_j = 150$ °C
- $V_{CE} = 600$ V
- $V_{GE} = \pm 15$ V
- $I_C = 40$ A

figure 7. FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

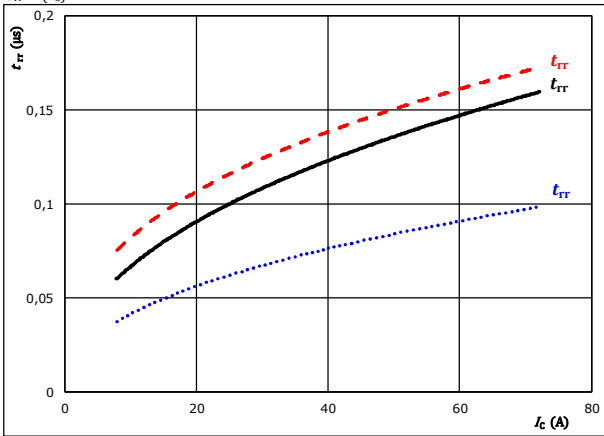

With an inductive load at


- $V_{CE} = 600$ V
- $V_{GE} = \pm 15$ V
- $R_{g(on)} = 8$ Ω

- $T_j: 25$ °C (dotted blue)
- 125 °C (solid black)
- 150 °C (dashed red)

figure 8. FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{g(on)})$$

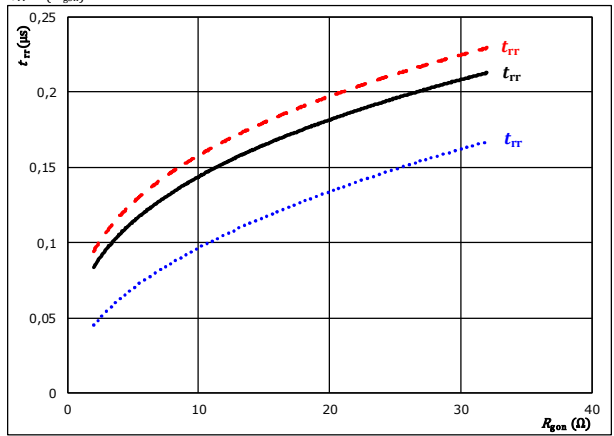

With an inductive load at

- $V_{CE} = 600$ V
- $V_{GE} = \pm 15$ V
- $I_C = 40$ A

- $T_j: 25$ °C (dotted blue)
- 125 °C (solid black)
- 150 °C (dashed red)




Inverter Switching Characteristics

figure 9. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

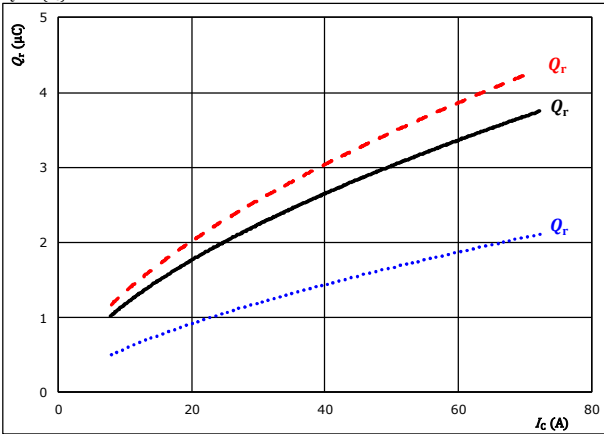


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gdn} = 8$ Ω
 T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)

figure 10. FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gdn})$$

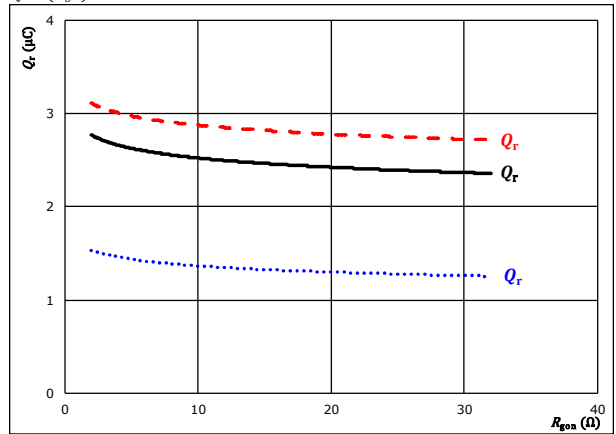


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 40$ A
 T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)

figure 11. FWD

Typical peak reverse recovery current current as a function of collector current

$$I_{RM} = f(I_c)$$

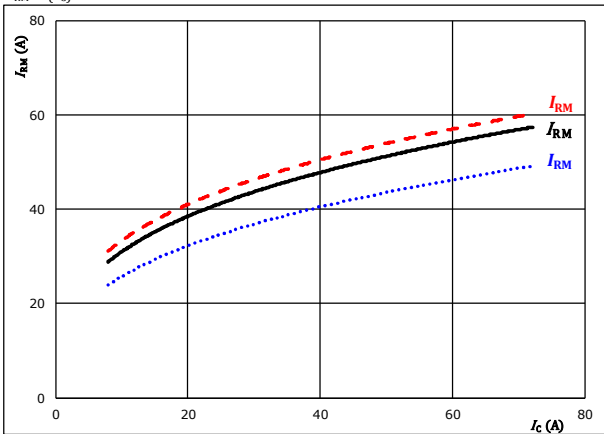


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gdn} = 8$ Ω
 T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)

figure 12. FWD

Typical peak reverse recovery current current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gdn})$$

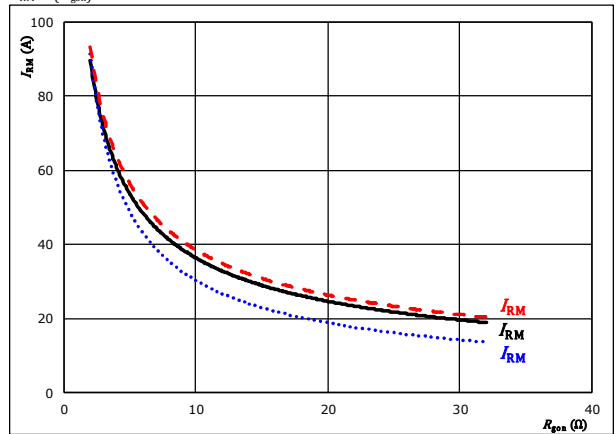


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 40$ A
 T_j : 25 °C (blue dotted), 125 °C (black solid), 150 °C (red dashed)



Inverter Switching Characteristics

figure 13. FWD


Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_{rr}/dt = f(I_c)$

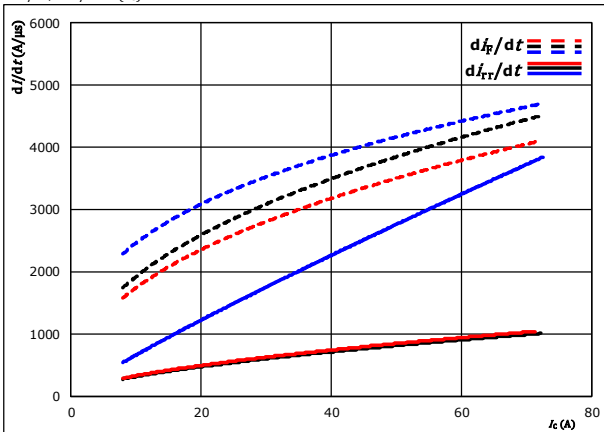

With an inductive load at
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g\text{on}} = 8 \ \Omega$
 $T_j = 25 \text{ }^\circ\text{C}$
 $125 \text{ }^\circ\text{C}$
 $150 \text{ }^\circ\text{C}$

figure 14. FWD


Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{g\text{on}})$

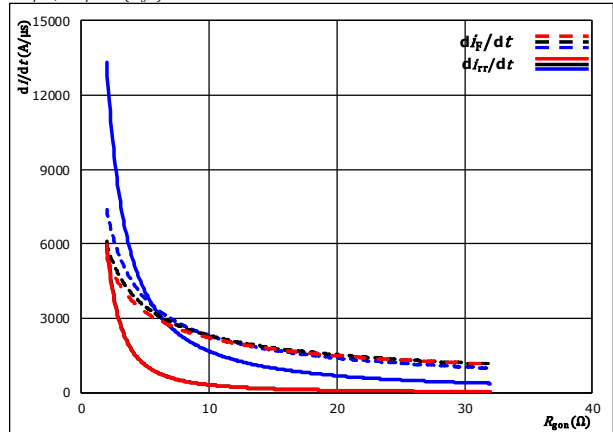

With an inductive load at
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 40 \text{ A}$
 $T_j = 25 \text{ }^\circ\text{C}$
 $125 \text{ }^\circ\text{C}$
 $150 \text{ }^\circ\text{C}$

figure 15. IGBT

Reverse bias safe operating area
 $I_c = f(V_{CE})$

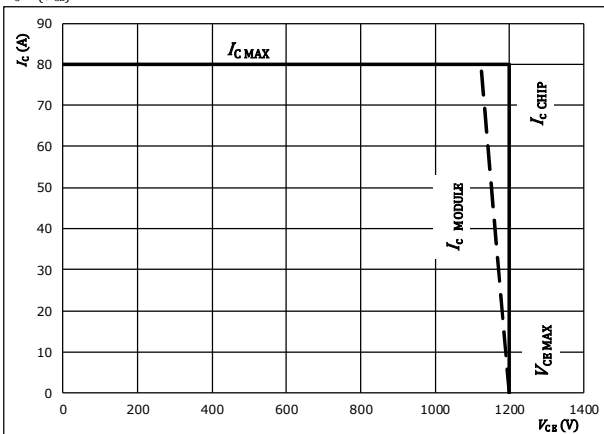

At
 $T_j = 125 \text{ }^\circ\text{C}$
 $R_{g\text{on}} = 8 \ \Omega$
 $R_{g\text{off}} = 8 \ \Omega$




Inverter Switching Definitions

General conditions		
T_j	=	125 °C
R_{gon}	=	8 Ω
R_{goff}	=	8 Ω

figure 1. IGBT


Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

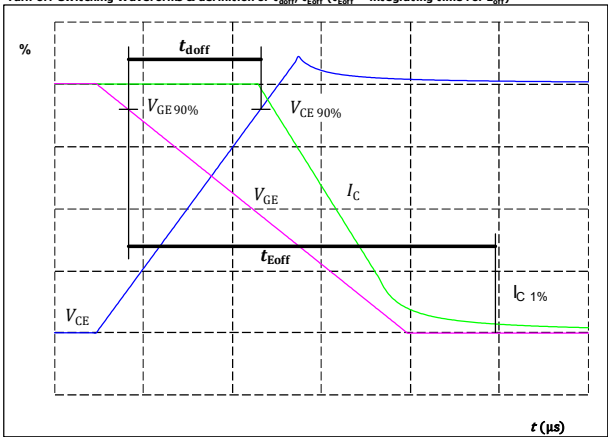

$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	40	A
$t_{doff} =$	217	ns

figure 2. IGBT


Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

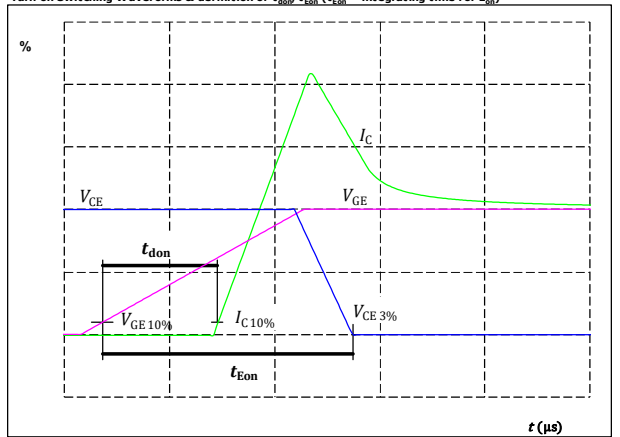

$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	40	A
$t_{don} =$	63	ns

figure 3. IGBT


Turn-off Switching Waveforms & definition of t_r

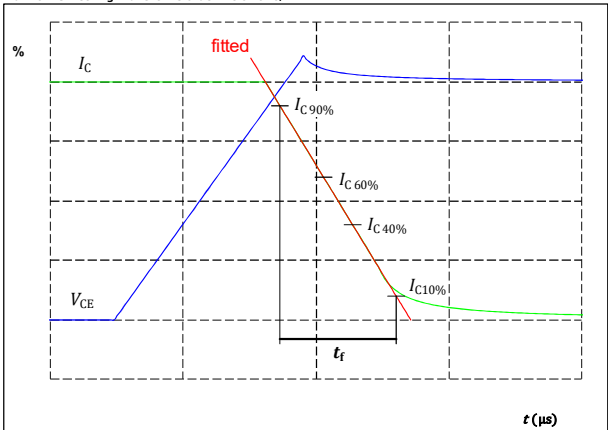

$V_C(100\%) =$	600	V
$I_C(100\%) =$	40	A
$t_r =$	63	ns

figure 4. IGBT

Turn-on Switching Waveforms & definition of t_r

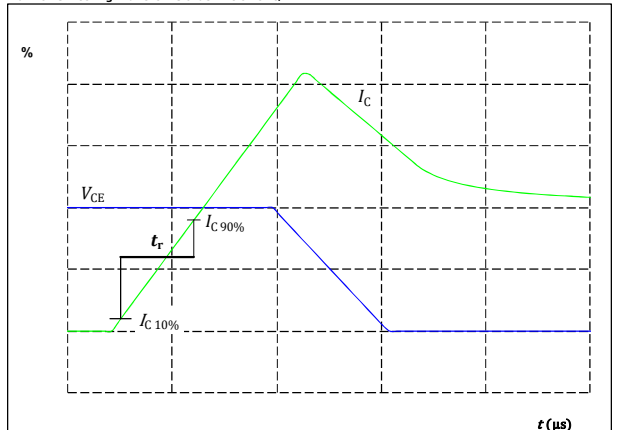


$V_C(100\%) =$	600	V
$I_C(100\%) =$	40	A
$t_r =$	15	ns



Vincotech


Inverter Switching Characteristics

figure 5. FWD
Turn-off Switching Waveforms & definition of t_{rr}

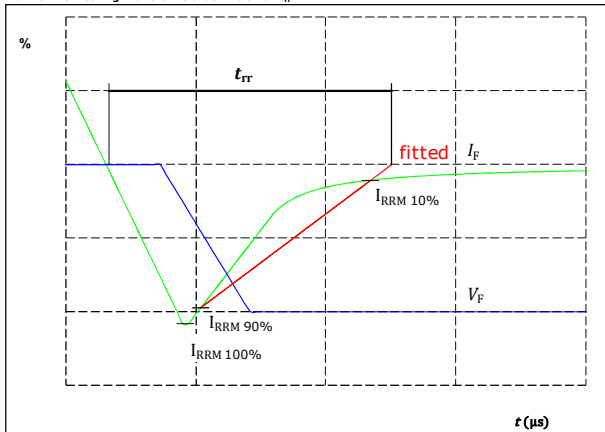

$V_F(100\%) =$	600	V
$I_F(100\%) =$	40	A
$I_{RRM}(100\%) =$	48	A
$t_{rr} =$	126	ns

figure 6. FWD
Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)

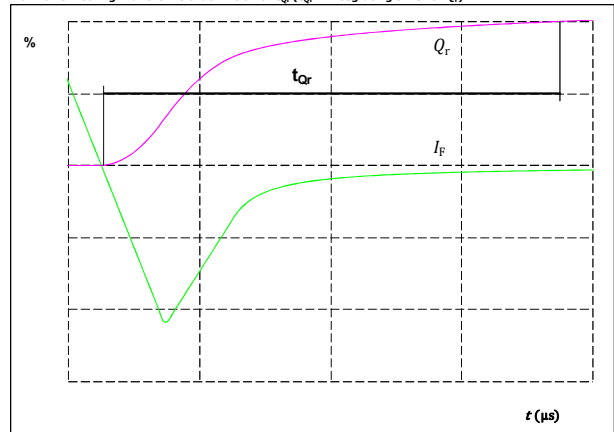

$I_F(100\%) =$	40	A
$Q_r(100\%) =$	2,66	μC



Vincotech

Ordering Code & Marking						
Version			Ordering Code			
without thermal paste 12mm housing with Press-fit pins			10-PY126TA040SH-L827F68Y			
with thermal paste 12mm housing with Press-fit pins			10-PY126TA040SH-L827F68Y-/3/			
NN-NNNNNNNNNNNNNN TTTTITVV WWYY UL VIN LLLLL SSSS						
Text	Name		Date code	UL & VIN	Lot	Serial
	NN-NNNNNNNNNNNNNN-TTTTITVV		WWYY	UL VIN	LLLLL	SSSS
Datamatrix	Type&Ver	Lot number	Serial	Date code		
	TTTTTITVV	LLLLL	SSSS	WWYY		

Pin table			
Pin	X	Y	Functions
1	52,6	0	DC-123
2	49,9	0	DC-123
3	42,65	0	G15
4	39,65	0	S15
5	35,15	0	Therm1
6	28,4	0	Therm2
7	24	0	G13
8	21	0	S13
9	12,2	0	G11
10	9,2	0	S11
11	2,7	0	DC-123
12	0	0	DC-123
13	0	14,65	DC+123
14	2,7	14,65	DC+123
15	0	28,6	Ph1
16	2,7	28,6	Ph1
17	5,4	28,6	Ph1
18	9,6	28,6	S12
19	12,6	28,6	G12
20	19,6	28,6	Ph2
21	22,3	28,6	Ph2
22	25	28,6	Ph2
23	29,7	28,6	S14
24	32,7	28,6	G14
25	39,7	28,6	S16
26	42,7	28,6	G16
27	47,2	28,6	Ph3
28	49,9	28,6	Ph3
29	52,6	28,6	Ph3
30	52,6	14,65	DC+123
31	49,9	14,65	DC+123

Outline

center of press-fit pinhead
for connection parameter see the handling instruction

12,93 ±0,1
16,2 ±0,5


14,3

26,3

Tolerance of pinpositions: ±0,5mm at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

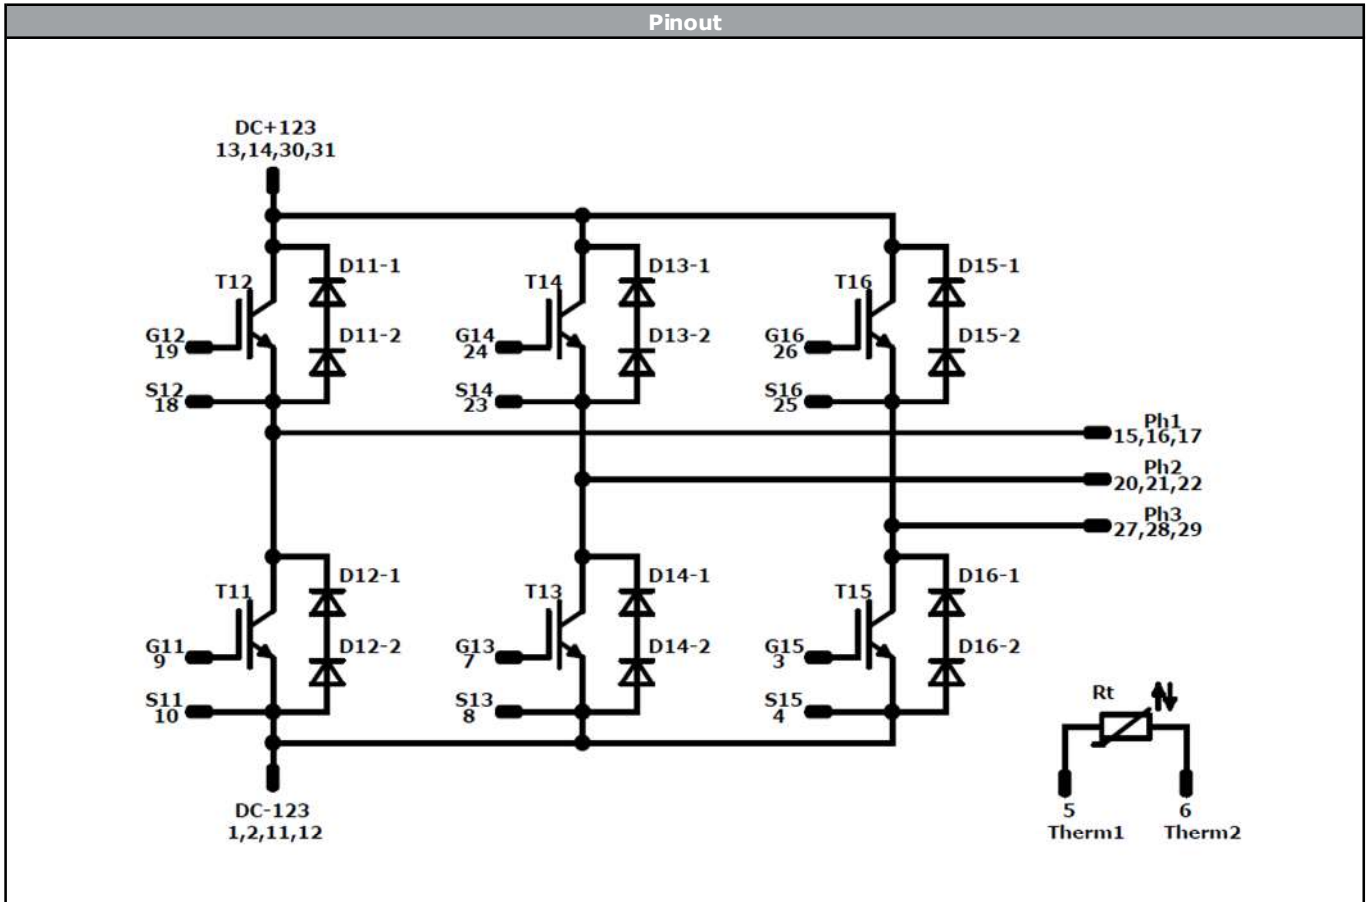

Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	1200 V	40 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1300 V	40 A	Inverter Diode	
Rt	NTC			Thermistor	




Vincotech

Packaging instruction			
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ Sample

Handling instruction
Handling instructions for <i>flow 1</i> packages see vincotech.com website.

Package data
Package data for <i>flow 1</i> packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-PY126TA040SH-L827F68Y-D2-14	16 May. 2019	Correction of I_c/I_f values	1

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.