



Vincotech

30-FT10NIA400S702-LP59F04

datasheet

flowNPC 2

950 V / 400 A

Topology features

- Low side Kelvin Emitter for improved switching performance
- Neutral Point Clamped Topology (I-Type)
- Split topology
- Temperature sensor

Component features

- Low collector emitter saturation voltage
- High speed and smooth switching

Housing features

- Base isolation: Si_3N_4
- Convex shaped baseplate for superior thermal contact
- Cu baseplate
- Thermo-mechanical push-and-pull force relief
- Solder pin


Target applications

- Solar Inverters


Types

- 30-FT10NIA400S702-LP59F04

flow 2 13 mm housing



Schematic

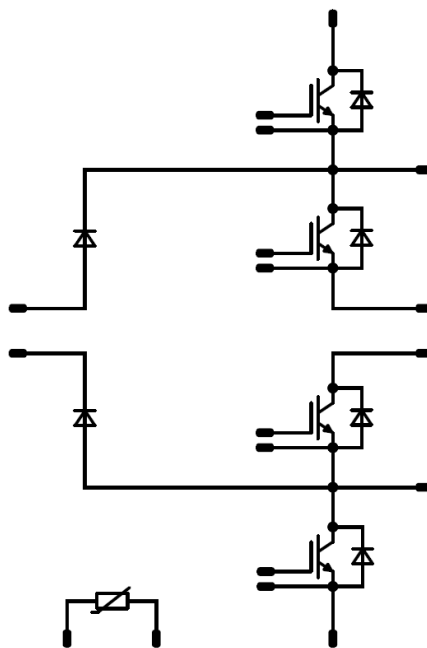



Vincotech

30-FT10NIA400S702-LP59F04
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Buck Switch

Collector-emitter voltage	V_{CES}		950	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	315	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	800	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	595	W
Gate-emitter voltage	V_{GES}		± 20	V
Maximum junction temperature	T_{jmax}		175	°C

Buck Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	131	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	455	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 25\text{ °C}$	650	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	305	W
Maximum junction temperature	T_{jmax}		175	°C

Boost Switch

Collector-emitter voltage	V_{CES}		950	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	388	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	800	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	483	W
Gate-emitter voltage	V_{GES}		± 20	V
Maximum junction temperature	T_{jmax}		175	°C



Vincotech

30-FT10NIA400S702-LP59F04
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Boost Diode				
Peak repetitive reverse voltage	V_{RRM}		950	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	131	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	400	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	253	W
Maximum junction temperature	T_{jmax}		175	°C

Boost Sw. Inv. Diode

Peak repetitive reverse voltage	V_{RRM}		950	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	131	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	400	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	253	W
Maximum junction temperature	T_{jmax}		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			>12,7	mm
Comparative Tracking Index	CTI		≥ 600	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Buck Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,00668	25	4,35	5,1	5,85	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		400	25 125 150		1,67 1,94 2,01	2,35 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	950		25			8	μA
Gate-emitter leakage current	I_{GES}		20	0		25			400	nA
Internal gate resistance	r_g							0,375		Ω
Input capacitance	C_{ies}	$f = 100 \text{ kHz}$	0	25		25		26000		pF
Output capacitance	C_{oes}							556		pF
Reverse transfer capacitance	C_{res}							80		pF
Gate charge	Q_g		±15		0	25		920		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						0,16		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 2 \Omega$ $R_{goff} = 2 \Omega$	±15	600	400	25 125 150		145 145,48 146,37		ns
Rise time	t_r					25 125 150		29,03 31,07 31,14		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		124,5 147,88 154,66		ns
Fall time	t_f					25 125 150		28,25 45,41 53,81		ns
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD}=0,707 \mu\text{C}$ $Q_{tFWD}=0,734 \mu\text{C}$ $Q_{tFWD}=0,802 \mu\text{C}$				25 125 150		10,4 10,91 10,73		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		10,86 17,3 18,77		mWs



Vincotech

30-FT10NIA400S702-LP59F04

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Buck Diode

Static

Forward voltage	V_F				100	25 125 150		1,51 1,77 1,91	1,8 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1200$ V				25		175	1000	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,31		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RM}	$di/dt=10042$ A/µs $di/dt=8996$ A/µs $di/dt=11100$ A/µs	± 15	600	400	25 125 150		71,16 73,03 74,16		A
Reverse recovery time	t_{rr}					25 125 150		16,85 16,93 17,82		ns
Recovered charge	Q_r					25 125 150		0,707 0,734 0,802		µC
Reverse recovered energy	E_{rec}					25 125 150		0,181 0,191 0,211		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		10735,79 11912,43 10123,02		A/µs



Vincotech

30-FT10NIA400S702-LP59F04

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Boost Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0065	25	4,15	4,85	5,65	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		400	25 125 150		1,21 1,23 1,24	1,4 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	950		25			8	µA
Gate-emitter leakage current	I_{GES}		20	0		25			200	nA
Internal gate resistance	r_g							0,75		Ω
Input capacitance	C_{ies}	$f = 100 \text{ kHz}$	0	25		25		49200		pF
Output capacitance	C_{oes}							530		pF
Reverse transfer capacitance	C_{res}							220		pF
Gate charge	Q_g		±15		0	25		4100		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						0,2		K/W
--	---------------	---	--	--	--	--	--	-----	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 2 \Omega$ $R_{goff} = 2 \Omega$	±15	600	400	25 125 150		350,79 357,58 359,52		ns
Rise time	t_r					25 125 150		33,96 37,07 38,17		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		323,89 373,74 386,34		ns
Fall time	t_f					25 125 150		263,26 364,29 383,57		ns
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD} = 6,17 \mu\text{C}$ $Q_{tFWD} = 15,31 \mu\text{C}$ $Q_{tFWD} = 18,06 \mu\text{C}$				25 125 150		8,2 10,02 10,86		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		50,11 71,74 76,66		mWs



Vincotech

30-FT10NIA400S702-LP59F04

datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Boost Diode

Static

Forward voltage	V_F				200	25 125 150	2,1	2,64 2,44 2,36	2,8 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 950$ V				25			8	μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,38		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RM}	$di/dt=10226$ A/μs $di/dt=9659$ A/μs $di/dt=9779$ A/μs	± 15	600	400	25 125 150		209,43 261,92 279,24		A
Reverse recovery time	t_{rr}					25 125 150		56,49 164,87 182,42		ns
Recovered charge	Q_r					25 125 150		6,17 15,31 18,06		μC
Reverse recovered energy	E_{rec}					25 125 150		2,5 6,62 7,85		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		7421,55 7019,14 6599,04		A/μs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Boost Sw. Inv. Diode

Static

Forward voltage	V_F				200	25 125 150	2,1	2,64 2,44 2,36	2,8 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 950$ V				25			8	μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,38		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5	%
Power dissipation	P					25		130		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ± 1 %						3962		K
B-value	$B_{(25/100)}$	Tol. ± 1 %						4000		K
Vincotech Thermistor Reference									I	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Vincotech


30-FT10NIA400S702-LP59F04 datasheet

Buck Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

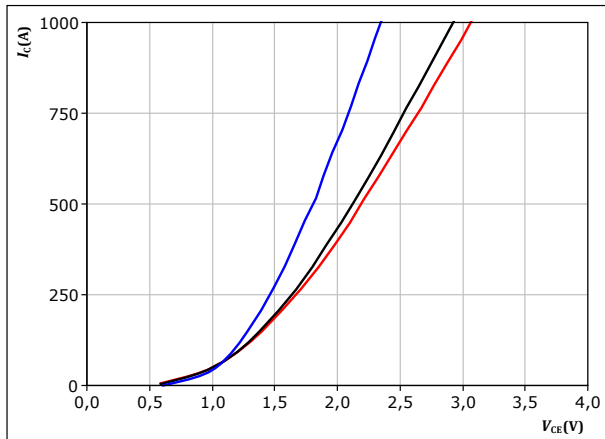


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_j:$ 25 °C, 125 °C, 150 °C

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

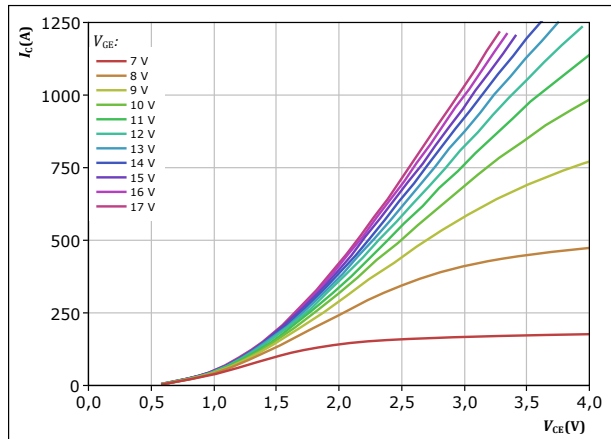


$t_p = 250 \mu s$
 $T_j = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

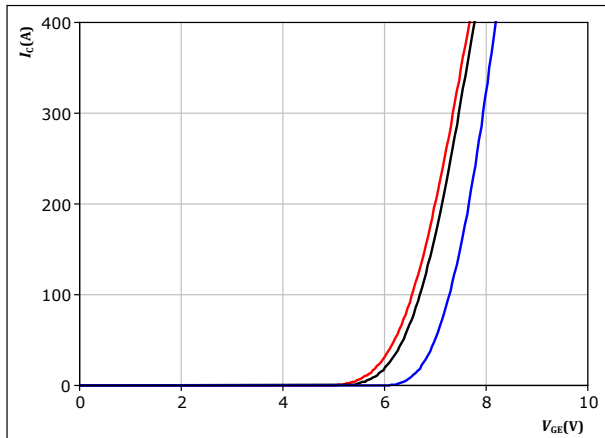


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_j:$ 25 °C, 125 °C, 150 °C

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

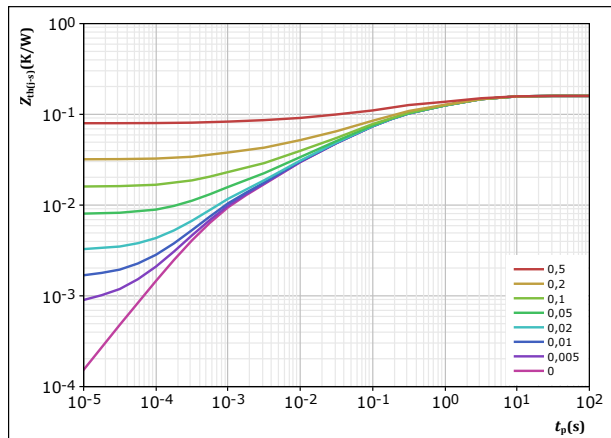

$D = t_p / T$
 $R_{th(j-s)} = 0,16 K/W$
IGBT thermal model values

$R (K/W)$	$\tau (s)$
2,78E-02	3,63E+00
4,33E-02	8,40E-01
5,78E-02	9,61E-02
2,24E-02	8,88E-03
8,34E-03	6,81E-04



Vincotech


30-FT10NIA400S702-LP59F04
datasheet

Buck Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

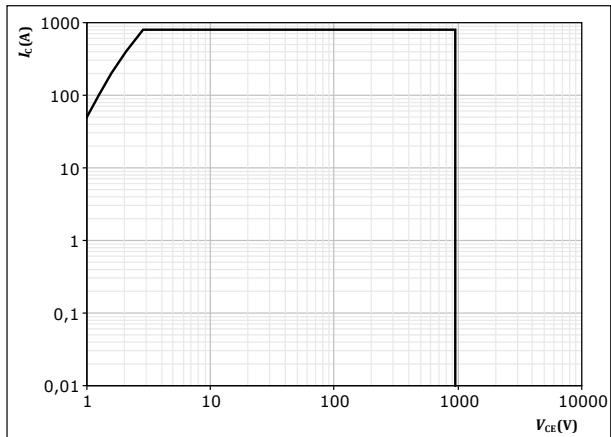

$D = \text{single pulse}$

$T_s = 80 \text{ } ^\circ\text{C}$
 $V_{GE} = 15 \text{ V}$
 $T_j = T_{jmax}$



Vincotech

Buck Diode Characteristics

figure 6.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


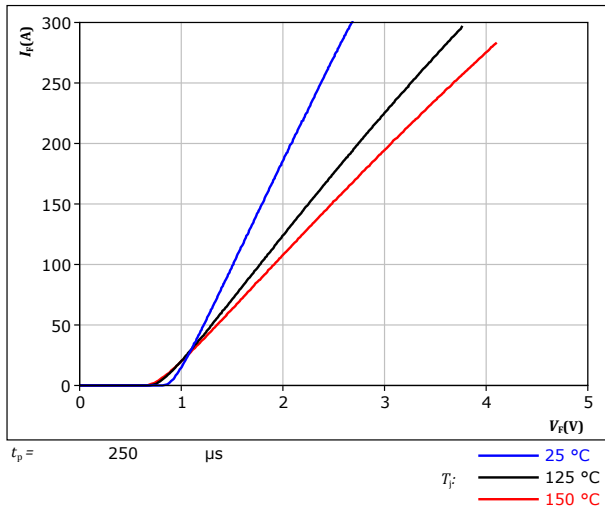


figure 7.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

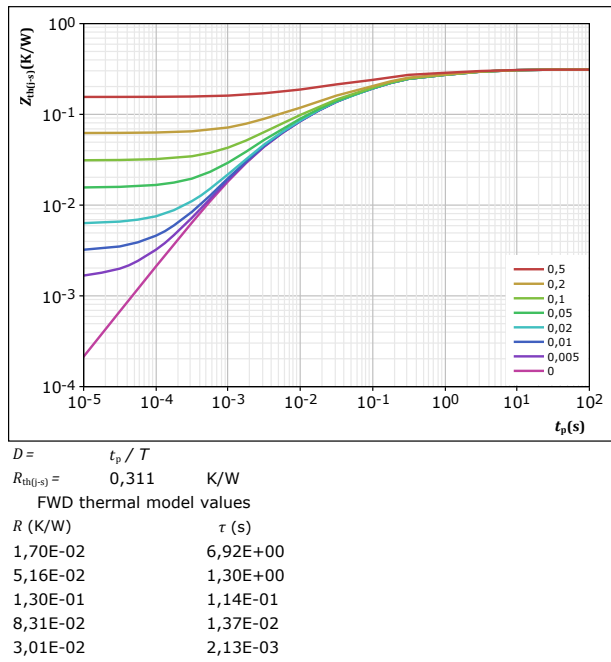



Vincotech

30-FT10NIA400S702-LP59F04 datasheet


Boost Switch Characteristics

figure 8.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

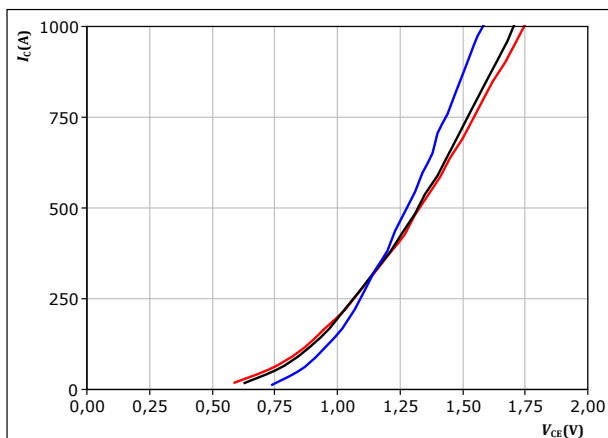

$t_p = 250 \mu s$
 $V_{GE} = 15 V$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 9.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

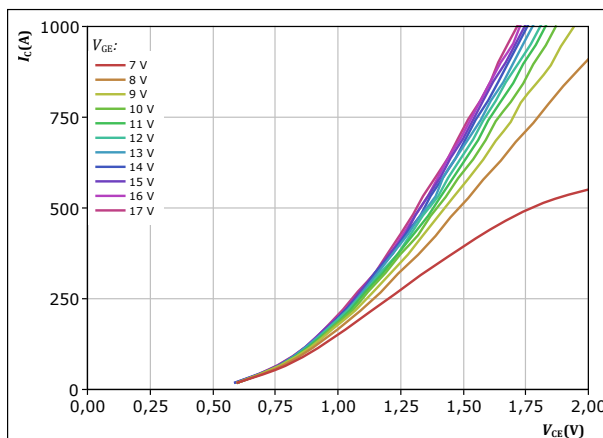


$t_p = 250 \mu s$
 $T_j = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 10.

IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

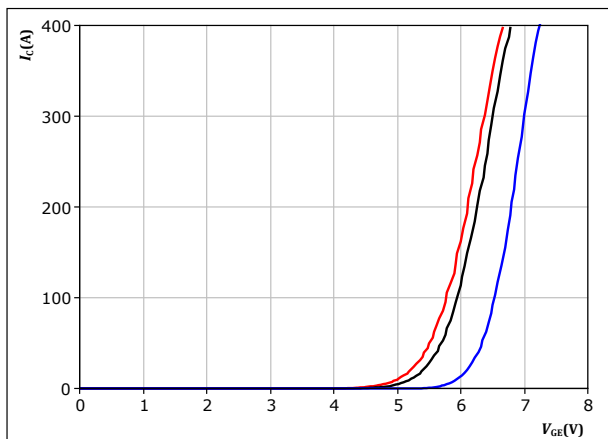

$t_p = 250 \mu s$
 $V_{CE} = 10 V$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 11.

IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

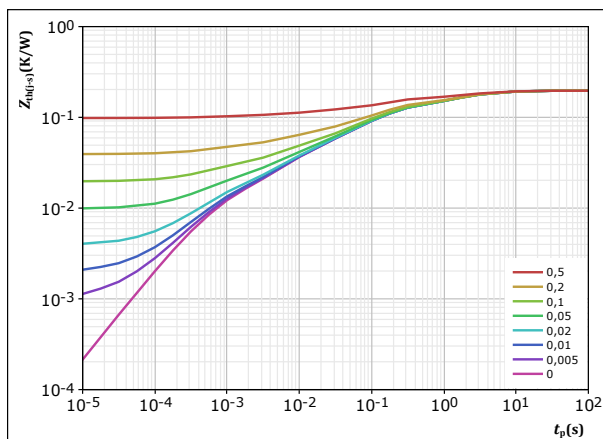

$D = t_p / T$
 $R_{th(j-s)} = 0,196 K/W$
IGBT thermal model values

$R (K/W)$	$\tau (s)$
1,70E-02	6,58E+00
5,92E-02	1,50E+00
8,39E-02	1,08E-01
2,62E-02	8,19E-03
1,02E-02	5,83E-04



Vincotech

30-FT10NIA400S702-LP59F04
datasheet


Boost Switch Characteristics

figure 12.

IGBT

Safe operating area

$I_C = f(V_{CE})$

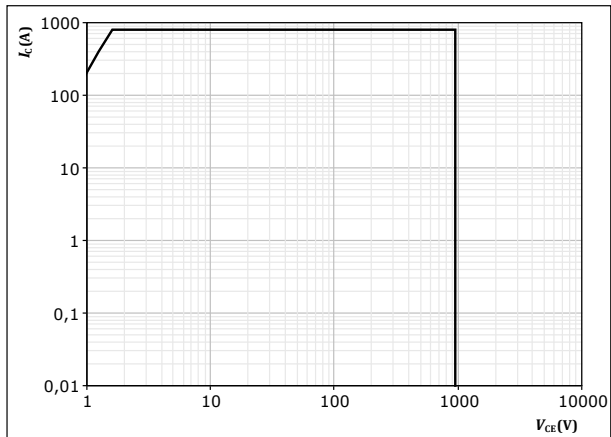

$D = \text{single pulse}$

$T_s = 80 \text{ } ^\circ\text{C}$

$V_{GE} = 15 \text{ V}$

$T_j = T_{jmax}$



Vincotech

30-FT10NIA400S702-LP59F04 datasheet

Boost Diode Characteristics

figure 13.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


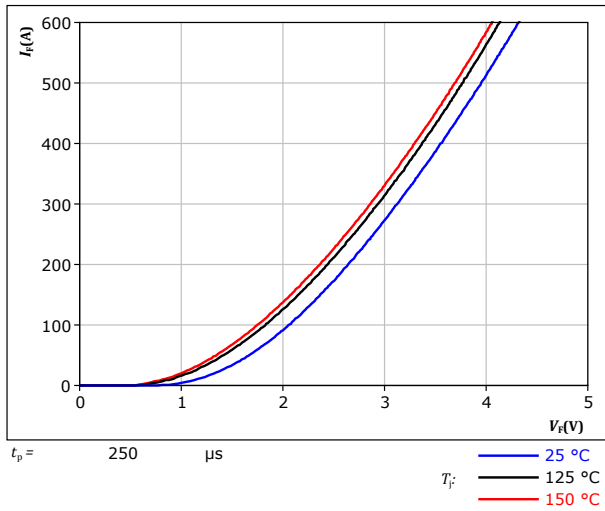


figure 14.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

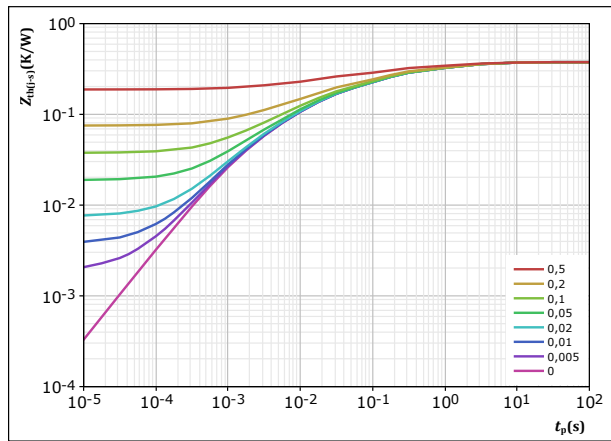

$D =$	t_p / T	
$R_{th(j-s)} =$	0,376	K/W
FWD thermal model values		
R (K/W)	τ (s)	
2,41E-02	5,52E+00	
7,30E-02	1,14E+00	
1,38E-01	1,19E-01	
1,11E-01	1,15E-02	
3,09E-02	1,39E-03	



Vincotech


30-FT10NIA400S702-LP59F04 datasheet

Boost Sw. Inv. Diode Characteristics

figure 15. FWD

Typical forward characteristics

$$I_F = f(V_F)$$

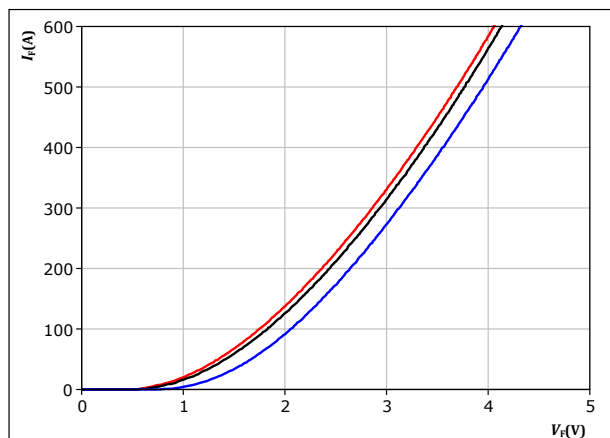


$t_p = 250 \mu s$

T_j :
— 25 °C
— 125 °C
— 150 °C

figure 16. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

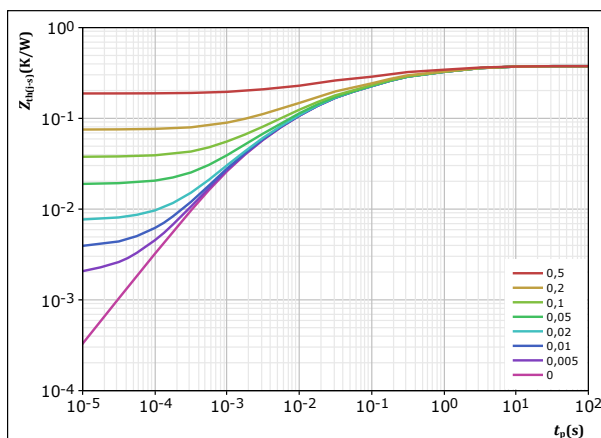

$D =$	t_p / T	
$R_{th(j-s)} =$	0,376	K/W
FWD thermal model values		
R (K/W)	τ (s)	
2,41E-02	5,52E+00	
7,30E-02	1,14E+00	
1,38E-01	1,19E-01	
1,11E-01	1,15E-02	
3,09E-02	1,39E-03	




Vincotech

Thermistor Characteristics

figure 17. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

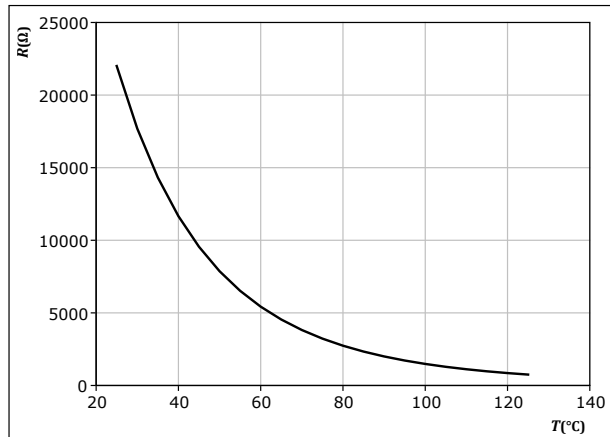



Vincotech

30-FT10NIA400S702-LP59F04 datasheet


Buck Switching Characteristics

figure 18.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

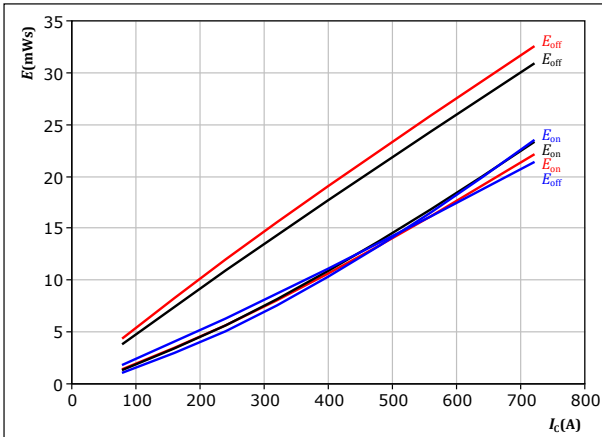

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 19.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

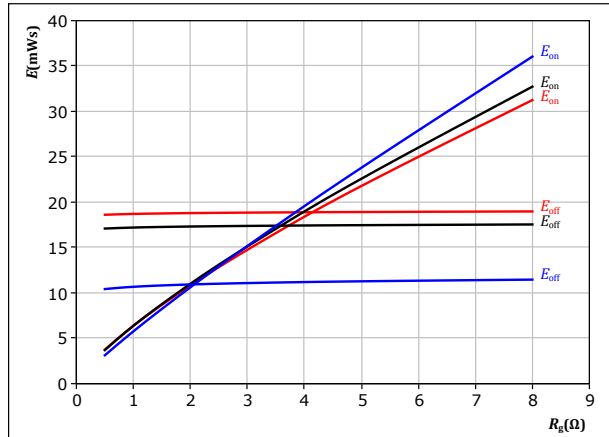

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 400 \text{ A}$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 20.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

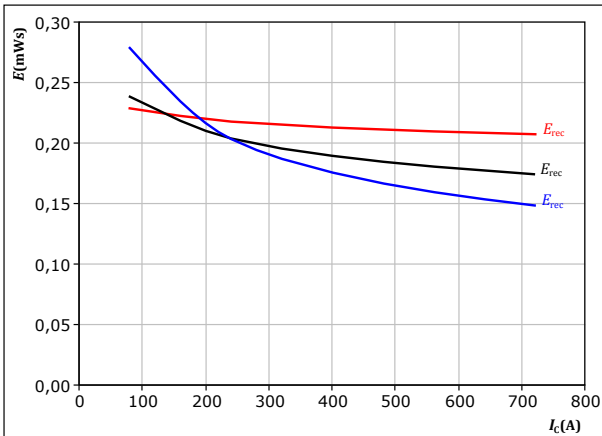

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 21.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

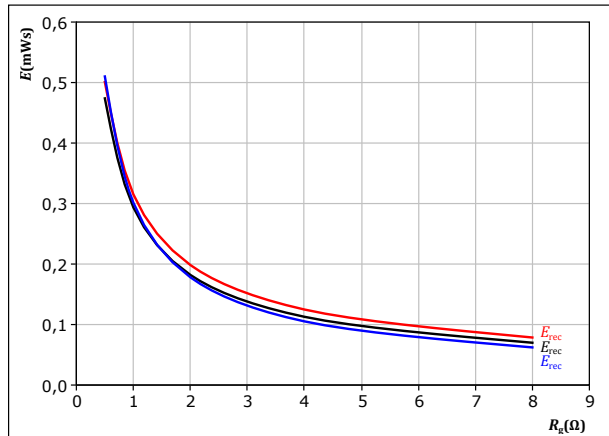

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 400 \text{ A}$

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech


30-FT10NIA400S702-LP59F04
datasheet

Buck Switching Characteristics

figure 22.

IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

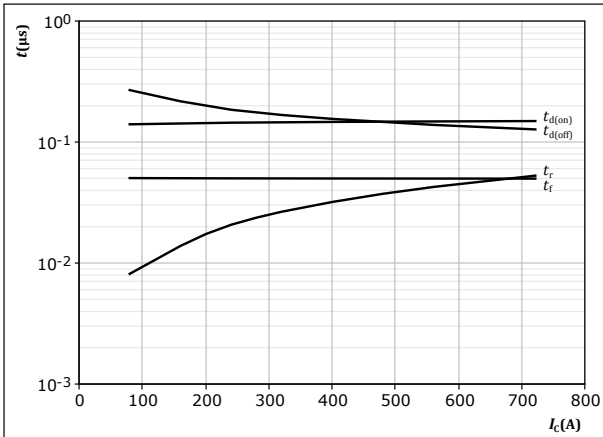


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω
 $R_{goff} = 2$ Ω

figure 23.

IGBT

Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

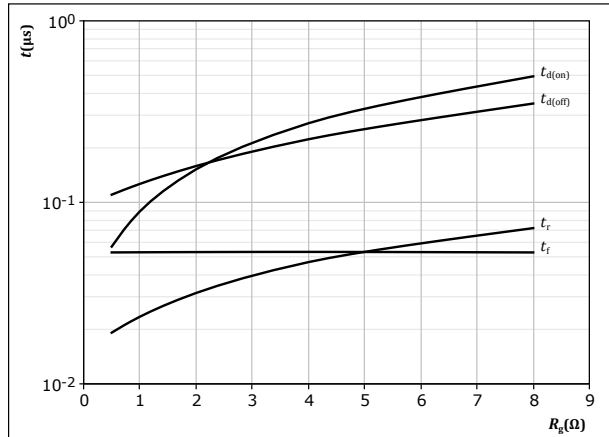


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 400$ A

figure 24.

FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

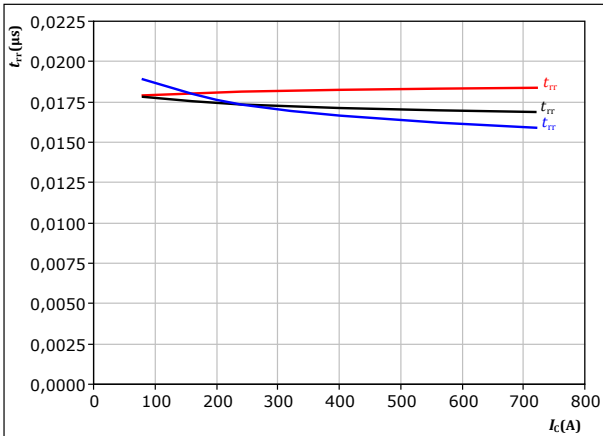

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω

T_j : — 25 °C
— 125 °C
— 150 °C

figure 25.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

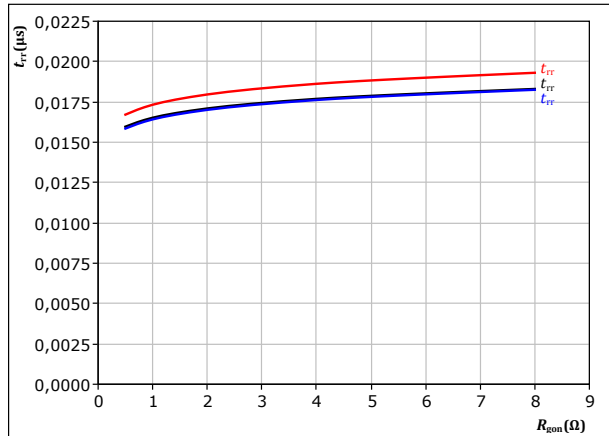

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 400$ A

T_j : — 25 °C
— 125 °C
— 150 °C



Vincotech

30-FT10NIA400S702-LP59F04
datasheet


Buck Switching Characteristics

figure 26.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

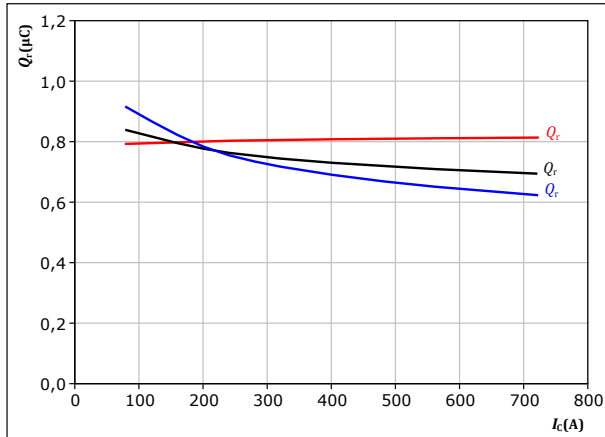

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j : 25 °C
125 °C
150 °C

figure 28.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

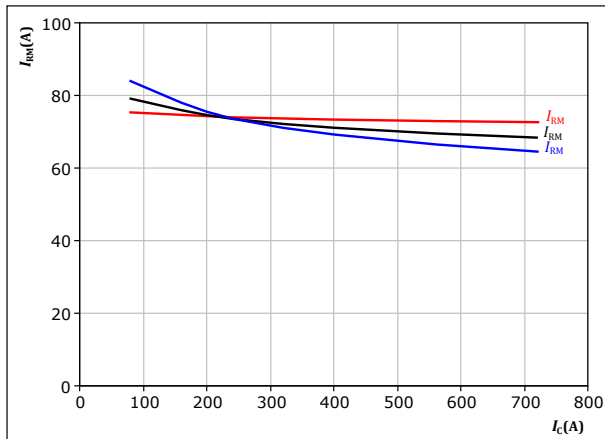

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j : 25 °C
125 °C
150 °C

figure 27.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

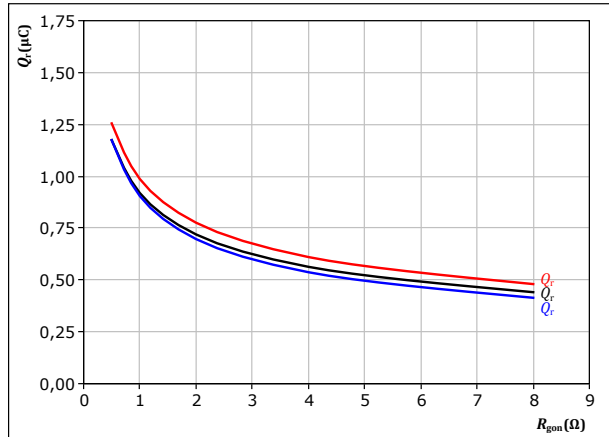

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 400$ A


T_j : 25 °C
125 °C
150 °C

figure 29.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

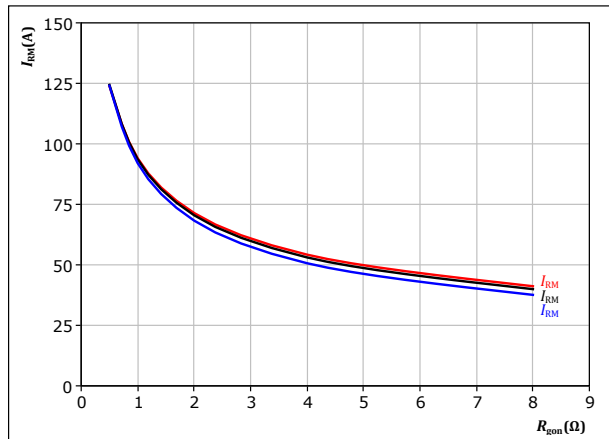

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 400$ A

T_j : 25 °C
125 °C
150 °C



Vincotech


30-FT10NIA400S702-LP59F04

datasheet

Buck Switching Characteristics

figure 30. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

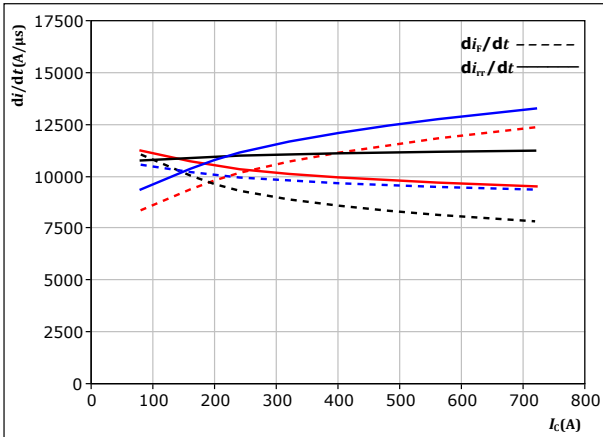

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$

$T_j:$ — 25 °C
 — 125 °C
 — 150 °C

figure 31. FWD

Reverse bias safe operating area


$I_C = f(V_{CE})$

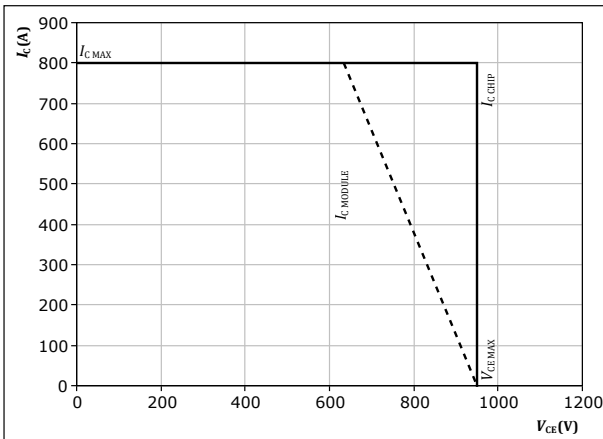

At $T_j = 150 \text{ } ^\circ\text{C}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$

figure 31. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

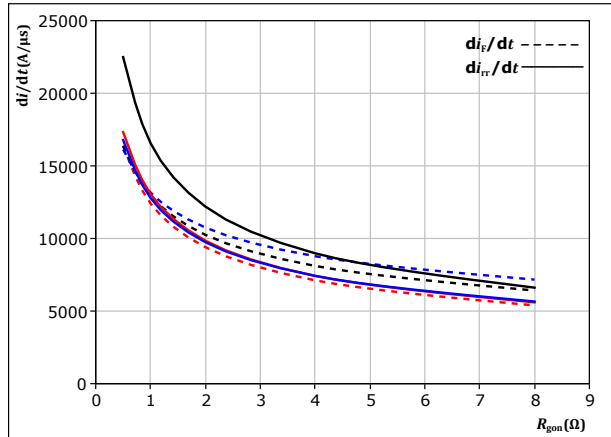

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 400 \text{ A}$

$T_j:$ — 25 °C
 — 125 °C
 — 150 °C



Vincotech

30-FT10NIA400S702-LP59F04 datasheet


Boost Switching Characteristics

figure 33.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

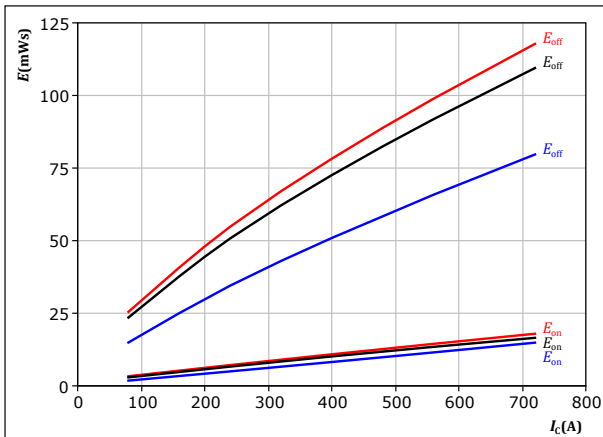

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$


T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)

figure 34.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

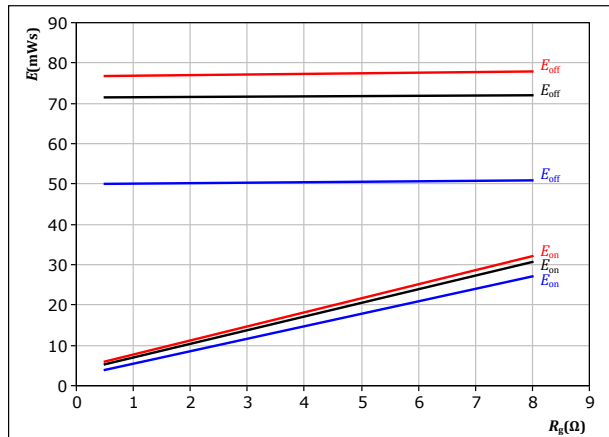

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 400 \text{ A}$


T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)

figure 35.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

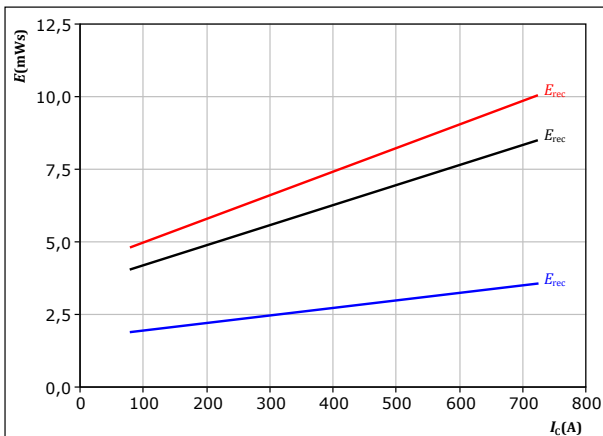

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$


T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)

figure 36.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

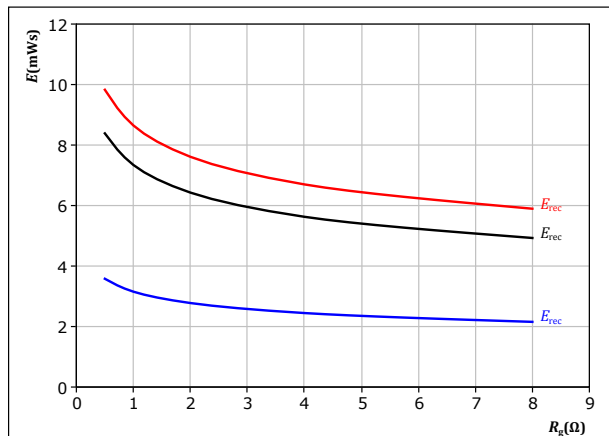

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 400 \text{ A}$

T_j : $25 \text{ } ^\circ\text{C}$ (blue)
 $125 \text{ } ^\circ\text{C}$ (black)
 $150 \text{ } ^\circ\text{C}$ (red)



Vincotech

30-FT10NIA400S702-LP59F04
datasheet

Boost Switching Characteristics

figure 37.

IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

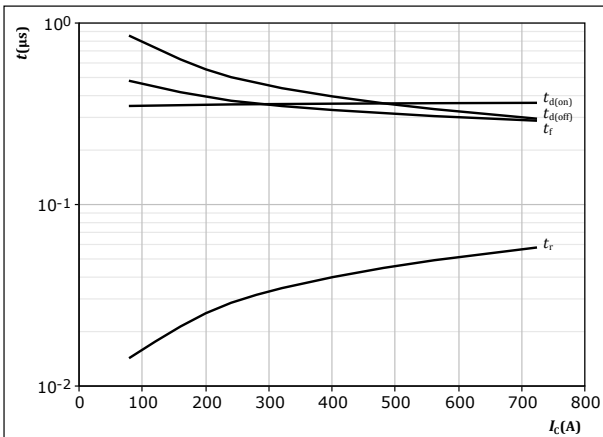


figure 38.

IGBT

Typical switching times as a function of IGBT turn on gate resistor

$$t = f(R_g)$$

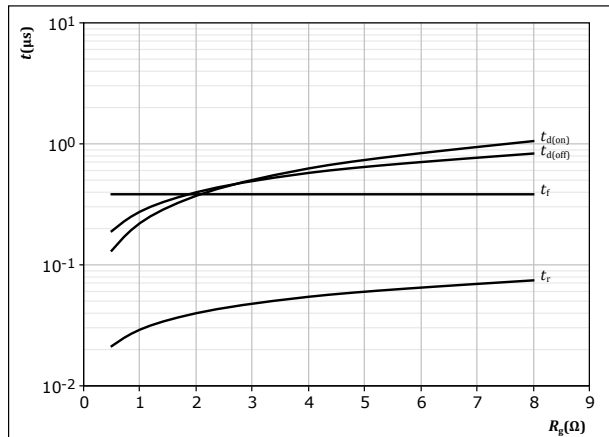


figure 39.

FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$


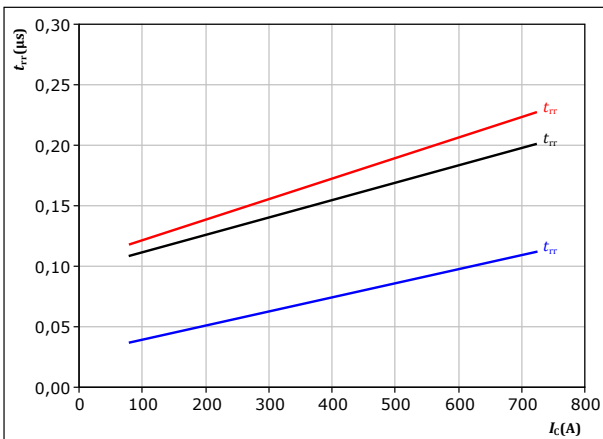


figure 40.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

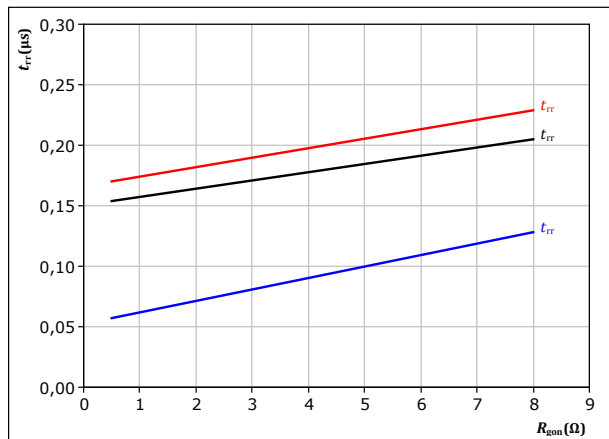



Vincotech

30-FT10NIA400S702-LP59F04 datasheet


Boost Switching Characteristics

figure 41.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

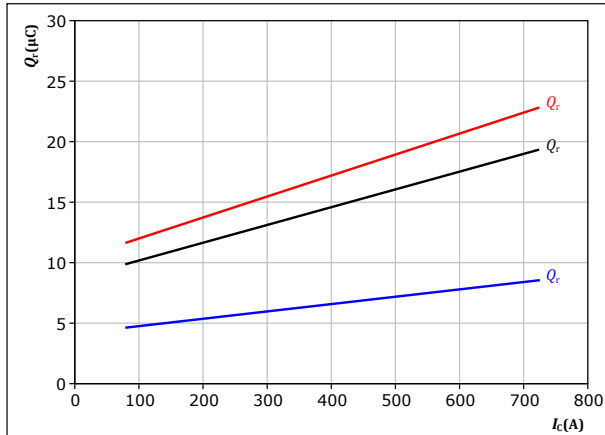

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j : — 25 °C
— 125 °C
— 150 °C

figure 42.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

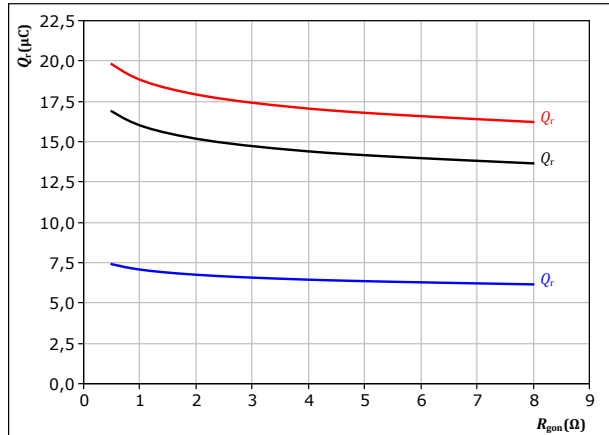

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 400$ A


T_j : — 25 °C
— 125 °C
— 150 °C

figure 43.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

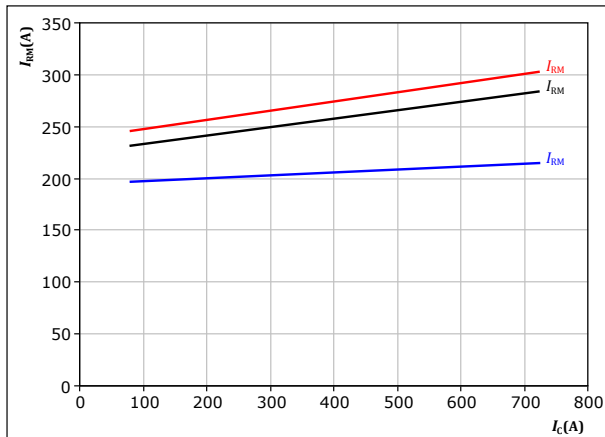

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 2$ Ω


T_j : — 25 °C
— 125 °C
— 150 °C

figure 44.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

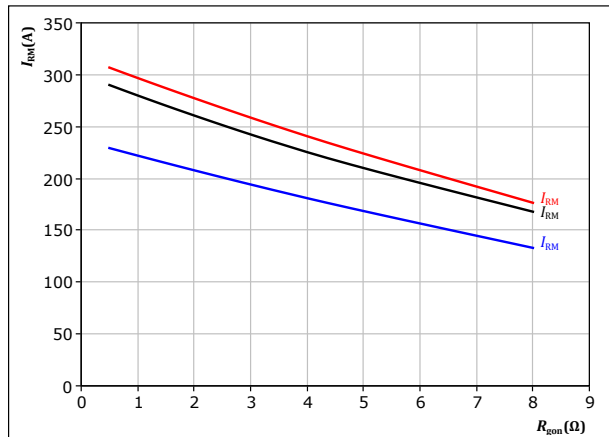

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 400$ A

T_j : — 25 °C
— 125 °C
— 150 °C




Vincotech

30-FT10NIA400S702-LP59F04
datasheet

Boost Switching Characteristics

figure 45. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

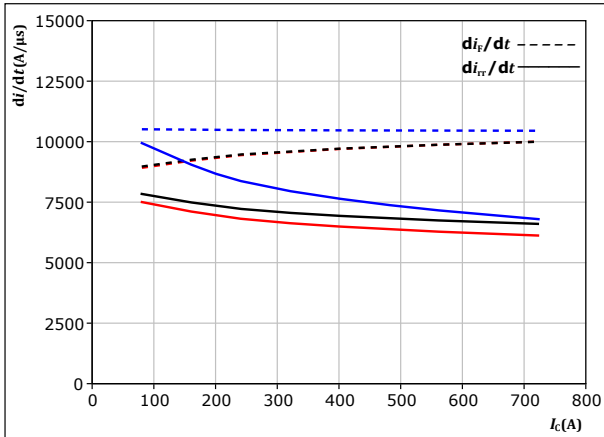


With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 2 \text{ } \Omega$

T_j : — 25 °C
— 125 °C
— 150 °C

figure 46. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

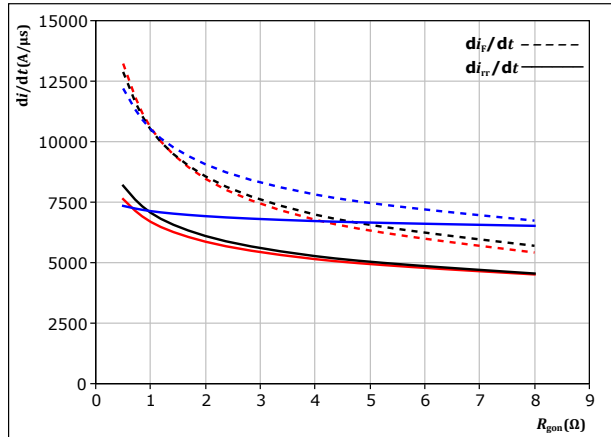

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 400 \text{ A}$

T_j : — 25 °C
— 125 °C
— 150 °C

figure 47. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

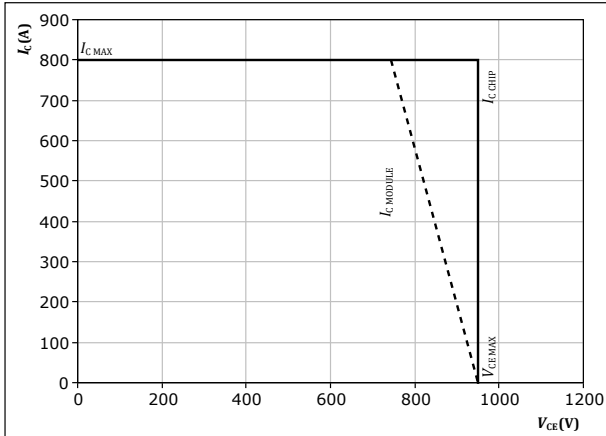

At $T_j = 150 \text{ } ^\circ\text{C}$
 $R_{gon} = 2 \text{ } \Omega$
 $R_{goff} = 2 \text{ } \Omega$



Vincotech

Switching Definitions

figure 48. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

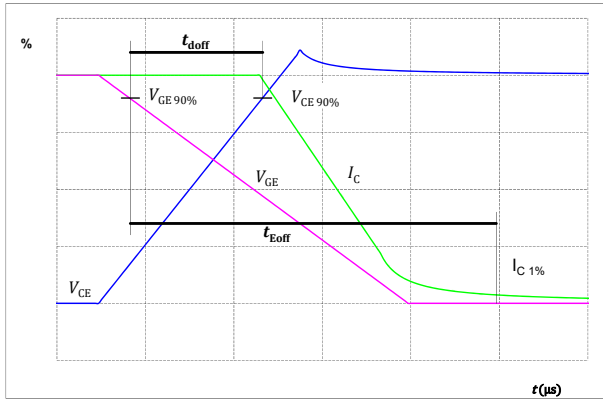


figure 49. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

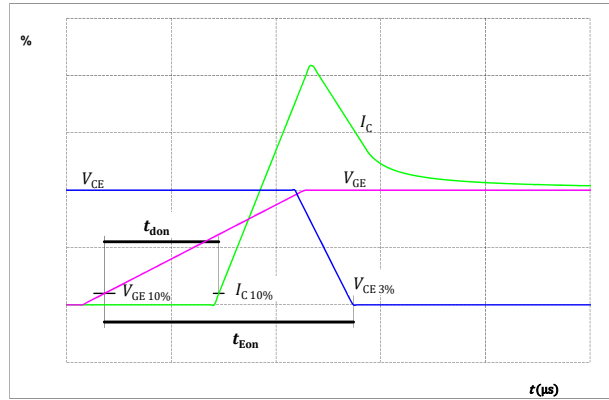


figure 50. IGBT

Turn-off Switching Waveforms & definition of t_f


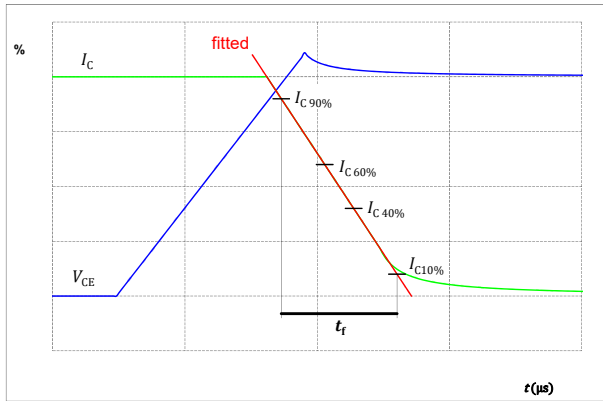


figure 51. IGBT

Turn-on Switching Waveforms & definition of t_r



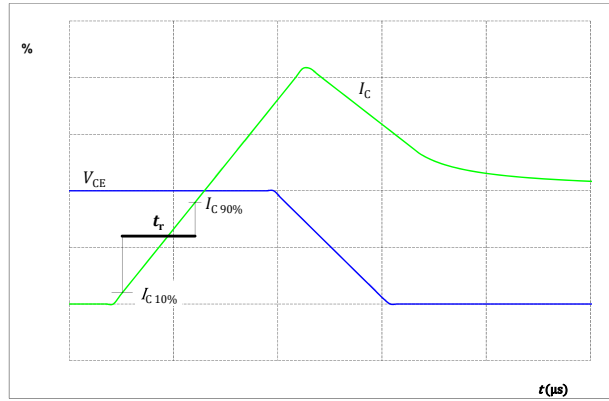

Vincotech

30-FT10NIA400S702-LP59F04 datasheet

Switching Definitions

figure 52.

FWD

Turn-off Switching Waveforms & definition of t_{rr}


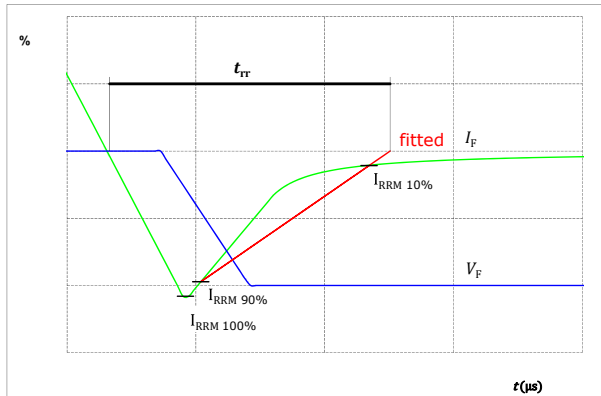


figure 53.

FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)



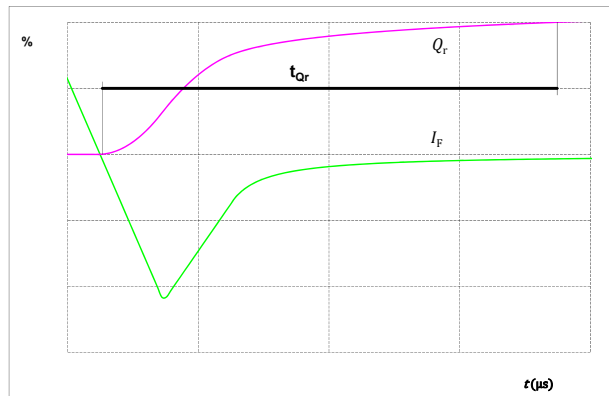

Vincotech

30-FT10NIA400S702-LP59F04

datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	30-FT10NIA400S702-LP59F04
With thermal paste (3,4 W/mK, PSX-P7)	30-FT10NIA400S702-LP59F04-/3/

Marking					
	Text	Name NN-NNNNNNNNNNNNNNNN- TTTTTVV	Date code WWYY	UL & VIN UL VIN	Lot LLLL
	Datamatrix	Type&Ver TTTTTTTVV	Lot number LLLLL	Serial SSSS	Date code WWYY

Outline																																																																																																																																																																															
Pin table [mm] <table><thead><tr><th>Pin</th><th>X</th><th>Y</th><th>Function</th></tr></thead><tbody><tr><td>1</td><td>70,9</td><td>0</td><td>DC-</td></tr><tr><td>2</td><td>68,2</td><td>0</td><td>DC-</td></tr><tr><td>3</td><td>65,5</td><td>0</td><td>DC-</td></tr><tr><td>4</td><td>62,8</td><td>0</td><td>DC-</td></tr><tr><td>5</td><td>60,1</td><td>0</td><td>DC-</td></tr><tr><td>6</td><td>70,9</td><td>10,8</td><td>S12</td></tr><tr><td>7</td><td>67,85</td><td>10,8</td><td>G12</td></tr><tr><td>8</td><td>48,8</td><td>0</td><td>GND1</td></tr><tr><td>9</td><td>46,1</td><td>0</td><td>GND1</td></tr><tr><td>10</td><td>43,4</td><td>0</td><td>GND1</td></tr><tr><td>11</td><td>40,7</td><td>0</td><td>GND1</td></tr><tr><td>12</td><td>38</td><td>0</td><td>GND1</td></tr><tr><td>13</td><td>32,9</td><td>0</td><td>GND2</td></tr><tr><td>14</td><td>30,2</td><td>0</td><td>GND2</td></tr><tr><td>15</td><td>27,5</td><td>0</td><td>GND2</td></tr><tr><td>16</td><td>24,8</td><td>0</td><td>GND2</td></tr><tr><td>17</td><td>22,1</td><td>0</td><td>GND2</td></tr><tr><td>18</td><td>19,35</td><td>9,1</td><td>S11</td></tr><tr><td>19</td><td>16,3</td><td>9,1</td><td>G11</td></tr><tr><td>20</td><td>10,8</td><td>0</td><td>DC+</td></tr><tr><td>21</td><td>8,1</td><td>0</td><td>DC+</td></tr><tr><td>22</td><td>5,4</td><td>0</td><td>DC+</td></tr><tr><td>23</td><td>2,7</td><td>0</td><td>DC+</td></tr><tr><td>24</td><td>0</td><td>0</td><td>DC+</td></tr><tr><td>25</td><td>19,75</td><td>18,7</td><td>P</td></tr><tr><td>26</td><td>0</td><td>36,9</td><td>Therm1</td></tr><tr><td>27</td><td>3</td><td>36,9</td><td>Therm2</td></tr><tr><td>28</td><td>12,2</td><td>35,95</td><td>S13</td></tr><tr><td>29</td><td>12,15</td><td>32,35</td><td>G13</td></tr><tr><td>30</td><td>22,2</td><td>36,9</td><td>Ph2</td></tr><tr><td>31</td><td>24,9</td><td>36,9</td><td>Ph2</td></tr><tr><td>32</td><td>27,6</td><td>36,9</td><td>Ph2</td></tr><tr><td>33</td><td>30,3</td><td>36,9</td><td>Ph2</td></tr><tr><td>34</td><td>33</td><td>36,9</td><td>Ph2</td></tr><tr><td>35</td><td>37,9</td><td>36,9</td><td>Ph1</td></tr><tr><td>36</td><td>40,6</td><td>36,9</td><td>Ph1</td></tr><tr><td>37</td><td>43,3</td><td>36,9</td><td>Ph1</td></tr><tr><td>38</td><td>46</td><td>36,9</td><td>Ph1</td></tr><tr><td>39</td><td>48,7</td><td>36,9</td><td>Ph1</td></tr><tr><td>40</td><td>52,3</td><td>20,7</td><td>G14</td></tr><tr><td>41</td><td>49,1</td><td>20,7</td><td>S14</td></tr><tr><td>42</td><td>45,55</td><td>19,35</td><td>N</td></tr></tbody></table>				Pin	X	Y	Function	1	70,9	0	DC-	2	68,2	0	DC-	3	65,5	0	DC-	4	62,8	0	DC-	5	60,1	0	DC-	6	70,9	10,8	S12	7	67,85	10,8	G12	8	48,8	0	GND1	9	46,1	0	GND1	10	43,4	0	GND1	11	40,7	0	GND1	12	38	0	GND1	13	32,9	0	GND2	14	30,2	0	GND2	15	27,5	0	GND2	16	24,8	0	GND2	17	22,1	0	GND2	18	19,35	9,1	S11	19	16,3	9,1	G11	20	10,8	0	DC+	21	8,1	0	DC+	22	5,4	0	DC+	23	2,7	0	DC+	24	0	0	DC+	25	19,75	18,7	P	26	0	36,9	Therm1	27	3	36,9	Therm2	28	12,2	35,95	S13	29	12,15	32,35	G13	30	22,2	36,9	Ph2	31	24,9	36,9	Ph2	32	27,6	36,9	Ph2	33	30,3	36,9	Ph2	34	33	36,9	Ph2	35	37,9	36,9	Ph1	36	40,6	36,9	Ph1	37	43,3	36,9	Ph1	38	46	36,9	Ph1	39	48,7	36,9	Ph1	40	52,3	20,7	G14	41	49,1	20,7	S14	42	45,55	19,35	N
Pin	X	Y	Function																																																																																																																																																																												
1	70,9	0	DC-																																																																																																																																																																												
2	68,2	0	DC-																																																																																																																																																																												
3	65,5	0	DC-																																																																																																																																																																												
4	62,8	0	DC-																																																																																																																																																																												
5	60,1	0	DC-																																																																																																																																																																												
6	70,9	10,8	S12																																																																																																																																																																												
7	67,85	10,8	G12																																																																																																																																																																												
8	48,8	0	GND1																																																																																																																																																																												
9	46,1	0	GND1																																																																																																																																																																												
10	43,4	0	GND1																																																																																																																																																																												
11	40,7	0	GND1																																																																																																																																																																												
12	38	0	GND1																																																																																																																																																																												
13	32,9	0	GND2																																																																																																																																																																												
14	30,2	0	GND2																																																																																																																																																																												
15	27,5	0	GND2																																																																																																																																																																												
16	24,8	0	GND2																																																																																																																																																																												
17	22,1	0	GND2																																																																																																																																																																												
18	19,35	9,1	S11																																																																																																																																																																												
19	16,3	9,1	G11																																																																																																																																																																												
20	10,8	0	DC+																																																																																																																																																																												
21	8,1	0	DC+																																																																																																																																																																												
22	5,4	0	DC+																																																																																																																																																																												
23	2,7	0	DC+																																																																																																																																																																												
24	0	0	DC+																																																																																																																																																																												
25	19,75	18,7	P																																																																																																																																																																												
26	0	36,9	Therm1																																																																																																																																																																												
27	3	36,9	Therm2																																																																																																																																																																												
28	12,2	35,95	S13																																																																																																																																																																												
29	12,15	32,35	G13																																																																																																																																																																												
30	22,2	36,9	Ph2																																																																																																																																																																												
31	24,9	36,9	Ph2																																																																																																																																																																												
32	27,6	36,9	Ph2																																																																																																																																																																												
33	30,3	36,9	Ph2																																																																																																																																																																												
34	33	36,9	Ph2																																																																																																																																																																												
35	37,9	36,9	Ph1																																																																																																																																																																												
36	40,6	36,9	Ph1																																																																																																																																																																												
37	43,3	36,9	Ph1																																																																																																																																																																												
38	46	36,9	Ph1																																																																																																																																																																												
39	48,7	36,9	Ph1																																																																																																																																																																												
40	52,3	20,7	G14																																																																																																																																																																												
41	49,1	20,7	S14																																																																																																																																																																												
42	45,55	19,35	N																																																																																																																																																																												




Vincotech

30-FT10NIA400S702-LP59F04

datasheet

Pinout

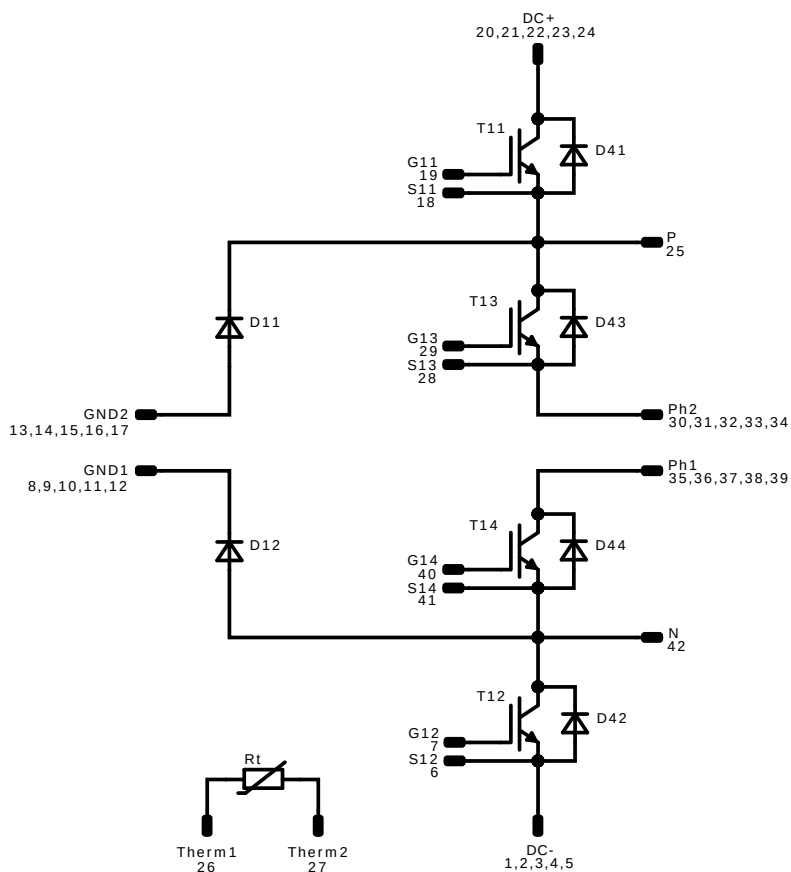

Identification

ID	Component	Voltage	Current	Function	Comment
T11, T12	IGBT	950 V	400 A	Buck Switch	
D11, D12	FWD	1200 V	100 A	Buck Diode	
T13, T14	IGBT	950 V	400 A	Boost Switch	
D42, D41	FWD	950 V	200 A	Boost Diode	
D43, D44	FWD	950 V	200 A	Boost Sw. Inv. Diode	
Rt	NTC			Thermistor	



Vincotech

30-FT10NIA400S702-LP59F04
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 36	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow 2</i> packages see vincotech.com website.

Package data
Package data for <i>flow 2</i> packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
30-FT10NIA400S702-LP59F04-D1-14	27 Aug. 2020		
30-FT10NIA400S702-LP59F04-D2-14	19 Jul. 2022	Extend current range of dynamic characteristic after design update	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.