


PCB specification according to the actual handling instruction document
 Refer to the module datasheet for actual pinout and 3D-CAD model
 Tolerance of pin positions $\pm 0,5\text{mm}$ at the end of the pins
 All dimensions are considered under unmounted condition



Proprietary data, company confidential. All rights reserved.

01.01.	16.12.2016	Update of drawing and product name	Buza M.	Gyimóthy Zs.	Package Drawing	View scale 1:1
01	19.05.2015		Gyimóthy Zs.	Gyetvai T.		
Rev.	Date	Alteration	Designed	Approved		
General tolerances ISO 2768 - m , K			Ps A4			
Linear dimensions	$x < 0,5 \pm 0,05$	$0,5 \leq x < 6 \pm 0,1$	$6 \leq x < 30 \pm 0,2$	$30 \leq x < 120 \pm 0,3$	$120 < x \pm 0,5$	
Chamfers, radii	$x < 0,3 \pm 0,05$	$0,3 \leq x < 0,5 \pm 0,1$	$0,5 \leq x < 3 \pm 0,2$	$3 \leq x < 6 \pm 0,5$	$6 < x \pm 1$	
References	Inspectional dim:	Revision number (Rev.): *	IP Development		Drawing alteration in revision: {}	

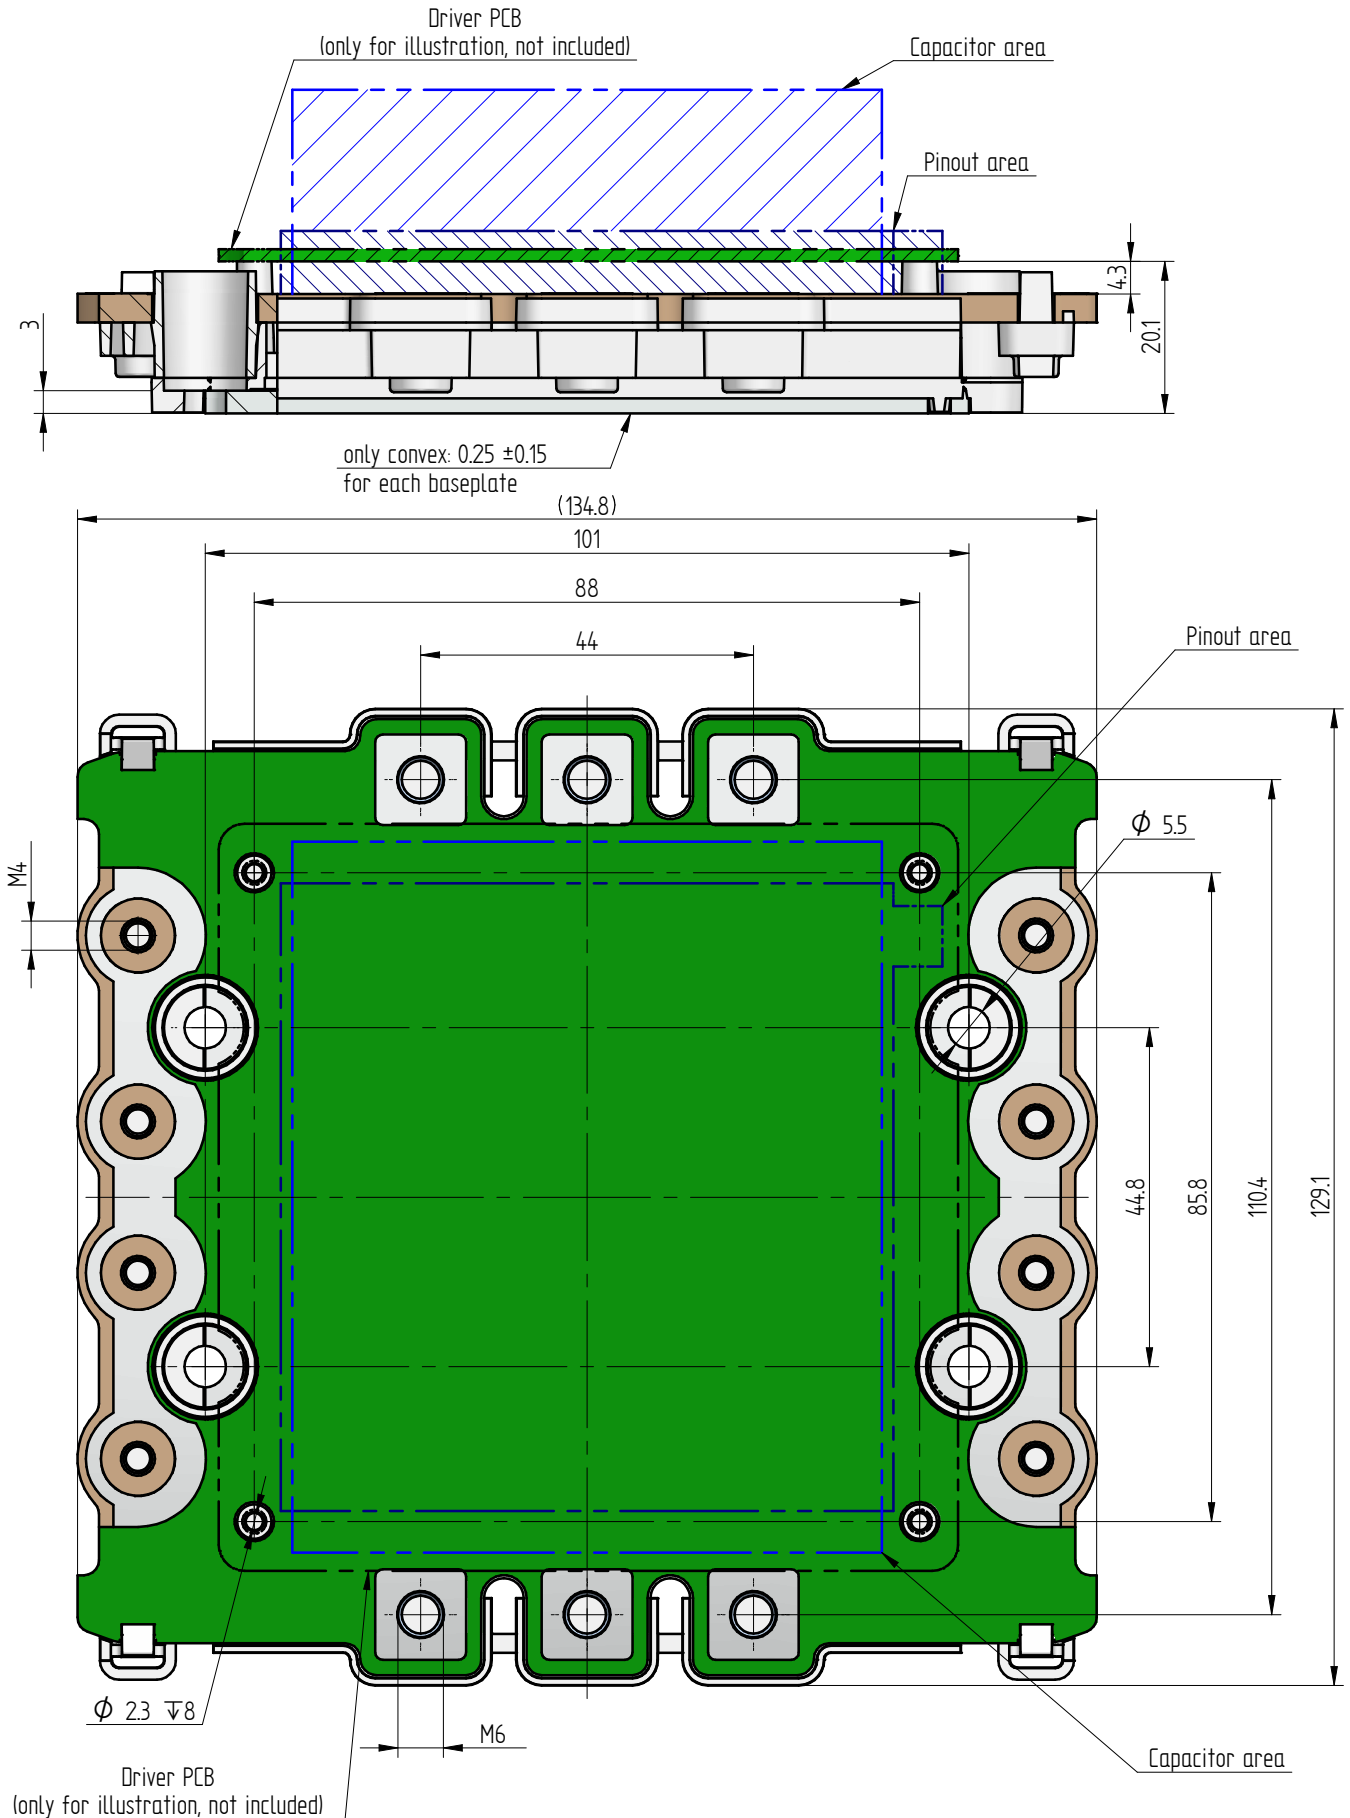

VINcoX4-4T12*-PD

Page 1/1