



Vincotech

10-FY07PMA050I7-P586B68
target datasheet

flowPIM 1

650 V / 50 A

Topology features

- Converter+Brake+Inverter
- Open Emitter configuration
- Temperature sensor

Component features

- Easy paralleling
- Low collector emitter saturation voltage
- Low turn-off losses
- Positive temperature coefficient

Housing features

- Base isolation: Al_2O_3
- Convex shaped substrate for superior thermal contact
- Thermo-mechanical push-and-pull force relief
- Solder pin


Target applications

- Industrial Drives


Types

- 10-FY07PMA050I7-P586B68

flow 1 12 mm housing



Schematic

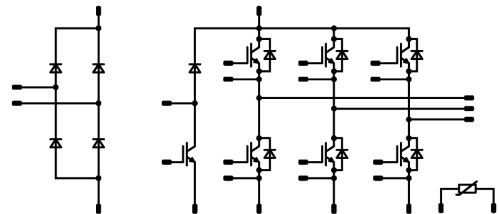



Vincotech

10-FY07PMA050I7-P586B68
target datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Inverter Switch				
Collector-emitter voltage	V_{CES}		650	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	51	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	150	A
Turn off safe operating area		$T_j = 150\text{ °C}$, $V_{CE} = 1200\text{ V}$	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	72	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 400\text{ V}$ $T_j = 150\text{ °C}$	3	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Inverter Diode				
Peak repetitive reverse voltage	V_{RRM}		650	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	41	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	58	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Brake Switch				
Collector-emitter voltage	V_{CES}		650	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	51	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	150	A
Turn off safe operating area		$T_j = 150\text{ °C}$, $V_{CE} = 1200\text{ V}$	150	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	72	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 400\text{ V}$ $T_j = 150\text{ °C}$	3	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$



Vincotech

10-FY07PMA050I7-P586B68
target datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Brake Diode				
Peak repetitive reverse voltage	V_{RRM}		650	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	32	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	90	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	48	W
Maximum junction temperature	T_{jmax}		175	°C

Rectifier Diode

Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	57	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	400	A
Surge current capability	I^2t		800	A²s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	66	W
Maximum junction temperature	T_{jmax}		150	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			7,91	mm
Comparative Tracking Index	CTI		≥ 200	



Vincotech

10-FY07PMA050I7-P586B68
target datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0005	25	4,35	5	5,65	V
Collector-emitter saturation voltage	V_{CEsat}		15		50	25		1,35	1,65	V
Collector-emitter cut-off current	I_{CES}		0	650		25			20	μA
Gate-emitter leakage current	I_{GES}		20	0		25			100	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	$f = 1 \text{ Mhz}$	0	25		25		3050		pF
Output capacitance	C_{oes}							92		pF
Reverse transfer capacitance	C_{res}							31		pF
Gate charge	Q_g	$V_{CC} = 520 \text{ V}$	15		50	25		290		nC

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						1,32		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Inverter Diode

Static

Forward voltage	V_F				50	25		1,65	2	V
Reverse leakage current	I_R	$V_r = 650 \text{ V}$				25			20	μA

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						1,64		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----



Vincotech

10-FY07PMA050I7-P586B68
target datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Brake Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0005	25	4,35	5	5,65	V
Collector-emitter saturation voltage	V_{CEsat}		15		50	25		1,35	1,65	V
Collector-emitter cut-off current	I_{CES}		0	650		25			20	µA
Gate-emitter leakage current	I_{GES}		20	0		25			100	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	$f = 1 \text{ Mhz}$	0	25		25		3050		pF
Output capacitance	C_{oes}							92		pF
Reverse transfer capacitance	C_{res}							31		pF
Gate charge	Q_g	$V_{CC} = 520 \text{ V}$	15		50	25		290		nC

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						1,32		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Brake Diode

Static

Forward voltage	V_F				30	25		1,65	2	V
Reverse leakage current	I_R	$V_r = 650 \text{ V}$				25			20	µA

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						2		K/W
-------------------------------------	---------------	---	--	--	--	--	--	---	--	-----



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Rectifier Diode

Static

Forward voltage	V_F				35	25		1,2	1,5	V
Reverse leakage current	I_R	$V_r = 1600$ V				25 150			100 2000	μA

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,06		K/W
-------------------------------------	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Thermistor


Static

Rated resistance	R					25		22		kΩ
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5	%
Power dissipation	P					25		130		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ± 1 %						3962		K
B-value	$B_{(25/100)}$	Tol. ± 1 %						4000		K
Vincotech Thermistor Reference									I	



target datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	10-FY07PMA050I7-P586B68
With thermal paste (5,2 W/mK, PTM6000HV)	10-FY07PMA050I7-P586B68-/7/


Marking							
	Text	Name		Date code	UL & VIN	Lot	Serial
		NN-NNNNNNNNNNNNN- TTTTTIVV		WWYY	UL VIN	LLLLL	SSSS
	Datamatrix	Type&Ver	Lot number	Serial	Date code		
TTTTTIVV		LLLLL	SSSS	WWYY			

Pin table [mm]			
Pin	X	Y	Function
1	52,55	0	G27
2	47,7	0	DC-Rect
3	44,8	0	DC-Rect
4	37,8	0	DC+Rect
5	37,8	2,8	DC+Rect
6	35	0	DC+Inv
7	35	2,8	DC+Inv
8	28	0	Therm1
9	25,2	0	Therm2
10	22,4	0	DC-3
11	19,6	0	G15
12	16,8	0	S15
13	14	0	DC-2
14	11,2	0	G13
15	8,4	0	S13
16	5,6	0	DC-1
17	2,8	0	G11
18	0	0	S11
19	0	28,5	Ph1
20	2,8	28,5	G12
21	7,5	28,5	S12
22	14,5	28,5	Ph2
23	17,3	28,5	G14
24	22	28,5	S14
25	29	28,5	Ph3
26	31,8	28,5	G16
27	36,5	28,5	S16
28	43,5	28,5	ACIn1
29	not assembled		
30	52,55	16,9	ACIn2
31	52,55	8,6	Br
32	52,55	2,8	DC-Br

The technical drawing shows the 32-pin connector from two perspectives. The side view (top) shows a rectangular profile with a height of 8,2 mm and a pin pitch of 0,5 mm. The top view (bottom) shows the 32 pins arranged in two rows of 16. The pins are numbered 1 to 32. The top row (pins 1-16) is labeled with functions: 1 (DC-Br), 2 (Br), 3 (ACIn2), 4 (G16), 5 (Ph3), 6 (S14), 7 (G14), 8 (Ph2), 9 (S12), 10 (G12), 11 (Ph1), 12 (S11), 13 (G11), 14 (DC-1), 15 (S13), 16 (G13). The bottom row (pins 17-32) is labeled with functions: 17 (DC-2), 18 (S15), 19 (DC-3), 20 (Therm2), 21 (Therm1), 22 (DC+Inv), 23 (DC+Rect), 24 (DC+Rect), 25 (DC-Rect), 26 (DC-Rect), 27 (G27), 28 (DC-Br), 29 (Br), 30 (ACIn2), 31 (ACIn1), 32 (DC-Br). The drawing includes dimensions for pin pitch (0,5 mm), pin diameter (0,5 mm), and overall dimensions (8,2 mm height, 28,5 mm width).



Vincotech

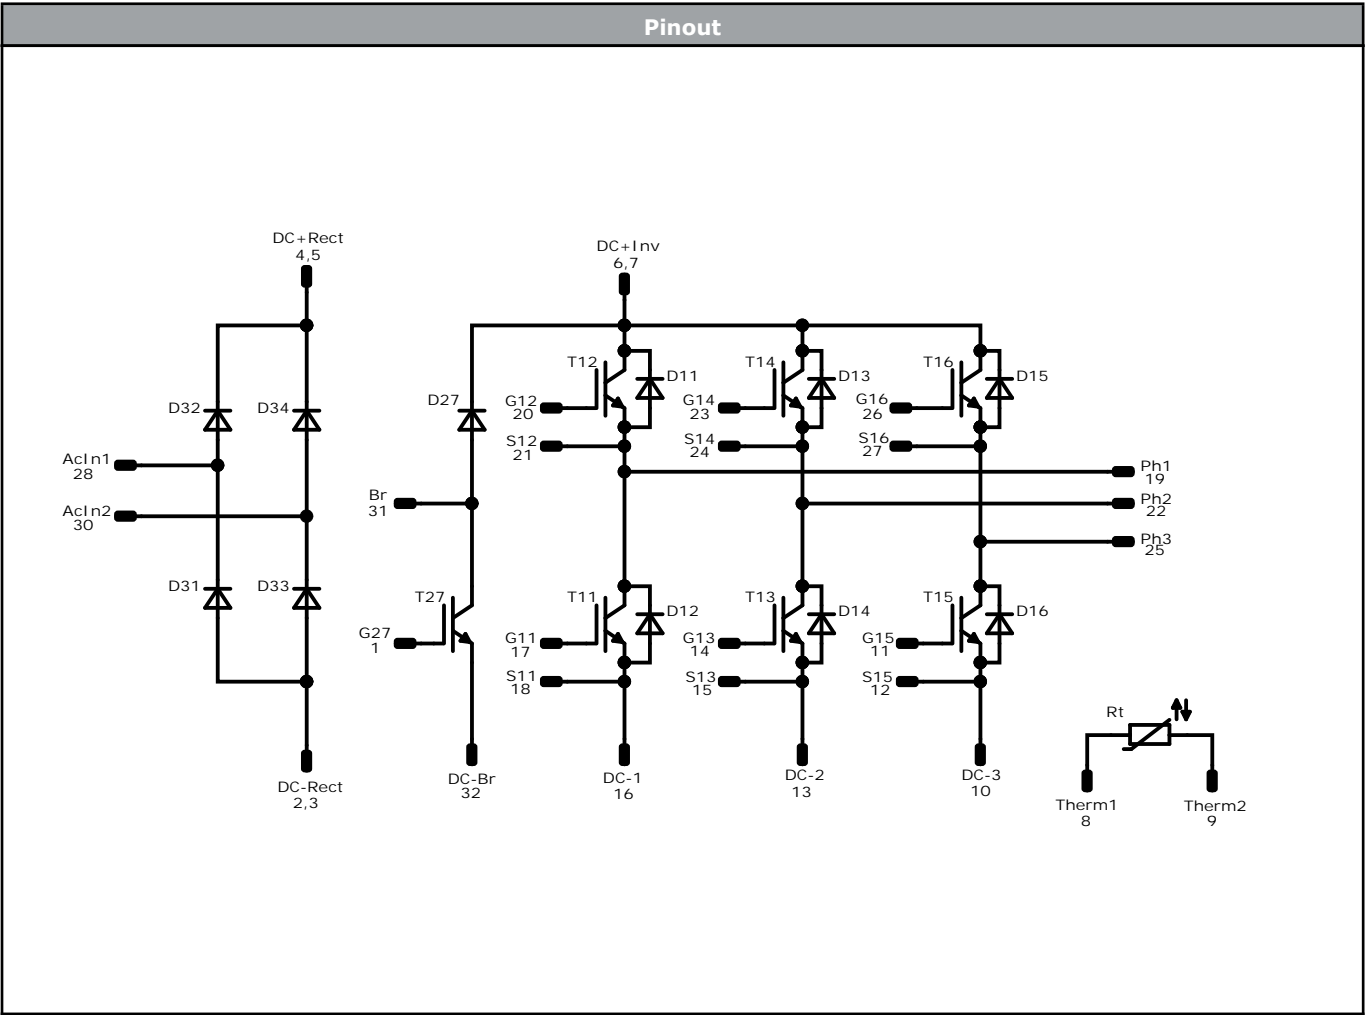


Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	650 V	50 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	650 V	50 A	Inverter Diode	
T27	IGBT	650 V	50 A	Brake Switch	
D27	FWD	650 V	30 A	Brake Diode	
D31, D32, D33, D34	Rectifier	1600 V	35 A	Rectifier Diode	
Rt	Thermistor			Thermistor	



Vincotech

10-FY07PMA050I7-P586B68
target datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow</i> 1 packages see vincotech.com website.				
Package data				
Package data for <i>flow</i> 1 packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,op}=175^{\circ}\text{C}$ and up to 3500VAC/1min isolation voltage. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
10-FY07PMA050I7-P586B68-T1-14	1 Feb. 2025	Initial Release	

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.