



Vincotech

V23990-P840-C58-PM

datasheet

flowPIM 0

1200 V / 15 A

Features

- 2 Clips housing in 12mm height
- Trench Fieldstop Technology IGBT4
- Enhanced Rectifier


Target applications

- Industrial Drives
- Embedded Drives


Types

- V23990-P840-C58-PM

flow 0 12 mm housing



Schematic

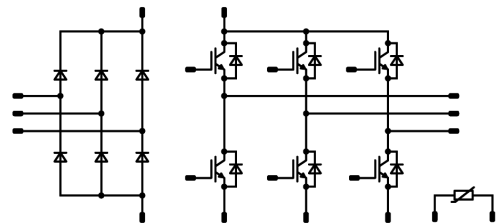



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Inverter Switch

Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	22	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	45	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	65	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	10	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Inverter Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	25	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	30	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	54	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Rectifier Diode

Peak repetitive reverse voltage	V_{RRM}		1600	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	A
Surge (non-repetitive) forward current	I_{FSM}	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	270	A
Surge current capability	I^2_t		370	A^2s
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	56	W
Maximum junction temperature	T_{jmax}		150	$^{\circ}\text{C}$



Vincotech

V23990-P840-C58-PM
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+(T_{jmax} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	V_{isol}	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			min. 12,7	mm
Clearance			9,29	mm
Comparative Tracking Index	CTI		> 200	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0005	25	5,3	5,8	6,3	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		15	25 125 150	1,58	1,87 2,14 2,21	2,07 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			2	µA
Gate-emitter leakage current	I_{GES}		20	0		25			120	nA
Internal gate resistance	r_g							None		Ω
Input capacitance	C_{ies}	$f = 1 \text{ Mhz}$	0	25		25		890		pF
Reverse transfer capacitance	C_{res}							30		pF
Gate charge	Q_g		20		0	25		120		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)						1,45		K/W
--	---------------	---	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 16 \Omega$ $R_{goff} = 16 \Omega$	± 15	600	15	25 125 150		59,6 60,4 60		ns
Rise time	t_r					25 125 150		14,8 19 20		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		196,6 238,8 251,6		ns
Fall time	t_f					25 125 150		79,13 105,52 110,2		ns
Turn-on energy (per pulse)	E_{on}					25 125 150		0,881 1,25 1,36		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		0,883 1,24 1,33		mWs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Diode

Static

Forward voltage	V_F				15	25 125 150	1,35	1,76 1,76 1,72	2,05 ⁽¹⁾	V
Reverse leakage current	I_R	$V_i = 1200$ V				25			3,5	µA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,78		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Peak recovery current	I_{RRM}	$di/dt=801$ A/µs $di/dt=1058$ A/µs $di/dt=1081$ A/µs	± 15	600	15	25 125 150		13,3 16,06 16,46		A
Reverse recovery time	t_{rr}					25 125 150		281,61 433,43 452,84		ns
Recovered charge	Q_r					25 125 150		1,59 2,75 2,98		µC
Reverse recovered energy	E_{rec}					25 125 150		0,65 1,16 1,25		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		129,01 108,84 103,64		A/µs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Rectifier Diode

Static

Forward voltage	V_F				13	25 125		1 0,908	1,21 ⁽¹⁾ 1,1 ⁽¹⁾	V
Reverse leakage current	I_R	$V_r = 1600$ V				25			50	μA

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,25		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5	%
Power dissipation	P							5		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ± 1 %						3962		K
B-value	$B_{(25/100)}$	Tol. ± 1 %						4000		K
Vincotech Thermistor Reference									I	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Vincotech

V23990-P840-C58-PM datasheet

Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

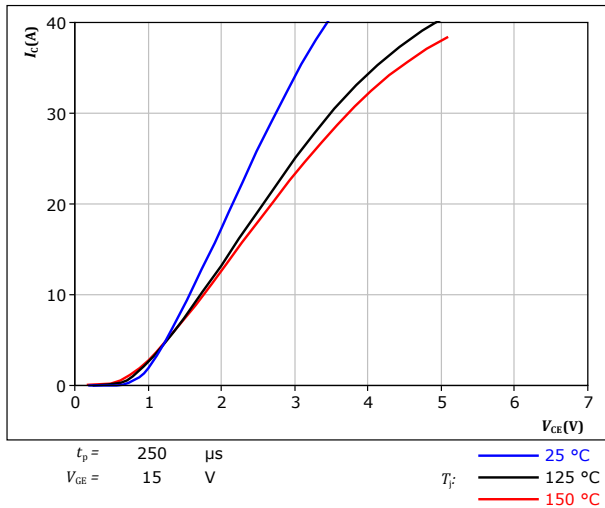


figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

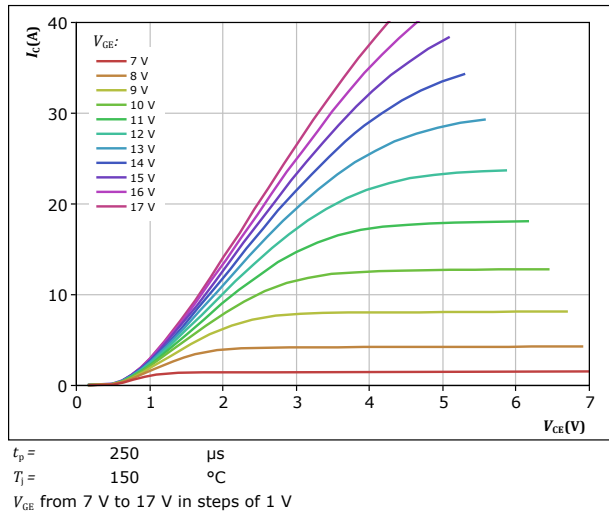


figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$


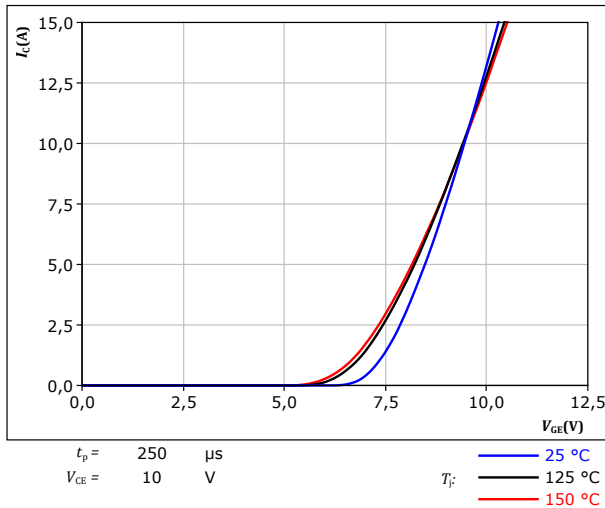


figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

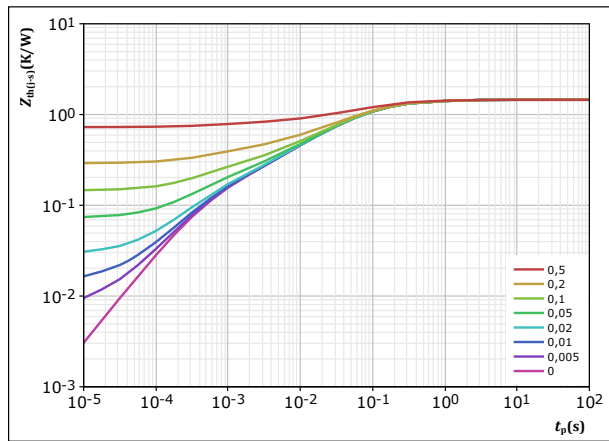

IGBT thermal model values	
R (K/W)	τ (s)
1,02E-01	1,17E+00
3,31E-01	1,69E-01
5,63E-01	5,65E-02
2,92E-01	1,03E-02
8,13E-02	1,50E-03
8,53E-02	4,00E-04



Vincotech


V23990-P840-C58-PM
datasheet

Inverter Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

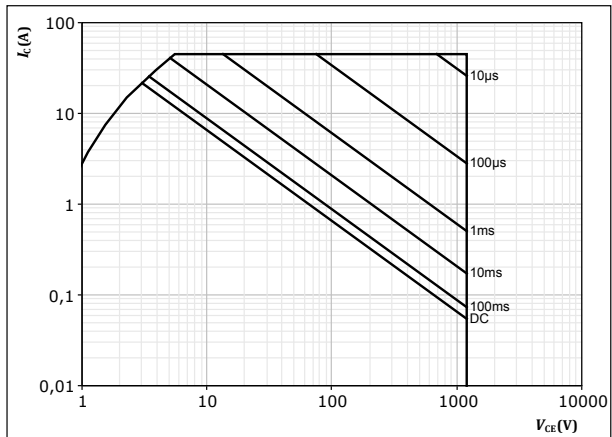

$D =$ single pulse

$T_s = 80$ °C

$V_{GE} = 15$ V

$T_j = T_{jmax}$



Vincotech

V23990-P840-C58-PM
datasheet

Inverter Diode Characteristics

figure 6.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


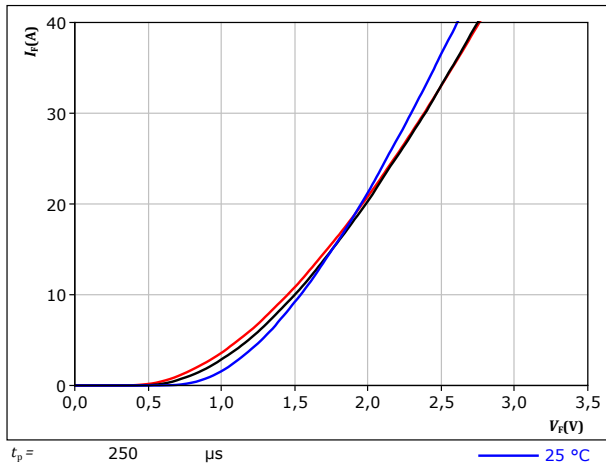


figure 7.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

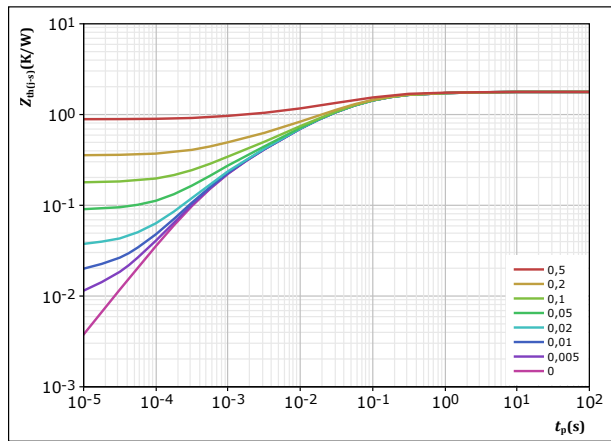

$D =$	t_p / T	
$R_{th(j-s)} =$	1,775	K/W
FWD thermal model values		
R (K/W)	τ (s)	
8,20E-02	1,96E+00	
1,92E-01	2,43E-01	
6,68E-01	6,43E-02	
4,69E-01	1,43E-02	
2,32E-01	2,97E-03	
1,33E-01	5,16E-04	



Vincotech

Rectifier Diode Characteristics

figure 8.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


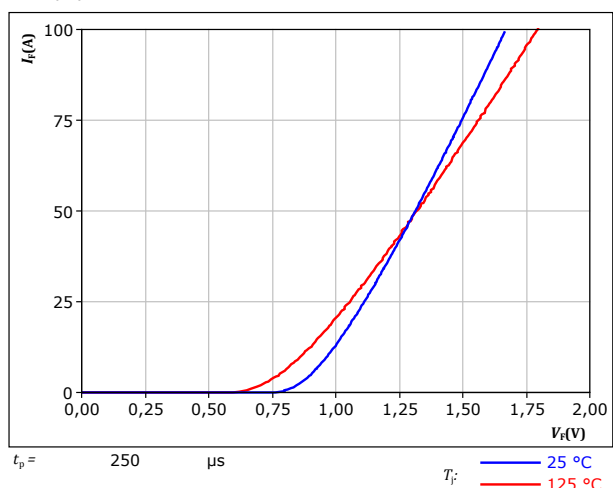


figure 9.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

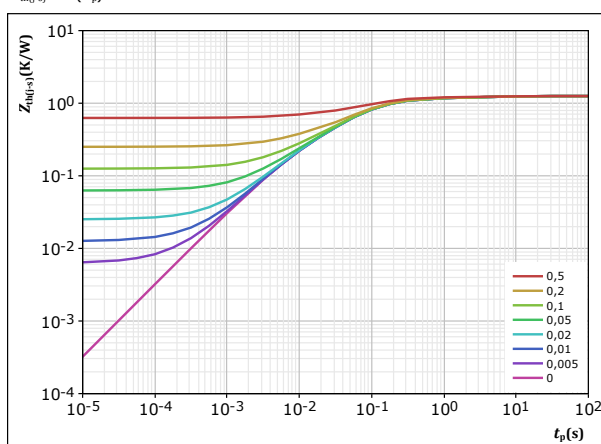

$D =$	t_p / T	
$R_{th(j-s)} =$	1,254	K/W
Rectifier thermal model values		
R (K/W)	τ (s)	
8,00E-02	5,22E+00	
1,56E-01	4,18E-01	
6,95E-01	8,82E-02	
2,23E-01	3,07E-02	
9,97E-02	5,99E-03	



Vincotech

V23990-P840-C58-PM
datasheet


Thermistor Characteristics

figure 10.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

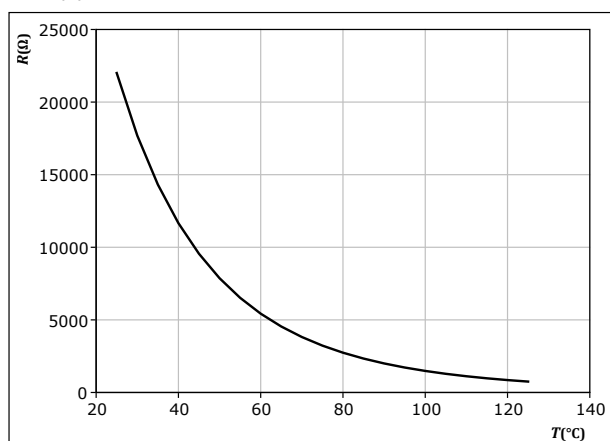



Vincotech


Inverter Switching Characteristics

figure 11.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

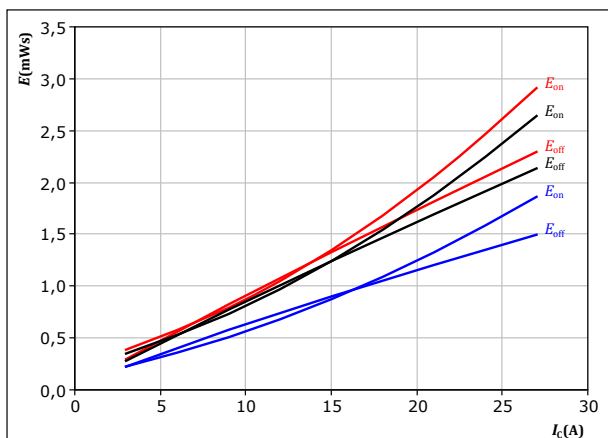

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 12.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

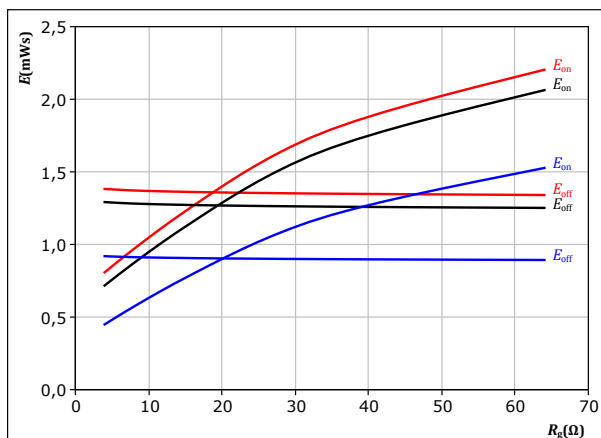

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 13.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

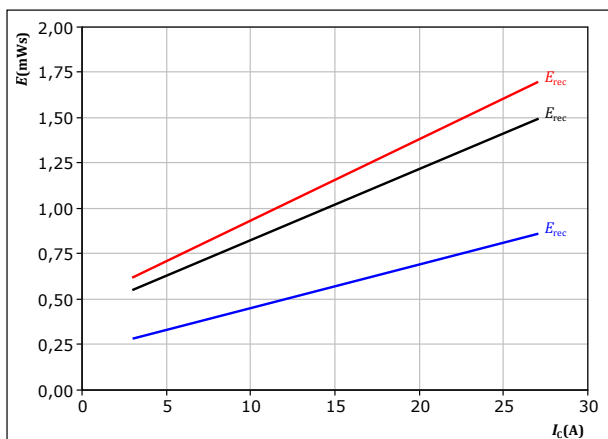

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 14.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

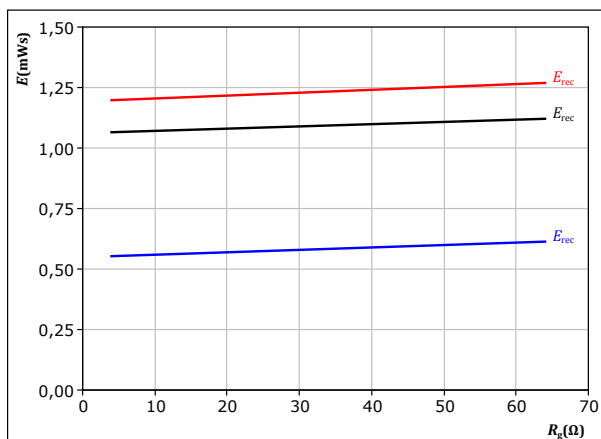

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech


V23990-P840-C58-PM
datasheet

Inverter Switching Characteristics

figure 15.

IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

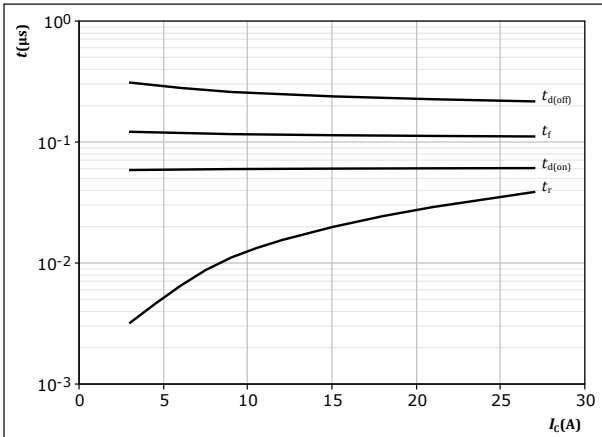


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

figure 16.

IGBT

Typical switching times as a function of gate resistor
 $t = f(R_g)$

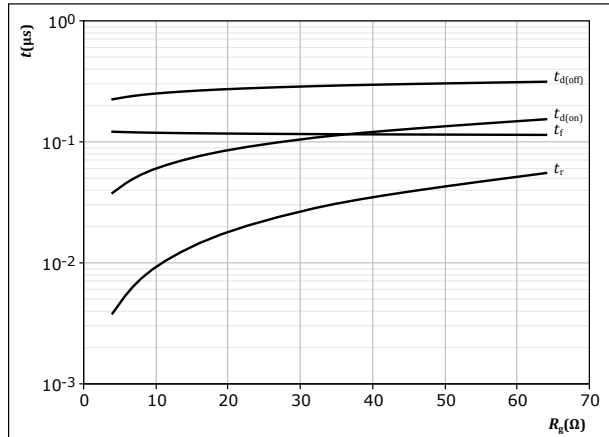


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

figure 17.

FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

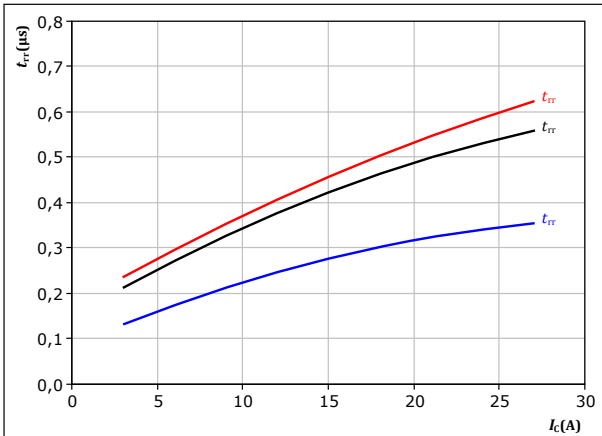

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω

T_j : — 25 °C
— 125 °C
— 150 °C

figure 18.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor
 $t_{rr} = f(R_{goff})$

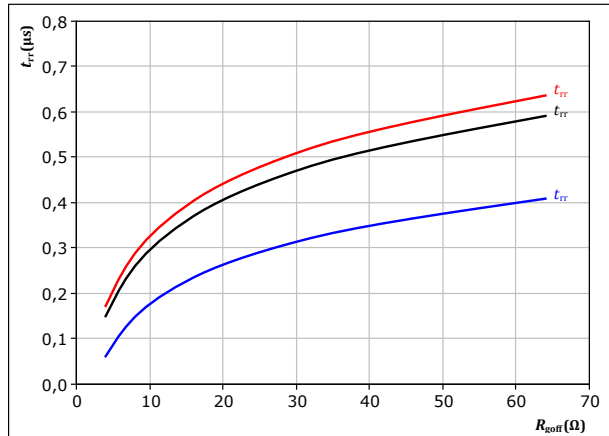

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 15$ A

T_j : — 25 °C
— 125 °C
— 150 °C



Vincotech

V23990-P840-C58-PM
datasheet


Inverter Switching Characteristics

figure 19.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

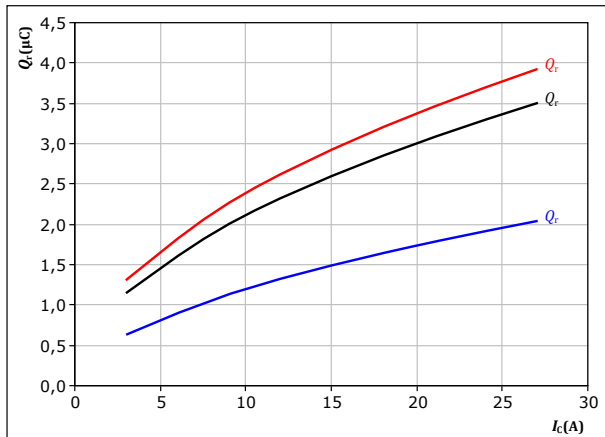

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 20.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

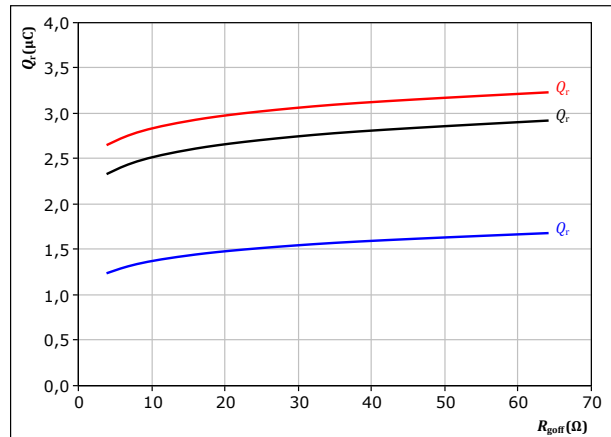

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 21.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

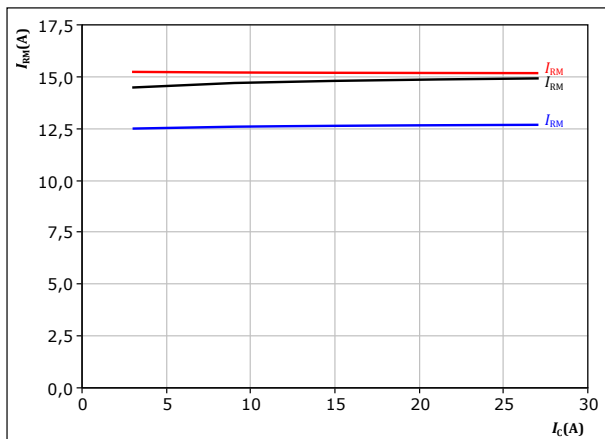

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 22.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

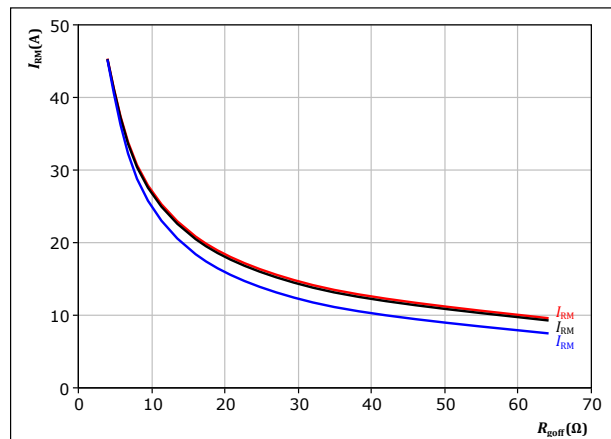

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech


V23990-P840-C58-PM
datasheet

Inverter Switching Characteristics

figure 23.

FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_c)$

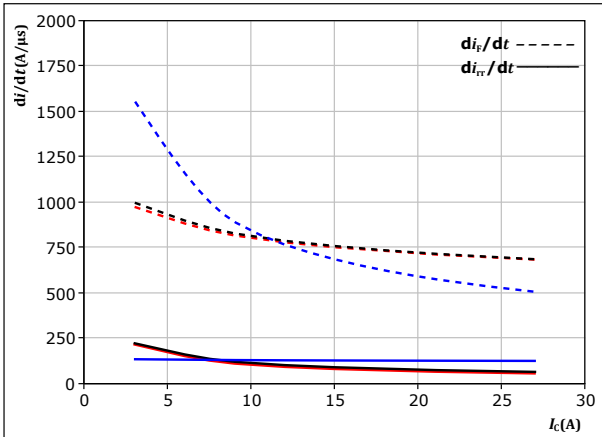

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j :
— 25 °C
— 125 °C
— 150 °C

figure 25.

IGBT

Reverse bias safe operating area

$I_c = f(V_{CE})$

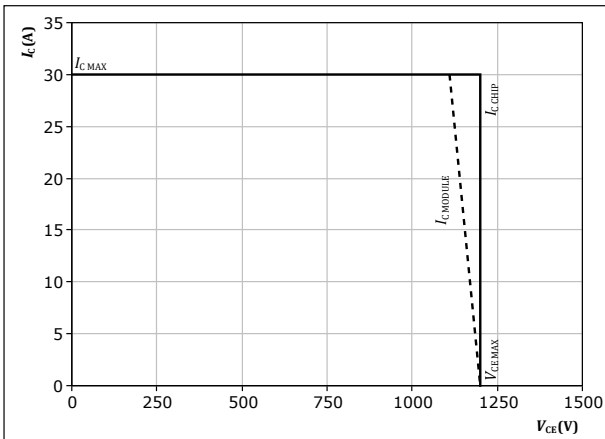


At $T_j = 150$ °C
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

figure 24.

FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_r/dt = f(R_{goff})$

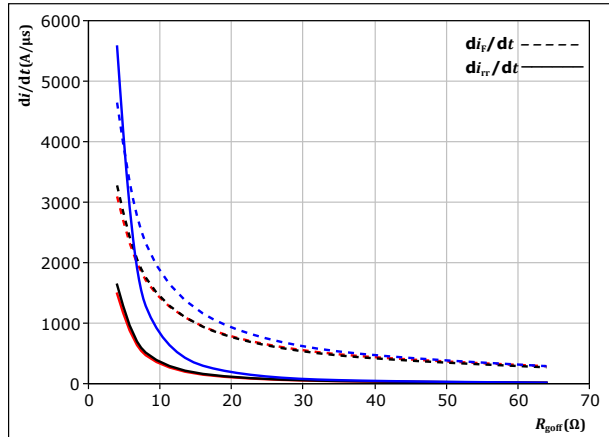

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 15$ A

T_j :
— 25 °C
— 125 °C
— 150 °C



Vincotech

Inverter Switching Definitions

figure 26. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

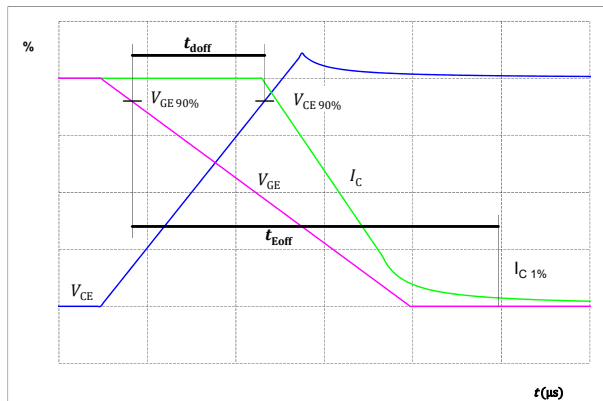


figure 27. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

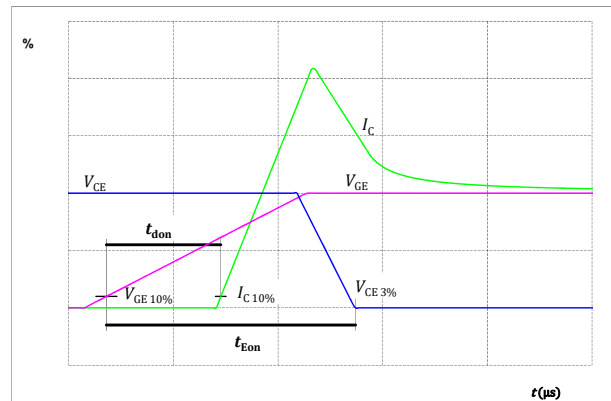


figure 28. IGBT

Turn-off Switching Waveforms & definition of t_f


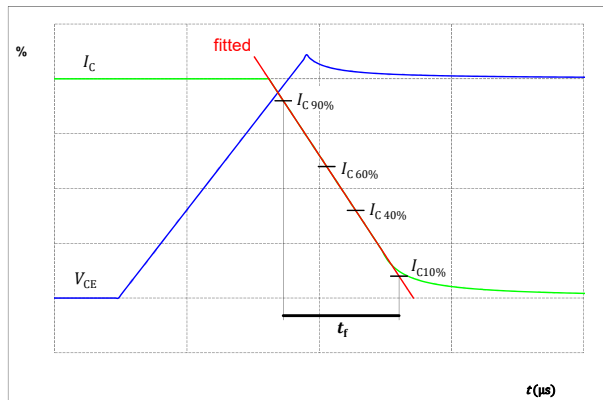


figure 29. IGBT

Turn-on Switching Waveforms & definition of t_r



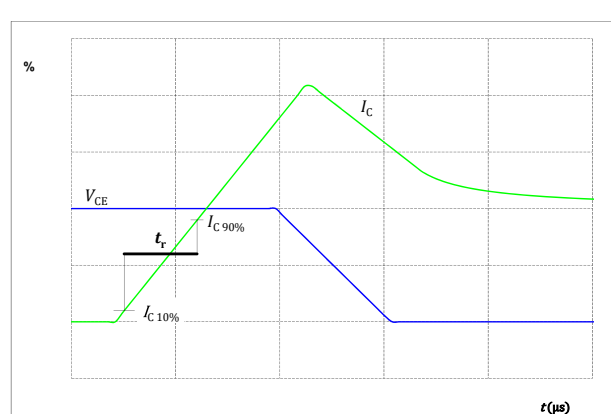

Inverter Switching Definitions

figure 30.

FWD

Turn-off Switching Waveforms & definition of t_{rr}


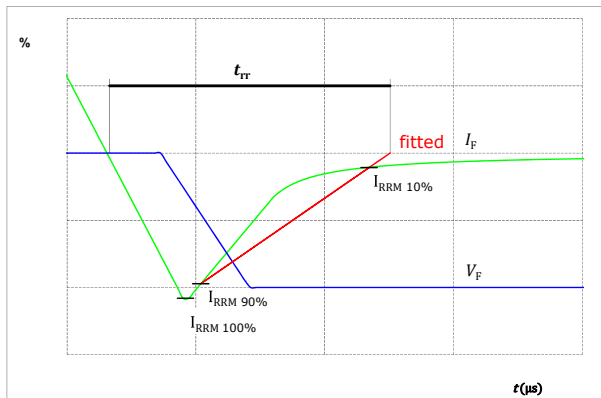


figure 31.

FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)



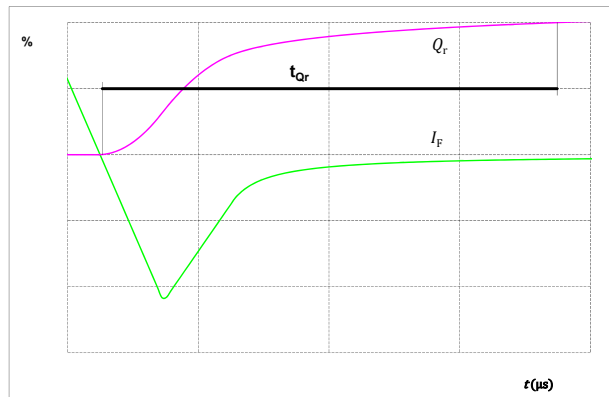

Vincotech

Marking							
	Text	VIN	Date code	Type&Ver	UL	Lot	Serial
		VIN	WWYY	TTTTITVV	UL	LLLL	SSSS
	Datamatrix	Type&Ver	Lot number	Serial	Date code		
		TTTTITVV	LLLL	SSSS	WWYY		


Pin table [mm]			
Pin	X	Y	Function
1	25,5	2,7	NTC1
2	25,5	0	NTC2
3	22,8	0	-DC
4	not assembled		
5	not assembled		
6	13,5	0	G6
7	10,8	0	E6
8	8,1	0	G5
9	5,4	0	E5
10	2,7	0	G4
11	0	0	E4
12	0	19,8	G1
13	0	22,5	U
14	7,5	19,8	G2
15	7,5	22,5	V
16	15	19,8	G3
17	15	22,5	W
18	22,8	22,5	+INV
19	25,5	22,5	+DC
20	not assembled		
21	33,5	15	L1
22	33,5	7,5	L2
23	33,5	0	L3

Tolerance of pinpositions: $\pm 0,5\text{mm}$ at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

Pinout

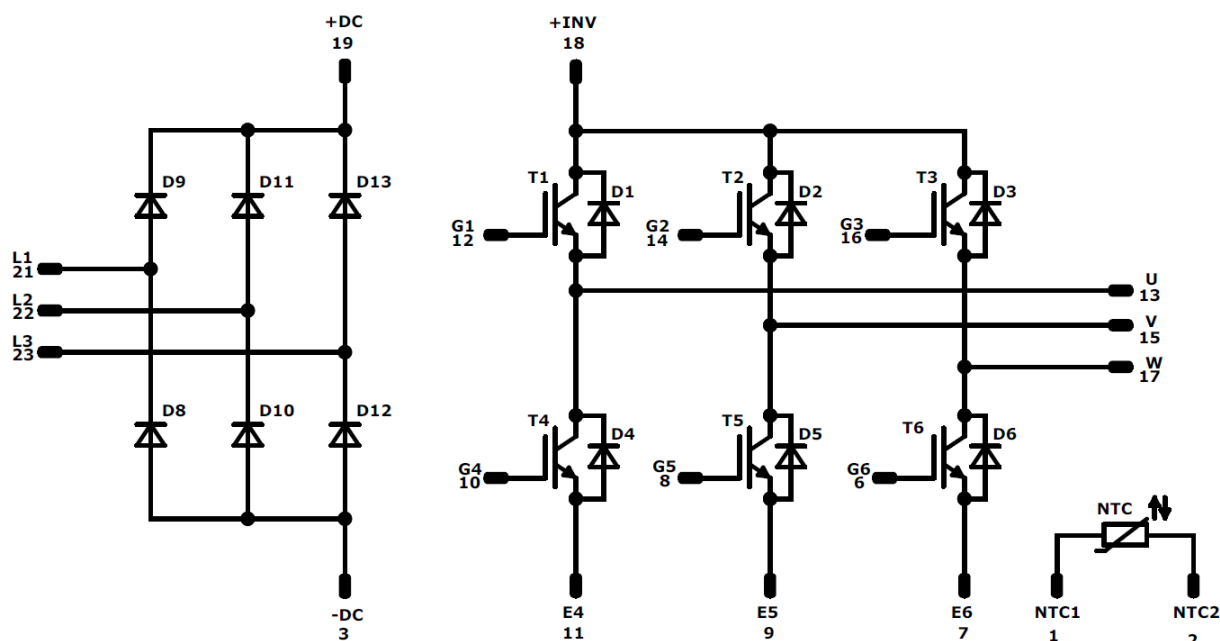

Identification

ID	Component	Voltage	Current	Function	Comment
T4, T1, T5, T2, T6, T3	IGBT	1200 V	15 A	Inverter Switch	
D1, D4, D2, D5, D3, D6	FWD	1200 V	15 A	Inverter Diode	
D8, D9, D10, D11, D12, D13	Rectifier	1600 V	35 A	Rectifier Diode	
NTC	Thermistor			Thermistor	



Vincotech

V23990-P840-C58-PM
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 135	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow 0</i> packages see vincotech.com website.

Package data
Package data for <i>flow 0</i> packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
V23990-P840-C58-PM-D8-14	30 Sep. 2021	New Datasheet format, module is unchanged Introduce Rth values with PSX-P7 TIM Separate datasheet for pressfit pin version	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.